

Pizza sales

Presented By:
Baibil shobhanshu





Hello!

My name is Baibil shobhanshu.

In this project I have utilise SQL queries to solve questions that were relted to pizza sales.

@reallygreatsite





Questions

Retrieve the total number of orders placed.

Calculate the total revenue generated from pizza sales.

Identify the highest-priced pizza.

Identify the most common pizza size ordered.

List the top 5 most ordered pizza types along with their quantities.

Join the necessary tables to find the total quantity of each pizza ordered.

Join the necessary tables to find the total quantity of each pizza category ordered.

Determine the distribution of orders by hour of the day.

Join relevant tables to find the category-wise distribution of pizzas.

Group the orders by date and calculate the average number of pizzas ordered per day.

Determine the top 3 most ordered pizza types based on revenue.



Calculate the percentage contribution of each pizza type to total revenue.

Analyze the cumulative revenue generated over time.

Determine the top 3 most ordered pizza types based on revenue for each pizza category.



Retrieve the total number of orders placed.

```
use pizzahut;  
SELECT  
    COUNT(order_id) AS total_orders  
FROM  
    orders;
```

Result Grid	
	total_orders
▶	21350

Calculate the total revenue generated from pizza sales.



```
use pizzahut;  
SELECT  
    SUM(order_details.quantity * pizzas.price)  
FROM  
    order_details  
    JOIN  
    pizzas ON pizzas.pizza_id = order_details.pizza_id;
```



Result Grid		Filter Rows:
	SUM(order_details.quantity * pizzas.price)	
▶	817860.0499999993	

Identify the highest-priced pizza.

```
use pizzahut;  
SELECT  
    pizza_types.name, pizzas.price  
FROM  
    pizza_types  
    JOIN  
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id  
ORDER BY pizzas.price DESC  
LIMIT 1;
```

Result Grid			Filter Rows:	
	name	price		
▶	The Greek Pizza	35.95		

Identify the most common pizza size ordered.

```
SELECT
    pizzas.size,
    COUNT(order_details.order_details_id) AS order_count
FROM
    order_details
    JOIN
    pizzas ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

Result Grid			Filter Rows:
	size	order_count	
▶	L	18526	
	M	15385	
	S	14137	
	XL	544	
	XXL	28	



List the top 5 most ordered pizza types along with their quantities.

```
use pizzahut;  
SELECT  
    pizza_types.name, SUM(order_details.quantity) AS quantity  
FROM  
    pizza_types  
    JOIN  
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id  
    JOIN  
    order_details ON order_details.pizza_id = pizzas.pizza_id  
GROUP BY pizza_types.name  
ORDER BY quantity DESC  
LIMIT 5;
```




Result Grid			Filter Rows:
	name	quantity	
▶	The Classic Deluxe Pizza	2453	
	The Barbecue Chicken Pizza	2432	
	The Hawaiian Pizza	2422	
	The Pepperoni Pizza	2418	
	The Thai Chicken Pizza	2371	



Join the necessary tables to find the total quantity of each pizza ordered. Join the necessary tables to find the total quantity of each pizza category ordered.

```
SELECT
    pizza_types.category,
    SUM(order_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    order_details ON pizzas.pizza_id = order_details.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity desc;
```

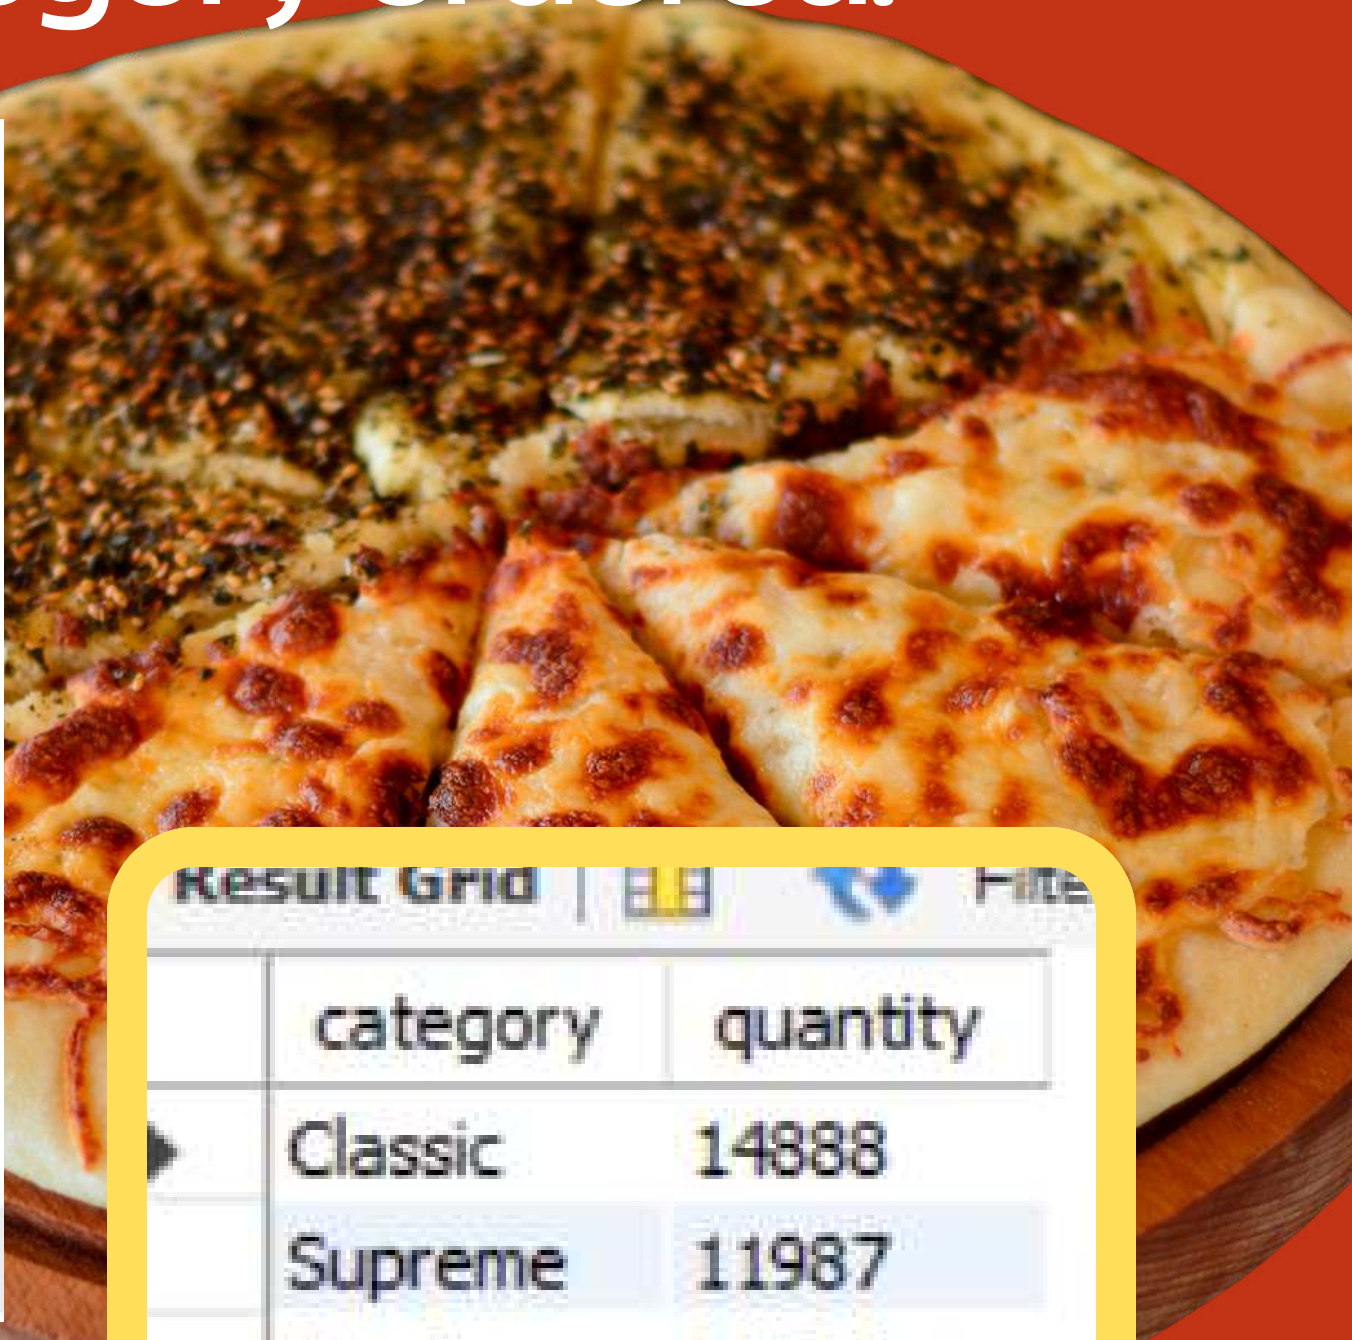

	category	quantity
▶	Classic	14888
	Supreme	11987
	Veggie	11649
	Chicken	11050

Determine the distribution of orders by hour of the day.

```
SELECT
    HOUR(order_time) AS hours, COUNT(order_id) AS order_count
FROM
    orders
GROUP BY hours
ORDER BY hours ASC;
```

Result Grid			Filter
	hours	order_count	
▶	9	1	
	10	8	
	11	1231	
	12	2520	
	13	2455	
	14	1472	
	15	1468	
	16	1920	
	17	2336	
	18	2399	
	19	2009	
	20	1642	
	21	1198	
	22	663	
	23	28	

Join relevant tables to find the category-wise distribution of pizzas.

```
SELECT  
    category, COUNT(name) AS total_count  
FROM  
    pizza_types  
GROUP BY category  
ORDER BY total_count DESC;
```



Result Grid			Filter R
	category	total_count	
▶	Supreme	9	
	Veggie	9	
	Classic	8	
	Chicken	6	



Group the orders by date and calculate the average number of pizzas ordered per day.

```
use pizzahut;
SELECT
  ROUND(AVG(quantity), 0) AS avg_pizza_ordered_per_day
FROM
  (SELECT
    orders.order_date, SUM(order_details.quantity) AS quantity
  FROM
    orders
  JOIN order_details ON orders.order_id = order_details.order_id
  GROUP BY orders.order_date) AS order_quantity;
```



Result Grid		Filter Rows:
	avg_pizza_ordered_per_day	
▶	138	

Determine the top 3 most ordered pizza types based on revenue.

```
SELECT
    pizza_types.name,
    SUM(order_details.quantity * pizzas.price) AS revenue
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```



Result Grid			Filter Rows:
	name	revenue	
▶	The Thai Chicken Pizza	43434.25	
	The Barbecue Chicken Pizza	42768	
	The California Chicken Pizza	41409.5	



Calculate the percentage contribution of each pizza type to total revenue.



```
SELECT
    pizza_types.category,
    (SUM(order_details.quantity * pizzas.price) / (SELECT
        ROUND(SUM(order_details.quantity * pizzas.price),
            2) AS total_sales
    FROM
        order_details
        JOIN
        pizzas ON pizzas.pizza_id = order_details.pizza_id)) * 100 AS revenue
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    order_details ON order_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue DESC;
```

Result Grid			Filter Rows:
	category	revenue	
▶	Classic	26.90596025566967	
	Supreme	25.45631126009862	
	Chicken	23.955137556847287	
	Veggie	23.682590927384577	



Analyze the cumulative revenue generated over time.

```
use pizzahut;
select order_date,sum(revenue)
over(order by order_date) as cum_revenue
from (select orders.order_date,sum(order_details.quantity * pizzas.price)
as revenue from order_details join pizzas
on order_details.pizza_id=pizzas.pizza_id
join orders on orders.order_id=order_details.order_id
group by orders.order_date) as sales;
```

Result Grid			Filter Rows:
	order_date	cum_revenue	
▶	2015-01-01	2713.85000000000004	
	2015-01-02	5445.75	
	2015-01-03	8108.15	
	2015-01-04	9863.6	
	2015-01-05	11929.55	
	2015-01-06	14358.5	
	2015-01-07	16560.7	
	2015-01-08	19399.05	
	2015-01-09	21526.4	
	2015-01-10	23990.3500000000002	

Determine the top 3 most ordered pizza types based on revenue for each pizza category.

```
use pizzahut;
select name, revenue from
(select category, name, revenue,
rank() over(partition by category order by revenue desc) as rn
from
(select pizza_types.category, pizza_types.name,
sum((order_details.quantity) * pizzas.price) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id=pizzas.pizza_type_id
join order_details
on order_details.pizza_id=pizzas.pizza_id
group by pizza_types.category, pizza_types.name) as a) as b
where rn<=3;
```



	name	revenue
▶	The Thai Chicken Pizza	43434.25
	The Barbecue Chicken Pizza	42768
	The California Chicken Pizza	41409.5
	The Classic Deluxe Pizza	38180.5
	The Hawaiian Pizza	32273.25
	The Pepperoni Pizza	30161.75
	The Spicy Italian Pizza	34831.25
	The Italian Supreme Pizza	33476.75
	The Sicilian Pizza	30940.5
	The Four Cheese Pizza	32265.700000000065
	The Mexicana Pizza	26780.75
	The Five Cheese Pizza	26066.5