

mirrorstats Group

John D. Baker

<https://github.com/bakerjd99/jacks/blob/master/mirrorxref/mirrorstats.ijs>

SHA-256: 97ae075d8119acffae0068058fb961227a0f1caac3db11f1aa4be95f8833b5b6

July 13, 2022

Contents

mirrorstats Overview	2
mirrorstats Interface	2
Using mirrorstats	2
mirror.db Schema	2
mirrorstats Source Code	4
=: Index	21

mirrorstats Overview

mirrorstats is a J script that queries the [SQLite](#) `mirror.db` database file built by [MirrorXref](#).

`mirror.db` cross references local image files with online <https://conceptcontrol.smugmug.com/> versions. Local images are catalogued in [ThumbsPlus](#) SQLite databases. `mirror.db` matches local ThumbsPlus image and path keys with online keys.

mirrorstats Interface

<code>NotDivisible</code>	<code>[7]</code>	<i>albums with image counts that are not divisible by 3 and 5</i>
<code>albdist</code>	<code>[8]</code>	<i>all mean album distances km from position (x)</i>
<code>fsd</code>	<code>[14]</code>	<i>fetch sqlite dictionary array</i>
<code>fst</code>	<code>[14]</code>	<i>fetch sqlite reads table</i>
<code>meanalbdist</code>	<code>[15]</code>	<i>mean km distance of geotagged album images from (x)</i>

Using mirrorstats

mirrorstats is typically used from the Jupyter notebook [Mirror SmugMug Statistics.ipynb](#).

mirror.db Schema

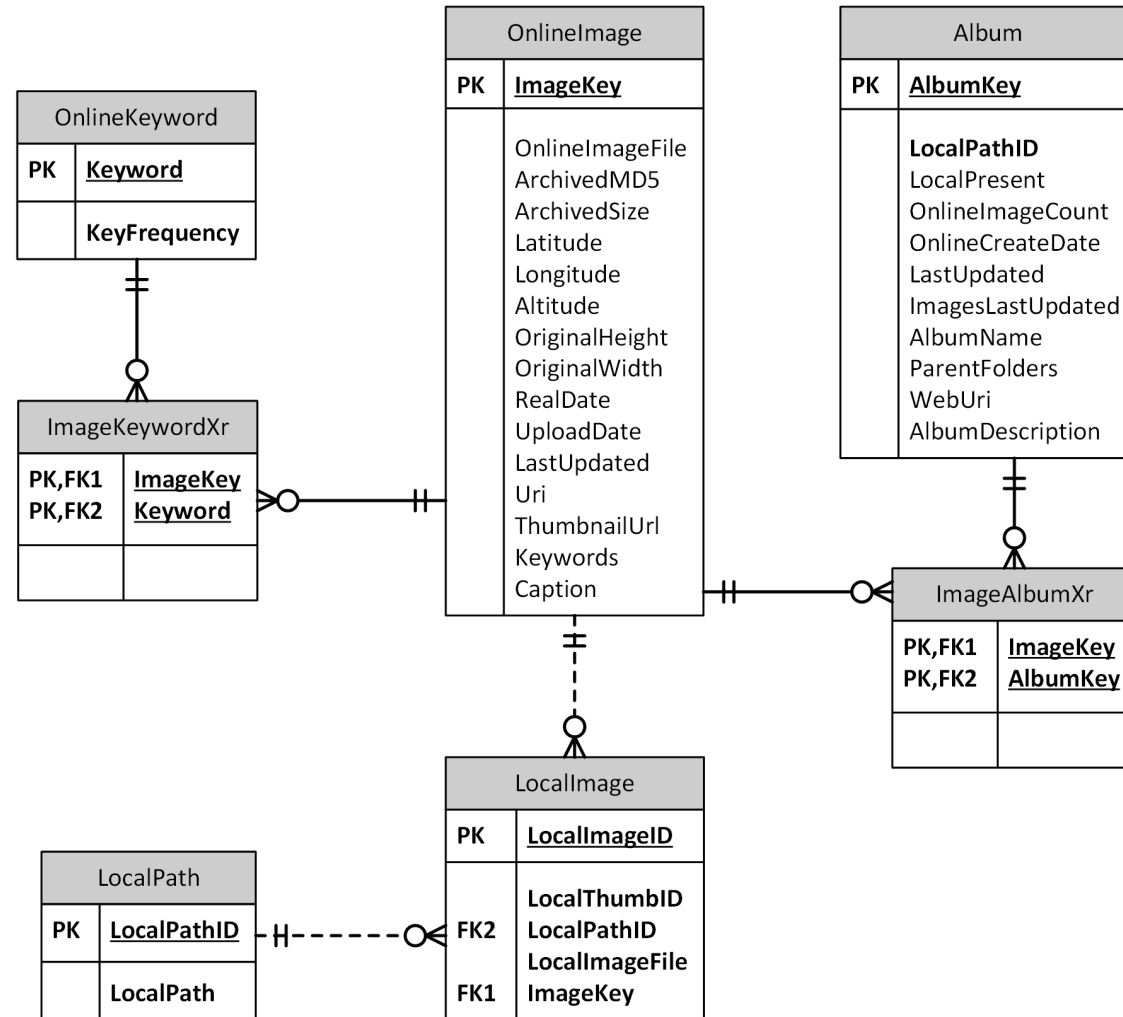


Figure 1: mirror.db schema.

mirrorstats Source Code

```
NB.*mirrorstats s-- utils for querying local SmugMug mirror_db metadata.
NB.
NB. verbatim:
NB.
NB. interface word(s):
NB. -----
NB. NotDivisible - albums with image counts that are not divisible by 3 and 5
NB. albdist      - all mean album distances km from position (x)
NB. fsd         - fetch sqlite dictionary array
NB. fst         - fetch sqlite reads table
NB. meanalbdist - mean km distance of geotagged album images from (x)
NB.
NB. created: 2022jul07
NB. -----

require 'data/sqlite'

coclass 'mirrorstats'

NB.*dependents
NB. (*)=: AlbumImageCount_sql GeotaggedAlbumImages_sql
NB.*enddependents

NB. NOTE: the j sqlite addon is fussy about how sql is formatted.
```

*NB. Running standard sql pretty printers or indenting sql in your
NB. favorite style is likely to produce code that doesn't work.*

```
AlbumImageCount_sql=: (0 : 0)
select count(1) as ImageCnt, a.AlbumKey, b.AlbumName from ImageAlbumXr a
inner join Album b on a.AlbumKey=b.AlbumKey group by a.AlbumKey
)
```

```
GeotaggedAlbumImages_sql=: (0 : 0)
select AlbumName, OnlineImageFile, Latitude, Longitude from OnlineImage a
inner join ImageAlbumXr b on a.ImageKey = b.ImageKey
inner join Album c on b.AlbumKey = c.AlbumKey
where (not (a.Latitude = 0 and a.Longitude = 0))
and c.AlbumName like
)
```

*NB.*end-header*

```
ALTMIRRORDBPATH=: 'c:/SmugMirror/Documents/XrefDb/'
```

NB. interface words (IFACEWORDSmirrorstats) group

```
IFACEWORDSmirrorstats=: <;._1 ' NotDivisible albdist fsd fst meanalbdist'
```

NB. sqlite mirror database file name

```
MIRRORDB=: 'mirror.db'
```

NB. mirror database path

MIRRORDBPATH=: 'c:/smugmirror/documents/xrefdb/'

NB. home longitude and latitude, west longitudes +, north latitudes +

MeeusHomeLonLat=: 0 0

NB. root words (ROOTWORDSmirrorstats) group

ROOTWORDSmirrorstats=: < ; _1 ' IFACEWORDSmirrorstats NotDivisible ROOTWORDSmirrorstats VMDmirrorstats albd
>..>st albextent dstat freq fsd fst histogram2 itYMDhms ofreq portchars read'

NB. version, make count and date

VMDmirrorstats=: '0.5.0';12;'12 Jul 2022 12:21:26'

AlbumImageCount=: 3 : 0

*NB.*AlbumImageCount v-- execute (AlbumImageCount_sql) query.*

NB.

NB. monad: bt =. AlbumImageCount clMirrorDb

NB.

NB. AlbumImageCount ALTMIRRORDBPATH,MIRRORDB

NB. get album image counts and names

AlbumImageCount_sql fsd y

)

```
NotDivisible=: 3 : 0
```

```
NB.*NotDivisible v-- albums with image counts that are not  
NB. divisible by 3 and 5.
```

```
NB.
```

```
NB. This verb finds albums with image counts that are not  
NB. divisible by 3 and 5. This weird requirement was motivated by  
NB. how the SmugMug iPhone App displays galleries. It breaks the  
NB. images into rows of three or five. I don't like incomplete  
NB. terminal rows.
```

```
NB.
```

```
NB. monad: bt =. NotDivisible clMirrorDb
```

```
NB.
```

```
NB.   trg=. 'c:/smugmirror/documents/xrefdb/mirror.db'
```

```
NB.   NotDivisible trg
```

```
NB.
```

```
NB. dyad:   bt =. ia NotDivisible clMirrorDb
```

```
NB.
```

```
NB.   4 NotDivisible trg
```

```
3 5 NotDivisible y
```

```
:
```

```
NB. !(*)=. ImageCnt AlbumName
```

```
(0 {"1 d)=. 1 {"1 d=. AlbumImageCount y
```

```
NB. works for integer (x) without common divisors
```

```
'common factor(s)' assert -.pwcfc x
```

```
a=. x , */x

b=. */ 0 < r=. a |"0 1 ImageCnt
c=. (a *"1 >. ImageCnt %"0 1 a) - ImageCnt
c=. (/ : |."1 b # c) { (<"0 b # ImageCnt,.c) ,. b # AlbumName
c ,~ '[Count]';(<"0 a),<'[Album Name]'
)

albdist=: 3 : 0

NB.*albdist v-- all mean album distances km from position (x).
NB.
NB. monad: bt =. albdist uuIgnore
NB.
NB.    albdist 0
NB.
NB. dyad: bt =. flLonLat albdist uuIgnore
NB.
NB.    0 0 albdist 0 NB. distances km from lb origin

MeeusHomeLonLat albdist 0
:
a=. nonemptyalbums 0
d=. x&meanalbdist&> 1 {"1 a
((<"0 b#d) ,. b # 1 {"1 a) [ b=. 0 < d
)

NB. mean km distance of geotagged album images from album "centroid"
```



```
albextent=: meanalblonlat meanalbdist ]

antimode=: 3 : 0

NB. *antimode v-- finds the least frequently occurring item(s) in
NB. a list.
NB.
NB. monad: ul =. antimode ul
NB.
NB.   antimode ?.500#100
NB.   antimode ;:'blah blah blah yada yada wisdom'

if. 0 < # y =. ,y do.    NB. no antimodes for null lists
  f =. #/.~ y           NB. nub frequency
  (~. y) #~ f e. <./ f   NB. lowest frequency items
else. y
end.
)

NB. arc tangent
arctan=: _3&o.

NB. signal with optional message
assert=: 0 0"_ $ 13!:8^:((0: e. ])^(12"_))

NB. retains string before first occurrence of (x)
beforestr=: ] {.~ 1&(i.~)@([ E. ])
```

```
charsub=: 4 : 0
```

```
NB.*charsub v-- single character pair replacements.
```

```
NB.
```

```
NB. dyad: clPairs charsub cu
```

```
NB.
```

```
NB.   '$_$ ' charsub '$123 -456 -789'
```

```
'f t'=. ((#x)$0 1)<@,&a./.x
```

```
t {~ f i. y
```

```
)
```

```
NB. cosine radians
```

```
cos=: 2&o.
```

```
NB. double quotes - doubles internal " quotes like (quote)
```

```
dbquote=: '""&,@(&'"')@(#~ >:@(&'"'))
```

```
NB. deviation about mean
```

```
dev=: -" _1 _ mean
```

```
dstat=: 3 : 0
```

```
NB.*dstat v-- descriptive statistics
```

```
NB.
```

```
NB. monad: ct =. dstal nl
```

```
NB.
```

```
NB.  dstat  ?.1000#100
NB.
NB.  dyad:  ct =.  faRound dstat nl
NB.
NB.  0.1 dstat  ?.1000#100

0.0001 dstat y
:
t=.  '/sample size/minimum/maximum/1st quartile/2nd quartile/3rd quartile/first mode'
t=. t ,  '/first antimode/mean/std devn/skewness/kurtosis'
min=. <./
max=. >./
t=. ,&' :  ' ;._1 t
v=. $,min,max,q1,median,q3,({.@mode2),({.@antimode),mean,stddev,skewness,kurtosis
t,. ": x round ,. v , y
)

earthdist=: 4 : 0

NB.*earthdist v-- distance in km between n points on the Earth's surface.
NB.
NB.  dyad:  (fl | ft) earthdist (fl | ft)
NB.
NB.  NB.  Paris longitude, latitude
NB.  NB.  ddfrdms computes decimal degrees from degree, minutes, seconds
NB.  l1      =. ddfrdms _2 _20 _14      NB.  2d 20m 14s (East)
NB.  theta1 =. ddfrdms 48 50 11        NB.  48d 40m 11s (North)
NB.
```

```
NB. NB. Washington
NB. l2      =. ddfrdms 77 3 56      NB. 77d 3m 56s (West)
NB. theta2 =. ddfrdms 38 55 17     NB. 38d 55m 17s (North)
NB.
NB. NB. rounded to 2 decimals matches Meeus
NB. 6181.63 = ". '0.2' 8!:2 (l1,theta1) earthdist l2,theta2
NB.
NB. NB. table arguments
NB. (/: 5 # ,: l1,theta1) earthdist /: 5 # ,: l2,theta2

a=. 6378.14      NB. Earth's mean radius (km)
fl=. % 298.257   NB. Earth's flattening (a * 1 - fl) is polar radius

NB. zero distances mask
b=. *./ x = y

NB. longitudes and latitudes in decimal degrees
NB. western longitudes +, northern latitudes +
NB. (*)=. l1 l2 theta1 theta2
'l1 theta1'=. x [ 'l2 theta2'=. y

f=.      rfd -: theta1 + theta2
g=.      rfd -: theta1 - theta2
lambda=. rfd -: l1 - l2

sqrsin=. *: @ sin
sqrcos=. *: @ cos
```

```
sinlam=. sqrsin lambda [ coslam=. sqrcos lambda
sqrcosg=. sqrcos g [ sqrsing=. sqrsin g
sqrsinf=. sqrsin f [ sqrcosf=. sqrcos f

s=. (coslam * sqrsing) + sinlam * sqrcosf
c=. (coslam * sqrcosg) + sinlam * sqrsinf

omega=. arctan %: s % c
r3=. 3 * (%: s * c) % omega
d=. +: omega * a
h1=. (<: r3) % +: c
h2=. (>: r3) % +: s

NB. required distance
d=. d * (>: fl*h1*sqrsinf*sqrcosg) - fl*h2*sqrcosf*sqrsing

NB. handle any zero distances
if. +./ b do.
  NB. cannot do b*d as d is undefined _ for zero distances
  if. ## d do. 0 (I. b)} d elseif. b do. 0 elseif. 1 do. d end.
else.
  d
end.
)
```

NB. frequency distribution

```
freq=: ~. ; #/.~
```

```
fsd=: 4 : 0
```

```
NB.*fsd v-- fetch sqlite dictionary array.
```

```
NB.
```

```
NB. dyad: clSql fsd clDb
```

```
NB.
```

```
NB.   trg=. 'c:/smugmirror/documents/xrefdb/mirror.db'
```

```
NB.   sql=. 'select ImageKey, OriginalWidth, OriginalHeight, OnlineImageFile, Keywords from OnlineImage'
```

```
NB.   sql fsd trg
```

```
NB. require 'data/sqlite' !(*)=. sqlclose__db sqldict__db sqlopen_psqlite_
```

```
d [ sqlclose__db '' [ d=. sqldict__db x [ db=. sqlopen_psqlite_ y  
)
```

```
fst=: 4 : 0
```

```
NB.*fst v-- fetch sqlite reads table.
```

```
NB.
```

```
NB. dyad: bt =. clSql fst clDb
```

```
NB.
```

```
NB.   trg=. 'c:/smugmirror/documents/xrefdb/mirror.db'
```

```
NB.   sql=. 'select ImageKey, OriginalWidth, OriginalHeight, OnlineImageFile, Keywords from OnlineImage'
```

```
NB.   sql fst trg
```

```
NB. require 'data/sqlite' !(*)=. sqlclose__db sqlreads__db sqlopen_psqlite_
```

```
d [ sqlclose__db '' [ d=. sqlreads__db x [ db=. sqlopen_psqlite_ y  
)
```

```
NB. variation on (histogram) uses left open intervals (xi, xi+1]
histogram2=: <:@(#/.~)@i.@>:@#@[ , |.@[ (#@[ - I.) ]])

NB. sqlite iso character timestamps to Y M D h m s table - ignores timezones
itYMDhms=: [: _1&".&> '- T : '&charsub@('+'&beforestr)&.>

NB. kurtosis
kurtosis=: # * +/@(^&4)@dev % *:@ssdev

NB. mean value of a list
mean=: +/ % #

meanalbdist=: 3 : 0

NB.*meanalbdist v-- mean km distance of geotagged album images
NB. from (x).
NB.
NB. monad: fa =. meanalbdist clAlbumName
NB.
NB. meanalbdist 'Weekenders' NB. has geotagged images
NB. meanalbdist 'Alpha Layered' NB. no geotagged images - 0 result
NB.
NB. dyad: fa =. flLonLat meanalbdist clAlbumName
NB.
NB. NB. mean distance from lb origin off west Africa
NB. 0 0 meanalbdist 'Ghana 1970''s'
```

```
MeeusHomeLonLat meanalbdist y
:
db=. ALTMIRRORDBPATH mirrorcn 0
(;0{r)=. ;1{r=. sqlread__db GeotaggedAlbumImages_sql,' ' ,dbquote y
NB. !(*)=. Longitude Latitude
if. #Longitude do. mean x earthdist (-Longitude) ,: Latitude else. 0 end.
)
```

```
meanalblonlat=: 3 : 0
```

```
NB.*meanalblonlat v-- mean longitude and latitude of geotagged
NB. album images.
NB.
NB. The point computed is roughly the "centroid" of geotagged
NB. album images. Uses Meeus conventions: western longitudes +,
NB. northern latitudes +.
NB.
NB. monad: meanalblonlat clAlbumName
```

```
db=. ALTMIRRORDBPATH mirrorcn 0
(;0{r)=. ;1{r=. sqlread__db GeotaggedAlbumImages_sql,' ' ,dbquote y
NB. !(*)=. Longitude Latitude
if. #Longitude do. mean"1 (-Longitude) ,: Latitude else. 0 0 end.
)
```

```
NB. median value of a list
median=: -:@(+/@)@((<. , >.)@midpt { /:~) ::_:
```



```
NB. mid-point
midpt=: -:@<:@#

mirrorcn=: 3 : 0

NB.*mirrorcn v-- connect to mirror database.
NB.
NB. monad: ba =. mirrorcn uuIgnore

MIRRORDBPATH mirrorcn 0
:
NB. require 'data/sqlite' !(*)=. sqlopen_psqli_
sqlopen_psqli_ x,MIRRORDB
)

mode2=: 3 : 0

NB.*mode2 v-- finds the most frequently occurring item(s) in a
NB. list.
NB.
NB. monad: ul =. mode2 ul
NB.
NB. mode2 ?.500#100
NB. mode2 ;:'I do what I do because I am what I am'

if. 0 < # y =. ,y do.      NB. null lists have no modes
  f =. #/.~ y              NB. nub frequency
```

```
(~. y) #~ f e. >./ f    NB. highest frequency items
else. y
end.
)

nonemptyalbums=: 3 : 0

NB.*nonemptyalbums v-- nonempty albums.
NB.
NB. monad: bt =. nonemptyalbums uuIgnore

db=. ALTMIRRORDBPATH mirrorcn 0
(;0{r)=. ;1{r=. sqlread__db AlbumImageCount_sql
NB. !(*)=. ImageCnt AlbumName
(<"0 b#ImageCnt) ,. b#AlbumName [ b=. 0 < ImageCnt
)

NB. like (freq) but results in descending frequency
ofreq=: [: (([: < [: \: [: ; 1 { ]) { &.> ]) ~. ; #/.~

NB. portable box drawing characters
portchars=: [: 9!:7 '+++++++|-'_"_ [ ]

NB. 1 if (x) has at least one pair with common factor(s) - see long document
pwc=: 1 < [: >./ [: +/ [: +./@e.&>/~ 0 -.&.>~ [: <"1 [: ~."1 q:

NB. first quartile
q1=: median@((median > ]) # ]) ::_:
```

NB. third quartile

```
q3=: median@((median < ]) # ]) ::_:
```

NB. reads a file as a list of bytes

```
read=: 1!:1&([`<@.(32&>@ (3!:0)))
```

NB. radians from degrees

```
rfd=: *&0.0174532925199432955
```

NB. round (y) to nearest (x) (e.g. 1000 round 12345)

```
round=: [ * [: (<.) 0.5 + %~
```

NB. sine radians

```
sin=: 1&o.
```

NB. skewness

```
skewness=: %:@# * +/@(^&3)@dev % ^&1.5@ssdev
```

NB. sum of square deviations (2)

```
ssdev=: +/@: *: @dev
```

NB. standard deviation (alternate spelling)

```
stddev=: %:@:var
```

NB. var

```
var=: ssdev % <:@#
```

NB.POST_mirrorstats post processor.

```
smoutput IFACE=: (0 : 0)
NB. (mirrorstats) interface word(s): 20220712j122126
NB. -----
NB. NotDivisible NB. albums with image counts that are not divisible by 3 and 5
NB. albdist      NB. all mean album distances km from position (x)
NB. fsd          NB. fetch sqlite dictionary array
NB. fst          NB. fetch sqlite reads table
NB. meanalbdist  NB. mean km distance of geotagged album images from (x)
)

cocurrent 'base'
coinsert 'mirrorstats'
```

Index

albdist, 8
albextent, 9
AlbumImageCount, 6
AlbumImageCount_sql, 5
ALTMIRRORDBPATH, 5
antimode, 9
arctan, 9
assert, 9

beforestr, 9

charsub, 10
cos, 10

dbquote, 10
dev, 10
dstat, 10

earthdist, 11

freq, 13
fsd, 14
fst, 14

GeotaggedAlbumImages_sql, 5

histogram2, 15

IFACE, 20
IFACEWORDSmirrorstats, 5
itYMDhms, 15

kurtosis, 15

mean, 15
meanalbdist, 15
meanalblonlat, 16
median, 16
MeeusHomeLonLat, 6
midpt, 17
mirrorcn, 17
MIRRORDB, 5
MIRRORDBPATH, 6
mode2, 17

nonemptyalbums, 18
NotDivisible, 7

ofreq, 18

portchars, 18
pwcf, 18

q1, 18
q3, 19

read, 19
rfd, 19
ROOTWORDSmirrorstats, 6
round, 19

sin, 19
skewness, 19
ssdev, 19
stddev, 19

var, 19
VMDmirrorstats, 6