




ProductID TCAS v8.5.0

Vocus Web Services Product Catalogue

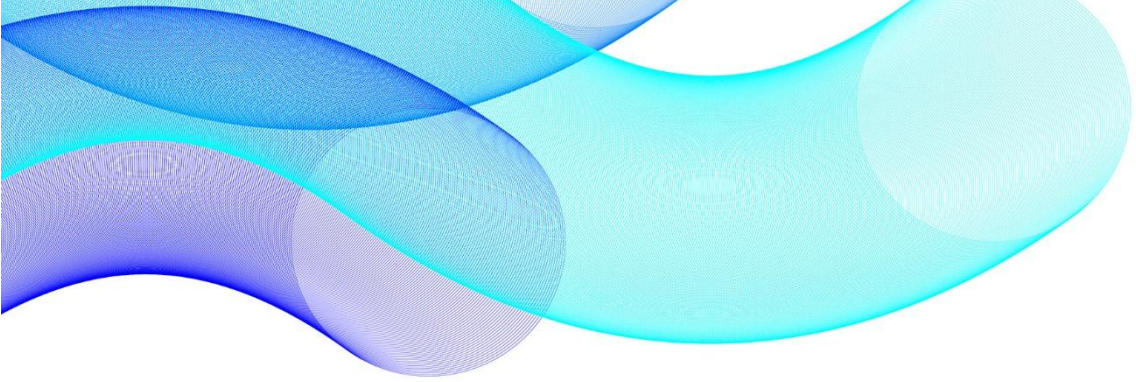

Commercial and in confidence

Vocus Group Limited | ABN 96 084 115 499 | vocus.com.au
Level 10, 452 Flinders Street, Melbourne
Victoria 3000, AUSTRALIA

Copyright Notice

This document is provided by Vocus Group Limited on the basis that you will treat it as confidential. No part of this documentation may be reproduced or copied in any form by any means without the written permission of Vocus Group Limited. Unless otherwise expressly agreed in writing, the information contained in this document is subject to change without notice and Vocus Group Limited assumes no responsibility for any alteration to, or any error or other deficiency, in this document.

Copyright © 2009 - 2025 Vocus Group Limited. All rights reserved.

1 Table of Contents

2	ProductID TCAS.....	2
2.1	Standard Plans	2
2.2	Dependencies.....	2
2.3	Transaction State Changes.....	2
3	TCAS Error Codes	3
4	PlanID TRANSACTION-ID.....	4
4.1	Operation WSM::Create.....	4
4.2	Operation WSM::Get	4
4.2.1	Scope RESPONSE.....	4
4.2.2	Scope REQUEST	5
4.2.3	Scope STEPS.....	5
4.3	Operation WSM::Set	7
4.4	Operation WSM::Delete.....	7
5	TCAS Sandbox	8
5.1	Simulating Successful Operation.....	8
5.2	Simulating Failed Operation.....	8

2 ProductID TCAS

The Transaction Control and Status (TCAS) service is an essential WSM component providing functionality for the management of WSM transactions. This service can also be used to retrieve the details of previous transactions (up to 7 days old).

2.1 Standard Plans


PlanID	Description
TRANSACTION-ID	Management, status reporting, and data extraction for TransactionID

2.2 Dependencies

Before reading this product catalogue please read the Wholesale Service Management main web service specification.

2.3 Transaction State Changes

There are 5 potential states for a transaction: QUEUED, PROCESSING, SUCCESS, FAILED, and WITHDRAWN. The following diagram shows the possible state transitions:

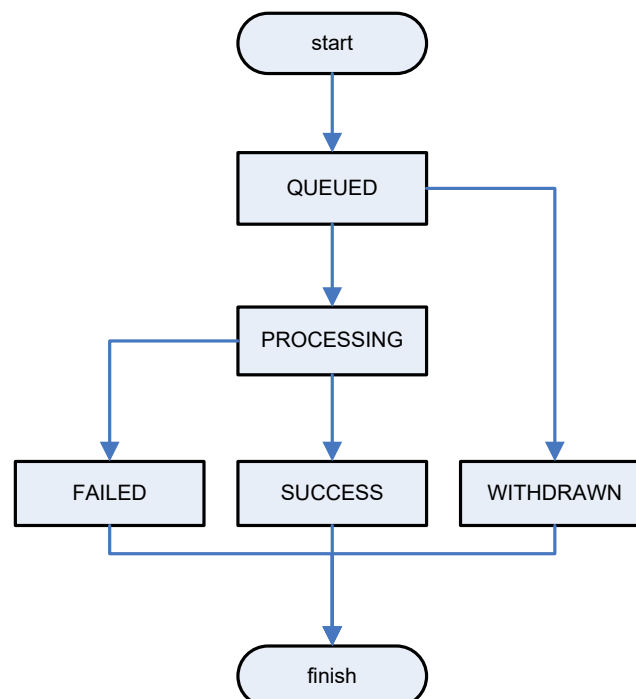

3 TCAS Error Codes

ErrorCodes	faultstring	Description
TCAS-0000	Internal error	Operation failed because of an unexpected internal error
TCAS-4220	Invalid Parameters. <i>Plus various messages, depending on what the invalid Parameters are</i>	Parameter validation error
TCAS-4222	Invalid PlanID	Requested PlanID does not exist
TCAS-4223	Invalid Scope	Scope is missing from request
TCAS-4300	Invalid TransactionID	TransactionID is not known
TCAS-4310	TransactionID Expired	TransactionID has been completed for more than 7 days and removed from historical table
TCAS-5030	Syndicated Service Error	Unrecoverable failure within one of the federated systems. Open a support ticket with Vocus and include any relevant parameters from the failed request.
TCAS-5050	Not implemented	The requested function is not implemented

4 PlanID TRANSACTION-ID

Use this PlanID to retrieve the status and response values for the corresponding WSM transaction.

4.1 Operation WSM::Create

The WSM::Create operation cannot be used with TCAS.

4.2 Operation WSM::Get

Perform data retrieval; the element **scope** is required for this operation.

4.2.1 Scope RESPONSE

For any valid TransactionID (up to 7 days old) use WSM::Get scope RESPONSE on a TransactionID to synchronously retrieve the corresponding status and response values for the operation the Transaction ID is associated with.

Request Params

Param	Cardinality	Notes
TransactionID	1..1	

Response Params

Param	Cardinality	Notes
TransactionState	1..1	The current status of the TransactionID in question: QUEUED: The operation is queued for processing PROCESSING: The operation is being processed SUCCESS: The operation has completed successfully FAILED: The operation has failed WITHDRAWN: The operation has been cancelled
<i>Plus more parameters.</i>	0..*	For TransactionState SUCCESS: The parameters will follow the parameter structure of the operation that is associated with the TransactionID. For example: <pre><Parameters> <Param id="TransactionState">SUCCESS</Param> <Param id="AppointmentDate">20120101</Param> </Parameters></pre> For TransactionState FAILED: The response parameters will be similar to a soap fault as seen below: <pre><Parameters> <Param id="TransactionState">FAILED</Param> <Param id="AppointmentDate">20120101</Param></pre>

		<pre> <Param id="faultcode">DIR-0000</Param> <Param id="faultmessage">General error</Param> </Parameters> For TransactionState QUEUED, PROCESSING, and WITHDRAWN: <Parameters> <Param id="TransactionState">QUEUED</Param> <Param id="AppointmentDate">20120101</Param> </Parameters> <Parameters> <Param id="TransactionState">PROCESSING</Param> <Param id="AppointmentDate">20120101</Param> </Parameters> </pre>
--	--	--

4.2.2 Scope REQUEST

For any valid TransactionID (up to 7 days old) use WSM::Get with scope REQUEST on a TransactionID to synchronously retrieve the corresponding request values of a TransactionID.

Client will generally use this scope to get the details of a WSM generated TransactionID.

Request Params

Param	Cardinality	Notes
TransactionID	1..1	

Response Params

Param	Cardinality	Notes
Operation	1..1	
AccessKey	0..1	Only the last 4 digit will be displayed for security reason. If the Transaction was initiated by WSM, this param is omitted
ProductID	1..1	
PlanID	0..1	
Scope	0..1	
<i>Multiple params depending on ProductID and operations.</i>	0..*	The parameters will follow the parameter structure of the operation that is associated with the TransactionID. For example: <pre> <Parameters> <Param id="Operation">GET</Param> <Param id="AccessKey">BBGF</Param> <Param id="ProductID">ADSL</Param> <Param id="PlanID">STANDARD-160GB</Param> <Param id="Scope">SERVICE</Param> <Param id="ServiceID">AABBCCDDEE</Param> </Parameters> </pre>

4.2.3 Scope STEPS

For any valid TransactionID (up to 7 days old) use WSM::Get scope STEPS on a TransactionID synchronously retrieve a detailed status of a TransactionID's processing steps within Vocus infrastructure.

Client will generally use this scope to get the details of a transaction with error code 5010 – Partially completed. For example, ProductID ADSL operation Set scope SERVICE allows client to modify multiple service parameters at once and only a subset of the modifications may fail. This scope will allow the client to tell which steps failed and the client can then fix and resubmit the request for the remaining changes required.

Transaction steps are generally processed in descending order. However, some steps might be done in parallel. It is not currently possible to manipulate transaction step status. This may be supported in a future release of TCAS.

Clients are advised to use this scope for information purpose only as Vocus cannot guarantee the processing steps will remain the same over the course of time. Changes in business rules and introduction of new products can affect the processing steps. For this reason these steps are not documented in this specification.

Request Params

Param	Cardinality	Notes
TransactionID	1..1	

Response Params

Param	Cardinality	Notes
<i>Multiple params depending on ProductID and operations.</i>	0..*	The parameters will show the internal steps of the operation. The format is similar with WSM call-back parameters that shows the step state: • QUEUED • PROCESSING • SUCCESS • FAILED • WITHDRAWN For example: <pre><Parameters> <Param id="SUCCESS">Validate XML</Param> <Param id="SUCCESS">Check FNN Ownership</Param> <Param id="FAILED">Service Qualification</Param> <Param id="SUCCESS">M2 Billing Provision</Param> <Param id="PROCESSING">Upstream Provision</Param> <Param id="QUEUED">M2 Radius Provision</Param> <Param id="QUEUED">Callback</Param> </Parameters></pre> Above example illustrates an ADSL service provisioning. The 2nd step is failing but since Vocus business rules ignores SQ result, the transaction is still in progress. Below example illustrates an ADSL modify transaction where multiple steps are processed all at once:

		<pre> <Parameters> <Param id="SUCCESS">Validate XML</Param> <Param id="SUCCESS">Update username</Param> <Param id="FAILED">Update FNN</Param> <Param id="PROCESSING">Update anniversary</Param> <Param id="PROCESSING">Update customer</Param> <Param id="FAILED">Update Password</Param> <Param id="PROCESSING">Update static UP</Param> <Param id="QUEUED">Callback</Param> </Parameters> </pre> This transaction will return error code ADSL-5010 Partially completed.
--	--	--

4.3 Operation WSM::Set

The WSM::Set operation cannot be used by TCAS.

4.4 Operation WSM::Delete

The WSM::Delete operation cannot be used by TCAS.

5 TCAS Sandbox

The Sandbox for TCAS works slightly differently to the sandbox for other WSM Products. The focus of the TCAS sandbox is to return the different TransactionStates that TCAS can provide.

5.1 Simulating Successful Operation

To generate the sandbox TransactionStates SUCCESS, QUEUED, WITHDRAWN, and PROCESSING, send the corresponding value SUCCESS, QUEUED, WITHDRAWN, or PROCESSING as the TransactionID.

5.2 Simulating Failed Operation

To generate the sandbox TransactionState FAILED, send the desired TCAS ErrorCode as the TransactionID.

The exception is for ErrorCode 4220 (Validation Error). To simulate a validation error, send a request with **invalid** Params to the WSM.