




Data Type Definitions v8.5.0

Vocus Wholesale Web Services

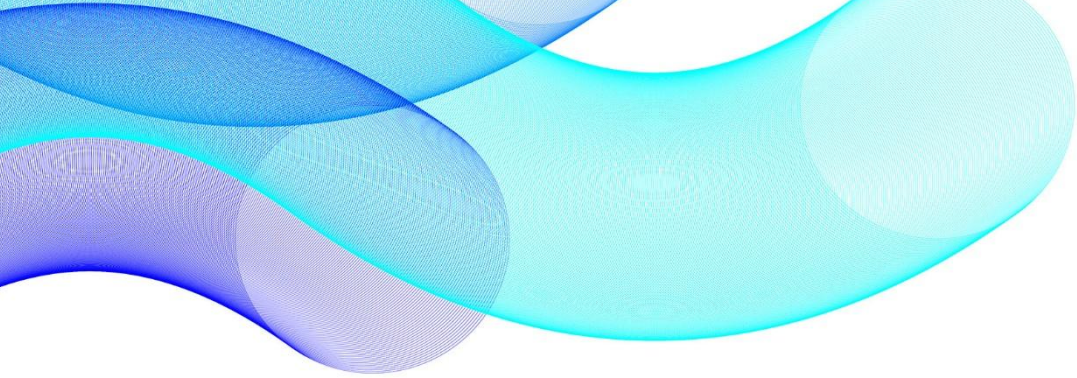

Commercial and in confidence

Vocus Group Limited | ABN 96 084 115 499 | vocus.com.au
Level 10, 452 Flinders Street, Melbourne
Victoria 3000, AUSTRALIA

Copyright Notice

This document is provided by Vocus Group Limited on the basis that you will treat it as confidential. No part of this documentation may be reproduced or copied in any form by any means without the written permission of Vocus Group Limited. Unless otherwise expressly agreed in writing, the information contained in this document is subject to change without notice and Vocus Group Limited assumes no responsibility for any alteration to, or any error or other deficiency, in this document.

Copyright © 2009 - 2025 Vocus Group Limited. All rights reserved.

1 Table of Contents

1	Table of Contents	1
2	General Information	2
3	Basic Data Types	3
4	Standard CSV Format.....	16
5	CDATA String.....	17

2 General Information

This document defines the data types used by the Wholesale Service Management Web Service (WSM). Use of the standard data type definitions helps achieve consistency across all web services.

There are 3 different formats for data:

- Basic data types used as individual elements, including elements within a 'Param' structure
- CDATA String used to embed a complex data type (XML record) inside a Param structure. The elements within the CDATA compound element are basic data types.
- CSV formatted data strings, typically used by WSM in the construction of report files

Please refer to the subsequent chapters for the definitions. For clients that prefer XML style definitions, these are available in **StandardDataTypes.xsd** distributed as part of the WSM SDK.

Example of Basic Data Types

All basic data types are highlighted in the example.

```
<GetRequest>
  <AccessKey>ZZZBCCDDFFEEGGHH1166</AccessKey>
  <ProductID>TCAS</ProductID>
  <PlanID>TRANSACTION-ID</PlanID>
  <Parameters>
    <Param id="TransactionID">ABACAC1234</Param>
  </Parameters>
</GetRequest>
```

Example of CSV file

Below is the content of a text file called "TEST.CSV":

```
"SUBURB", "SIZE", "NOTES"
"CITY A", "2000", "North facing with \"Superb\" location"
"CITY B", "1000", "Excellent public transport"
"CITY C", "5000", "Very large suburb\nExcellent amenities\nPublic transport"
"CITY D", "5000", "South\nNorth facing city"
```

Example of CDATA string

CSV string is commonly used to represent a compound data type inside a Param structure.

```
<GetResponse>
  <TransactionID>CGFF192A</TransactionID>
  <ResponseType>SYNC</ResponseType>
  <Parameters>
    <Param id="AuthUsageRecord">
      <![CDATA[
        <AuthUsageRecord>
          <DateTime>20100725130000</DateTime>
          <AuthResult>PASS</AuthResult>
          <Reason>Accepted</Reason>
        </AuthUsageRecord>
      ]]>
    </Param>
  </Parameters>
</GetResponse>
```

3 Basic Data Types

Most of the following definitions are used to describe content of the Params element.

Name	Type	Permitted Values	Description
ABN	string(11)		Australian Business Number
AccessKey	string(1..64)		A credentials key associated with an Vocus secure certificate
ActionAtExpiry	string(1..20)		Action that will be taken when the expiry date is reached – e.g. SHAPE, SUSPEND, RENEW
ActionAtLimit	string(1..20)		Action that will be taken when the quota limit is reached – e.g. SHAPE, SUSPEND, NONE
ActivationDate	string(8)		Activation date in YYYYMMDD format
Address Address2 Address3	string(1..40)		A geographical address
AddressLine1 AddressLine2 AddressLine3	string(1..40)		A geographical address
AddressType	string	RESIDENTIAL BUSINESS	
AggregatedVirtualCircuit	string		This will be replaced by params AVCID
Alias	string(2..100)	a to z, A to Z, 0 to 9, dot, dash, and underscore	Alias generally for username
AlternativeTechnology	boolean	TRUE FALSE	NBN Fibre on Demand programme
AnniversaryDay	integer(0..31)		Billing period of a service. If the Anniversary date is beyond the last date of the month, it will default to the last date of that month.
AppointmentDate	string(12)		Appointment date in YYYYMMDDHHMMSS format
AppointmentSLA	string		
AppointmentSlot	string		Slot available for an appointment
AppointmentStatus	string		Status of an appointment
AntiSpam	boolean	TRUE FALSE	Enable / disable anti spam processing on a mailbox
AntiVirus	boolean	TRUE FALSE	Enable / disable antivirus processing on a mailbox
AssignedSTag	string(1..50)	a to z, A to Z, 0 to 9, dot, dash, and underscore	Assigned Service Tags
Attachments	boolean	TRUE FALSE	Enable / disable block of forbidden attachment e.g. *.exe
AuthResult	boolean	TRUE FALSE	Authentication result
AuthType	string	PPPoE IPoE NA	Authentication type
AuthUsageRecord	CDATA string		Historical authentication records. Refer to CDATA string section of this specification for the fields.
AvailableCTAG	integer		The number of available CTAG for a CVC. Only for NCL2.
AVCID	string		Aggregated Virtual Circuit
AVCIDMatch	boolean		TRUE when it's a match
AVCIDTarget	string		Target of AVCIDMatch.
Battery	boolean	TRUE FALSE	When TRUE, a battery is installed

BatteryMonitor	boolean	TRUE FALSE	When TRUE, battery monitoring is enabled
BatteryDate	string(8)		Date in YYYYMMDD. This is the date when the battery was installed.
BucketID	string(1..30)	a-z, A-Z, 0-9, dash, underscore, and dot	A unique ID for the service
BucketType	string	DATA-HOSTED STANDARD-POSTPAID	Type of bucket
BundleReference	string(2..30)	a-z, A-Z, 0-9, dash, underscore, and dot	Record of a linked service such as an ADSL FNN. The value is ProductID and PlanID dependant.
BlackberryPlan	string	Provided by Vocus	Blackberry plan
BillingProviderID	string(1..30)		A billing provider ID
CADate	string(8)		Customer Authority date in YYYYMMDD format
CallWait	boolean	TRUE FALSE	Status of call wait of a handset
CarrierID	integer(2..15)	0 - 9	Unique carrier identified ID for a service. E.g. Naked DSL carrier identifier or Full National Number (FNN) of a service.
CentralSplitter	boolean		Central splitter installation
CCA	string		Call Collection Area. A geographical area containing one or more telephone exchanges.. e.g. CANBERRA
CCPassword	string(2..50)		Commander Central password
ChangeDate	string(14)		Change over date in YYYYMMDDHHMMSS
CommandType	string		A special command e.g. TRANSFER
ContactRecord	CDATA		A record for contact
ConversationRecord	CDATA		A record containing message interchange between systems. Refer to CDATA string section of this specification for the fields.
Code	string		A generic code holder. Refer to ProductID for specific use.
CopperDisconnectionDate	string(8)		The date copper will be disconnected in Date in YYYYMMDD format
CopperPairID	string(1..15)		Copper Pair Identification
CompanyName	string(1..64)		Name of a company or business
ConnectionType	string		A connection type
ConnectivityServiceArea	string(1..16)		An area identifier for fibre
ConnectivityVirtualCircuit	string(1..16)		This will be replaced by param CVCID
Consignment	string(1..50)		Generally a tracking number for a dispatch
CorpDataProductRecord	CDATA string		Corporate data product record. Refer to CDATA string section of this specification for the fields.
CorpVoiceProductRecord	CDATA string		Corporate voice product record. Refer to CDATA string section of this specification for the fields.
CPEOptions	string		CPE fulfilment options
CPEPlanID	string		CPE order detail
CPEServiceID	string(1..30)	a-z, A-Z, 0-9, dash, underscore, and dot	A unique ID for the service in Vocus
CPEDirectoryID	string		DirectoryID for CPE
CreationDate	string(8)		Date in YYYYMMDD format
CTAG	string(1..50)		Customer Tag
CurrentEPID	string		Current EPID of a service. https://www.commsalliance.com.au/Documents/Industry-Lists/EPID
CustomerClass	String(1..20)	CLASS0 CLASS1 CLASS2	Customer classification. Default is CLASS 5.

		CLASS3 CLASS4 CLASS5	
CustomerName	string(1..40)		A customer full name, including title
CustomerType	string	PERSONAL BUSINESS GOVT CHARITY NA	Type of customer Default value is NA = Not available
CVCID	string		Connectivity virtual circuit identifier
CVCState	string	NSW SA WA TAS VIC QLD NT NATIONAL	Comma separated or NATIONAL only
DailyUsageRecord	CDATA string		Daily data usage records. Refer to CDATA string section of this specification for the fields.
DatabasePassword	string(1..25)		A password for database
RecordDate	string(8)		Date in YYYYMMDD
DataPort	string		Data port
DataPortID	string		NBN Data Port ID eg. 1-UNID-2
DataPortNumber	integer		NBN Data port Number
DateTime	string(14)		Date and time in YYYYMMDDHHMMSS format
DemandType	string		Demand type of an NBN appointment
Description	string		Multipurpose textual description
DestinationServiceID	string(1..30)	a-z, A-Z, 0-9, dash, underscore, and dot	A unique ID for the service in Vocus
DevelopmentName	string		Name of development
DevelopmentCharge	boolean	TRUE FALSE	When TRUE, extra charges apply
DeviceAccessCode	string		Password to access device
DeviceBuild	string		Device build information
DeviceType	string		Type of device
DirectoryID	string(1..30)	A-Z, a-z, 0-9, dash, dot, and under-score	System generated unique ID assigned to an address created by the client.
DispatchReference	string(2..30)	a-z, A-Z, 0-9, dash, underscore, and dot	Reference number to group shipment together for the same address.
DispatchRequest	string(14)		Date and time when dispatch request sent to warehouse in YYYYMMDDHHMMSS format
DispatchResponse	string(14)		ETA Date and time when shipment will arrive at destination in YYYYMMDDHHMMSS format
DisplayCLI	boolean	TRUE FALSE	Caller Line Identification status of a handset
DisconnectReason	string		Reason for disconnection
DOB	string(8)		Date of birth in YYYYMMDD format
Domain	string(1..64)		A domain
DomainName	string(1..64)		Internet domain name
DSLAMType	string		A type of DSLAM
DownloadSpeed	string		Download speed per second in octets e.g. 1256000
Duration	integer		Duration in seconds
DynamicVars	string(1..200)		List of user tags in CSV format, in tagName=tagValue format
EmailAlias	string(1..100)	Email address	An email alias address
Emergency.ContactFirstName	string(1..40)		Emergency contact Firstname
Emergency.ContactLastName	string(1..40)		Emergency contact Lastname
Emergency.Phone	string(1..20)	up to 20 digits	Full national number for emergency contact eg. 61433222999

EndDate	string(8)		End date in YYYYMMDD
EndTime	string(14)		End date time in YYYYMMDDHHMMSS
ErrorCode	string(1..20)		Error identifier
EventID	string		Multi purpose ID for an event
EPID	string		EPID of a service. https://www.commsalliance.com.au/Documents/Industry-Lists/EPID
Exchange	string		Unique exchange identified for a CarrierID e.g. LONSDALE
ExpiryDate	string(8)		Date in YYYYMMDD format
Extension	string(1..10)		Extension
ExtraCharge	boolean		Extra charges
FAILED	string(1..20)		Contains the TransactionID of the failed transaction
faultcode	string		The ErrorCode of the failed operation
faultstring	string		The faultstring of the failed operation
Feature	string(1..30)		Name of a feature
FeatureName	string(1..30)		Name of a feature
FeatureValue	string(1..100)		Value of a feature
FibreAddressRecord	CDATA		A fibre compatible address record
FibreResult	string	PASS REJECTED ERROR MANUAL	Result of a fibre service qualification
Firmware	string		A device firmware
FirstName	string(1..40)		Customer first name
FNN	string(1..10)	Numeric values only (0-9)	Full National Number e.g. 0396746804
ForecastAccessTechnology	string	FTTP	Forecasted future access technology
ForecastRTCDate	String(14)		Forecasted date when alternative technology is available for ordering in YYYYMMDDHHMMSS
ForwardAddress	string(1..100)	Email address	Email forwarding address
Frequency	unsignedInt		
FrustratedStatus	boolean	TRUE FALSE	
FsamIdentifier	string		Area identifier eg. 2GOS-07
FsaWsaName	string		Name of area eg. Gosford
GPRS	boolean	TRUE FALSE	Status of GPRS service
GPRSPlan	string		GPRS plans
Hardware	string		A hardware code
HasMore	boolean	TRUE FALSE	Has more
HFCSelfInstall	boolean	TRUE FALSE	Eligibility for HFC NTD Self Install
HFCStatus	boolean	TRUE FALSE	
HourlyUsageRecord	CDATA string		Hourly data usage record. Refer to CDATA string section of this specification for the fields.
HPS	string	0-9,A-Z	Hosted Phone Service identifier
ID	string(1..30)	a-z, A-Z, 0-9, dash, underscore, and dot	A generic param for ID
IMEI	string(1..15)		Unique handset identifier
IPAddress	string(7..39)		IPv4 address e.g. 123.168.10.5
IPAssignment	string	CGNAT STATIC DYNAMIC TEMPORARY STICKY TEMPORARY-	IP assignment method for a service.

		EXTENDED OTHER	
IPv6Address	string(7..46)		IPv6 address e.g. 2001:0db8:85a3:0000:0000: 8a2e:0370:7334
IPv6PrefixList	string(1..20)		IPv6 address prefix list e.g. 64
Label	string(1..50)	a-z, A-Z, 0-9, underscore	A free text label
LastRecordID	unsignedLong		Pointer to last record
Latitude	string		Latitude coordinate e.g. -34.96929095
LastInform	string		Date and Time or string
LocationReference	string(1..30)		Location reference for a service. Normally a postcode, state, or GPS coordinate.
Longitude	string		Longitude
MAC	string(12)	0-9,A-F	Mac address without the separator eg. 0123456789AB
MACWL	string		MAC address white list in CSV format
Main.Country Directory.Country Billing.Country	unsignedInt	0 to 99999	International Direct Dial code for the service eg. 61 = Australia, 64 = New Zealand
Main.BuildingType Directory.BuildingType Billing.BuildingType	string		
Main.FloorNumber Directory.FloorNumber Billing.FloorNumber	unsignedInt	0 to 9999	Building floor number
Main.FloorSuffix Directory.FloorSuffix Billing.FloorSuffix	string(1)		Building floor number suffix
Main.FloorType Directory.FloorType Billing.FloorType	string(1..3)		Abbreviated building floor type. Australian addresses must follow "Vocus Street Address Component and PostCode Standard"
Main.LotNumber Directory.LotNumber Billing.LotNumber	string (1..5)		Property lot number
Main.PostCode Directory.PostCode Billing.PostCode	string(1..6)		Billing postcode. Australian addresses must follow "Vocus Street Address Component and PostCode Standard"
Main.PropertyName Directory.PropertyName Billing.PropertyName	string(1..40)		Building name eg. Temple Court Apartments
Main.State Directory.State Billing.State	string(1..10)		Abbreviated service state / province. Australian addresses must follow "Vocus Street Address Component and PostCode Standard"
Main.Street1stNumber Directory.Street1stNumber Billing.Street1stNumber	unsignedInt	0 to 99999	Building first street number
Main.Street1stNumberSuffix Directory.Street1stNumberSuffix Billing.Street1stNumberSuffix	string(1..3)		Building first street number suffix
Main.Street2ndNumber Directory.Street2ndNumber Billing.Street2ndNumber	unsignedInt	0 to 99999	Building second street number
Main.Street2ndNumberSuffix Directory.Street2ndNumberSuffix Billing.Street2ndNumberSuffix	string(1)		Building second street number suffix
Main.StreetName Directory.StreetName Billing.StreetName	string(1..25)		Building street name
Main.StreetSuffix Directory.StreetSuffix Billing.StreetSuffix	string(1..6)		Abbreviated building street suffix. Australian addresses must follow "Vocus Street Address Component and

			PostCode Standard"
Main.StreetType Directory.StreetType Billing.StreetType	string(1..8)		Abbreviated building street type. Australian addresses must follow "Vocus Street Address Component and PostCode Standard"
Main.Suburb Directory.Suburb Billing.Suburb	string(1..40)		Suburb, city, or locality name
Main.Unit1stNumber Directory.Unit1stNumber Billing.Unit1stNumber	unsignedInt	0 to 99999	Building first unit number
Main.Unit1stSuffix Directory.Unit1stSuffix Billing.Unit1stSuffix	string(1)		Building first unit number suffix
Main.Unit1stType Directory.Unit1stType Billing.Unit1stType	string(1..4)		Abbreviated building subunit type. Australian addresses must follow "Vocus Street Address Component and PostCode Standard"
Main.Unit2ndNumber Directory.Unit2ndNumber Billing.Unit2ndNumber	unsignedInt	0 to 99999	Building second unit number
Main.Unit2ndSuffix Directory.Unit2ndSuffix Billing.Unit2ndSuffix	string(1)		Building second unit number suffix
Main.Unit2ndType Directory.Unit2nd Type Billing.Unit2nd Type	string(1..4)		Abbreviated building subunit type. Australian addresses must follow "Vocus Street Address Component and PostCode Standard"
MainAddressType Directory.AddressType Billing.AddressType	string(1..6)		Abbreviated building subunit or postal delivery service type. Australian addresses must follow "Vocus Street Address Component and PostCode Standard"
MaxRecorCount	unsignedLong		Total record count
Message	string		A generic textual message string
MeteredUsage	unsignedLong		Billable usage specified in octets
MMS	boolean	TRUE FALSE	Status of MMS service
Month	unsignedInt	1 to 12	Numeric representation of a month with no leading zero.
MSISDN	string(1-15)	11 to 15 digits	Mobile Station International Subscriber Directory Number (globally unique MSN) eg. 61411222333
MSN	string(1..10)	10 digits	Mobile Service Number eg. 0411222333
MSNTType	string	POSTPAID PREPAID	Type of a MSN (should this be type of the service associated with the MSN instead?)
NASIPAddress	string(7..39)		IPv4 or IPv6 address e.g. 123.168.10.5
NASPort	unsignedInt		NAS port e.g. 1055
NBNCOATRecord	CDATA		NBN Change of Access Technology record
NBNCPEFirstAlert	string(8)		The date of the first alert for NBN HFC NTD. HFC Resume is available from this date. Date in YYYYMMDD
NBNCPEID	string(1..30)		
NBNCPEPlanID	string(2..30)		Plan code
NBNCPEServiceID	string(1..30)	a-z, A-Z, 0-9, dash, underscore, and dot	A unique ID for the service in Vocus
NBNCRD	string(8)		Date in YYYYMMDD
NBNFeatureRecord	CDATA		A record of NBN product feature
NBNIdentifier	string(1..16)		NBN identifier eg. NTD120123456789

NBNInstanceID	string(1..20)		NBN Service Identifier eg. PRI000029575139
NBNNote	string		Various note from NBN
NBNPortRecord	CDATA		A record of an NBN device port
NBNRollOutRecord	CDATA		NBN deployment information
NBNServiceStatus	string		Status of an NBN Service
NBNUnplannedOutageRecord	CDATA		NBN unplanned outage record
NetworkName	string		Network identification name
NetworkConnectionType	string		Connection Type of a network
NetworkCoExist	boolean		Status of network co-existence. Eg. shared network
NetworkCircuitID	string		Circuit identifier for a network
NetworkCableLength	integer		Cable length in meter
Normal.ContactFirstName	string(1..40)		Contact first name
Normal.ContactLastName	string(1..40)		Contact last name
Normal.Phone	string(1..20)		Full national number for contact eg. 61433222999
Notes	string(1..255)		Notes
NTDID	string		NBN NTD Identifier
NTDVersion	string		NBN NTD version
OffPeakExternalDownload	unsignedLong		Total external off peak download traffic in octets
OffPeakExternalUpload	unsignedLong		Total external off peak upload traffic in octets
OffPeakInternalDownload	unsignedLong		Total internal off peak download traffic in octets
OffPeakInternalUpload	unsignedLong		Total internal off peak upload traffic in octets
OffPeakPeeringDownload	unsignedLong		Total peering off peak download traffic in octets
OffPeakPeeringUpload	unsignedLong		Total peering off peak upload traffic in octets
OnlineSessionRecord	CDATA string		Online session record. Refer to CDATA string section of this specification for the fields.
OperationType	string	CREATE GET SET DELETE	Type of WSM operation
OrderReference	string(2..30)	a-z, A-Z, 0-9, dash, underscore, and dot	Reference to an order. The value is ProductID and PlanID dependant.
OrderType	string	NEW CHURN B-CHURN PORTIN TRANSFER OUTSTANDING	Type of service order. B-CHURN is specific for DSL service with Telstra.
OriginalTechnology	string		The original technology for an address
OptusAddressRecord	CDATA string		An address record which likely exists in Optus system. Refer to CDATA string section of this specification for the fields.
Param	string(1..256)		A generic option container for a product, plan or operation
Parameters	Array	Param	Array of Params
Password	string(2..50)		Service password
PeakExternalDownload	unsignedLong		Total peak external download traffic in octets
PeakExternalUpload	unsignedLong		Total peak external traffic upload in octets
PeakInternalDownload	unsignedLong		Total peak internal download traffic in octets
PeakInternalUpload	unsignedLong		Total peak internal traffic upload in octets
PeakPeeringDownload	unsignedLong		Total peak peering download traffic in octets
PeakPeeringUpload	unsignedLong		Total peak peering traffic upload in

			octets
PeriodLength	unsignedInt		Total length of a period
Phone	integer(10)		Phone number for contact eg. 0433222999
PlanID	string(2..30)		Plan code
PlanType	string	3G GPRS BLACKBERRY	A type of a mobile plan, generally a bolt-on or VAS plans
PortID	string(1..30)	a-z, A-Z, 0-9, dash, underscore, and dot	Port identification
PortIDPrimary	Integer		Primary port ID
PortIDSecondary	integer		Secondary port ID
PortName	string		Name of a port eg. UNI-D-2
PortNumber	integer		Port number eg. 1
PortOutReference	unsignedLong		CID for porting mobile service out
PortResult	string	REJECTED SCP-READY PISO-READY CUTOVER-READY COMPLETED	Result of a service PORT. REJECT = Port is rejected. SCP-READY = MSN is ready for POST-SCP PISO-READY = MSN is ready for Port In Service Order process (PISO) CUTOVER-READY = FNN is ready for cutover
PortType	string	PORTIN REVERSAL WITHDRAWAL GIVEBACK VOICE DATA PRIMARY SECONDARY	Type of service port which being use for type of MNP. GIVEBACK is only supported for Telstra MobileNet MSN.
PostCode	string(1..6)		A postcode. Australian addresses must follow "Vocus Street Address Component and PostCode Standard"
POI	string(1..10)		An NBN POI
POIData	string		POI data
POIID	string		Point of Interconnect ID
POIName	string		Name of Point of Interconnect
POTSInterconnect	string		FNN or ULL
POTSMatch	boolean		
POTSLoudnessLoss	float		POTS Loudness loss in decibel
POTSAttenuation	float		
POTSResistance	float		
POTSBridgeTapLength	Integer		
POTSMigrationAllowed			
POTSLevelSetting	string		
POTSDeploymentRecord	CDATA string		Available POTS deployment record. Refer to CDATA string section of this specification for the fields.
PROCESSING	string(1..20)		Contains the TransactionID of the transaction that is currently being processed
PrimaryTechnology	string		The primary access technology for an address
PriorityAssist	boolean	TRUE FALSE	
ProductCode	string		Product code
ProductID	string(1..30)		Product package
Profile	string		This parameter is not in use.
PUK	Integer(8)		Personal Unlock Code for a SIM
QUEUED	string(1..20)		Contains the TransactionID of the transaction that has been queued for processing

QuotaAmount	unsignedLong		Quota allowance specified in octets
QuotaAmountVoice	unsignedLong		Voice quota in minutes
QuotaAmountSMS	unsignedLong		SMS quota in total available
QuotaAmountData	unsignedLong		Data quota in MB
QuotaDialect	string		Internal quota identifier. To be ignored.
QuotaFuture	unsignedLong		Future quota
QuotaName	string(1..20)		Identifier for the quota – e.g. STANDARD, PEAK, OFFPEAK, SOFTLIMIT, HARDLIMIT, UNLIMITED. Used for differentiation where a plan has multiple quotas.
QuotaFutureVoice	unsignedLong		Future Voice quota in minutes
QuotaFutureSMS	unsignedLong		Future SMS quota in total available
QuotaFutureData	unsignedLong		Future Data quota in MB
QuotaStatus	string(1..20)	ACTIVE CONSUMED EXPIRED QUEUED	Status of the quota.
QuotaType	string(1..20)		Type of the quota - e.g INITIAL, TOPUP, PREPAID
RadiusTestResult	string		Result of a RADIUS authentication test, wrapped inside CDATA tag
Realm	string(1..61)		A radius authentication realm
Reason	string		A textual description
ReasonCode	string(2)	DD, HC, FH, LH, NE, NR, PI, PO, PS, RS, SD, SF, SR, SS, ST, VA, XX	Reason for a service being cancelled, suspended, or resumed. DD - Dead SIM HC - Running costs high FH - Found Handset LH - Lost Handset NE - Dissatisfied with network NR - No longer required PI - Port In PO - Port Out PS - Poor service with phone H/W RS - Restore SD - Sold car/phone (still with us) SF - Faulty SIM SR - Special request SS - SIM stolen ST - Stolen Handset VA - Vacation XX - Other
RecordID	string		ID of a record
Reference	string(2..30)	a-z, A-Z, 0-9, dash, underscore, and dot	Record of a customer account on client system. The value is ProductID and PlanID dependant.
RemediationDate	string(8)		Remediation date in YYYYMMDD
Result	string		Generic field for result
ResponseType	string	SYNC ASYNC	Type of response. If this element is not present, the response is assumed to be synchronous
ResumeDateTime	string(14)		Resume date time in YYYYMMDDHHMMSS format
RetailAccountNo	string(1..50)		Client's retail account number for a service
Roaming	string	INTERNATIONAL HOME	Roaming status of a MSN
RollOutRegionId	string		Rollout Identifier
RoutedSubnet	string(10..18)		Contains the routed subnet, including mask size e.g. X.X.X.X/28
RoutedSubnetIP	string(7..15)		Contains the IP for routed subnet, without the mask size. e.g. 123.123.123.123
RoutedSubnetMask	string(1..2)		Contains the size of the routed subnet mask in bits e.g. 28 = x.x.x.x/28

RoutedSubnetType	string	INTERNAL EXTERNAL	Type of subnet routing
RTCDate	string(14)		Ready to connect date for alternative technology in YYYYMMDDHHMMSS
Salutation	string(1..12)		Customer title
SameCarrierPort	boolean		Same carrier port status
Scope	string(1..30)		Operation action selector
SearchMode	string	DEFAULT CACHE	Search mode
Serviceable	boolean	TRUE FALSE	Status of serviceability of a product
ServiceClass	string		Class of service eg. 6
ServiceID	string(1..30)	a-z, A-Z, 0-9, dash, underscore, and dot	A unique ID for the service
ServiceGroup	string(1..50)		A service grouping
ServiceLevel	string	STANDARD ENHANCED4 ENHANCED6 ENHANCED8 ENHANCED12 ENHANCED4-24/7 ENHANCED6-24/7 ENHANCED8-24/7 ENHANCED12-24/7	Service level
ServiceStatus	string	ACTIVE, INACTIVE, SUSPEND, PROCESSING	Status of a service. INACTIVE equals with cancelled service
ServiceTags	string(1..200)		List of user tags in CSV format, in tagName=tagValue format
ServiceType	string	ADSL1, ADSL2, ADSL2+, N/A, FIBRE, WIRELESS, SATELLITE, 2G, 3G, 4G, DIAL, VOIP, FTTB, FTTN, HFC, FTTC	Available Service types Response "N/A" means either no service types are available, or the service type is unknown. E.g as a response to an ADSL Service Qualification query for an address that is not on an ADSL-enabled exchange
SessionID	string(1..64)		A session identifier. This value can be the ADSL session ID from NAS.
SessionLogRecord	CDATA string		Historical session record. Refer to CDATA string section of this specification for the fields.
SerialNumber	string		A device serial number
ServiceType	string(1..20)		Type of Service
ShapeStatus	boolean	TRUE FALSE	Shape status of a service. TRUE means the service is shaped.
ShapingInstanceID	string(1..15)		A shaping instance ID for group allowance
ShipmentCompany	string	AusPost Toll DHL UNKNOWN	UNKNOWN does not means an unknown shipment company, it can means the shipment company code is not registered in Vocus database
SiteNote	string(1..255)		A note for site information Eg. Corner of house
SIM	string(1..22)		A SIM number
SIMRange	string		SIM card number range. Eg. 99909012310001-99909012310500
SIMType	string	2G USIM ESIM PHYSICAL	Type of SIM card. USIM is a 3G SIM
SIP.Username SIP.1.Username SIP.2.Username	string(2..100)	a to z, A to Z, 0 to 9, dot, dash, @, and underscore	A SIP username
SIP.Password SIP.1.Password SIP.2.Password	string(2..50)		A SIP password

SIP.State SIP.1.State SIP.2.State	string(1..10)		Valid state or province abbreviation. Australian addresses must follow "Vocus Street Address Component and PostCode Standard"
SpecialCondition	string(1..255)		Special condition Eg.Clearance requirement
SMSIN	boolean	TRUE FALSE	Status of incoming SMS
SMS	boolean	TRUE FALSE SMS-IN SMS-OUT SMS-PREMIUM	Status of SMS service
SMSPremium	boolean	TRUE FALSE	Status of Premium SMS service
SMSOUT	boolean	TRUE FALSE	Status of outgoing SMS
Speed	string		Speed in octets or as defined by method
SRMPassword	string(1..50)		A device TR-069 authentication password
SSID	string		SSID name
STAG	string(1..50)	a to z, A to Z, 0 to 9, dot, dash, and underscore	Service Tags
StabilityProfile	string	STANDARD STABLE REPAIR	Stability profile for FTTB, FTTN, FTTC
StandardExternalDownload	unsignedLong		Total standard external download traffic in octets
StandardExternalUpload	unsignedLong		Total standard external upload traffic in octets
StandardInternalDownload	unsignedLong		Total standard internal download traffic in octets
StandardInternalUpload	unsignedLong		Total standard internal upload traffic in octets
StandardPeeringDownload	unsignedLong		Total standard peering download traffic in octets
StandardPeeringUpload	unsignedLong		Total standard peering upload traffic in octets
StartDate	string(8)		Start date in YYYYMMDD
StartDateTime	String(14)		Star date time in YYYYMMDDHHMMSS
StartRecordID	unsignedLong		Pointer to a record
StartTime	string(6)		Start time in HHMMSS
State	string(1..10)		Valid state or province abbreviation. Australian addresses must follow "Vocus Street Address Component and PostCode Standard"
StockID	string(1..30)		A unique ID for a stock
StockIDOther	string(1..30)		Other StockID with the same serial number in CSV format. This generally indicates the device was restocked.
Suburb	string(1..20)		City, town, or suburb name.
Status	string		A Status
StatusChangeDate	string(8)		Date in YYYYMMDD format
SubMac	string(12)	0-9,A-F	Mac address without the separator eg. 0123456789AB
SubPlan	string(2..30)		Sub plan code
SubProductCode	string		
SubSerialNumber	string		A device serial number
SubStatus	string		
SUCCESS	string(1..20)		Contains the TransactionID of the successfully completed transaction
SyncStatus	string		Synchronisation status e.g. SYNCHRONISED

TagName	string		Name of a tag
TagType	String		Type of a tag
TelstraAddressRecord	CDATA string		An address record which likely exists in Telstra system. Refer to CDATA string section of this specification for the fields.
ThreeGInBuilding	string		3G signal coverage inside building
ThreeGOnStreet	string		3G signal coverage on the street
ThreeGPlan	string	Provided by Vocus	3G mobile plans.
TwoGCoverage	boolean		TRUE if there a 2G coverage in the area
TimeZone	string	ACST AEST AWST WCT	Valid time zone
TraceLevel	integer	1 to 5	Specifies the level of detail returned in the response. Permitted values are between 1 and 5 with 5 returning the greatest detail. The default value is 3. Some products may only support the default level.
TransactionID	string(1..20)		Unique ID of the individual request. Client can also uses this ID to track the progress of asynchronous operations or retrieve historical information
TransactionState	string	QUEUED PROCESSING SUCCESS FAILED WITHDRAWN HELD	Status of an operation
TransactionSubState	string		Sub status of TransactionState
TrafficClass	String	TC1 TC2 TC3 TC4	Traffic Classes
TrafficClass1	string	0K, 150K, 300K, 500K, 1M, 2M, 5M, TRUE, FALSE	Traffic Class 1 Speed or availability
TrafficClass2	string	0M, 5M, 10M, 20M, TRUE, FALSE	Traffic Class 2 Speed or availability
TrafficClass3	string	TRUE, FALSE	Traffic Class 3 availability
TrafficClass4	string	TRUE, FALSE	Traffic Class 4 availability
UnMeteredUsage	unsignedLong		Non-Billable usage specified in octets
UploadSpeed	string		Upload speed in octets per second e.g. 256000
Username	string(2..64)	a to z, A to Z, 0 to 9, and underscore	Authentication name for an internet service including the realm. For example: user_id@realm.com User_id must be between 2 to 22 characters. Generally must be unique within active services.
UserTags	string(1..200)		List of user tags in CSV format, in tagName=tagValue format
Value	string		Value
VLANID	string(1..20)		Virtual LAN ID. Generally for CPE.
VoiceBarring	string	DISABLED LEVEL1 LEVEL2 LEVEL3 LEVEL4 LEVEL5	DISABLED = No voice restriction LEVEL 1 = Bar all calls LEVEL 2 = Bar all outgoing, incoming ok LEVEL 3 = Bar all outgoing international calls LEVEL 4 = When roaming – bar all calls LEVEL 5 = When roaming – ball incoming calls. Allows outgoing.

VoiceBarInAll	boolean	TRUE, FALSE	All incoming calls barred.
VoiceBarInWhenRoaming	Boolean	TRUE, FALSE	Incoming calls barred when roaming.
VoiceBarOutAll	Boolean	TRUE, FALSE	All outgoing calls barred
VoiceBarOutAllInternational	Boolean	TRUE, FALSE	All outgoing international calls barred
VoiceBarOutAllIntlExcHome	boolean	TRUE, FALSE	All outgoing calls barred except to AU
VoiceBarOut	string	ALL INTERNATIO-NAL FALSE	Voice barring configuration of a service. INTERNATIONAL – Bar only call to international numbers. ALL – Bar both national and international call. FALSE – Barring is inactive
VoiceBarInternational	string	TRUE FALSE	
VoiceBarMobile	string	ACTIVE INACTIVE	
VoiceBarPremium	string	ACTIVE INACTIVE	
VoiceCVCID	string		CVC for Voice
VoicePortID1AVCID	string		AVC ID for voice port 1
VoicePortID2AVCID	string		AVC ID for voice port 2
VoiceDivertBusy	string(5..18)	FALSE or a phone number	Voice diversion configuration when handset is busy. Set it to FALSE to disable. The destination number must be in international format e.g. 622199988777
VoiceDivertUnreachable	string(5..18)	FALSE or a phone number	Voice diversion configuration when handset is unreachable. Set it to FALSE to disable. The destination number must be in international format e.g. 622199988777
VoiceDivertNoAnswer	string(5..18)	FALSE or a phone number	Voice diversion configuration when handset is not answering. Set it to FALSE to disable. The destination number must be in international format e.g. 622199988777
VoiceDivertAlways	string(5..18)	FALSE or a phone number	Voice diversion configuration for always divert. Set it to FALSE to disable. The destination number must be in international format e.g. 622199988777
Voicemail	Boolean	TRUE FALSE	Status of voicemail service
VoicemailEmail	string(1..100)	Email address	An email address to receive voicemail carbon copy
VoicemailPIN	string(2..10)	0-9	Voicemail personal identification number
VoicePort	string	UNI-V1, UNI-V2, FXS-1, FXS-2	A voice port
VoicePortID1	string		
VoicePortID2	string		
VOIPServiceID	string(1..30)	a-z, A-Z, 0-9, dash, underscore, and dot	A unique ID for the service in Vocus
WITHDRAWN	string(1..20)		Contains the TransactionID of the successfully cancelled transaction
WPAPSK	string		WPA PSK password
Year	unsignedInt	4 digits	Year, e.g. 2010, 1977
Zone	string	METRO REGIONAL REMOTE URBAN MAJOR-RURAL MINOR-RURAL	Zone

4 Standard CSV Format

CSV files will use a UNIX text file format where new lines are separated by the ASCII code 10 character (Line Feed). The first line of the CSV file is the **CSV header**. Each header field is enclosed by double quotes and separated by comma character (ASCII code 44). An empty CSV file will still include a header.

CSV records (rows) are separated by newlines. **CSV fields** (column) are enclosed by double quotes and separated by comma characters. This includes empty fields.

Double quote, new line, and backslash characters contained within fields must be preceded by a backslash “escape” character as follows:

- ASCII 10 (new line) → \n
- double quote → \"
- backslash → \\

Example

SUBURB	SIZE	NOTES
CITY A	2000	North facing with “Superb” location
CITY B	1000	Excellent public transport
CITY C	5000	Very large suburb Excellent amenities Public transport
CITY D	500	South\North facing city

The above data will be represented in CSV format as follows:

```
"SUBURB","SIZE","NOTES"
"CITY A","2000","North facing with \"Superb\" location"
"CITY B","1000","Excellent public transport"
"CITY C","5000","Very large suburb\nExcellent amenities\nPublic transport"
"CITY D","500","South\\North facing city"
```

5 CDATA String

CDATA string is used to embed an XML record inside a Param structure. Each element in the CDATA string is one of the basic data types defined in Chapter 3 - Basic Data Types.

AuthUsageRecord

Historical authentication record for a single user. Some data are returned on best effort basis.

Element	Cardinality	Notes
ServiceID	1..1	
Username	0..1	
DateTime	1..1	
AuthResult	1..1	
Reason	1..1	

OnlineSessionRecord

Historical online session record. Some data are returned on best effort basis.

Element	Cardinality	Notes
ServiceID	1..1	
DateTime	1..1	Date and time of last received data packet.
IPAddress	1..1	
NASIPAddress	1..1	
NASPort	1..1	
SessionID	1..1	
MAC	0..1	

SessionLogRecord

Historical session record. Some data are returned on best effort basis.

Element	Cardinality	Notes
ServiceID	1..1	
DateTime	1..1	
PeriodLength	1..1	
SessionID	1..1	
IPAddress	1..1	
NASIPAddress	1..1	
DisconnectReason	1..1	
StandardExternalDownload	0..1	
StandardInternalUpload	0..1	

HourlyUsageRecord

Historical daily data usage record. The returned element will depends on the PlanID.

Element	Cardinality	Notes
ServiceID	1..1	
StartTime	1..1	
PeriodLength	1..1	
StandardExternalDownload	0..1	
StandardInternalDownload	0..1	

StandardPeeringDownload	0..1	
StandardExternalUpload	0..1	
StandardInternalUpload	0..1	
StandardPeeringUpload	0..1	
OffPeakExternalDownload	0..1	
OffPeakInternalDownload	0..1	
OffPeakPeeringDownload	0..1	
OffPeakExternalUpload	0..1	
OffPeakInternalUpload	0..1	
OffPeakPeeringUpload	0..1	
PeakExternalDownload	0..1	
PeakInternalDownload	0..1	
PeakPeeringDownload	0..1	
PeakExternalUpload	0..1	
PeakInternalUpload	0..1	
PeakPeeringUpload	0..1	

DailyUsageRecord

Historical daily data usage record. The returned element will depends on the PlanID.

Element	Cardinality	Notes
ServiceID	1..1	
RecordDate	1..1	
StandardExternalDownload	0..1	
StandardInternalDownload	0..1	
StandardPeeringDownload	0..1	
StandardExternalUpload	0..1	
StandardInternalUpload	0..1	
StandardPeeringUpload	0..1	
OffPeakExternalDownload	0..1	
OffPeakInternalDownload	0..1	
OffPeakPeeringDownload	0..1	
OffPeakExternalUpload	0..1	
OffPeakInternalUpload	0..1	
OffPeakPeeringUpload	0..1	
PeakExternalDownload	0..1	
PeakInternalDownload	0..1	
PeakPeeringDownload	0..1	
PeakExternalUpload	0..1	
PeakInternalUpload	0..1	
PeakPeeringUpload	0..1	

QuotaRecord

Quota record. The number of returned elements will depend on the PlanID.

Element	Cardinality	Notes
PlanID	1..1	
QuotaType	1..1	PlanID dependant. E.g. INITIAL, TOPUP, PREPAID, VOICE, DATA, SMS, DATA-HOSTED
QuotaName	1..1	Example values: STANDARD, PEAK, OFFPEAK, HARDLIMIT, SOFTLIMIT, UNLIMITED
QuotaStatus	1..1	ACTIVE, CONSUMED, EXPIRED, QUEUED
QuotaAmount	1..1	Specifies the number of octets or seconds of metered usage allowed by the quota
QuotaDialect	1..1	Internal system identifier for the quotas. To be ignored.
QuotaFuture	0..1	Future quota
MeteredUsage	0..1	Number of octets or seconds of billable usage associated with the quota
UnMeteredUsage	0..1	Number of octets or seconds of non-billable (free) usage associated with the quota

ActionAtLimit	1..1	Action to take when the quota limit is reached SHAPE, SUSPEND, NONE
ActionAtExpiry	1..1	Action to take when the expiry date is reached SHAPE, SUSPEND, RENEW, UPGRADE
CreationDate	1..1	Date quota was created, or last renewal date for auto-renew plans
StatusChangeDate	1..1	Date of last status change or action. For example the date where QuotaFuture was changed.
ExpiryDate	1..1	Date the quota expires (AKA Anniversary Date for postpaid monthly services)

MasterConversationRecord

Communication record between systems.ie. NBN order updates

Element	Cardinality	Notes
DateTime	0..1	Time record is received
TransactionSubState	0..1	Sub state of TransactionState
Message	0..1	Extra notes if available
ServiceID	0..1	
RemediationDateTime	0..1	Estimated remediation date, if available
RecordID	1..1	

MasterAppointmentRecord

A detailed master record of an appointment.

Element	Cardinality	Notes
DateTime	0..1	Time record is updated. If available.
AppointmentID	0..1	
ServiceID	0..1	
CustomerName	0..1	Customer name as primary contact
Phone	0..1	Phone number of primary contact
AppointmentSlot	0..1	
StartDateTime	0..1	
EndDateTime	0..1	
Status	0..1	Status of an appointment
SubStatus	0..1	Sub status of an appointment
SiteNote	0..1	Site note eg. Corner of house
SpecialCondition	0..1	Special information eg. Clearance requirement
DemandType	0..1	
AppointmentSLA	0..1	
RecordID	1..1	ID for this record

ConversationRecord

Communication record between systems.

Element	Cardinality	Notes
ServiceID	0..1	
DateTime	1..1	Time record is received
TransactionSubState	0..1	Sub state of TransactionState
Message	0..1	Extra notes if available
RemediationDateTime	0..1	Estimated remediation date, if available

AppointmentRecord

A detailed record of an appointment. When updating an appointment generally only AppointmentSlot, StartDateTime, DemandType and EndDateTime is required. The rest of params are only returned when trying to retrieve appointment detail.

Element	Cardinality	Notes
ServiceID	0..1	
DateTime	0..1	Time record is updated. If available.
AppointmentSlot	0..1	
StartDateTime	0..1	
EndDateTime	0..1	
DemandType	0..1	
Status	0..1	Status of an appointment
SubStatus	0..1	Sub status of an appointment
Message	0..1	

BroadbandAddressRecord

A Vocus DirectoryID record for an Australian address which acceptable for provisioning.

Element	Cardinality	Notes
DirectoryID	1..1	
Carrier	0..1	Valid value are NBN, OPTICOMM, FUJITSU, PLACESVIC, TELSTRA
AddressLong	0..1	Composite address string

ContactRecord

A contact person detail.

Element	Cardinality	Notes
CustomerName	1..1	
Phone	1..1	
Message	0..1	Optional message

CopperPairRecord

An FTTB/N Copper Pair Record. Some of these details are required for provisioning.

Element	Cardinality	Notes
CopperPairID	0..1	
CopperPairStatus	0..1	ACTIVE, INACTIVE, ULL, or N/A. When this params return N/A, it indicates the CPI has been transitioned to NBNco.
NBNServiceStatus	0..1	String representation of the nbn service e.g. "Line In Use".
ServiceClass	0..1	NBN Service Class for the Copper Pair
POTSInterconnect	0..1	This is either the FNN, ULL, or maybe replaced by the hash # sign
POTSMatch	0..1	TRUE when the CarriedID provided in query match NBNco database
UploadSpeed	0..1	Minimum/Maximum theoretical upload speed in Mbps e.g 25-40
DownloadSpeed	0..1	Minimum/Maximum theoretical download speed in Mbps e.g. 90-100
NetworkCoExist	0..1	When TRUE, not all FNN has been cutover to FTTN node. Minimum speed is limited to 12M
ExtraCharge	0..1	TRUE or FALSE
EPID	0..1	EPID of service if available. https://www.commsalliance.com.au/Documents/Industry-Lists/EPID

CVCRecord

An aggregatedCVC record from Vocus network.

Element	Cardinality	Notes
---------	-------------	-------

CVCID	1..1	
PortIDPrimary	0..1	
PortIDSecondary	0..1	
TrafficClass1	0..1	Bandwidth of TC1 or FALSE when not available
TrafficClass2	0..1	Bandwidth of TC2 or FALSE when not available
TrafficClass3	0..1	Bandwidth of TC3 or FALSE when not available
TrafficClass4	0..1	Bandwidth of TC4 or FALSE when not available
AvailableCTAG	0..1	
STAG	0..1	
CVCState	0..1	Valid State for the CVCID – comma separated or NATIONAL
Description	0..1	

PortRecord

A network port record from Vocus network.

Element	Cardinality	Notes
PortID	0..1	
PortType	0..1	PRIMARY or SECONDARY
Description	0..1	

NBNServiceRecord

A service record related to NBN service. Currently not in use.

Element	Cardinality	Notes
NBNInstanceID	1..1	
NBNIdentifier	0..1	
PriorityAssist	0..1	TRUE or FALSE
CopperPairID	0..1	Returned only for FTTB/N
DataPortID	0..*	Port ID for the data service
VoicePortID	0..*	Port ID for voice service. Multiple port might be returned. This port is connected to this DataPortID.

NTDRecord

National Broadband Network device NTD record. Returned only for FTTP, FixedWireless, and HFC.

Element	Cardinality	Notes
NTDID	0..1	
NTDType	0..1	
NTDVersion	0..1	
Battery	0..1	
BatteryMonitor	0..1	
BatteryDate	0..1	
UploadSpeed	0..1	
DownloadSpeed	0..1	
RemainingUpload	0..1	
RemainingDownload	0..1	
MAC	0..1	Partial MAC address for HFC NTD, if available

NBNPortRecord

National Broadband Network device port record.

Element	Cardinality	Notes
NTDID	0..1	

NTDVersion	0..1	
PortNumber	0..1	
PortName	0..1	
Available	0..1	Whether a port is free or not
PortType	0..1	Valid value are DATA or VOICE
EPID	0..1	EPID of service if available. https://www.commsalliance.com.au/Documents/Industry-Lists/EPID
MAC	0..1	Partial MAC address for HFC NTD, if available

NBNOutageRecord & NBN UnplannedOutageRecord

NBN Planned outage and NBN Unplanned outage record.

Element	Cardinality	Notes
EventID	1..1	Outage ID
Status	0..1	Status of the event. For example: Scheduled, cancelled, completed
Description	0..1	Description of the outage
StartDateTime	0..1	Outage start date time in YYYYMMDDHHMMSS AEST
EndDateTime	0..1	Outage end date time in YYYYMMDDHHMMSS AEST
Duration	0..1	Duration of outage within the above window in seconds
Notes	0..*	Various update notes from NBNco

NBNFeatureRecord

NBN product feature available record.

Element	Cardinality	Notes
FeatureName	1..1	Name of feature. This can be LocationID or product dependent. For example: NHAS TC4 High Speed Tiers (greater or equal to 250Mbps)
FeatureValue	1..1	Value for the feature above. For example: Yes or No.

Currently supported **FeatureName**:

- NFAS TC4 High Speed Tier variants
- NHAS TC2 and TC4 High Speed Tiers variants
- NWS TC4 High Speed Tiers variants

NBNCOATRecord

National Broadband Network Change of Access Technology (COAT) record.

Element	Cardinality	Notes
ChangeDate	0..1	The changeover date when previous technology will be disconnected
ForecastAlternativeTechnology	0..1	Forecasted new access technology
ForecastRTCDate	0..1	Forecasted date when new access technology available for order. This date is only estimated date.
RTCDate	0..1	Ready to connect to new access technology. Indicates the alternative technology above can be ordered.
Reason	0..1	Reason for change of access technology change. For Fibre On Demand this will contains the keyword "on-demand".

POIDataRecord

A POI simple status record.

Element	Cardinality	Notes
POIData	1..1	POI ID, name, and state
Status	1..1	Green / Amber / Red