

### Articles in this section

[Manage your Amazon FBA returns \(add-on\)](#)[FBA returns custom flow](#)[Ignore 'Reimbursed' FBA returns](#)

## FBA returns custom flow

**Balasubramanian Mahadevan**

Updated 1 year ago

The **FBA returns custom flow** enables you to sync returns that were not processed or errored out when the **Amazon (FBA) returns to NetSuite RA and item receipts** flow is run.

Prerequisite: Check the date ranges while uploading the file using the data loader. Ensure that the **Offset time to sync Amazon FBA returns** setting is updated with a value of 4320 (to have a 3-day offset to the current date).



### Notice

If the start date and time is set as 08:00 AM, 04th January; current date and time is 05:00 PM, 07th January; and you entered the value as 4320, the returns will be synced from 08:00 AM, 01st January till 05:00 PM, 04th January.

## Install and configure the flow

- 1 Before you install the **FBA returns custom flow**, download the zip file to your local drive.

[Download](#)

You need to install and configure the custom flow in order to run it.

- 2 To install the custom flow, follow the steps mentioned in the [Install integration](#) section of the [Install integration or download integration zip](#) article.
- 3 Click **Configure** for the integrated app HTTP connection
- 4 Update information for the following settings:

a **Base URI:** <https://api.integrator.io>

b **Configure HTTP headers:**

| HTTP header                  | Value                                |
|------------------------------|--------------------------------------|
| content-type                 | application/json                     |
| Integrator-Method            | GET                                  |
| Integrator-NetSuite-DeployId | customdeploy_celigo_rt_import_deploy |
| Integrator-NetSuite-ScriptId | customscript_celigo_rt_import_rest   |

c **Media type:** JSON

d Create an API token from the Amazon-NetSuite integration tile. (Go to **Admin > Token** tab and click **+ Create API Token**).

e Add it in the **Configure token** auth setting.

f Update the following parameters for the setting:

- **Send token via:** HTTP header
- **Header name:** Authorization
- **Header scheme:** Bearer

g Click **Test Connection** to check if the connection is working as expected.

h Click **Save & close**.

5 Click **Configure** for IO Connection.


a Create an API token by navigating to **Resource > API Token**.

b Use an existing IO connection or create a new connection using the API token

c After configuring the IO connection, click **Save & close**.

6 Click **Install**.

- 7 Enable the **Sync FBA returns file to NS** realtime flow and the **Process FBA returns file** data loader flow.
- 8 Access the **Sync FBA returns file to NS** flow.
  - a Access the **Amazon returns listener** step.
  - b Copy the export ID from the **Public URL** setting as highlighted below:

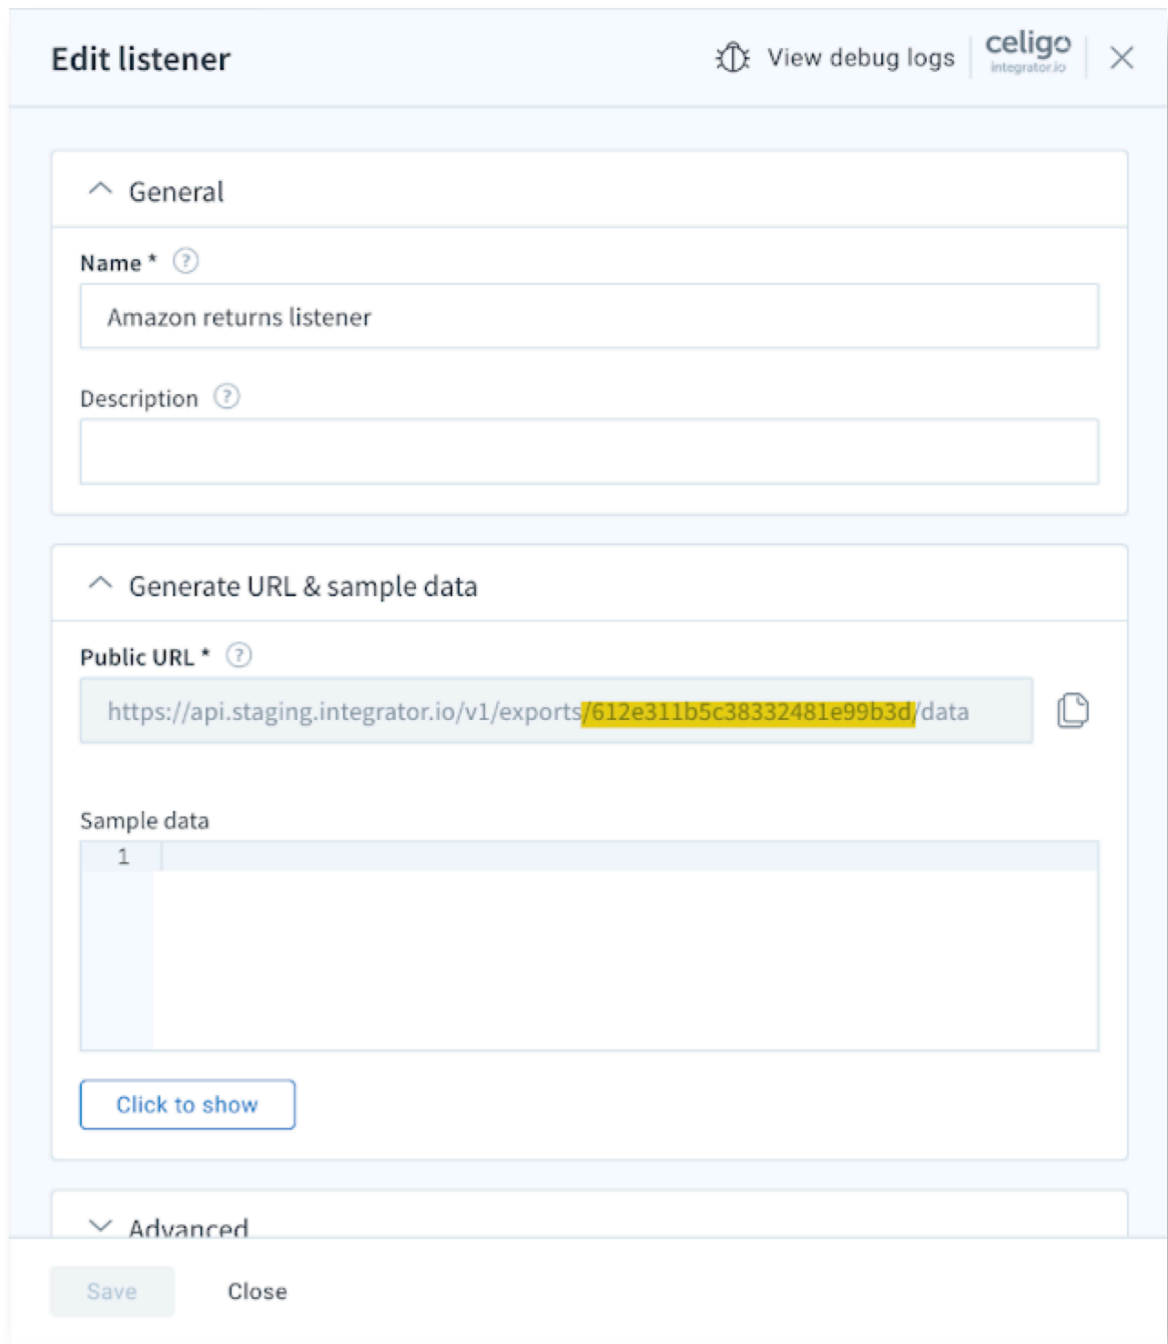

The screenshot shows the 'Edit listener' dialog box in the Celigo interface. The dialog has a title bar with 'Edit listener', a 'View debug logs' button, the Celigo logo, and a close button. The main content is divided into three sections: 'General', 'Generate URL & sample data', and 'Advanced'.

- General**: Contains a 'Name' field with the value 'Amazon returns listener' and a 'Description' field.
- Generate URL & sample data**: Contains a 'Public URL' field with the value 'https://api.staging.integrator.io/v1/exports/612e311b5c38332481e99b3d/data'. The export ID '612e311b5c38332481e99b3d' is highlighted in yellow. Below this is a 'Sample data' table with one row and one column, and a 'Click to show' button.
- Advanced**: This section is currently collapsed.

At the bottom of the dialog are 'Save' and 'Close' buttons.

- 9 Access the **Process FBA returns** file data loader flow.
  - a Access the **Invoke HTTP Orchestration for Returns** step.
  - b Under **Relative URI**, paste the copied export id (copied from the **Amazon returns listener** step) after **exports/**.
  - c Click **Save & close**.

- 10 Access the **Sync FBA returns file to NS** realtime flow.
  - a Access the **Invoke Post return authorization** step.
  - b Under **Relative URI**, use the API identifier from the **Post return authorization** step of the **Amazon (FBA) returns to NetSuite RA and item receipts** flow.

**Edit import** ORACLE NETSUITE ×

☐ Add or update  
☐ Attach  
☐ Detach  
☐ Delete  
☐ Ignore existing records ?

**Advanced**

NetSuite API version ?  
☒ SuiteScript 1.0  
☐ SuiteScript 2.0 (beta)

Concurrency ID lock template ?  
 { }

Data URI template ?  
 { }

Batch size limit ?

Invoke ?  
 Copy URL

Save Close

- c Access the **Invoke Post item receipt** step.
- d Under **Relative URI**, use the API identifier from the **Post item receipt** step of the **Amazon (FBA) returns to NetSuite RA and item receipts** flow.
- e Access the **Invoke Close return authorization** step.
- f Under **Relative URI**, use the API identifier from the **Close return authorization** step of the **Amazon (FBA) returns to NetSuite RA and item receipts** flow.

- 11 Prepare the CSV file for the missing FBA returns. Ensure the CSV file has all the required columns. Refer [Sample CSV file](#) for the required columns in the CSV file.
- 12 Once the CSV file has been prepared, run the **Process FBA returns file** data loader flow to sync the missing FBA returns with NetSuite.

## Configuration for missing FBA returns across multiple Amazon stores

The process for configuring the **FBA returns custom flow** is the same when you have installed multiple FBA Returns add-ons installed in multiple stores from the same integration. You need to configure the installation for each store individually and need to ensure that the following guidelines are followed:

- 1 Use extreme caution when selecting a store to copy the API identifiers from the **Amazon (FBA) returns to NetSuite RA and item receipts** flow for the **Post return authorization**, **Post item receipt**, and **Close return authorization** steps and using it in the **Sync FBA returns file to NS** realtime flow for all the other stores. The flow settings and invoices from the store selected for copying the API identifiers will be considered for all the other stores where it will be used.
- 2 The CSV file for the missing FBA returns has to be created store-wise. You must ensure that the correct CSV file is selected for a store before uploading it using the **Process FBA returns file** data loader flow. For example, ensure only orders for store 1 are added to the CSV file, if you want to upload the missing FBA returns for that store.

 [FBA returns custom flow sample.xlsx](#)  
(5 KB)

 [FBA returns custom flow.zip](#)  
(8 KB)

Can't find what you're looking for?

Ask the Celigo community, contact your account manager, or get help with Celigo User.

[Visit the Community](#)

## Resources

[Blog](#)

[Ebooks](#)

[Webinars](#)

[Events](#)

[Builder's Hub](#)

[Celigo University](#)

[Videos](#)



3 Lagoon Dr.  
Suite 130  
Redwood City, CA 94065

(650) 579-0210

(650) 240-0143

[info@celigo.com](mailto:info@celigo.com)

© 2026 Celigo, Inc. All Rights Reserved. | [Privacy Policy](#) | [Security, Privacy, & Compliance](#) | [California Privacy Rights](#) | [Terms of Use](#) | [Legal Resources](#)