

## DAY-3 BALACHANDRAN S

Kubernetes

Backend-Pandas and flask in python

---

Docker Build & Run Documentation

### 1. Verify File Structure

ls

Lists files in the current directory (should include Dockerfile, app.py, docker-compose.yml, requirements.txt, etc.).

---

### 2. Create or Edit CSV File nano

products.csv

Opens the products.csv file in the nano editor to add or modify product data.

---

### 3. Verify CSV File Content cat

products.csv

Displays the contents of products.csv to confirm the data.

---

### 4. Build Docker Image Without

Cache sudo docker build --no-cache -t backend:latest .

Builds a fresh Docker image, ensuring all changes are included. The --no-cache flag forces a rebuild of every layer.

---

## 5. Run the Docker Container

```
sudo docker run -d -p  
7000:7000 backend:latest
```

Runs the container in detached mode and maps host port 7000 to container port 7000.

---

## 6. Check Container Logs sudo

```
docker logs <container_id>
```

Replace <container\_id> with the actual container ID to view the running application's logs.


---

```
nisanth@LAPTOP-G3U57BJM:~/e-commerce/backend$ ls
Dockerfile app.py docker-compose.yml requirements.txt
nisanth@LAPTOP-G3U57BJM:~/e-commerce/backend$ nano products.csv
nisanth@LAPTOP-G3U57BJM:~/e-commerce/backend$ cat products.csv
id,name,price,qty
1,apple,100,20
2,orange,100,40

nisanth@LAPTOP-G3U57BJM:~/e-commerce/backend$ ls
Dockerfile app.py docker-compose.yml products.csv requirements.txt
```

```
Sending build context to Docker daemon 6.144kB
Step 1/6 : FROM python:3.9
3.9: Pulling from library/python
7cd785773db4: Already exists
091eb8249475: Already exists
255774e0027b: Already exists
353e14e5cc47: Pull complete
f6d72b00ae7c: Pull complete
6e02a90e58ae: Pull complete
f299e0671245: Pull complete
Digest: sha256:bc2e05bca883473050fc3b7c134c28ab822be73126ba1ce29517d9e8b7f3703b
Status: Downloaded newer image for python:3.9
--> 859d4a0f1fd8
Step 2/6 : WORKDIR /app
--> Running in 906c4d86e51e
--> Removed intermediate container 906c4d86e51e
--> 9b462bd1a74e
Step 3/6 : COPY . /app
--> 0b518568be97
Step 4/6 : RUN pip install --no-cache-dir -r requirements.txt
--> Running in b40e29a8d476
Collecting flask
  Downloading flask-3.1.0-py3-none-any.whl (102 kB)
    _____ 103.0/103.0 kB 3.4 MB/s eta 0:00:00
Collecting pandas
  Downloading pandas-2.2.3-cp39-cp39-manylinux_2_17_x86_64.manylinux2014_x86_64.whl (13.1 MB)
    _____ 13.1/13.1 MB 977.2 kB/s eta 0:00:00
```

```
[notice] A new release of pip is available: 23.0.1 -> 25.0.1
[notice] To update, run: pip install --upgrade pip
--> Removed intermediate container b40e29a8d476
--> 0118bb277b97
Step 5/6 : EXPOSE 7000
--> Running in 7faab071ae74
--> Removed intermediate container 7faab071ae74
--> 9c174f70ab2a
Step 6/6 : CMD ["python", "app.py"]
--> Running in 25df95f0b331
--> Removed intermediate container 25df95f0b331
--> 8757bb6b4caa
Successfully built 8757bb6b4caa
Successfully tagged backend:latest
nisanth@LAPTOP-G3U57BJM:~/e-commerce/backend$ sudo docker run -d --name backend 0c75ca92aae20b846ee45a602e266a2c9e2f2f8949f3865ee853f9ee9c170b1f backend:latest
nisanth@LAPTOP-G3U57BJM:~/e-commerce/backend$ sudo docker logs 0c75ca92aae20b846ee45a602e266a2c9e2f2f8949f3865ee853f9ee9c170b1f
* Serving Flask app 'app'
* Debug mode: off
WARNING: This is a development server. Do not use it in a production environment.
* Running on all addresses (0.0.0.0)
* Running on http://127.0.0.1:7000
* Running on http://172.17.0.2:7000
```

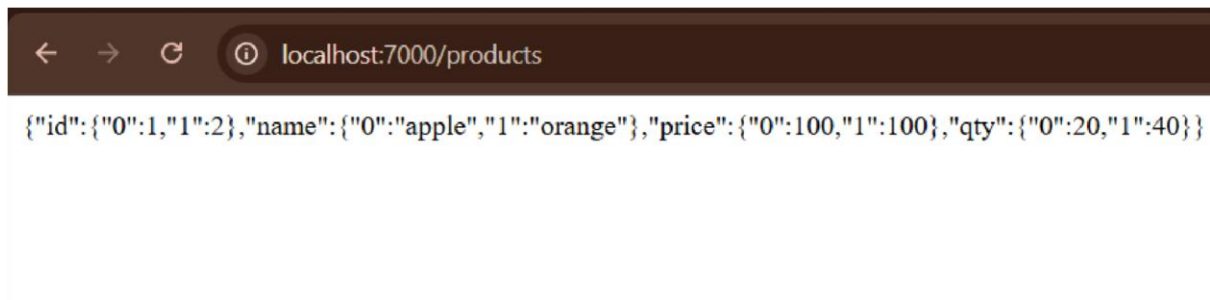

Creating a container for frontend

Below is the concise documentation content for your frontend Docker build:

---

### Frontend Docker Build Documentation

1. Navigate to the Frontend Directory `cd frontend/`

Changes directory to the frontend folder where your files are located.

- 
2. Create or Edit the HTML File

`nano index.html`

Opens the index.html file in the nano editor for creating or modifying the webpage content.

- 
3. Create or Edit the Dockerfile `nano`

`Dockerfile`

Opens the Dockerfile in the nano editor to set up instructions for building the Docker image.

- 
4. Dockerfile Content

`FROM nginx:alpine`

`COPY index.html /usr/share/nginx/html/index.html`

Specifies the base image as `nginx:alpine` and copies your `index.html` to the default Nginx HTML directory.

---

```
nisanth@LAPTOP-G3U57BJM:~/e-commerce$ cd frontend/
nisanth@LAPTOP-G3U57BJM:~/e-commerce/frontend$ nano index.html
nisanth@LAPTOP-G3U57BJM:~/e-commerce/frontend$ nano Dockerfile
nisanth@LAPTOP-G3U57BJM:~/e-commerce/frontend$ cat Dockerfile
FROM nginx:alpine
COPY index.html /usr/share/nginx/html/index.html
nisanth@LAPTOP-G3U57BJM:~/e-commerce/frontend$ sudo docker build -t frontend:latest .
DEPRECATED: The legacy builder is deprecated and will be removed in a future release.
             Install the buildx component to build images with BuildKit:
             https://docs.docker.com/go/buildx/

Sending build context to Docker daemon  3.584kB
Step 1/2 : FROM nginx:alpine
alpine: Pulling from library/nginx
f18232174bc9: Pull complete
ccc35e35d420: Pull complete
43f2ec460bdf: Pull complete
984583bcf083: Pull complete
8d27c072a58f: Pull complete
ab3286a73463: Pull complete
6d79cc6084d4: Pull complete
0c7e4c092ab7: Pull complete
Digest: sha256:4ff102c5d78d254a6f0da062b3cf39eaf07f01eec0927fd21e219d0af8bc0591
Status: Downloaded newer image for nginx:alpine
--> 1ff4bb4faebc
Step 2/2 : COPY index.html /usr/share/nginx/html/index.html
--> 209b4021b344
Successfully built 209b4021b344
Successfully tagged frontend:latest
```

---

## 5. Build the Docker Image sudo

`docker build -t frontend:latest .`

Builds the Docker image for the frontend. The command pulls the necessary Nginx image, executes the copy command, and tags the image as frontend:latest.

Kubernetes Deployment YAML files

Below is a brief, step-by-step description for setting up your Kubernetes deployments for both backend and frontend:

---

### 1. Organize Project Structure

- Create a Kubernetes Folder:
- `mkdir k8s`

This creates a separate folder (k8s) to store all your Kubernetes configuration files.

- Navigate to the Kubernetes Directory:
- `cd k8s/`

Move into the k8s directory to work on deployment files.

---

## 2. Create Backend Deployment Configuration

- Create/Edit the Backend Deployment File:
- `nano backend-deployment.yaml`

Opens the file in the nano editor to add deployment configuration for the backend.

- Backend Deployment File Content:

□

apiVersion: apps/v1

□ kind: Deployment □

metadata: □

name: backend

- spec: □ replicas: 1
- selector:
- matchLabels: □ app: backend
- template:
- metadata:
- labels: □ app: backend
- spec:
- containers:
- - name: backend □ image: backend:latest □ ports:
- - containerPort: 7000

This file defines a Kubernetes Deployment for your backend application:

- apiVersion & kind: Specifies the resource type.
- metadata: Names the deployment as backend.
- spec.replicas: Sets the number of pod replicas.
- selector & template.metadata.labels: Ensure that the Deployment manages pods with the label app: backend.
- spec.template.spec.containers: Specifies the container details, including the Docker image (backend:latest) and the port (7000) that the container exposes.

---

### 3. Create Frontend Deployment Configuration

- Create/Edit the Frontend Deployment File:

- nano frontend-deployment.yaml

Opens the file in nano to add deployment configuration for the frontend.

- Frontend Deployment File Content:

- apiVersion: apps/v1

- kind: Deployment □ metadata: □ name: frontend

- spec: □ replicas: 1

- selector:

- matchLabels: □ app: frontend

- template:

- metadata:

- labels: □ app: frontend

- spec:

- containers:

- - name: frontend □ image: frontend:latest □ ports:

- - containerPort: 7500

This file defines a Kubernetes Deployment for your frontend application:

- metadata: Names the deployment as frontend.
- selector & template.metadata.labels: Ensure that the Deployment manages pods with the label app: frontend.
- Container Specification: Sets the container to use the Docker image (frontend:latest) and exposes port 7500.

---

## Summary

- Directory Setup:

Organized your project by creating a k8s directory for Kubernetes configuration files.

Backend Deployment:

Created backend-deployment.yaml to deploy the backend container (using port 7000).



□

- Frontend Deployment:

Created frontend-deployment.yaml to deploy the frontend container (using port 7500).

This documentation provides a brief and clear outline of your Kubernetes deployment process for both backend and frontend components.

Below is a step-by-step description for setting up Kubernetes Services for your backend and frontend applications using the provided YAML configuration:

---

## 1. Create a Service Configuration File

- **Command to Create/Edit the File:**

- `nano service.yaml`

*This command opens a text editor (nano) to create or edit the service configuration file where you'll define both backend and frontend services.*

---

## 2. Define the Backend Service

Paste the following YAML snippet for the backend service into your service.yaml file:

apiVersion: v1 kind:

Service metadata:

name: backend-service

spec: selector:

app: backend

ports:

- protocol: TCP

port: 7000

targetPort: 7000 type:

ClusterIP

**Explanation:**

- **apiVersion: v1**

*Specifies the API version used to create the Service.*

□

**kind: Service**

*Indicates that the resource being created is a Service.*

- **metadata.name: backend-service**

*Sets the name of the service to backend-service.*

- **spec.selector:**

*Matches pods that have the label app: backend. This ensures the service routes traffic to the correct backend pods.*

- **spec.ports:**

*Defines the port configuration:*

- **protocol: TCP** – The network protocol used.
- **port: 7000** – The port on which the service is exposed within the cluster.
- **targetPort: 7000** – The port on the pod to which traffic will be directed.

- **type: ClusterIP**

*Creates an internal service, exposing it only within the cluster.*

---

### 3. Define the Frontend Service

Below the backend service configuration in the same file, add the following YAML snippet for the frontend service:

```
apiVersion: v1 kind:
```

```
Service metadata:
```

```
name: frontend-service
```

```
spec: selector:
```

```
  app: frontend
```

```
ports:
```

```
  - protocol: TCP
```

```
    port: 7500
```

```
    targetPort: 7500 type:
```

□

NodePort

**Explanation:**

- **metadata.name: frontend-service**  
*Names the service frontend-service.*  
**spec.selector:**  
*Matches pods with the label app: frontend so that this service routes traffic to your frontend pods.*
  - **spec.ports:**  
*Defines the ports:*
    - **protocol: TCP** – Uses the TCP protocol.
    - **port: 7500** – The port exposed by the service inside the cluster.
    - **targetPort: 7500** – The port on the frontend pod that will handle the incoming traffic.
  - **type: NodePort**  
*Exposes the service on a port on each node's IP, allowing external access to the frontend application.*
- 

#### 4. Save and Exit

- **In nano:** Press Ctrl+O to write the changes, then Enter to confirm. Press Ctrl+X to exit the editor.
- 

#### 5. Apply the Service Configuration

- **Command to Apply the YAML File:**
- `kubectl apply -f service.yaml`

*This command tells Kubernetes to create or update the services as defined in the service.yaml file.*

---

□

## 6. Verify the Services

- **Command to Check Services:**
- `kubectl get services`

*This command lists all services in the current namespace, confirming that both `backendservice` and `frontend-service` have been created and are running with the correct configuration.*

---

## Summary

- **Backend Service:**  
Uses ClusterIP to expose the backend on port 7000 internally. It routes traffic to pods labeled app: backend.
- **Frontend Service:**  
Uses NodePort to expose the frontend externally on port 7500, routing traffic to pods labeled app: frontend.

This detailed step-by-step guide covers creating a configuration file, defining services for both backend and frontend applications, applying the configuration with `kubectl`, and verifying that the services are correctly deployed.

Below is a step-by-step explanation for the provided ConfigMap YAML configuration:

---

## 1. Purpose of the ConfigMap

- **Objective:**  
The ConfigMap stores configuration data (in this case, a file path) that can be consumed by the backend application without hardcoding values into the container image.
- 

## 2. YAML Breakdown

```
apiVersion: v1 kind: ConfigMap metadata:  name: backend-config  data:
```

```
  DATABASE_FILE: "/backend/products.csv"
```

□

- **apiVersion: v1**  
Specifies the API version for the ConfigMap resource.
  - **kind: ConfigMap**  
Indicates that the resource being created is a ConfigMap.
  - **metadata:**
    - **name: backend-config**  
Sets the name of the ConfigMap to backend-config. This is how you will reference it in other configurations (like a Deployment).
  - **data:**
    - **DATABASE\_FILE:**  
Defines a key called DATABASE\_FILE with a value of `"/backend/products.csv"`. This key-value pair is the configuration data your backend application can use to locate the products CSV file.
-

### 3. Creating the ConfigMap File

- **Command to Create/Edit the ConfigMap File:**
- `nano backend-config.yaml`

*Opens the nano text editor to create or modify the file containing the ConfigMap definition.*

- **Paste the YAML Content:**  
Insert the above YAML content into the file and save it.
- 

### 4. Applying the ConfigMap

- **Command to Create the ConfigMap in Kubernetes:**
- `kubectl apply -f backend-config.yaml`

*This command tells Kubernetes to create or update the ConfigMap using the configuration specified in the YAML file.*

---

### 5. Using the ConfigMap in Your Application

- **Reference in a Pod or Deployment:**  
You can reference the backend-config ConfigMap in your Deployment YAML to inject the DATABASE\_FILE variable into your container. For example, under the container spec, you could add:
  - `env:`
  - `- name: DATABASE_FILE`
  - `valueFrom:`
  - `configMapKeyRef:`
  - `name: backend-config`
  - `key: DATABASE_FILE`

*This makes the DATABASE\_FILE environment variable available to your application at runtime, with the value /backend/products.csv.*

---

### Summary

- **What it Does:**  
The ConfigMap named backend-config stores a key-value pair where DATABASE\_FILE points to the CSV file location.
- **Why It's Useful:**  
It decouples configuration from the container image, making it easier to update configuration without rebuilding the image.
- **How to Apply:**  
Create the YAML file, then run `kubectl apply -f backend-config.yaml` to deploy the configuration in your cluster.

This explanation covers the configuration's intent, its components, how to create and apply it, and how to integrate it into your application's deployment.

Below is a step-by-step description of the commands you executed and what each step accomplished:

---

## 1. Change Directory to the Kubernetes

**Folder** `cd ~/e-commerce/k8s`

*Navigates to the k8s directory where you keep your Kubernetes configuration and installation files.*

---

## 2. Download kubectl

```
curl -LO "https://dl.k8s.io/release/$(curl -L -s  
https://dl.k8s.io/release/stable.txt)/bin/linux/amd64/kubectl"
```

*This command downloads the latest stable version of the kubectl binary for Linux (amd64).*

---

## 3. Make kubectl Executable `chmod +x`

`kubectl`

*Gives the downloaded kubectl binary execute permissions so it can run.*

---

## 4. Move kubectl to a Directory in Your

**PATH** `sudo mv kubectl /usr/local/bin/`



*Moves the kubectl binary to /usr/local/bin, allowing you to run it from anywhere in your terminal.*

---

## **5. Verify kubectl Installation**

```
version --client
```

*Checks the installed version of kubectl to confirm the installation was successful.*

---

## **6. Download minikube**

```
curl -LO https://storage.googleapis.com/minikube/releases/latest/minikube-linux-amd64
```

*Downloads the latest minikube binary, which will be used to run a local Kubernetes cluster.*

---

## **7. Make minikube Executable**

```
chmod +x minikube-linux-amd64
```

*Sets the executable permission on the minikube binary.*

---

## **8. Move minikube to a Directory in Your**

```
PATH sudo mv minikube-linux-amd64 /usr/local/bin/minikube
```

*Moves the minikube binary to /usr/local/bin and renames it to minikube so it can be executed easily. Note:*

An error like mv: missing destination file operand occurs if there's no space between the source and destination. Ensure you separate the source file (minikube-linux-amd64) and the destination (/usr/local/bin/minikube) with a space.

---

```
nisanth@LAPTOP-G3U57BJM:~$ cd e-commerce
nisanth@LAPTOP-G3U57BJM:~/e-commerce$ ls
backend frontend k8s
nisanth@LAPTOP-G3U57BJM:~/e-commerce$ cd k8s
nisanth@LAPTOP-G3U57BJM:~/e-commerce/k8s$ git clone https://github.com/PadmavathyNarayanan/kubernetes.git
Cloning into 'kubernetes'...
remote: Enumerating objects: 22, done.
remote: Counting objects: 100% (22/22), done.
remote: Compressing objects: 100% (18/18), done.
remote: Total 22 (delta 2), reused 15 (delta 1), pack-reused 0 (from 0)
Receiving objects: 100% (22/22), 4.41 KiB | 1.10 MiB/s, done.
Resolving deltas: 100% (2/2), done.
nisanth@LAPTOP-G3U57BJM:~/e-commerce/k8s$ ls
backend-deployment.yaml configmap.yaml frontend-deployment.yaml kubernetes service.yaml
nisanth@LAPTOP-G3U57BJM:~/e-commerce/k8s$ cd ..
nisanth@LAPTOP-G3U57BJM:~/e-commerce$ cd ..
nisanth@LAPTOP-G3U57BJM:~$ kubectl delete all --all --force --grace-period=0
E0321 03:59:22.904696 4620 memcache.go:265] "Unhandled Error" err=
couldn't get current server API group list: <html><head><meta http-equiv='refresh' content='1;url=/login?from=%2
```

```
</body></html>
nisanth@LAPTOP-G3U57BJM:~$ minikube stop
😞 "minikube" does not exist, nothing to stop
🔴 0 node stopped.
nisanth@LAPTOP-G3U57BJM:~$ minikube delete --all --purge
🔥 Deleting "minikube" in docker ...
💀 Removed all traces of the "minikube" cluster.
🔥 Successfully deleted all profiles
💀 Successfully purged minikube directory located at - [/home/nisanth/.minikube]
```

## 9. Start Minikube minikube start

*Initiates the minikube local Kubernetes cluster using Docker as the driver. During this process, minikube pulls necessary images and preloads Kubernetes components.*

## 10. Verify Minikube Installation

minikube version

*Displays the minikube version information to confirm that minikube is properly installed and running.*

This complete sequence sets up both kubectl and minikube on your system, allowing you to manage and run a local Kubernetes cluster.