

Module Guide for Slope Stability Analysis Program

Henry Frankis and Brooks MacLachlan

October 31, 2018

1 Revision History

Date	Version	Notes
31/10/2018	1.0	Initial template updates

2 Reference Material

This section records information for easy reference.

2.1 Abbreviations and Acronyms

Symbol	Description
AC	Anticipated Change
DAG	Directed Acyclic Graph
M	Module
MG	Module Guide
OS	Operating System
R	Requirement
SC	Scientific Computing
SRS	Software Requirements Specification
SSP	Slope Stability Analysis Program
UC	Unlikely Change

[This section is not on the template but I think that it should be since this document introduces many new acronyms —BM]

Contents

1	Revision History	i
2	Reference Material	ii
2.1	Abbreviations and Acronyms	ii
	List of Tables	iv
	List of Figures	iv
3	Introduction	1
4	Anticipated and Unlikely Changes	2
4.1	Anticipated Changes	2
4.2	Unlikely Changes	3
5	Module Hierarchy	3
6	Connection Between Requirements and Design	4
7	Module Decomposition	4
7.1	Hardware-Hiding (M1)	5
7.2	Behaviour-Hiding	5
7.2.1	Control (M2)	5
7.2.2	Input Format (M3)	5
7.2.3	Output Format (M4)	6
7.2.4	Genetic Algorithm (M5)	6
7.2.5	Kinematic Admissibility (M6)	6
7.2.6	Slip Slicing (M8)	6
7.2.7	Slip Weighting (M7)	7
7.2.8	Morgenstern-Price Calculation (M9)	7
7.2.9	Slice Property Calculation (M10)	7
7.3	Software Decision	7
7.3.1	Array Data Structure (M11)	8
7.3.2	Random Number Generation (M12)	8
7.3.3	Plotting (M13)	8
8	Traceability Matrix	8
9	Use Hierarchy Between Modules	8
10	Bibliography	9

List of Tables

1	Module Hierarchy	4
2	Trace Between Requirements and Modules	9
3	Trace Between Anticipated Changes and Modules	9

List of Figures

1	Use Hierarchy Diagram	10
---	---------------------------------	----

3 Introduction

Decomposing a system into modules is a commonly accepted approach to developing software. A module is a work assignment for a programmer or programming team (Parnas et al., 1984). In the best practices for Scientific Computing (SC), Wilson et al. (2013) advise a modular design, but are silent on the criteria to use to decompose the software into modules. We advocate a decomposition based on the principle of information hiding (Parnas, 1972). This principle supports design for change, because the “secrets” that each module hides represent likely future changes. Design for change is valuable in SC, where modifications are frequent, especially during initial development as the solution space is explored.

Our design follows the rules laid out by Parnas et al. (1984), as follows:

- System details that are likely to change independently should be the secrets of separate modules.
- Any other program that requires information stored in a module’s data structures must obtain it by calling access programs belonging to that module.

[There is an item here in the template saying ”each data structure is used in only one module”, which just seems wrong to me. Maybe each data structure is implemented by a dedicated module, but then many other modules can still use that data structure (module). —BM]

In a rational design process, the Module Guide (MG) is developed after completing the Software Requirements Specification (SRS) (Parnas et al., 1984). The MG specifies the modular structure of the system and is intended to allow both designers and maintainers to easily identify the parts of the software. The potential readers of this document are as follows:

- New project members: This document can be a guide for a new project member to easily understand the overall structure and quickly find the relevant modules they are searching for.
- Maintainers: The hierarchical structure of the module guide improves the maintainers’ understanding when they need to make changes to the system. It is important for a maintainer to update the relevant sections of the document after changes have been made.
- Designers: Once the module guide has been written, it can be used to check for consistency, feasibility, and flexibility. Designers can verify the system in various ways, such as consistency among modules, feasibility of the decomposition, and flexibility of the design.

The rest of the document is organized as follows. Section 4 lists the anticipated and unlikely changes of the software requirements. Section 5 summarizes the module decomposition that was constructed according to the likely changes. Section 6 specifies the connections

between the software requirements and the modules. Section 7 gives a detailed description of the modules. Section 8 includes two traceability matrices. One checks the completeness of the design against the requirements provided in the SRS. The other shows the relation between anticipated changes and the modules. Section 9 describes the use relation between modules.

4 Anticipated and Unlikely Changes

This section lists possible changes to the system. According to the likeliness of the change, the possible changes are classified into two categories. Each Anticipated Change (AC) is listed in Section 4.1, and each Unlikely Change (UC) is listed in Section 4.2.

4.1 Anticipated Changes

Anticipated changes are the source of the information that is to be hidden inside the modules. Ideally, changing one of the anticipated changes will only require changing the one module that hides the associated decision. The approach adapted here is called design for change.

AC1: The specific hardware on which the software is running.

AC2: The algorithm for the overall operation procedure of the program.

AC3: The format of the initial input data.

AC4: The format of the final output data.

AC5: Algorithm for determining the critical slip surface.

AC6: Criteria for a slip surface to be considered physically realistic/ kinematically admissible.

AC7: The algorithm for creating the slice points for slip surface analysis.

AC8: The weighting scheme for comparing slip surfaces factors of safety.

AC9: The algorithm for implementation of the Morgenstern Price Solver.

AC10: The algorithm for assigning soil properties to slices.

AC11: The implementation for the sequence (array) data structure.

AC12: The method of generating pseudo-random numbers.

AC13: The method of displaying the final output.

4.2 Unlikely Changes

The module design should be as general as possible. However, a general system is more complex. Sometimes this complexity is not necessary. Fixing some design decisions at the system architecture stage can simplify the software design. If these decision should later need to be changed, then many parts of the design will potentially need to be modified. Hence, it is not intended that these decisions will be changed.

UC1: Input/Output devices (Input: File and/or keyboard, Output: File, memory, and/or screen).

UC2: The goals of SSP, to determine a slope’s critical slip surface and corresponding factor of safety, will not change.

5 Module Hierarchy

This section provides an overview of the module design. Modules are summarized in a hierarchy decomposed by secrets in Table 1. The modules listed below are the modules that will actually be implemented. Modules are numbered by **M** followed by a number.

M1: Hardware-Hiding

M2: Control

M3: Input

M4: Output

M5: Genetic Algorithm

M6: Kinematic Admissibility

M7: Slip Weighting

M8: Slip Slicing

M9: Morgenstern-Price Calculation

M10: Slice Property Calculation

M11: Array Data Structure

M12: Random Number Generation

M13: Plotting

Note that **M1** is a commonly used module and is already implemented by the operating system.

Level 1	Level 2
Hardware-Hiding	
	Control
	Input Format
	Output Format
Behaviour-Hiding	Genetic Algorithm
	Kinematic Admissibility
	Slip Weighting
	Slip Slicing
	Morgenstern Price Calculation
	Slice Property Calculation
Software Decision	Array Data Structure
	Random Number Generation
	Plotting

Table 1: Module Hierarchy

6 Connection Between Requirements and Design

The design of the system is intended to satisfy the requirements developed in the SRS. In this stage, the system is decomposed into modules. The connection between requirements and modules is listed in Table 2. The program uses the Morgenstern-Price method to calculate the factor of safety, which is implemented by M9. Further information on the Morgenstern Price algorithm can be found in Zhu et al. (19 February 2005). A genetic algorithm is used to generate potential slip surfaces to compare to find the critical slip surface, implemented in M5. Further information on use of a genetic algorithm in relation to a slope stability problem can be found in Li et al. (25 June 2010).

7 Module Decomposition

Modules are decomposed according to the principle of “information hiding” proposed by Parnas et al. (1984). The *Secrets* field in a module decomposition is a brief statement of the design decision hidden by the module. The *Services* field specifies *what* the module will do without documenting *how* to do it. For each module, a suggestion for the implementing software is given under the *Implemented By* title. If the entry is *OS*, this means that the module is provided by the operating system or by standard programming language libraries. If the entry is *SSP*, the module will be implemented by SSP. Only the leaf modules in the hierarchy have to be implemented. If a dash (–) is shown, this means that the module is

not a leaf and will not have to be implemented. Whether or not this module is implemented depends on the programming language selected.

7.1 Hardware-Hiding (M1)

Secrets: The data structure and algorithm used to implement the virtual hardware.

Services: Serves as a virtual hardware used by the rest of the system. This module provides the interface between the hardware and the software. So, the system can use it to display outputs or to accept inputs.

Implemented By: OS

7.2 Behaviour-Hiding

Secrets: The contents of the required behaviors.

Services: Includes programs that provide externally visible behaviors of the system as specified in the software requirements specification (SRS) documents. This module serves as a communication layer between the hardware-hiding module and the software decision module. The programs in this module will need to change if there are changes in the SRS.

Implemented By: –

7.2.1 Control (M2)

Secrets: The algorithm for coordinating how the program runs.

Services: Drives the program through the required tasks.

Implemented By: SSP

7.2.2 Input Format (M3)

Secrets: The format and structure of the input data.

Services: Read, verify, and store the input data. This includes a set of coordinates for each slope layer, soil properties for each layer, specifically effective angle of friction, effective cohesion, dry unit weight, and saturated unit weight, and the coordinates and unit weight of water for a water table, if one exists. This also includes an expected range for the start and end points of the critical slip surface and a decision on whether to use a half-sine or the constant 1 for the interslice normal to shear force ratio variability function.

Implemented By: SSP

7.2.3 Output Format (M4)

Secrets: The format and structure of the output data.

Services: Outputs the results of the calculations, including the factor of safety for the critical slip calculated by the Morgenstern Price Module (M9) and a plot of the critical slip surface on the slope geometry.

Implemented By: SSP

7.2.4 Genetic Algorithm (M5)

Secrets: Algorithm to identify the slip surface that has the minimum factor of safety, based on the inputs.

Services: Searches the slope for the critical slip surface with the minimum factor of safety

Implemented By: SSP

7.2.5 Kinematic Admissibility (M6)

Secrets: Algorithm to determine if a given slip surface passes or fails a set of admissibility criteria.

Services: Some slip surfaces are physically unlikely or impossible to occur in a slip surface, such as slip surfaces containing sharp angles, or going above the slope surface. Ensures randomly generated or mutated slopes from the Genetic Algorithm Module (M5) are physically possible according to the criteria of the Kinematic Admissibility Module.

Implemented By: SSP

7.2.6 Slip Slicing (M8)

Secrets: Algorithm to determine the coordinates of where the slip surface interslice nodes occur.

Services: When preparing a slip surface for analysis by the Morgenstern Price Module (M9) the x-coordinates defining the boundaries of the slices are identified and stored in a vector.

Implemented By: SSP

7.2.7 Slip Weighting (M7)

Secrets: The weighting for each slip surface in a set of slip surfaces, based on each slip surfaces factor of safety.

Services: Weights a set of slip surfaces generated by the Genetic Algorithm Module (M5) based on their factors of safety. A slip surface with a low factor of safety will have a high weight as it is more likely to be or to lead to generation of the critical slip surface.

Implemented By: SSP

7.2.8 Morgenstern-Price Calculation (M9)

Secrets: The factor of safety of a given slip surface.

Services: Calculates the factor of safety of a given slip surface, through implementation of a Morgenstern Price slope stability analysis method.

Implemented By: SSP

7.2.9 Slice Property Calculation (M10)

Secrets: Algorithm to assigns soil properties to slices based on the location of the slice with respect to the different soil layers.

Services: When performing slip analysis with the Morgenstern Price Module (M9), the base and interslice surfaces of each slice in the analysis requires a soil constant. Slice Property Sorter Module identifies which soil layer the surface is in to assign properties from that soil layer, and uses a weighting scheme when the surface crosses multiple soil layers.

Implemented By: SSP

7.3 Software Decision

Secrets: The design decision based on mathematical theorems, physical facts, or programming considerations. The secrets of this module are *not* described in the SRS.

Services: Includes a data structure and algorithms used in the system that do not provide direct interaction with the user.

Implemented By: –

7.3.1 Array Data Structure (M11)

Secrets: The data structure for a sequence data type.

Services: Provides array manipulation, including building an array, accessing a specific entry, slicing an array etc.

Implemented By: Matlab

7.3.2 Random Number Generation (M12)

Secrets: Pseudo-random numbers between 0 and 1.

Services: Randomly produces numbers between 0 and 1, using a chaotic function with an external seed. Used when generating slip surfaces in the Genetic Algorithm Module M5.

Implemented By: Matlab

7.3.3 Plotting (M13)

Secrets: The data structures and algorithms for plotting data graphically.

Services: Provides a plot function.

Implemented By: Matlab

8 Traceability Matrix

This section shows two traceability matrices: between the modules and the requirements Table 2 and between the modules and the anticipated changes Table 3.

9 Use Hierarchy Between Modules

In this section, the uses hierarchy between modules is provided. Parnas (1978) said of two programs A and B that A *uses* B if correct execution of B may be necessary for A to complete the task described in its specification. That is, A *uses* B if there exist situations in which the correct functioning of A depends upon the availability of a correct implementation of B. Figure 1 illustrates the use hierarchy between the modules. The graph is a Directed Acyclic Graph (DAG). Each level of the hierarchy offers a testable and usable subset of the system, and modules in the higher level of the hierarchy are essentially simpler because they use modules from the lower levels.

[Want to combine M-P, slice property (slicing too?) —BM]

Req.	Modules
R1	M2 M3 M11
R2	M5 M12 M11
R3	M6 M11
R4	M5 M8 M11
R5	M9 M11
R6	M7 M11
R7	M5 M12 M11
R8	M5 M11
R9	M2 M4 M8 M11
R10	M4 M9 M11
R11	M4 M13

Table 2: Trace Between Requirements and Modules

Req.	Modules
AC1	M1
AC2	M2
AC3	M3
AC4	M4
AC5	M5
AC6	M6
AC7	M8
AC8	M7
AC9	M9
AC10	M10
AC11	M11
AC12	M12
AC13	M13

Table 3: Trace Between Anticipated Changes and Modules

10 Bibliography

Yu-Chao Li, Yun-Min Chen, Tony L.T Zhan, Dao-Sheng Ling, and Peter John Cleall. An efficient approach for locating the critical slip surface in slope stability analyses using a

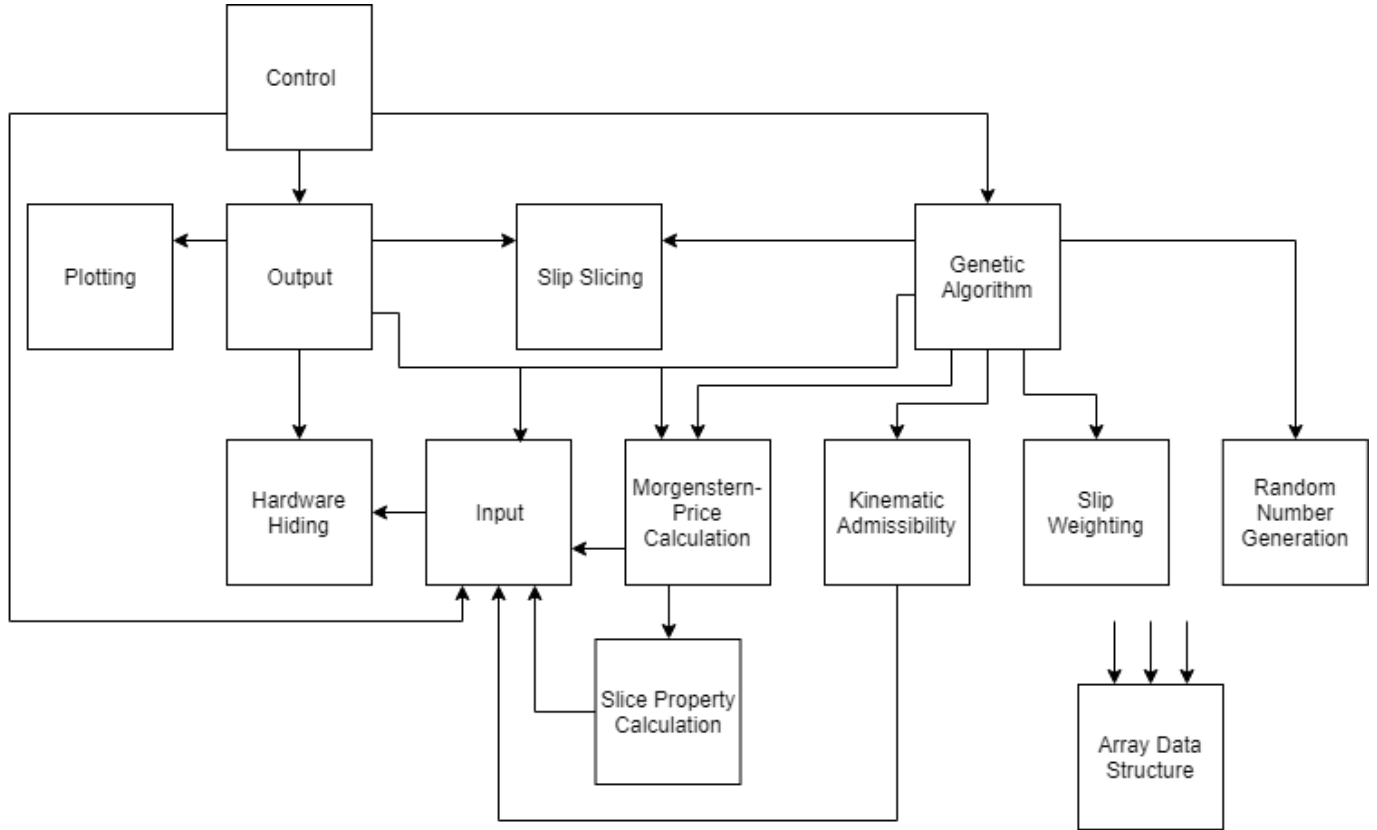


Figure 1: Use Hierarchy Diagram

real-coded genetic algorithm. *Can. Geotech. J.*, (47):806–820, 25 June 2010.

D. L. Parnas, P. C. Clements, and D. M. Weiss. The modular structure of complex systems. In *ICSE '84: Proceedings of the 7th international conference on Software engineering*, pages 408–417, Piscataway, NJ, USA, 1984. IEEE Press. ISBN 0-8186-0528-6.

David L. Parnas. On the criteria to be used in decomposing systems into modules. *Comm. ACM*, vol. 15, no. 2, pp. 1053-1058, December 1972.

David L. Parnas. Designing software for ease of extension and contraction. In *ICSE '78: Proceedings of the 3rd international conference on Software engineering*, pages 264–277, Piscataway, NJ, USA, 1978. IEEE Press. ISBN none.

Dieter Stolle and Peijun Guo. Limit equilibrium slope stability analysis using rigid finite elements. *Can. Geotech. J.*, (45):653–662, 20 May 2008.

Greg Wilson, D.A. Aruliah, C. Titus Brown, Neil P. Chue Hong, Matt Davis, Richard T. Guy, Steven H.D. Haddock, Kathryn D. Huff, Ian M. Mitchell, Mark D. Plumblet, Ben

Waugh, Ethan P. White, and Paul Wilson. Best practices for scientific computing. *CoRR*, abs/1210.0530, 2013.

D.Y. Zhu, C.F. Lee, Q.H. Qian, and G.R. Chen. A concise algorithm for computing the factor of safety using the morgenstern–price method. *Can. Geotech. J.*, (42):272–278, 19 February 2005.