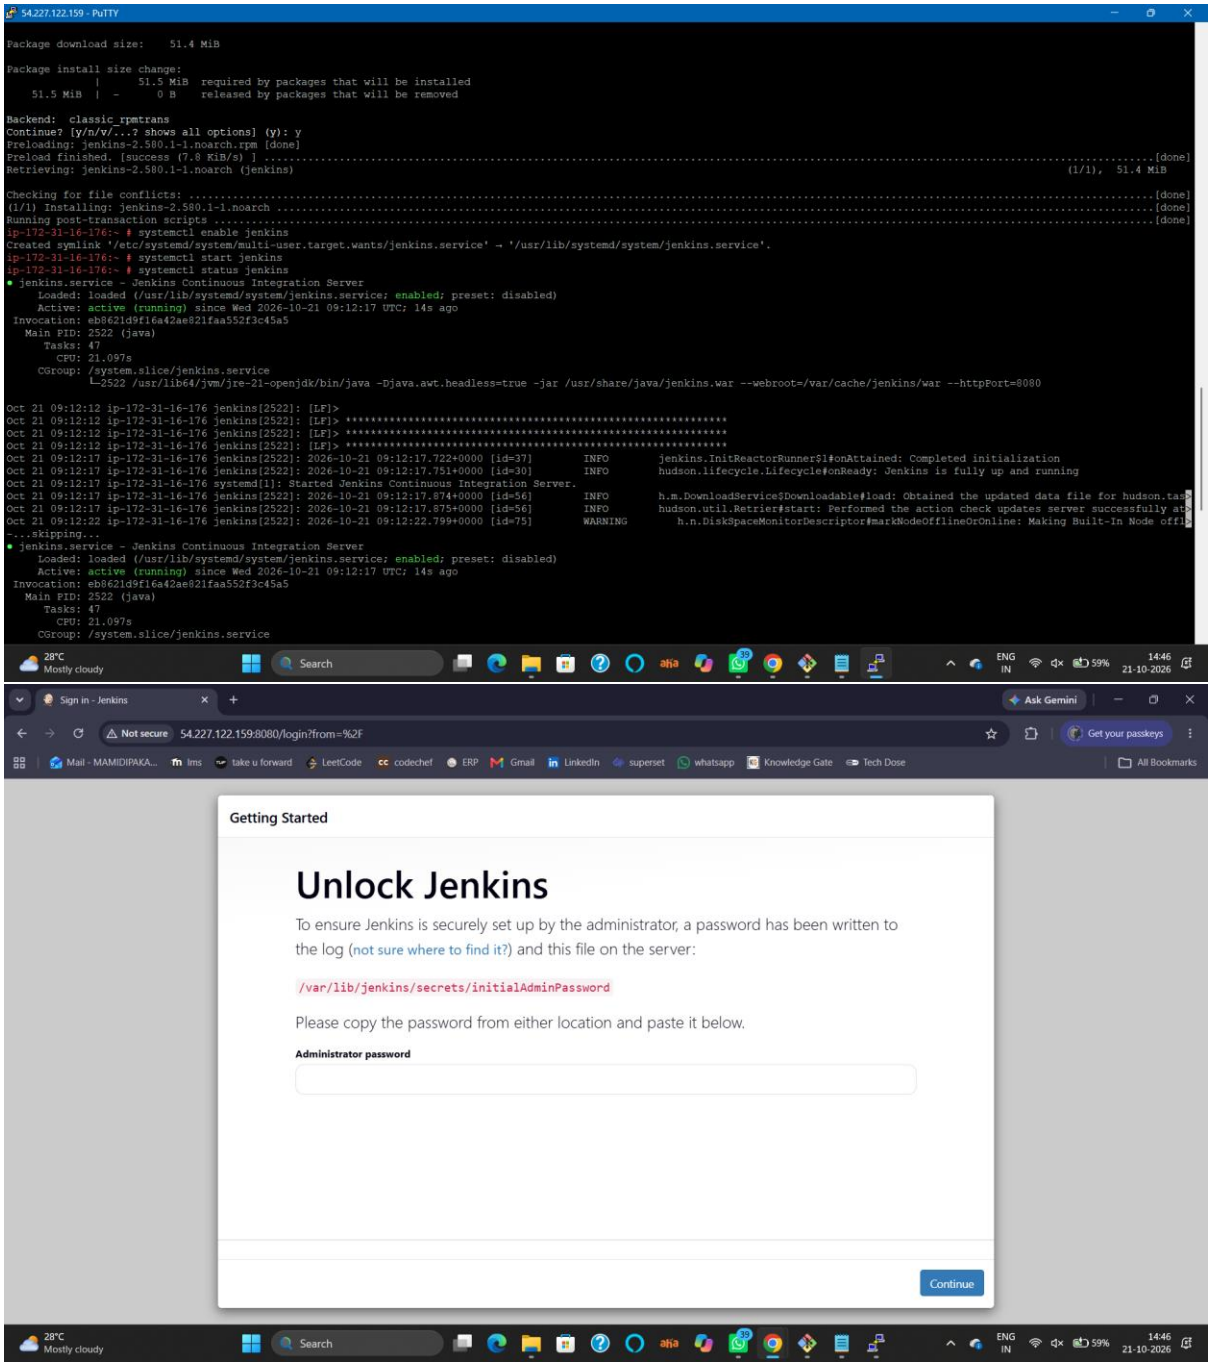

54.227.122.159 - PuTTY
Package download size: 51.4 MiB
Package install size change:
51.5 MiB required by packages that will be installed
0 B released by packages that will be removed
Backend: classic_rpmtrans
Continue? [y/n/v/...? shows all options] (y): y
Preloading: jenkins-2.580.1-1.noarch.rpm [done]
Preload finished. [success (7.8 KiB/s)]
Retrieving: jenkins-2.580.1-1.noarch (jenkins)
(1/1), 51.4 MiB
Checking for file conflicts:
(1/1) Installing: jenkins-2.580.1-1.noarch
Running post-transaction scripts
ip-172-31-16-176:~ # systemctl enable jenkins
Created symlink '/etc/systemd/system/multi-user.target.wants/jenkins.service' → '/usr/lib/systemd/system/jenkins.service'.
ip-172-31-16-176:~ # systemctl start jenkins
ip-172-31-16-176:~ # systemctl status jenkins
● jenkins.service - Jenkins Continuous Integration Server
Loaded: loaded (/usr/lib/systemd/system/jenkins.service; enabled; preset: disabled)
Active: active (running) since Wed 2026-10-21 09:12:17 UTC; 14s ago
Invocation: eb8621d9f16a42ae821faa552f3c45a5
Main PID: 2522 (java)
Tasks: 47
CPU: 21.097s
CGroup: /system.slice/jenkins.service
└─2522 /usr/lib64/jvm/jre-21-openjdk/bin/java -Djava.awt.headless=true -jar /usr/share/java/jenkins.war --webroot=/var/cache/jenkins/war --httpPort=8080
Oct 21 09:12:12 ip-172-31-16-176 jenkins[2522]: [LF]>
Oct 21 09:12:12 ip-172-31-16-176 jenkins[2522]: [LF]> **
Oct 21 09:12:12 ip-172-31-16-176 jenkins[2522]: [LF]> **
Oct 21 09:12:12 ip-172-31-16-176 jenkins[2522]: [LF]> **
Oct 21 09:12:17 ip-172-31-16-176 jenkins[2522]: 2026-10-21 09:12:17.722+0000 [id=37] INFO jenkins.InitReactorRunner$1#onAttained: Completed initialization
Oct 21 09:12:17 ip-172-31-16-176 jenkins[2522]: 2026-10-21 09:12:17.751+0000 [id=30] INFO hudson.lifecycle.Lifecycle#onReady: Jenkins is fully up and running
Oct 21 09:12:17 ip-172-31-16-176 systemd[1]: Started Jenkins Continuous Integration Server.
Oct 21 09:12:17 ip-172-31-16-176 jenkins[2522]: 2026-10-21 09:12:17.874+0000 [id=56] INFO h.m.DownloadService$Downloadable#load: Obtained the updated data file for hudson.tas
Oct 21 09:12:17 ip-172-31-16-176 jenkins[2522]: 2026-10-21 09:12:17.875+0000 [id=56] INFO hudson.util.Retrier#start: Performed the action check updates server successfully at
Oct 21 09:12:22 ip-172-31-16-176 jenkins[2522]: 2026-10-21 09:12:22.799+0000 [id=75] WARNING h.n.Disk$paceMonitorDescriptor#markNodeOfflineOrOnline: Making Built-In Node offl
-...skipping...
● jenkins.service - Jenkins Continuous Integration Server
Loaded: loaded (/usr/lib/systemd/system/jenkins.service; enabled; preset: disabled)
Active: active (running) since Wed 2026-10-21 09:12:17 UTC; 14s ago
Invocation: eb8621d9f16a42ae821faa552f3c45a5
Main PID: 2522 (java)
Tasks: 47
CPU: 21.097s
CGroup: /system.slice/jenkins.service
28°C Mostly cloudy
Search
ENG IN
59%
14:46 21-10-2026

Sign in - Jenkins
Ask Gemini
Not secure
54.227.122.159:8080/login?from=%2F
Get your passkeys
Mail - MAMIDIPAKA...
lms
take u forward
LeetCode
codechef
ERP
Gmail
LinkedIn
superset
whatsapp
Knowledge Gate
Tech Dose
All Bookmarks
Getting Started
Unlock Jenkins
To ensure Jenkins is securely set up by the administrator, a password has been written to the log (not sure where to find it?) and this file on the server:
/var/lib/jenkins/secrets/initialAdminPassword
Please copy the password from either location and paste it below.
Administrator password
Continue
28°C Mostly cloudy
Search
ENG IN
59%
14:46 21-10-2026