
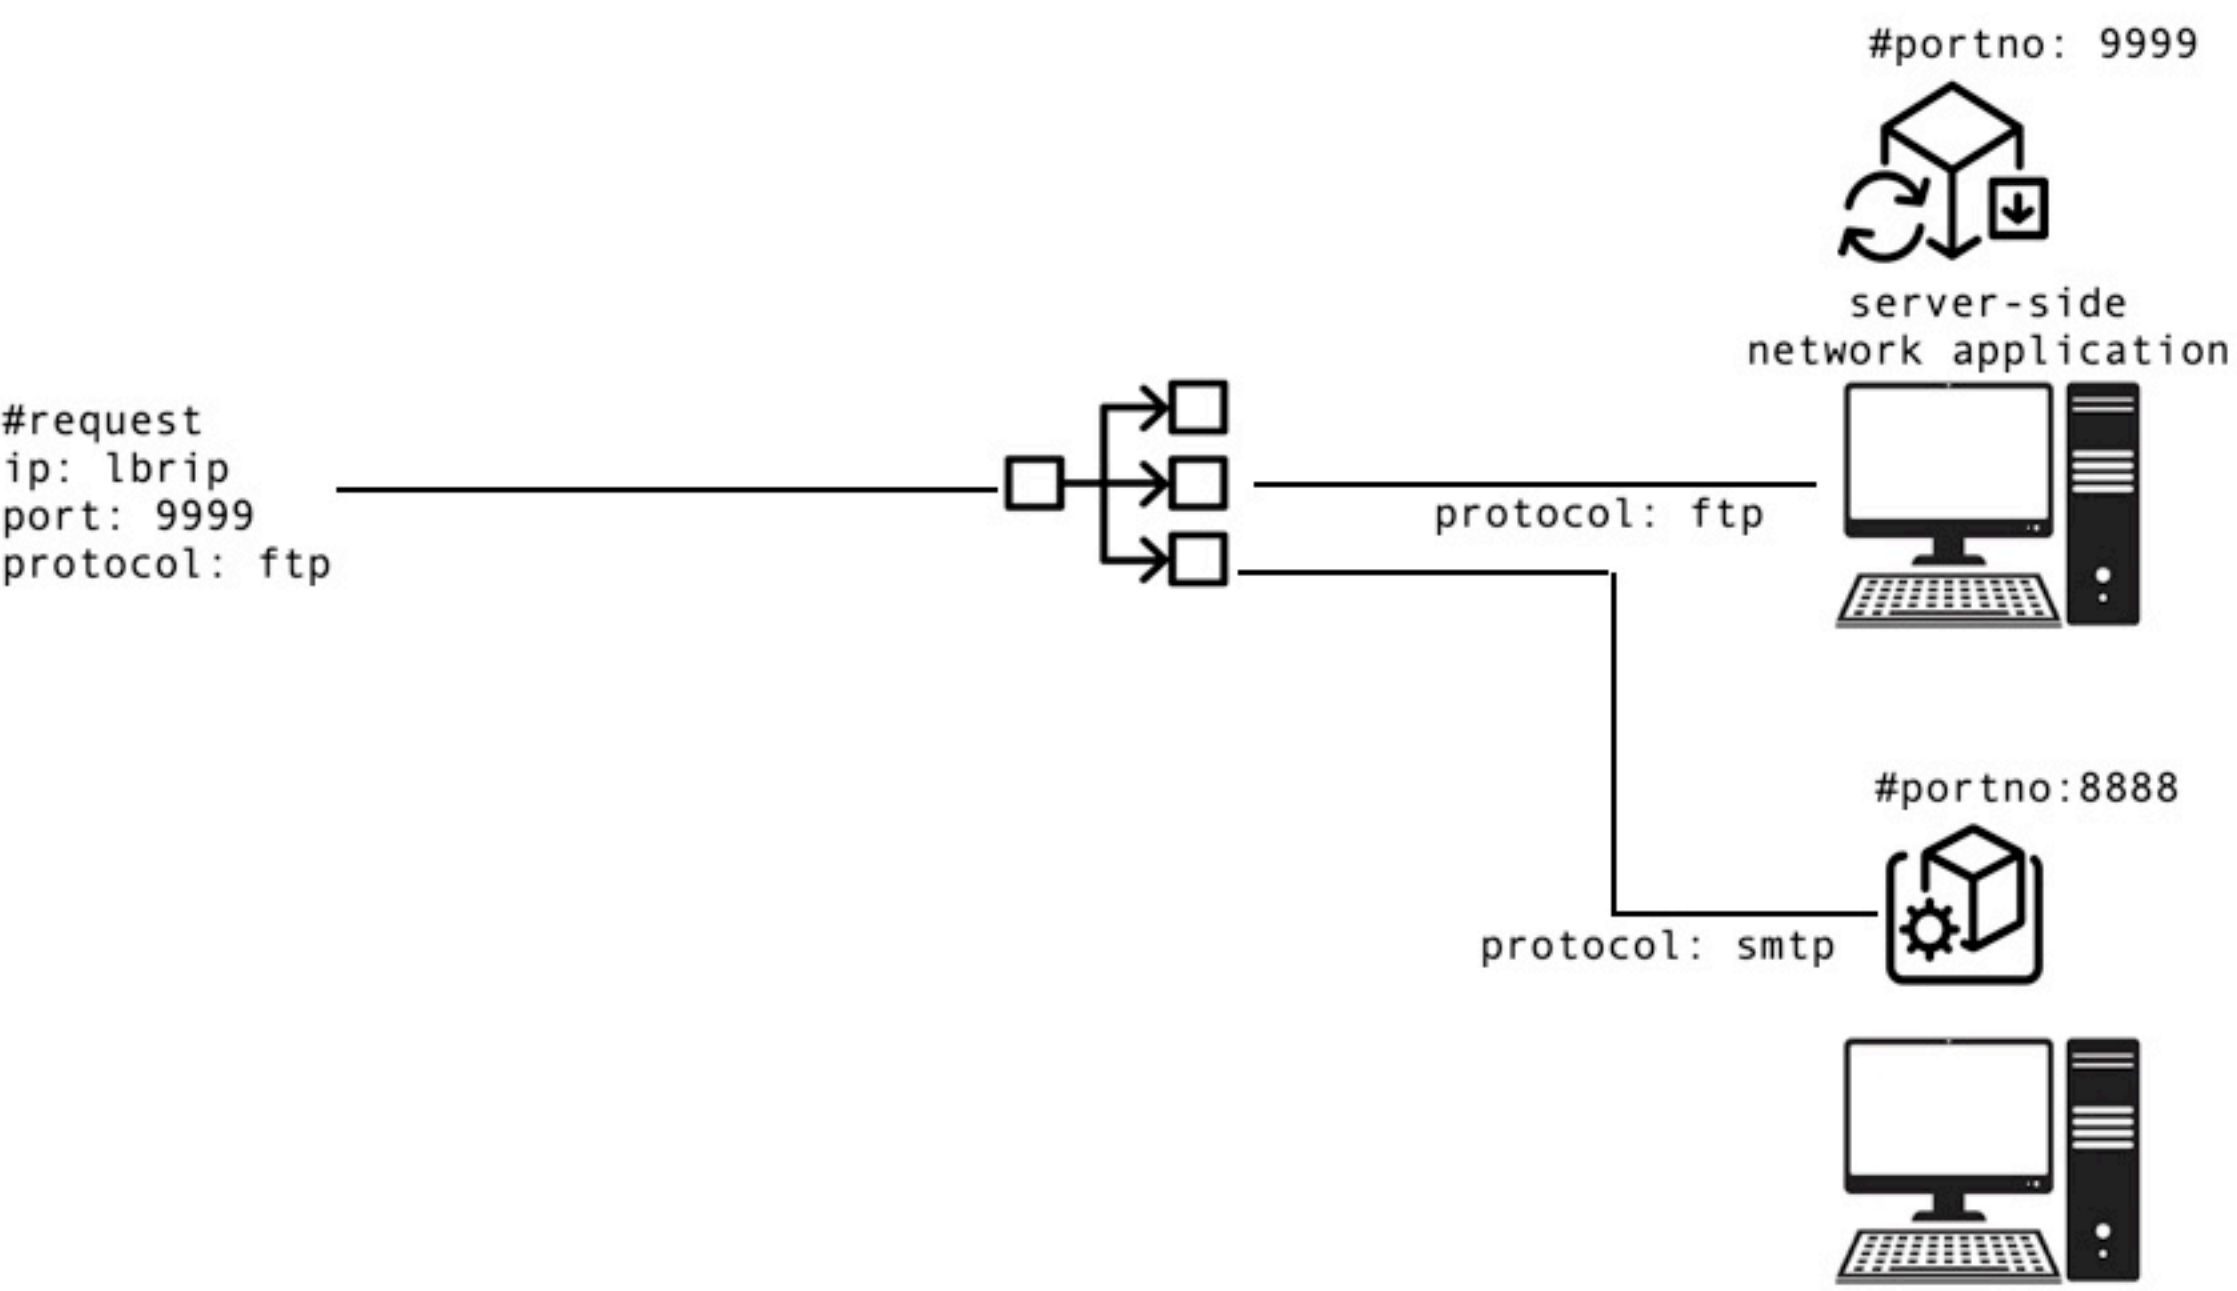


www.speed.com -> http/80
www.roadster.com -> http/80

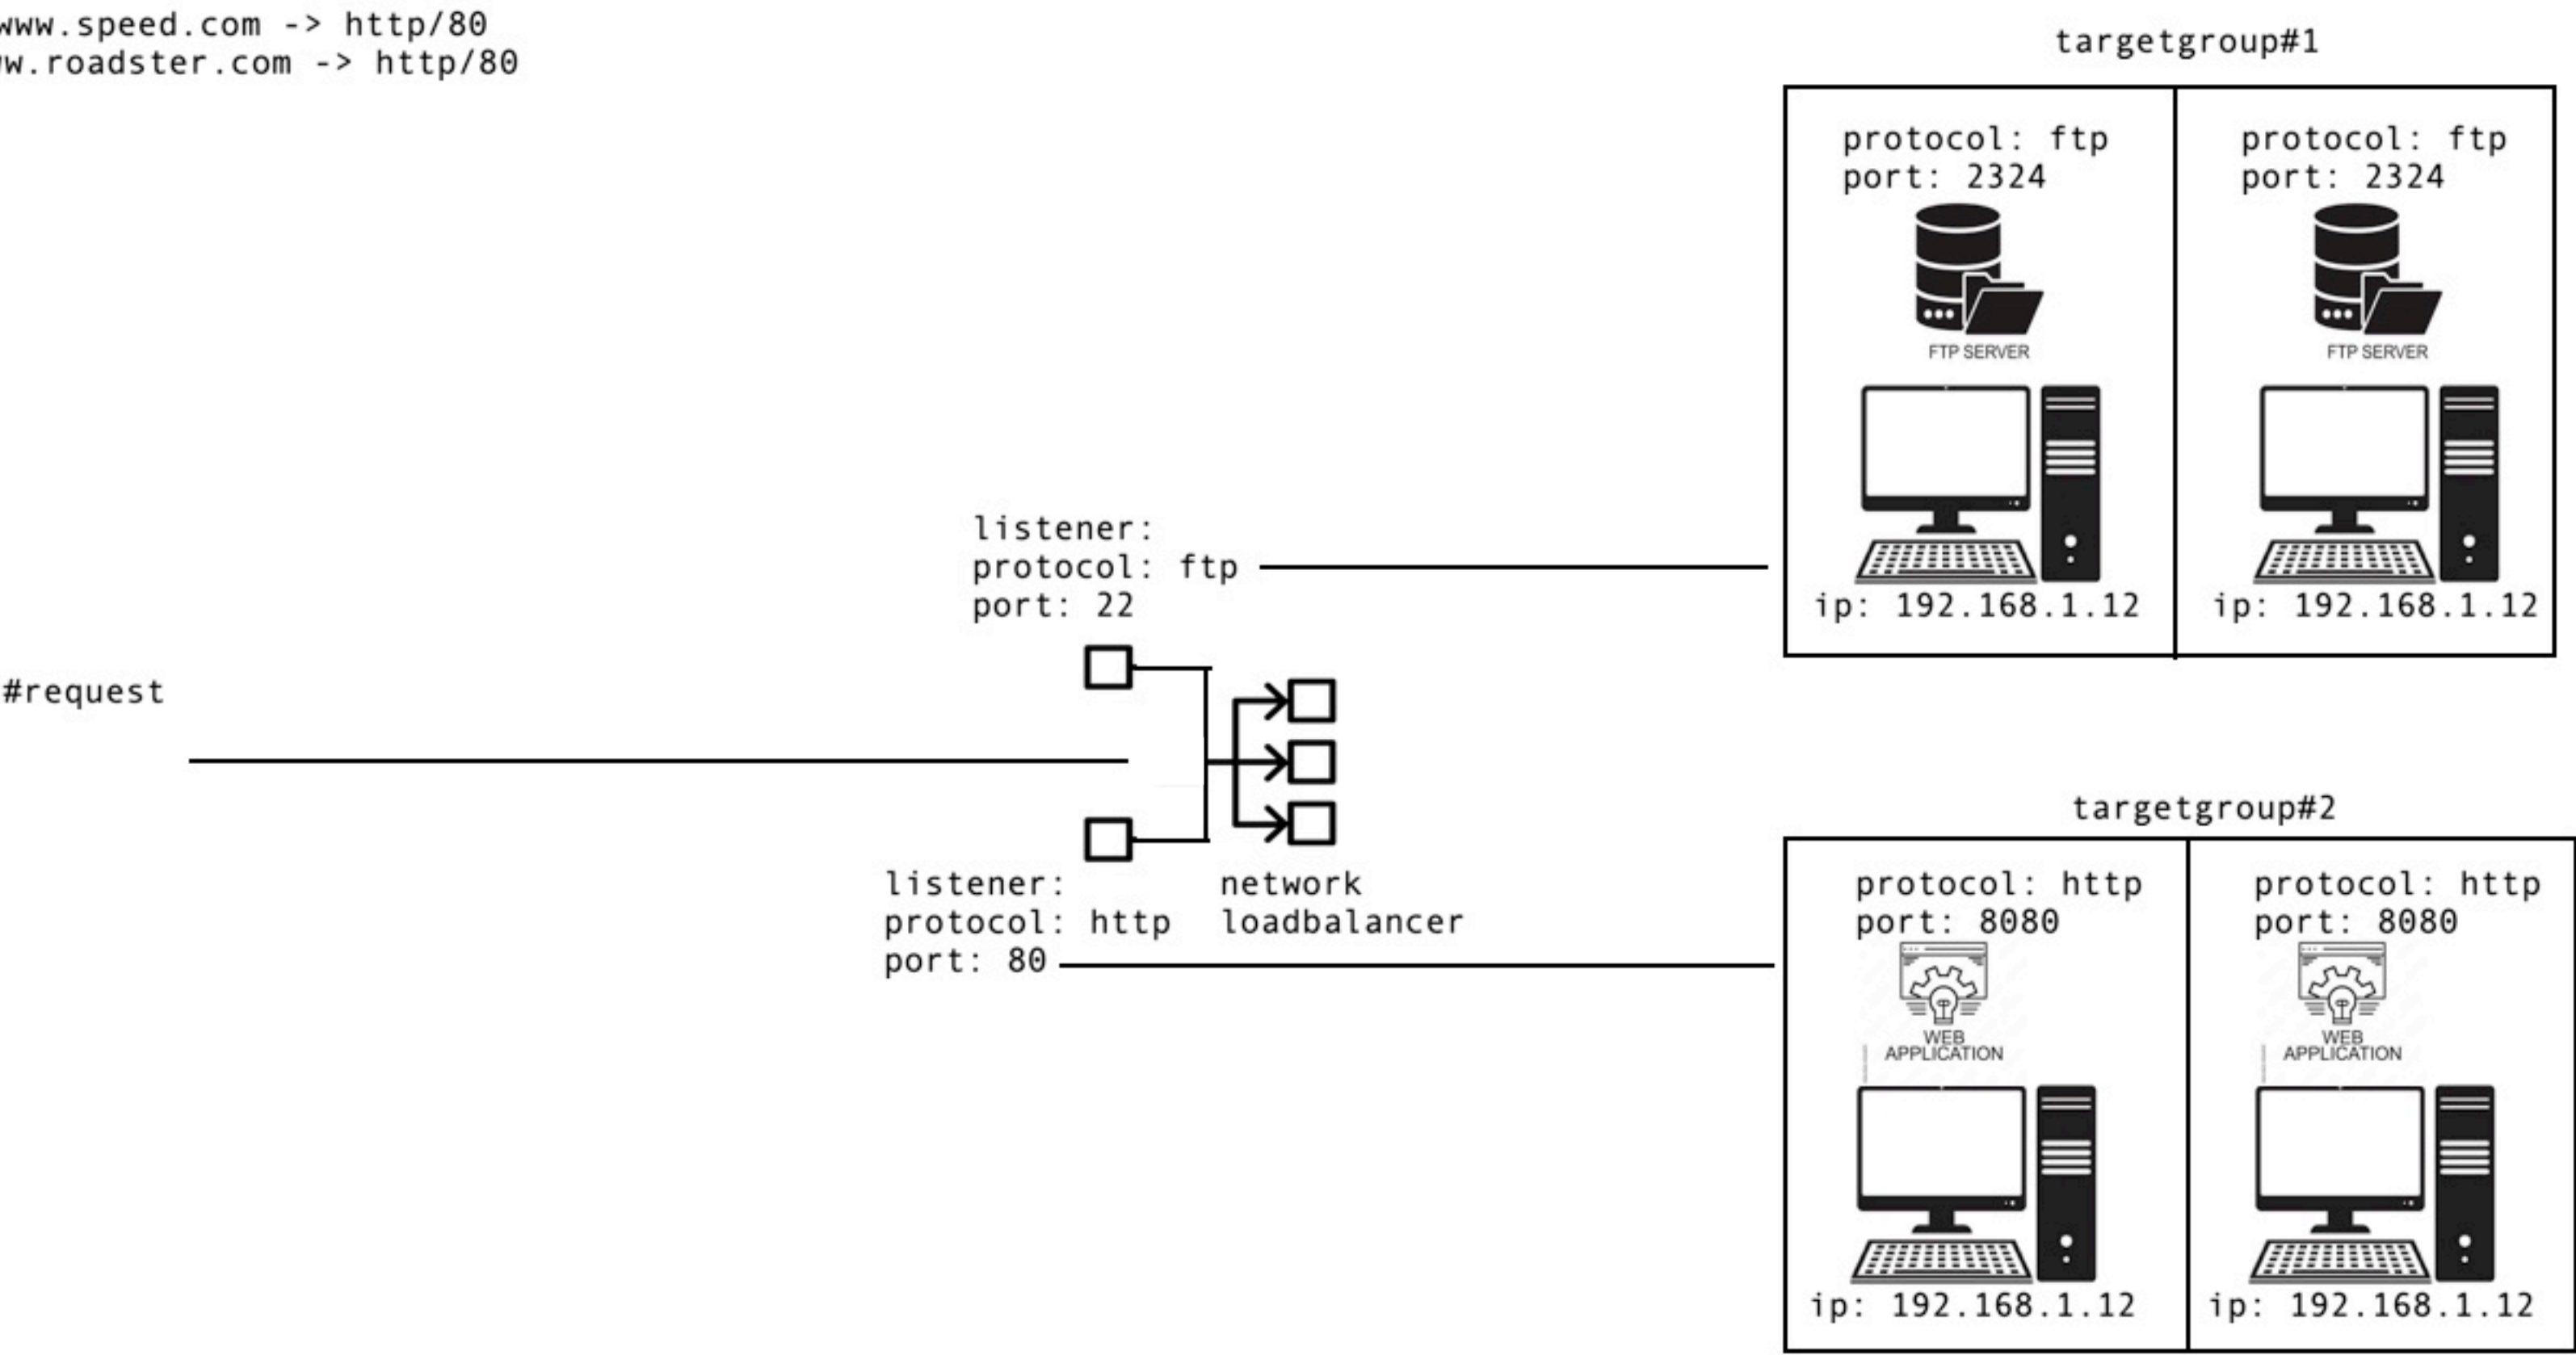

A network application has its identity only based on
1. portno
2. protocol

whereas in a web application the identity of a program is based on url

since network loadbalancer is used for distributing the network traffic across the any network applications, it doesnt rely on url (as it is only for web applications). so the only way to identify the network application is based on protocol&portno, so it uses it to identify and distribute the traffic