



block all public access: enabled

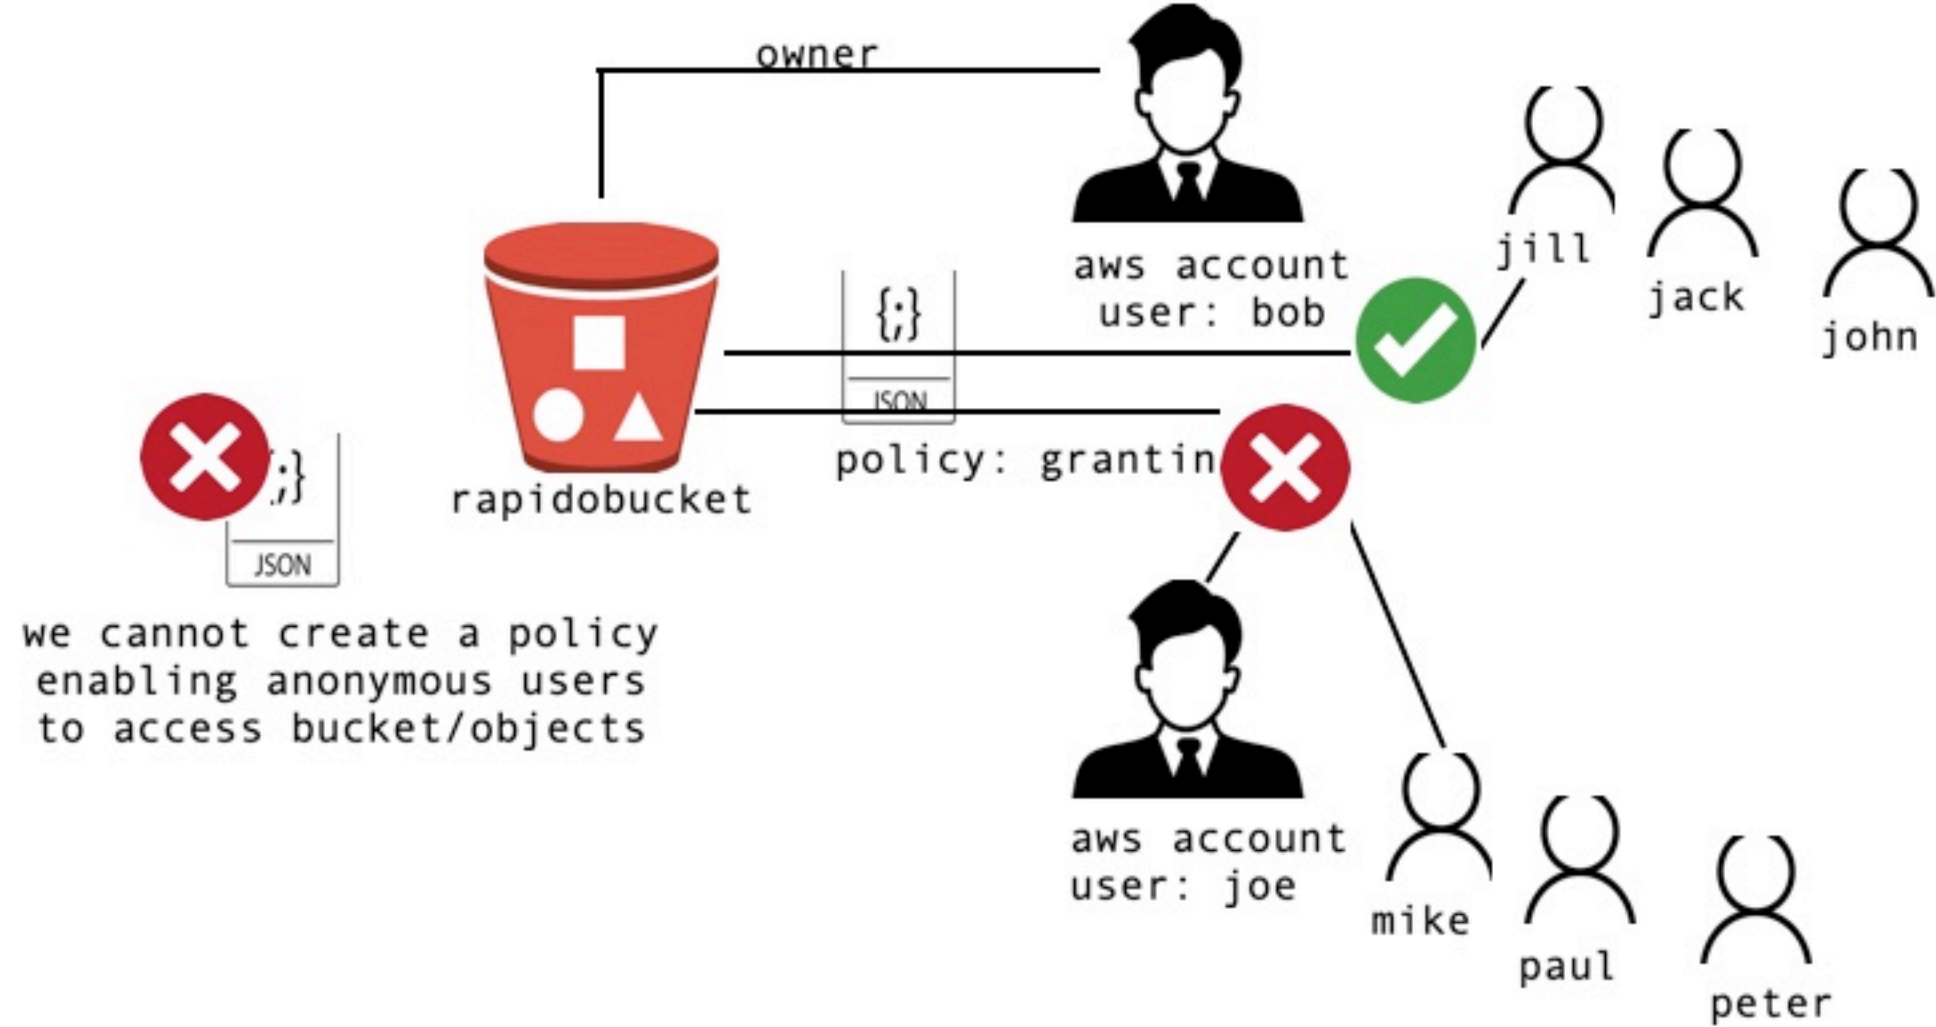


block all public access: disabled
#4 checkboxes are enabled for turning on/off, out of which the top #2 are related to acls and there is no use of checking/unchecking them as we disabled acls.
Now let us discuss about the remaining #2 checkboxes. Now we have #3 options now.

#option1:
block all public access: disabled
3 checkbox: Block public access to buckets and objects granted through new public bucket or access point policies (unchecked)
4 checkbox: Block public and cross-account access to buckets and objects through any public bucket or access point (unchecked)
with this above configuration if we have created the bucket then we have:

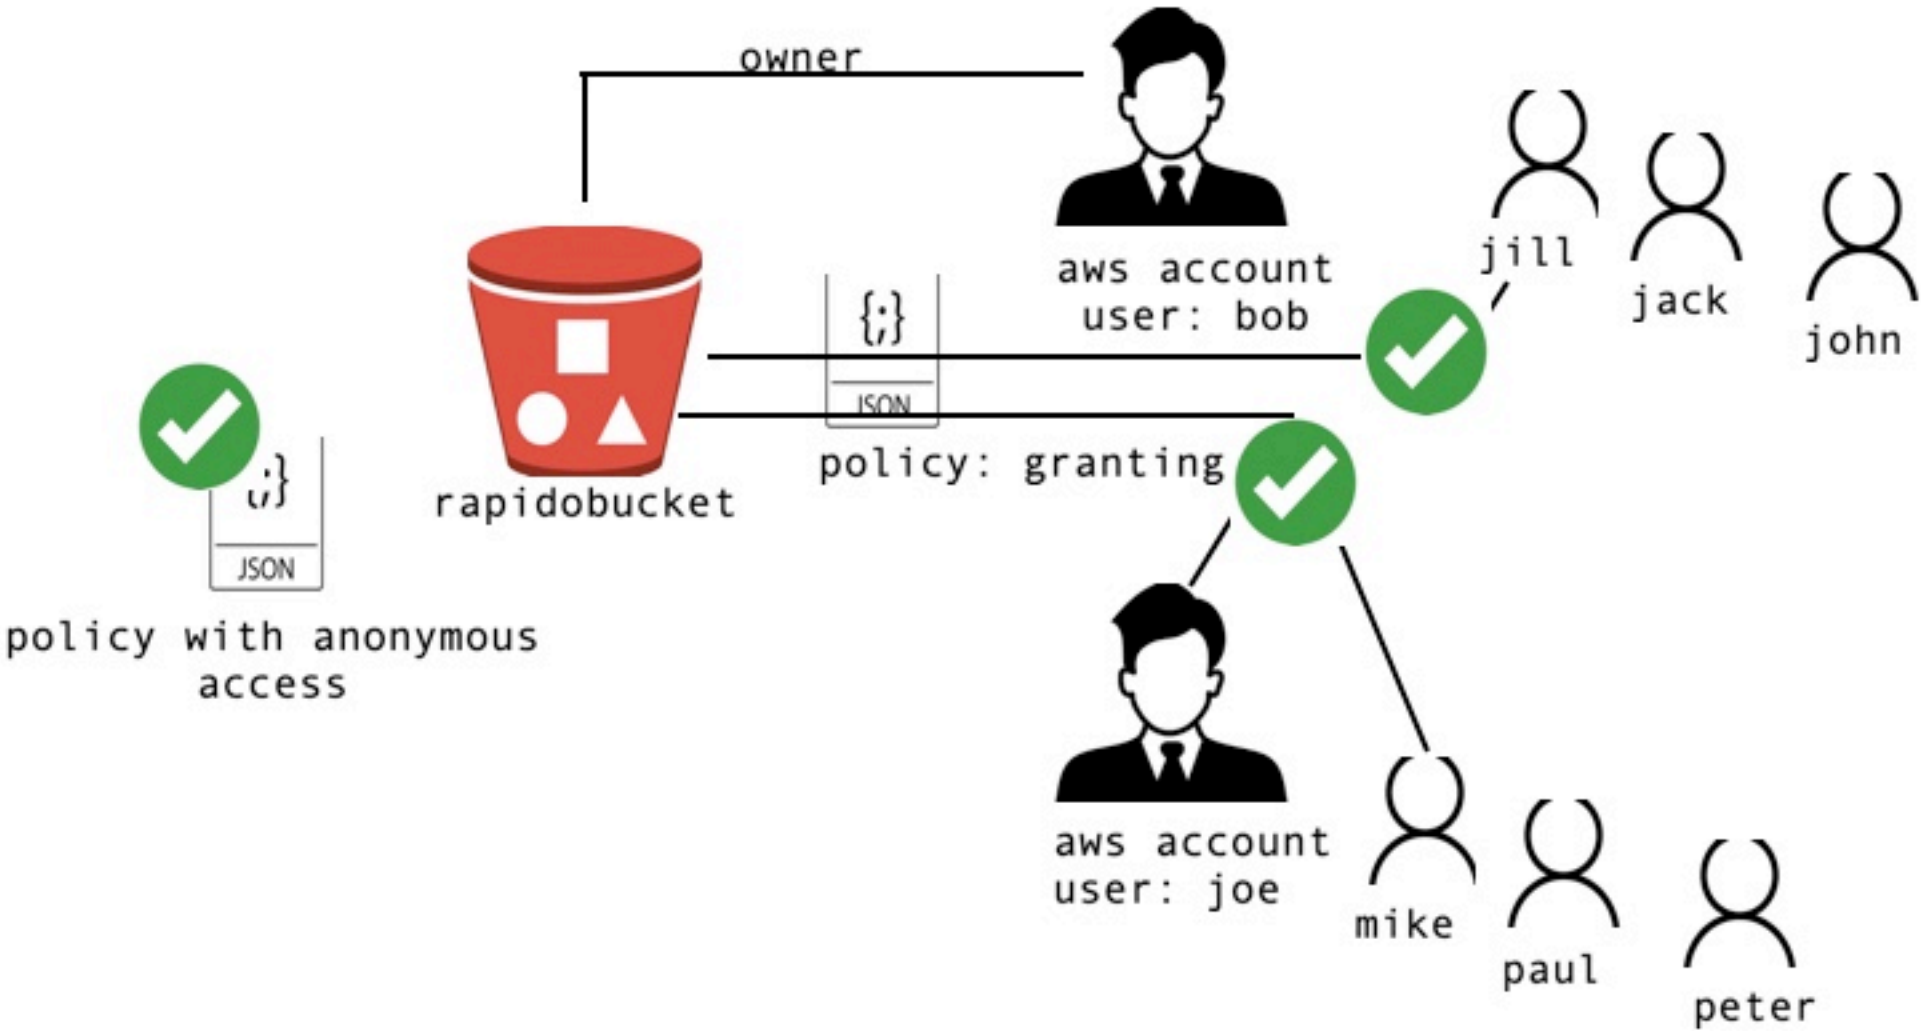

Note: without any policy defined, no one can access bucket/objects implicitly

#option2:
block all public access: disabled
3 checkbox: Block public access to buckets and objects granted through new public bucket or access point policies (checked)
4 checkbox: Block public and cross-account access to buckets and objects through any public bucket or access point (unchecked)
with this above configuration if we have created the bucket then we have:

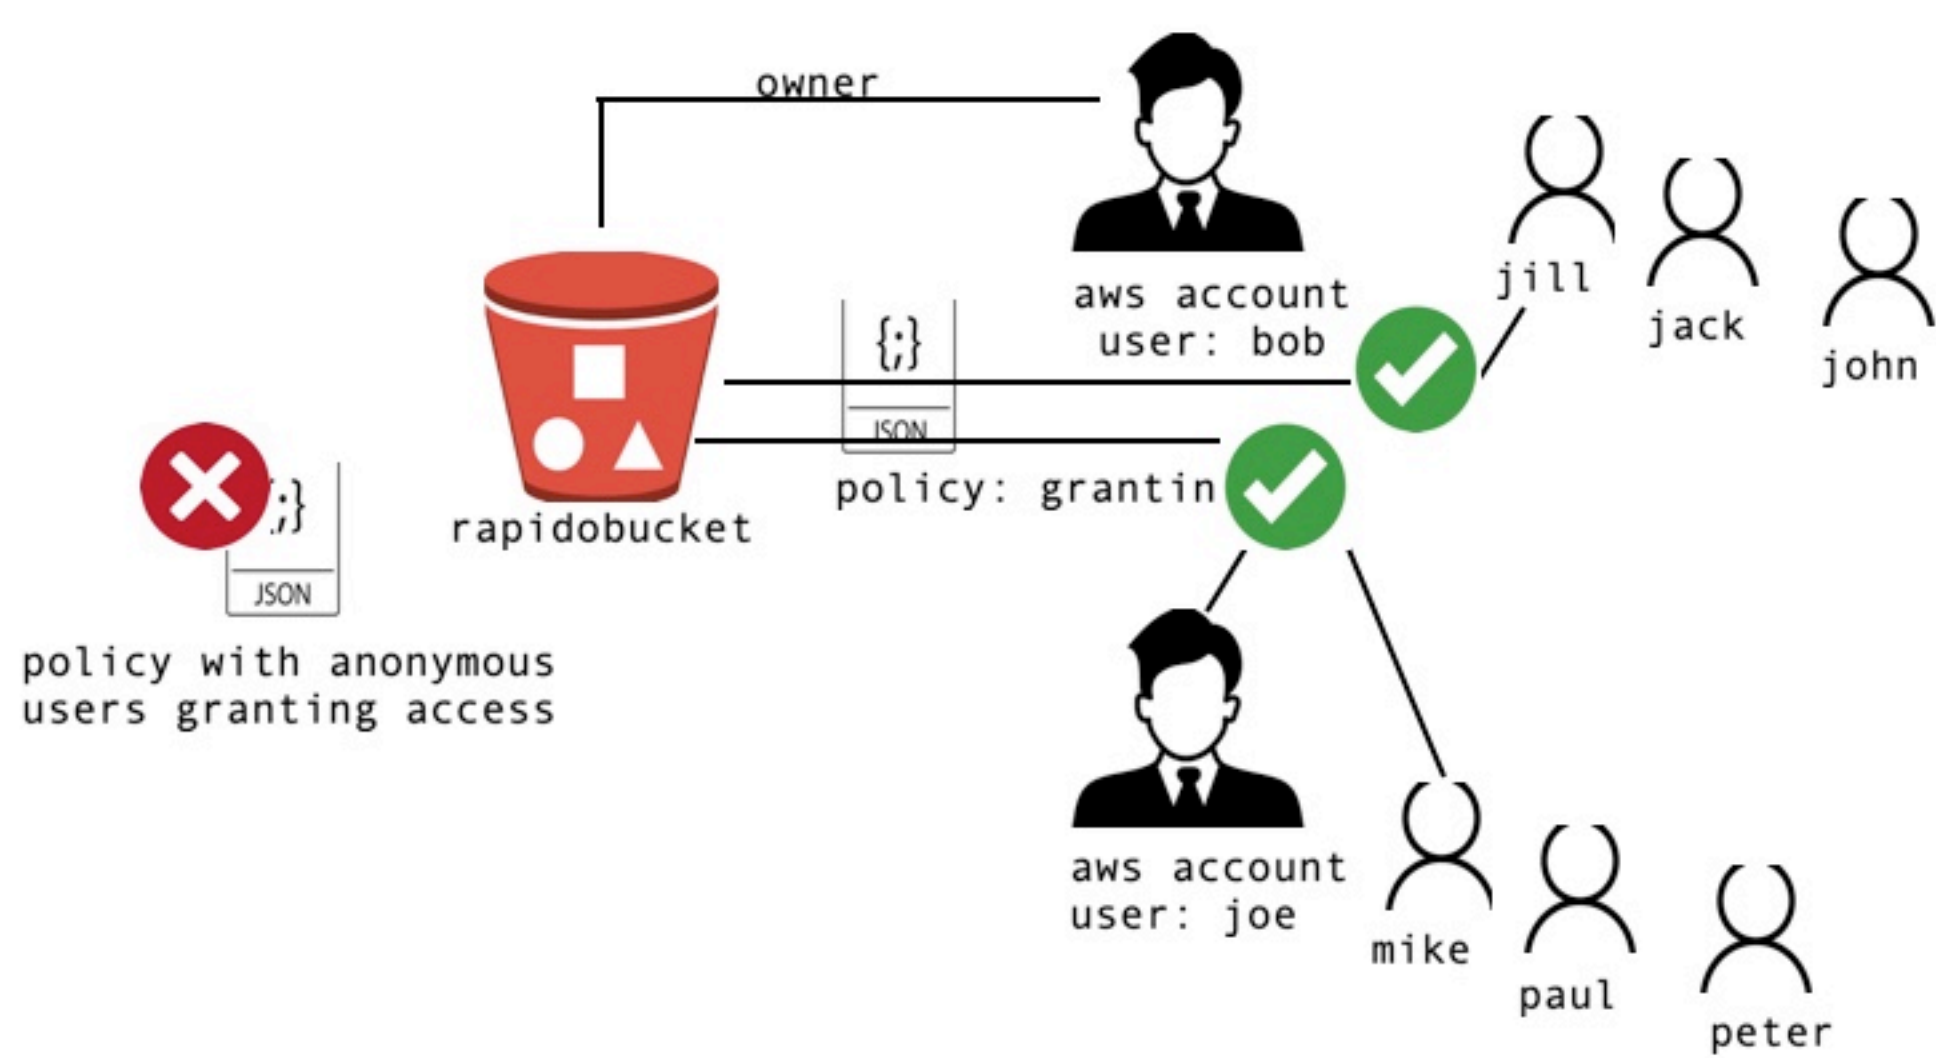

#option3:
block all public access: disabled
3 checkbox: Block public access to buckets and objects granted through new public bucket or access point policies (unchecked)
4 checkbox: Block public and cross-account access to buckets and objects through any public bucket or access point (checked)
with this above configuration if we have created the bucket then we have:

