



Spring in 15 minutes

by David Kiss (<http://kaviddiss.com>)

Table of Contents

[Overview](#)

[Prerequisites](#)

[Step #1 - Create your first project](#)

[Step #2 - Create static content](#)

[Step #3 - Create our data model](#)

[Step #4 - Manipulate the data](#)

[Using Spring Data JPA](#)

[Creating a RestController](#)

[Creating Rest Resources](#)

[Step #5 - Securing the application](#)

Welcome to the Spring in 15 Minutes tutorial

This step-by-step tutorial was created to help you get started with Spring and take you through creating a sample blog application using Spring framework v4, Spring Boot, Spring Data and Spring Security frameworks.

You are welcome to share, transmit or include this tutorial in training packages or resources (free or paid), provided you keep it intact as a complete document. No permission from the author is required.

If you find this document useful, you'll find more Spring tutorials at <http://kaviddiss.com/learn-spring/>.

In case you have a question on Spring, found an error in the tutorial, or just want to compliment on the nice fonts in this document, leave a message at <http://kaviddiss.com/contact/>.

Prerequisites

- Previous experience with Java
- An IDE to editing Java source code. I personally prefer using IntelliJ (<https://www.jetbrains.com/idea/download>), but feel free to use Eclipse (<http://www.eclipse.org/downloads/>), Netbeans (<https://netbeans.org/downloads/>) or anything else you feel comfortable with.
- JDK installed and configured for the project in your IDE, preferably v1.8, the latest, version


Step #1 - Create your first project

In this section we'll create a very basic Java project that we'll use for creating the blog application.

To get started, navigate to the Spring Initializr webpage at <http://start.spring.io> in your favourite browser. On this page you'll be able to generate a basic Spring framework / [Spring Boot](#) based project.

What is Spring Boot?

In case you're not familiar with Spring Boot, it's one of the latest additions to the many existing Spring frameworks. It was inspired by Dropwizard (<http://www.dropwizard.io/>) and it's main goal is to simplify working with Spring and supporting development of microservices using Spring.

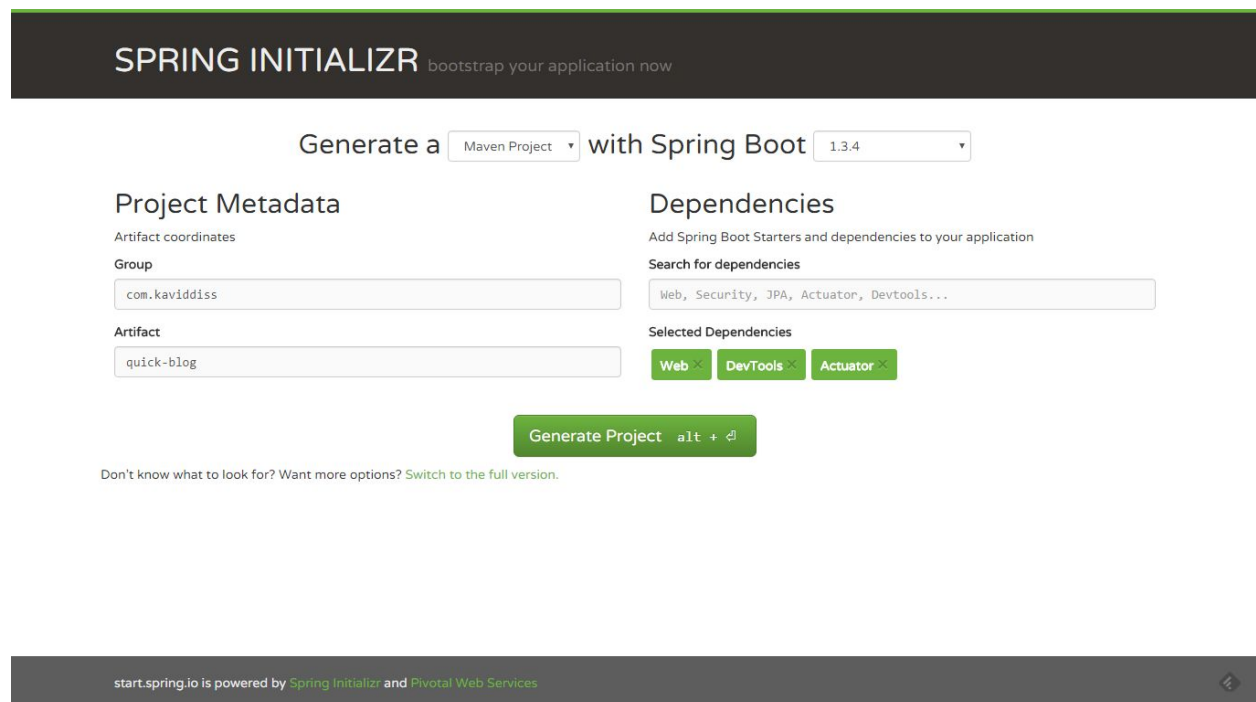

The screenshot shows the Spring Initializr web application interface. At the top, it says "SPRING INITIALIZR bootstrap your application now". Below this, there's a form to generate a project. The form has two main sections: "Project Metadata" and "Dependencies".

Project Metadata:

- Artifact coordinates: Group (com.kaviddiss), Artifact (quick-blog)

Dependencies:

- Add Spring Boot Starters and dependencies to your application
- Search for dependencies: Web, Security, JPA, Actuator, Devtools...
- Selected Dependencies: Web, DevTools, Actuator

At the bottom of the form, there's a green button labeled "Generate Project" with a keyboard shortcut "alt + ⌘". Below the button, there's a link: "Don't know what to look for? Want more options? [Switch to the full version.](#)"

At the very bottom of the page, there's a footer: "start.spring.io is powered by [Spring Initializr](#) and [Pivotal Web Services](#)".

On the Spring Initializr webpage select Maven Project and the latest stable Spring Boot version (currently 1.3.5).

What is Maven?

Apache Maven (<http://maven.apache.org/>) is probably the most commonly used open-source build and dependency management tool for Java. It is similar to NPM in Node.js or RubyGems in Ruby.


The Group field allows grouping build artifacts together. For example, if your company's website is <http://mycompany.com>, you'd use `com.mycompany` as the Group for all the java projects within the company.

The Artifact field along with the Group field allows to uniquely identify a Java project in Maven. It's generally a good idea to set it to a meaningful value that describes your project.

In the Dependencies field select these options:

- *Web*: allows us to create web applications
- *DevTools*: a library used locally in development mode that can automatically restart your Spring web application whenever files in the classpath change (in IntelliJ it can be triggered by clicking Build / Make Project menu item, in Eclipse by saving a modified file)
- *Actuator*: a library that provides useful information (monitoring, health, etc.) on the running Spring application

At this point you can click the Generate Project button that will generate a zip file that you'll need to download and extract on your computer.

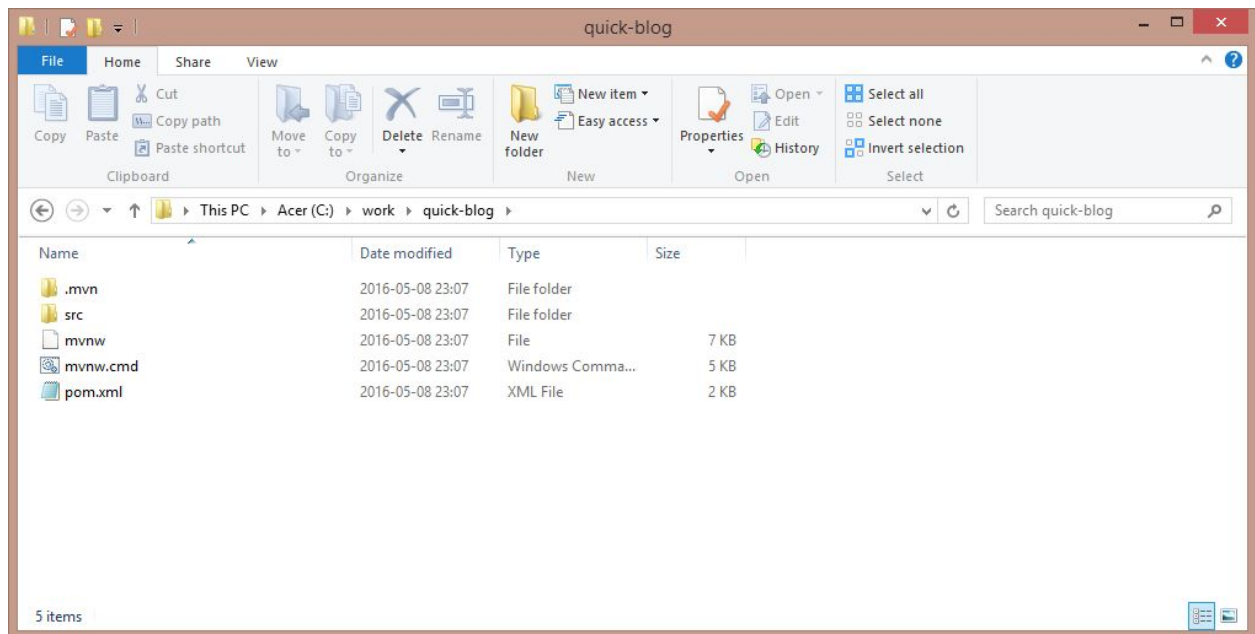


Starting from the bottom,

- `pom.xml`: is the Maven project descriptor file where you can configure the project's dependencies and build steps
- `mvnw` or `mvnw.cmd`: if you don't have Maven installed yet, running these commands will install it locally
- `src`: folder containing all source files needed to build this project
- `.mvn`: folder needed for `mvnw` command

- `~/.m2/repository`: this folder is not inside the project folder, rather it lives on it's own and includes a local cache of all the artifacts used as a dependency for your local Java projects

Now in the command line run: `mvnw spring-boot:run`

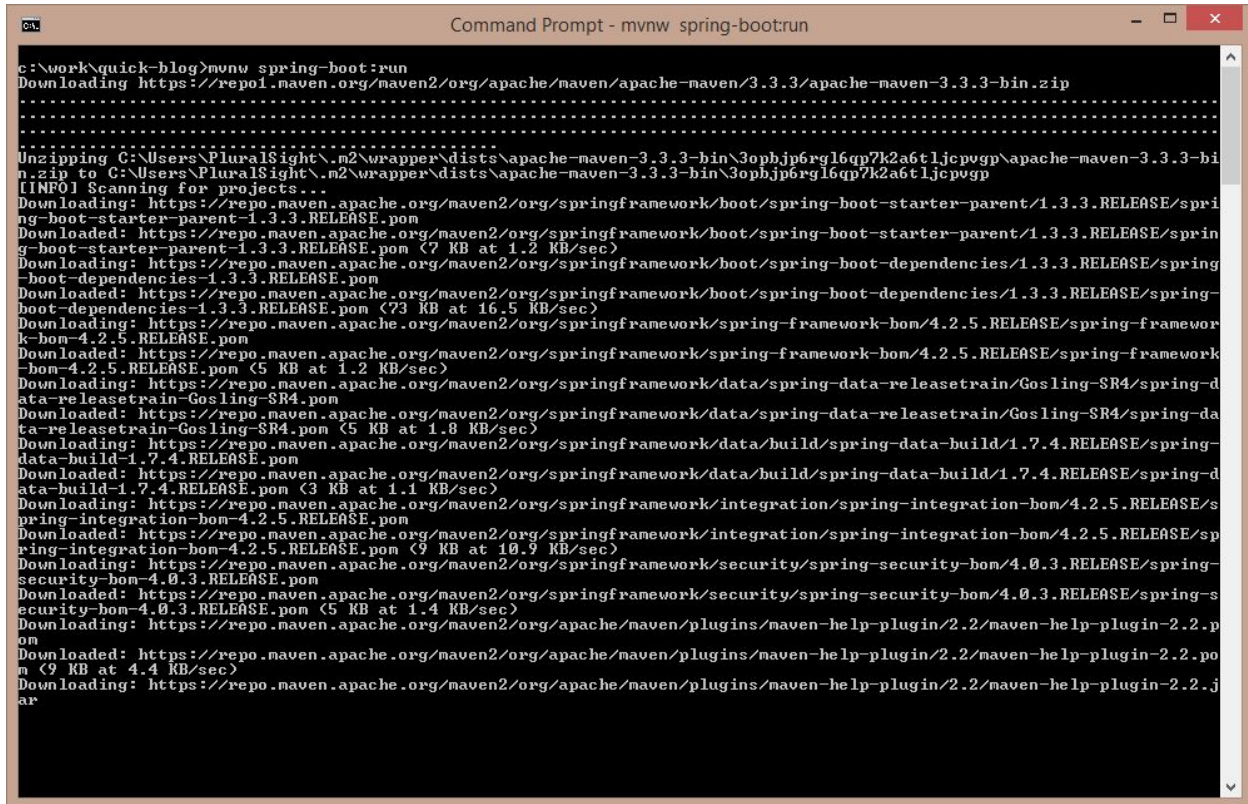


```
Command Prompt - mvnw spring-boot:run

c:\work\quick-blog>mvnw spring-boot:run
Downloading https://repo1.maven.org/maven2/org/apache/maven/apache-maven/3.3.3/apache-maven-3.3.3-bin.zip
.....
.....
Unzipping C:\Users\PluralSight\.m2\wrapper\dists\apache-maven-3.3.3-bin\3opbjp6rgl6qp7k2a6tljcpvgp\apache-maven-3.3.3-bin.zip to C:\Users\PluralSight\.m2\wrapper\dists\apache-maven-3.3.3-bin\3opbjp6rgl6qp7k2a6tljcpvgp
[INFO] Scanning for projects...
Downloading: https://repo.maven.apache.org/maven2/org/springframework/boot/spring-boot-starter-parent/1.3.3.RELEASE/spring-boot-starter-parent-1.3.3.RELEASE.pom
Downloaded: https://repo.maven.apache.org/maven2/org/springframework/boot/spring-boot-starter-parent/1.3.3.RELEASE/spring-boot-starter-parent-1.3.3.RELEASE.pom (7 KB at 1.2 KB/sec)
Downloading: https://repo.maven.apache.org/maven2/org/springframework/boot/spring-boot-dependencies/1.3.3.RELEASE/spring-boot-dependencies-1.3.3.RELEASE.pom
Downloaded: https://repo.maven.apache.org/maven2/org/springframework/boot/spring-boot-dependencies/1.3.3.RELEASE/spring-boot-dependencies-1.3.3.RELEASE.pom (73 KB at 16.5 KB/sec)
Downloading: https://repo.maven.apache.org/maven2/org/springframework/spring-framework-bom/4.2.5.RELEASE/spring-framework-bom-4.2.5.RELEASE.pom
Downloaded: https://repo.maven.apache.org/maven2/org/springframework/spring-framework-bom/4.2.5.RELEASE/spring-framework-bom-4.2.5.RELEASE.pom (5 KB at 1.2 KB/sec)
Downloading: https://repo.maven.apache.org/maven2/org/springframework/data/spring-data-releasetrain/Gosling-SR4/spring-data-releasetrain-Gosling-SR4.pom
Downloaded: https://repo.maven.apache.org/maven2/org/springframework/data/spring-data-releasetrain/Gosling-SR4/spring-data-releasetrain-Gosling-SR4.pom (5 KB at 1.8 KB/sec)
Downloading: https://repo.maven.apache.org/maven2/org/springframework/data/build/spring-data-build/1.7.4.RELEASE/spring-data-build-1.7.4.RELEASE.pom
Downloaded: https://repo.maven.apache.org/maven2/org/springframework/data/build/spring-data-build/1.7.4.RELEASE/spring-data-build-1.7.4.RELEASE.pom (3 KB at 1.1 KB/sec)
Downloading: https://repo.maven.apache.org/maven2/org/springframework/integration/spring-integration-bom/4.2.5.RELEASE/spring-integration-bom-4.2.5.RELEASE.pom
Downloaded: https://repo.maven.apache.org/maven2/org/springframework/integration/spring-integration-bom/4.2.5.RELEASE/spring-integration-bom-4.2.5.RELEASE.pom (9 KB at 10.9 KB/sec)
Downloading: https://repo.maven.apache.org/maven2/org/springframework/security/spring-security-bom/4.0.3.RELEASE/spring-security-bom-4.0.3.RELEASE.pom
Downloaded: https://repo.maven.apache.org/maven2/org/springframework/security/spring-security-bom/4.0.3.RELEASE/spring-security-bom-4.0.3.RELEASE.pom (5 KB at 1.4 KB/sec)
Downloading: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-help-plugin/2.2/maven-help-plugin-2.2.pom
Downloaded: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-help-plugin/2.2/maven-help-plugin-2.2.pom (9 KB at 4.4 KB/sec)
Downloading: https://repo.maven.apache.org/maven2/org/apache/maven/plugins/maven-help-plugin/2.2/maven-help-plugin-2.2.jar
```

This command will run the empty Spring Boot application and when you execute the command for the first time, it will also download Maven and the project's dependencies (into the `~/.m2/repository` folder).

If you open your browser and go to <http://localhost:8080> now, you should see something like this:

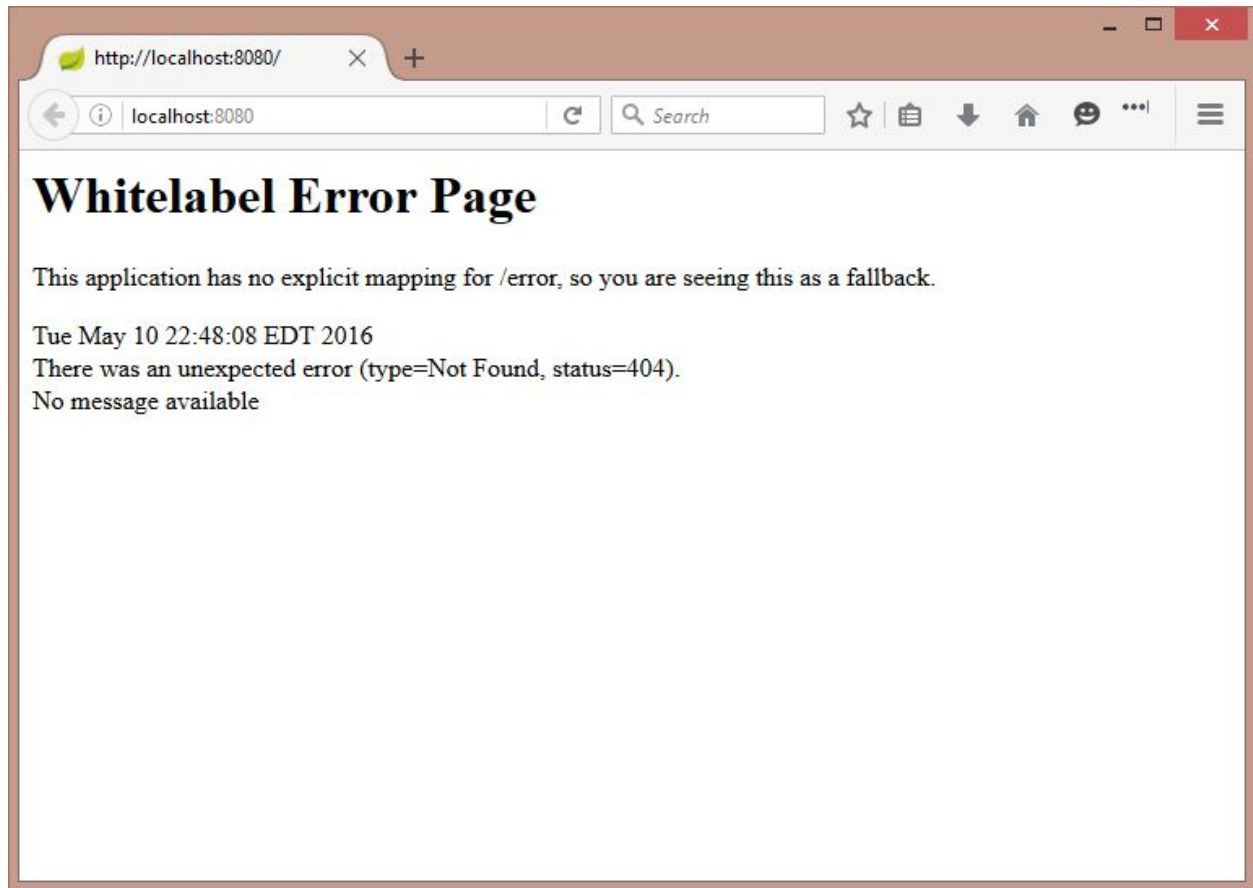


It's not the most beautiful welcome page, right? We're faced with this HTTP 404 (Not Found) error message since our application doesn't have any web pages or REST services configured yet. At least we know the application is running!


Now let's open the project in IntelliJ (or your favourite IDE). Start IntelliJ and click Open (or File / Open...menu, if you have another project already open).



Then select the `pom.xml` file in your project and click OK:

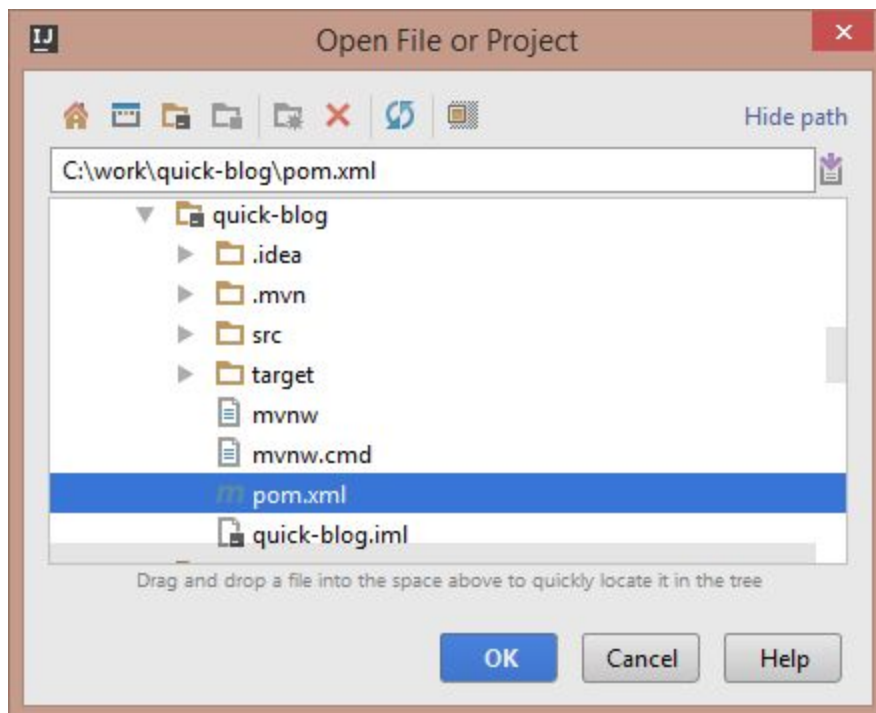

You should see something like this in IntelliJ:

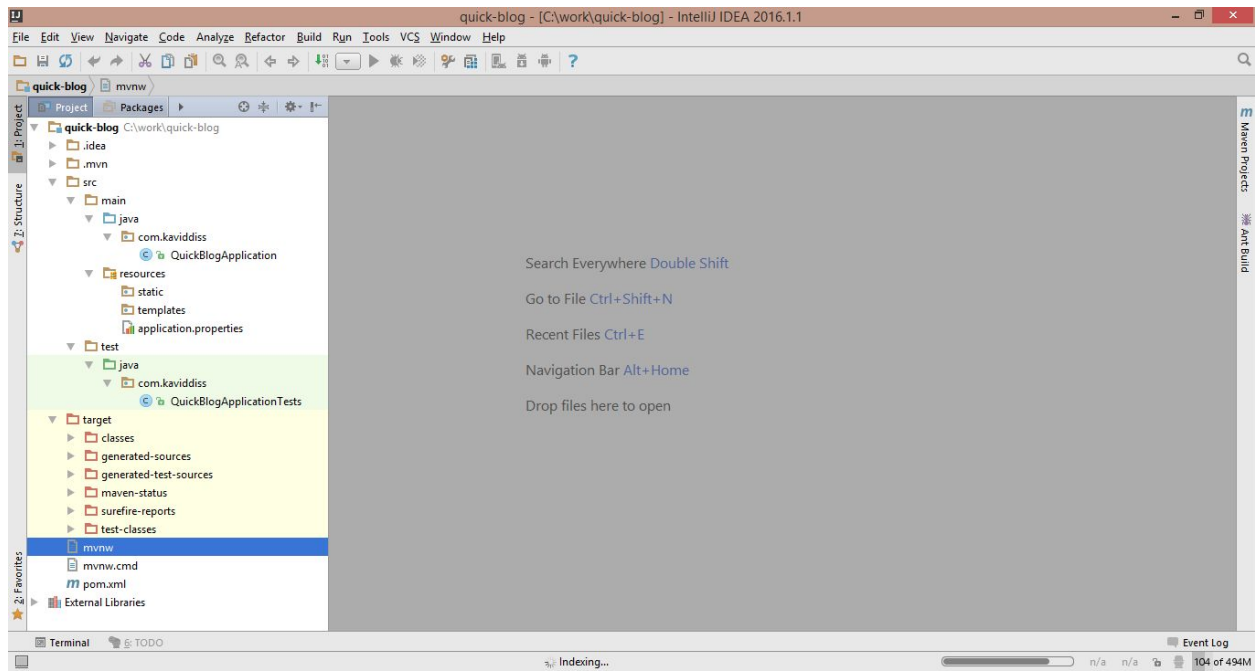

Step #2 - Create static content

Now we have the project created, it's time to add some static content to the web application.

Let's fix the HTTP 404 issue by returning a hard-coded "My Quick Blog" when the user navigates to <http://localhost:8080/> in the browser.

To be able to do that, we'll create below MainController class in the `com.kaviddiss.web` package:

```
package com.kaviddiss.web;

import org.springframework.stereotype.Controller;
import org.springframework.web.bind.annotation.RequestMapping;
import org.springframework.web.bind.annotation.ResponseBody;

@Controller
public class MainController {
    @RequestMapping("/")
    @ResponseBody
    public String index() {
        return "My Quick Blog";
    }
}
```


The MainController is annotated with the `@Controller` annotation which tells Spring that this class is a Spring component (Spring Bean) and it implements the **Controller** from the MVC (**Model-View-Controller**) pattern.

If you're wondering what that means, let's take a look at the `index()` method.

Public methods marked with `@RequestMapping` inside controller classes will map to a context path (for example: `/product/12345`). In our case, the `index()` method is mapped to the root path (`/`). This maps to the <http://localhost:8080/> url when running the application locally on the 8080 port.

You'll notice that all what the `index()` method does is returning the text "My Quick Blog". Since the method is annotated with `@ResponseBody`, Spring will use the result of the `index()` method as the body of the HTTP response it returns.

Rebuild the project or restart the web application for these changes to take effect:

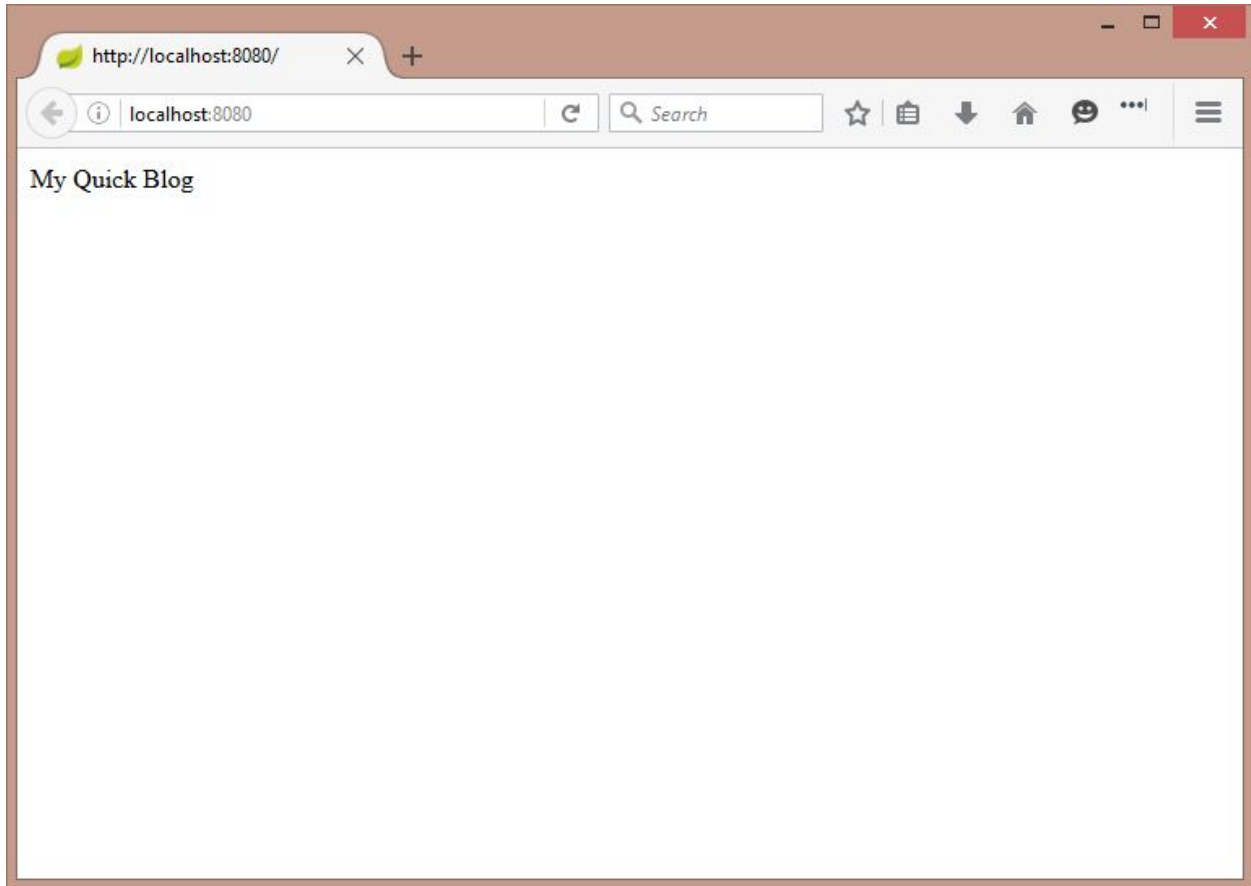

Step #3 - Create dynamic content

Let's make the previous page a little nicer by using some HTML code. In addition to that, we'll make it dynamic: it will take a `name` request param which will be included in the HTML response.

In order to generate a dynamic HTML page, we'll use a template engine called Thymeleaf to render the content.

What is Thymeleaf?

Thymeleaf (<http://www.thymeleaf.org/>) is an open-source and Java-based template engine that is fully integrated with Spring and aims to be a substitute for JSP.

The first step is to add the Thymeleaf dependencies to the project. In the `pom.xml` file add the thymeleaf dependency under `project/dependencies` (around line 39):

```
<dependency>  
  <groupId>org.springframework.boot</groupId>
```

```
<artifactId>spring-boot-starter-thymeleaf</artifactId>
</dependency>
```

Click the Enable Auto Import link in IntelliJ, in case that notification appears in the top right corner. This will configure IntelliJ to automatically import any new dependencies we add manually to the `pom.xml`.

Create an `index.html` file under `src/main/resources/templates` with below content:

```
<html>
<body>
  <h1>My Quick Blog</h1>
  <p>
    Welcome to my blog, <span th:text="${name}"></span>!
  </p>
</body>
</html>
```

Notice the `th:text="${name}"` section in the file which instructs Thymeleaf to set the content of the `` tag to the `name` parameter passed to Thymeleaf.

We'll configure Spring to return this HTML code when users navigate to the root context path by updating the `index()` method in the `MainController` class:

```
@RequestMapping("/")
public ModelAndView index(@RequestParam("name") String name) {
    Map<String, Object> model = new HashMap<>();
    model.put("name", name);
    return new ModelAndView("/index", model);
}
```

First, the `@ResponseBody` annotation got removed, then the method now takes a request parameter called `name` (see the `@RequestParam` annotation).

Also, instead of `String`, now we return a `ModelAndView` object which allows us to configure the name of the view to be returned `"/index"` and pass in various parameters to the view (for example: `name`) that can be referenced in the HTML template to make the content dynamic.

Remember, the `"/index"` refers to the view used for rendering and **View** is the **V** in the MVC pattern we discussed earlier.

What is a View?

View is a representation of the data we want to display to the user. In this case, a view is an HTML file and view name is the filename of the view (without the `.html` extension)

Earlier in the tutorial we placed the `index.html` file under the `src/main/resources/templates` folder. If you're not familiar with Maven, the `src/main/resources` folder is used for resource files / static content that will be copied to the `target/classes` folder along with the Java class files during the build process and therefore will be available on the classpath at runtime.


Now the `src/main/resources/templates` is folder used by Spring for storing template files (for rendering HTML, as an example). When the `index()` method returns `"/index"`, Spring will look for a template file under the `src/main/resources/templates` folder with the relative path of `"/index.html"` (the `.html` is the default postfix for view names) that would translate to `src/main/resources/templates/index.html`, which we created earlier.

Once Spring finds this `index.html` file, it will render it using Thymeleaf, the templating engine.

To ensure that changes to HTML files take effect after rebuilding the project without any restarts,, we need to turn off the Thymeleaf caching by updating the `src/main/resources/application.properties` file by adding below line:

```
spring.thymeleaf.cache=false
```

If you followed these steps, let's rebuild the project to trigger the auto-reload and go to <http://localhost:8080/> in the browser to see the magic happen:

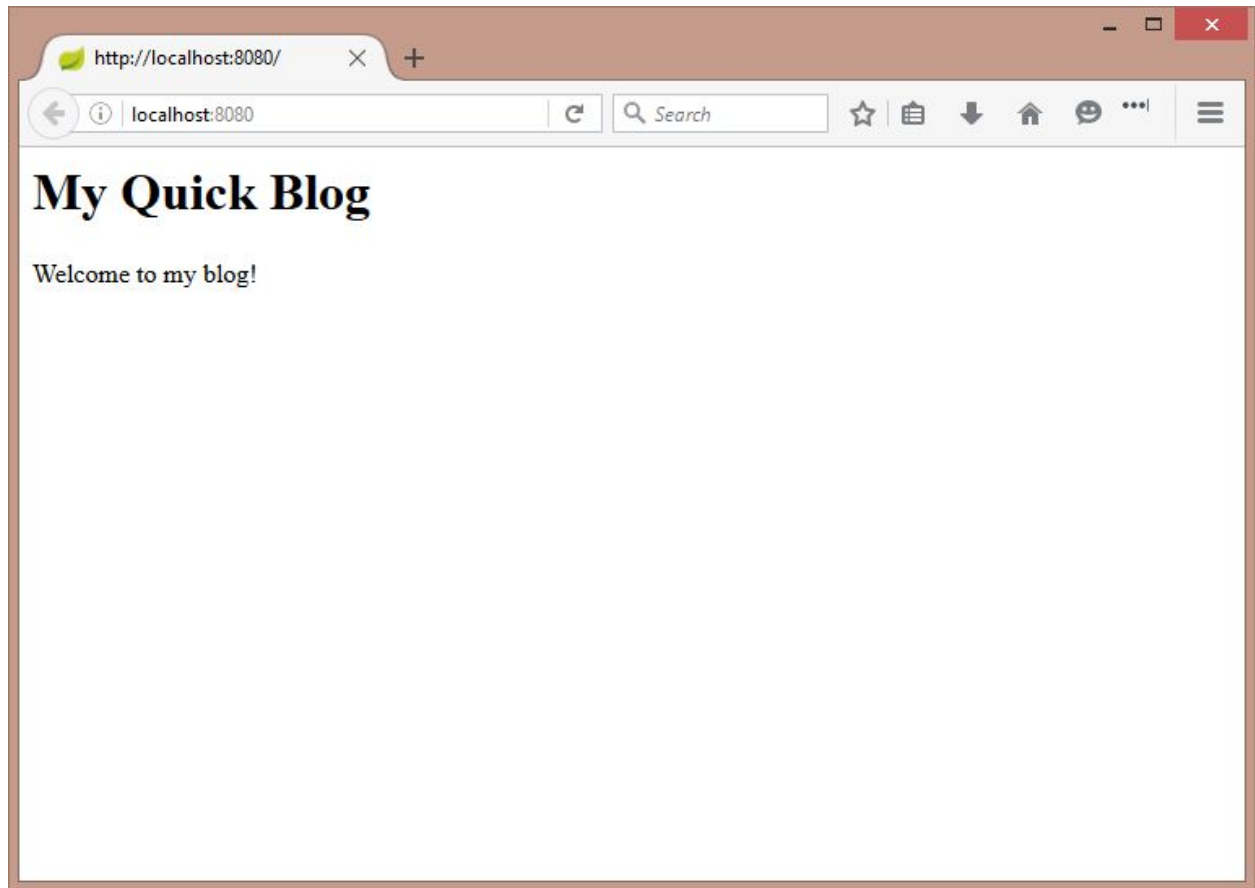

After taking a short glimpse into rendering UI using Spring Boot and Thymeleaf now let's take a look into working with databases.

Step #4 - Create our data model

In the previous steps we created a controller and a simple HTML view. In this step we're going to create our data **Model**, the M in the MVC pattern.

Now let's create a Post entity!

What is an entity?

An entity is a Java object that is mapped to a database table and is used to store and retrieve data from the DB using an ORM (Object Relational Mapping) tool, like Hibernate (<http://hibernate.org>).

First, let's include the `spring-boot-starter-data-jpa` and `h2` dependencies in the `pom.xml` file:

```
<!-- DB access -->
<dependency>
  <groupId>org.springframework.boot</groupId>
  <artifactId>spring-boot-starter-data-jpa</artifactId>
</dependency>
<dependency>
  <groupId>com.h2database</groupId>
  <artifactId>h2</artifactId>
</dependency>
```

What is Spring Data JPA?

Spring Data JPA is a Spring framework that makes it very easy to work with SQL databases using the JPA (Java Persistence Api) standard

What is H2?

H2 is a Java-based SQL database that can be used in both embedded and standalone scenarios and it's commonly used when developing/testing web applications locally.

Next, let's create the `com.kaviddiss.domain` package under `src/main/java` and create the `Post` class within that package:

```
import javax.persistence.Entity;
import javax.persistence.GeneratedValue;
import javax.persistence.Id;
import java.io.Serializable;

@Entity
public class Post {
    @Id
    @GeneratedValue
    private Long id;
```

```

private String title;
private String body;

public Long getId() {
    return id;
}

public void setId(Long id) {
    this.id = id;
}

public String getTitle() {
    return title;
}

public void setTitle(String title) {
    this.title = title;
}

public String getBody() {
    return body;
}

public void setBody(String body) {
    this.body = body;
}
}

```


If the `spring-boot-starter-data-jpa` dependency is added to the project, Spring Boot will automatically try to initialize the Spring Data JPA framework. Spring Data JPA then will scan the classpath for classes marked with the `@Entity` annotation (ie: the `Post` class) and will map them to their corresponding DB tables including the columns defined by the entity fields. By default, it will re-create the tables every time the application starts up.

Now let's look at the fields of the `Post` entity:

- `id` - the `@Id` annotation on this field marks it as the primary key for this entity. It also has the `@GeneratedValue` annotation which means the primary key will be automatically generated and will be sequentially increased every time a new entity is created in the DB
- `title` - this is a `String` field / `varchar` column
- `body` - this is a `String` field / `varchar` column


Since the `h2` dependency is added to the classpath, Spring will automatically create a H2 datasource that will be responsible for creating connections to the H2 database when the application tries to store/retrieve data to/from the DB. The default JDBC url for the H2 database is `jdbc:h2:mem:testdb`, the driver class name is `org.h2.Driver`, the username is `sa` and there's no password. In case you're not familiar with JDBC, the JDBC url, driver class name, username and password are the most important and most commonly used DB connection details.

Now restart the application and go to <http://localhost:8080/h2-console>:

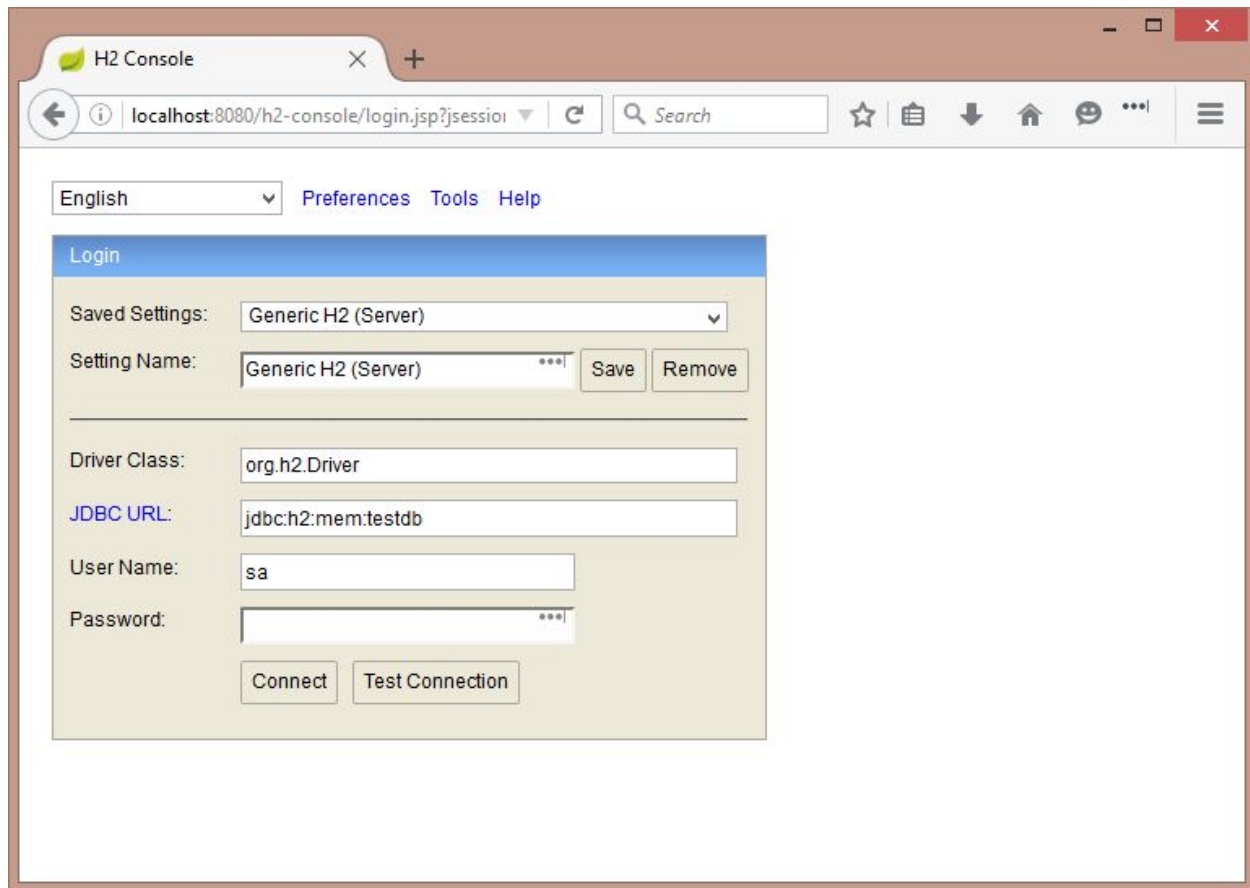

The screenshot shows a web browser window titled "H2 Console" with the address bar displaying "localhost:8080/h2-console/login.jsp?jsessionid=...". The browser's address bar also includes a search field and navigation icons. The main content area of the browser shows the H2 Console interface. At the top, there is a language dropdown menu set to "English" and links for "Preferences", "Tools", and "Help". Below this, a "Login" dialog box is displayed. The dialog box has a blue header with the word "Login". Inside the dialog, there is a "Saved Settings:" dropdown menu currently showing "Generic H2 (Server)". Below this, there is a "Setting Name:" field containing "Generic H2 (Server)" with "Save" and "Remove" buttons to its right. A horizontal line separates this section from the connection details. The connection details section includes fields for "Driver Class:" (containing "org.h2.Driver"), "JDBC URL:" (containing "jdbc:h2:mem:testdb"), "User Name:" (containing "sa"), and "Password:" (with a masked input field). At the bottom of the dialog, there are two buttons: "Connect" and "Test Connection".

If you click the Connect button, you should see the POST table in the left navigation bar:

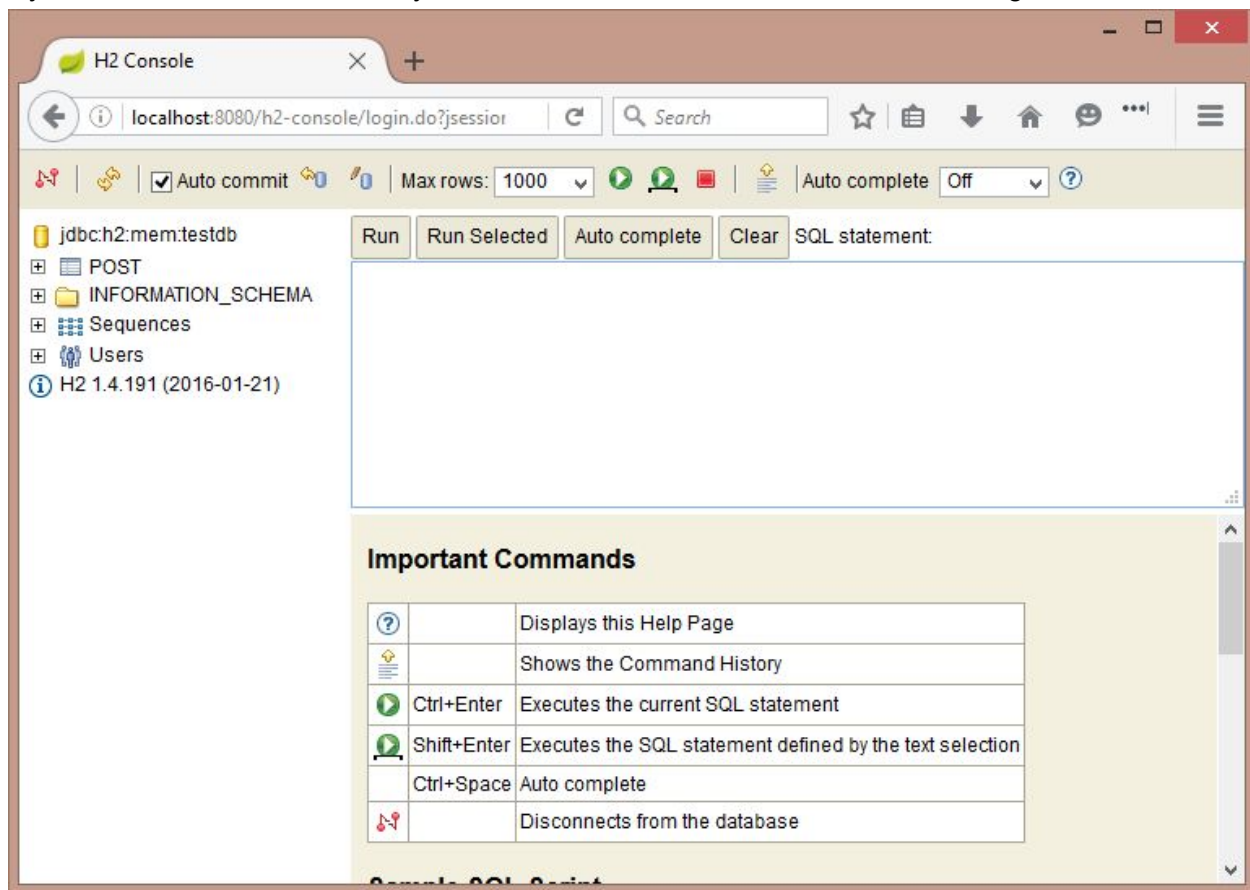

It would be nice to pre-populate the DB with some data for testing so we don't have to create those records manually every time the application is started up.

Actually Spring provides a few ways to do that, but for now, let's take a look at one of the most easiest option. Spring Boot provides a simple way to initialize a database by placing a file named `import.sql` file under `src/main/resources` folder. During application startup time, Spring Boot looks for that file and if it exists, it will execute its content.

With that said, let's create that file with below content that will insert 4 Posts into the database:

```
insert into post (title, body) values ('Lorem ipsum dolor sit amet, consectetur
adipiscing elit', 'Fusce urna nulla, fringilla lacinia euismod eget, vestibulum id
metus.');
```

```
insert into post (title, body) values ('Mauris vulputate massa ac volutpat fermentum',
'Ut at mollis purus, vitae feugiat lacus.');
```

```
insert into post (title, body) values ('Morbi porttitor pharetra ex nec eleifend',
'Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus
mus.');
```

```
insert into post (title, body) values ('Praesent iaculis sollicitudin ligula et lacinia', 'Morbi commodo, erat sit amet lobortis molestie, nibh mi tristique ligula, consectetur varius nisi erat in orci.');
```

Let's validate the script was executed by typing `SELECT * FROM POST` into the H2 Console text area and clicking the Run button:

The screenshot shows the H2 Console web interface in a browser. The address bar shows `localhost:8080/h2-console/login.do?jsessionid=...`. The interface includes a sidebar with a tree view of the database structure: `jdbc:h2:mem:testdb`, `POST`, `INFORMATION_SCHEMA`, `Sequences`, `Users`, and `H2 1.4.191 (2016-01-21)`. The main area has a toolbar with buttons for `Run`, `Run Selected`, `Auto complete`, and `Clear`, along with a text input for the `SQL statement`. The text area contains the query `SELECT * FROM POST`. Below the text area, the query results are displayed in a table format. The table has three columns: `ID`, `BODY`, and `TITLE`. There are four rows of data. At the bottom, it indicates `(4 rows, 14 ms)`.

| ID | BODY | TITLE |
|----|---|---|
| 1 | Fusce urna nulla, fringilla lacinia euismod eget, vestibulum id metus. | Lorem ipsum dolor sit amet, consectetur adipiscing elit |
| 2 | Ut at mollis purus, vitae feugiat lacus. | Mauris vulputate massa ac volutpat fermentum |
| 3 | Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. | Morbi porttitor pharetra ex nec eleifend |
| 4 | Morbi commodo, erat sit amet lobortis molestie, nibh mi tristique ligula, consectetur varius nisi erat in orci. | Praesent iaculis sollicitudin ligula et lacinia |

Step #5 - Manipulating the data

Since we have some dummy test data already inserted into our database, we might as well write some queries to fetch them from the DB.

Using Spring Data JPA

In this section we're going to create two REST services, one that will find a blog post by its title and another one that will search blog posts based on a keyword in the post's body.

The Spring Data JPA framework allows us to create interfaces that define access to the database and it will automatically generate the db queries for the methods we declare within the repository interfaces.

Now, let's create a `PostRepository` interface under `com.kaviddiss.repository`:

```
package com.kaviddiss.repository;

import com.kaviddiss.domain.Post;
import org.springframework.data.repository.CrudRepository;
import org.springframework.stereotype.Repository;

@Repository
public interface PostRepository extends CrudRepository<Post, Long> {
    Post findOneByTitle(String title);

    List<Post> findByBodyContaining(String keyword);
}
```

This interface is annotated with the `@Repository` annotation which tells Spring this is a Spring component and that it's a Spring Data repository interface.

There are two methods in `PostRepository` and they both follow a naming convention that allows Spring Data to understand the meaning of the method names and generate their matching JPA (and in turn SQL) queries.

The first method, `findOneByTitle()`, returns a single `Post` entity that has a title matching the provided parameter, and the second method, `findByBodyContaining()`, returns a list of posts that include the `keyword` parameter in their body.

See, this is easy. We didn't even write a single SQL query!

Here's a list of some of the supported keywords that can be used in method names: `And`, `Or`, `Equals`, `Between`, `LessThan`, `LessThanEqual`, `GreaterThan`, `GreaterThanEqual`, `After`, `Before`, `IsNull`, `NotNull`, `Like`, `Containing`, `OrderBy`, `In`, `Not`.

You may notice that the interface also extends `CrudRepository` which comes from the Spring Data framework and it declares many methods around common functionalities for accessing the database: `save()`, `findOne()`, `findAll()`, `exists()`, `count()`, `delete()`, `deleteAll()`, etc.

Spring Data will also automatically generate JPA (and SQL) queries for methods declared in parent interfaces that our interface extends.

What we'll do here next is to create REST services to expose the methods in the `PostRepository` class. There are multiple ways to do that. First, similar to the `MainController` class we created earlier we'll create a `PostRestController`.

Creating a RestController

In this example you'll see how to create REST services manually and also, how to reference other Spring components (aka Beans):

Under the `com.kaviddiss.web` package create the `PostRestController` class with below code:

```
package com.kaviddiss.web;

import com.kaviddiss.domain.Post;
import com.kaviddiss.repository.PostRepository;
import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.web.bind.annotation.RequestMapping;
import org.springframework.web.bind.annotation.RequestParam;
import org.springframework.web.bind.annotation.RestController;

import java.util.List;

@RestController
public class PostRestController {
    private final PostRepository postRepository;

    @Autowired
    public PostRestController(PostRepository postRepository) {
        this.postRepository = postRepository;
    }

    @RequestMapping(value = "/post/findByTitle")
    public Post findOneByTitle(@RequestParam("title") String title) {
        return postRepository.findOneByTitle(title);
    }
}
```

```

@RequestMapping(value = "/post/search")
public List<Post> findByBodyContaining(@RequestParam("keyword") String keyword) {
    return postRepository.findByBodyContaining(keyword);
}

@RequestMapping(value = "/post/count")
public long count() {
    return postRepository.count();
}
}

```


This controller uses the `@RestController` annotation instead of `@Controller`. It's essentially doing the same thing, except the `@ResponseBody` annotation is used automatically to annotate method results as the response body.

The `PostRestController` has a `PostRepository` field which gets populated in the class' constructor where the `@Autowired` annotation tells Spring to automatically inject an instance of the `PostRepository` class as a constructor argument.

The following three methods are separate REST services that we can call from our browser (for example: <http://localhost:8080/post/search?keyword=us>). Note how the `@RequestMapping` annotation configures the context path used for the REST service.

By default, the result of these methods are serialized into JSON objects, as you can see that in below screenshot.

Rebuild the application (Build / Make Project menu item) to refresh the running application with the latest code changes.

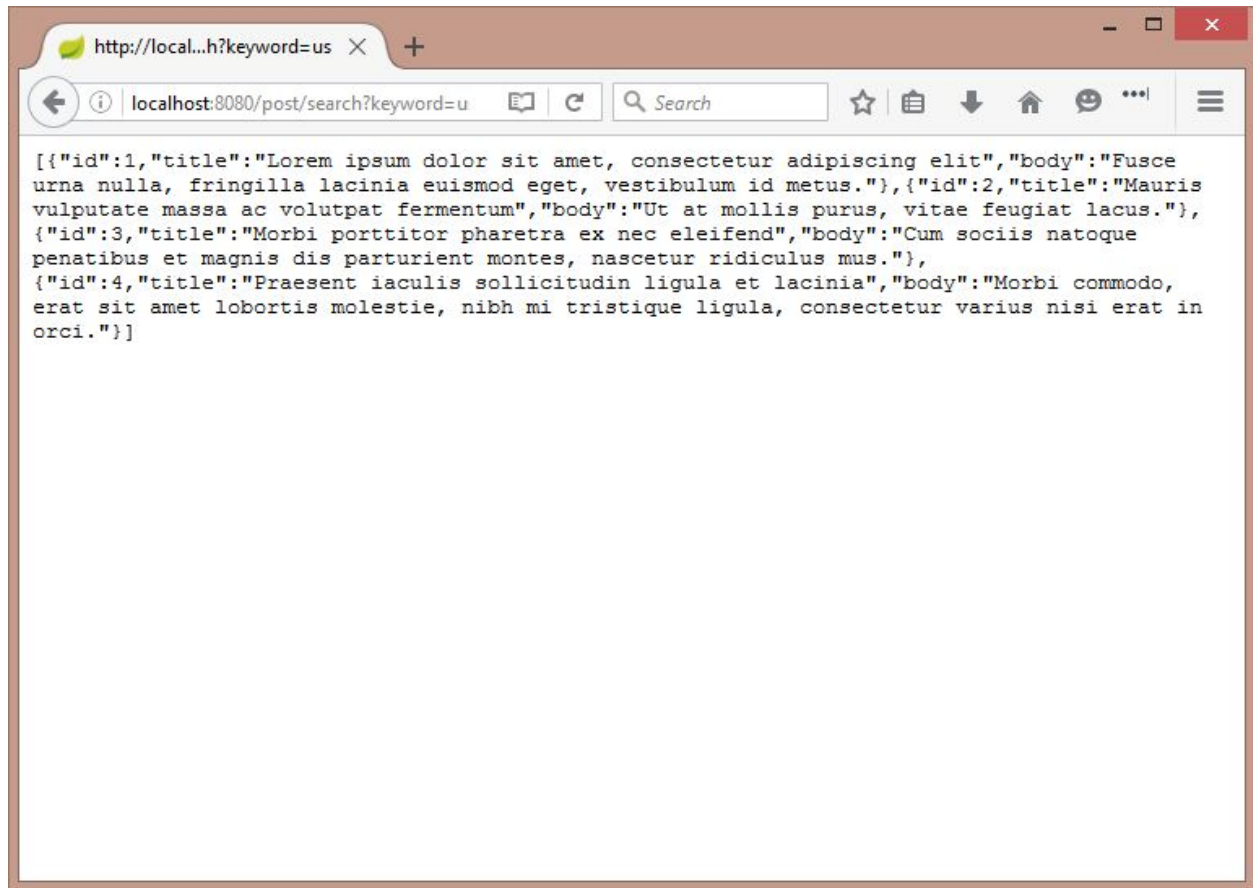

Creating Rest Resources

In the previous section we looked at how to create REST services using the `@RestController` annotation. Now we take a peek at the Spring Data Rest framework that allows to expose Spring Data repository interfaces (ie: `PostRepository`) as REST services.

First, add the `spring-boot-starter-data-rest` dependency to the `pom.xml` file under `build/dependencies` (around line 50):

```
<dependency>
  <groupId>org.springframework.boot</groupId>
  <artifactId>spring-boot-starter-data-rest</artifactId>
</dependency>
```

Step #2 is to replace the `@Repository` annotation with `@RepositoryRestResource` in the existing `PostRepository` class and add the `@Param` annotation to the method parameters which will set the name of the request parameters of the new REST services:

```
package com.kaviddiss.repository;
```

```

import com.kaviddiss.domain.Post;
import org.springframework.data.repository.CrudRepository;
import org.springframework.data.rest.core.annotation.RepositoryRestResource;

import java.util.List;


@RepositoryRestResource(collectionResourceRel = "posts", path = "posts")
public interface PostRepository extends CrudRepository<Post, Long> {
    Post findOneByTitle(@Param("title") String title);

    List<Post> findByBodyContaining(@Param("keyword") String keyword);
}

```

Rebuild or restart the running project for the changes to take effect.

If you have Chrome installed on your machine, install the Postman extension (offered by www.getpostman.com) to test the new REST services:

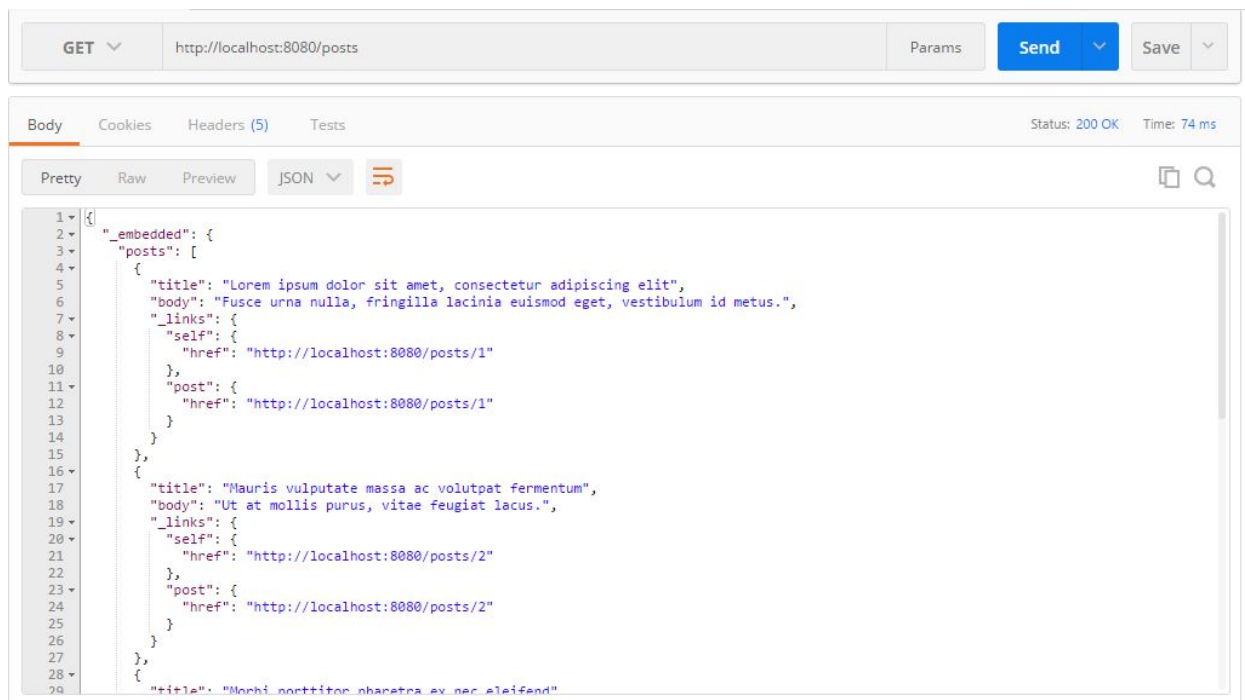

List of posts: `curl -X GET "http://localhost:8080/posts"`

GET http://localhost:8080/posts/search Params Send Save

Body Cookies Headers (5) Tests Status: 200 OK Time: 60 ms

Pretty Raw Preview JSON

```
1 {
2   "_links": {
3     "findOneByTitle": {
4       "href": "http://localhost:8080/posts/search/findOneByTitle {?title}",
5       "templated": true
6     },
7     "findByBodyContaining": {
8       "href": "http://localhost:8080/posts/search/findByBodyContaining {?keyword}",
9       "templated": true
10    },
11    "self": {
12      "href": "http://localhost:8080/posts/search"
13    }
14  }
15 }
```

List of post search services: `curl -X GET "http://localhost:8080/posts/search"`

GET http://localhost:8080/posts/search/findByBodyContaining?keyword=nulla Params Send Save

Body Cookies Headers (5) Tests Status: 200 OK Time: 44 ms

Pretty Raw Preview JSON

```
1 {
2   "_embedded": {
3     "posts": [
4       {
5         "title": "Lorem ipsum dolor sit amet, consectetur adipiscing elit",
6         "body": "Fusce urna nulla, fringilla lacinia euismod eget, vestibulum id metus.",
7         "_links": {
8           "self": {
9             "href": "http://localhost:8080/posts/1"
10          },
11          "post": {
12            "href": "http://localhost:8080/posts/1"
13          }
14        }
15      }
16    ]
17  },
18  "_links": {
19    "self": {
20      "href": "http://localhost:8080/posts/search/findByBodyContaining?keyword=nulla"
21    }
22  }
23 }
```

Searching posts by keyword in body: `curl -X GET "http://localhost:8080/posts/search/findByBodyContaining?keyword=us"`

POST http://localhost:8080/posts/ Params Send Save

Authorization Headers (1) Body Pre-request Script Tests Generate Code

form-data x-www-form-urlencoded raw binary JSON (application/json)

```
1 { "title": "Title #1", "body": "This is my post." }
```

Body Cookies Headers (6) Tests Status: 201 Created Time: 1210 ms

Pretty Raw Preview JSON

```
1 {
2   "title": "Title #1",
3   "body": "This is my post.",
4   "_links": {
5     "self": {
6       "href": "http://localhost:8080/posts/5"
7     },
8     "post": {
9       "href": "http://localhost:8080/posts/5"
10    }
11  }
12 }
```

Creating a new post: `curl -X POST -H "Content-Type: application/json" -d '{"title": "Title #1", "body": "This is my post." }' "http://localhost:8080/posts/"`

DELETE http://localhost:8080/posts/1 Params Send Save

Authorization Headers Body Pre-request Script Tests Generate Code


key value Bulk Edit Presets

Body Cookies Headers (3) Tests Status: 204 No Content Time: 207 ms

Pretty Raw Preview HTML

```
1
```

Deleting a post: `curl -X DELETE "http://localhost:8080/posts/1"`

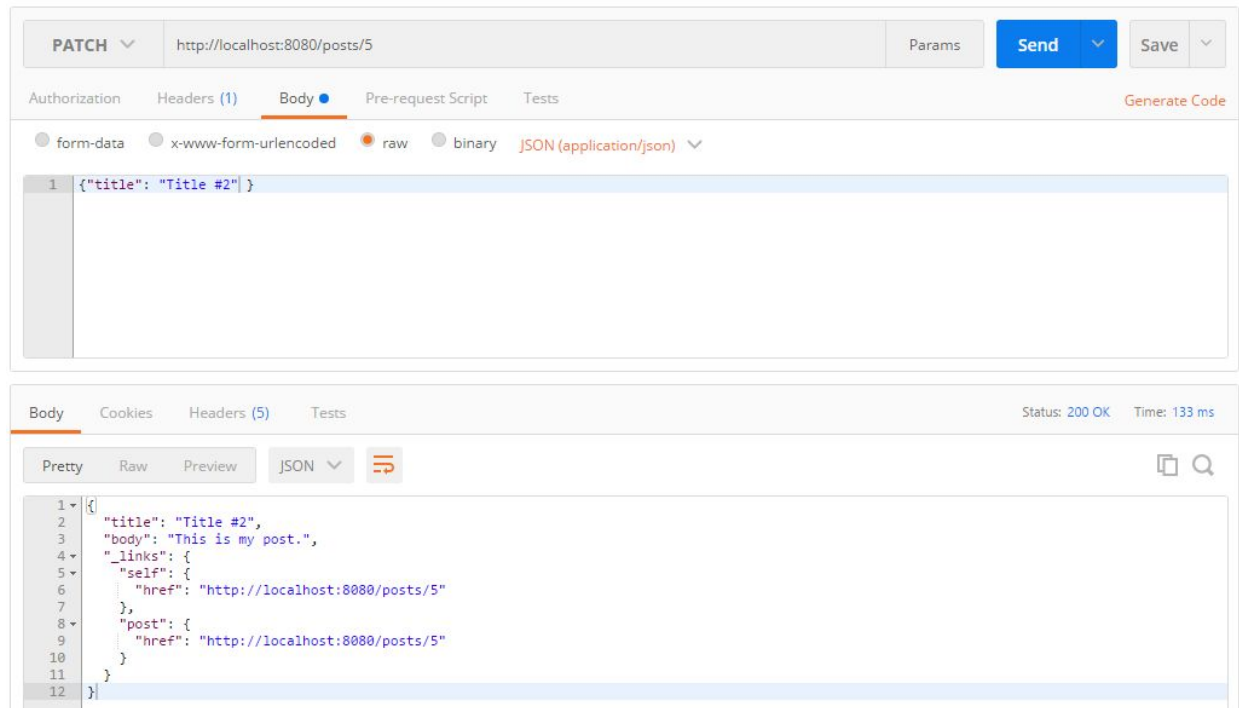

Updating an existing post: `curl -X PATCH -d '{"title": "Title #2" }'`
`"http://localhost:8080/posts/5"`

Let's add some validation to make it a bit more realistic. Update the Post entity with the `@NotNull` annotation on both title and body fields:

```
package com.kaviddiss.domain;
```

```
import javax.persistence.Entity;  
import javax.persistence.GeneratedValue;  
import javax.persistence.Id;  
import javax.validation.constraints.NotNull;  
import java.io.Serializable;
```

```
@Entity
```

```
public class Post implements Serializable {  
    @Id  
    @GeneratedValue  
    private Long id;  
    @NotNull  
    private String title;  
    @NotNull  
    private String body;  
  
    public Long getId() {  
        return id;  
    }  
  
    public void setId(Long id) {
```

```

        this.id = id;
    }

    public String getTitle() {
        return title;
    }


    public void setTitle(String title) {
        this.title = title;
    }

    public String getBody() {
        return body;
    }

    public void setBody(String body) {
        this.body = body;
    }
}

```

Now let's see what happens if we don't provide any data (after rebuilding/restarting the application):

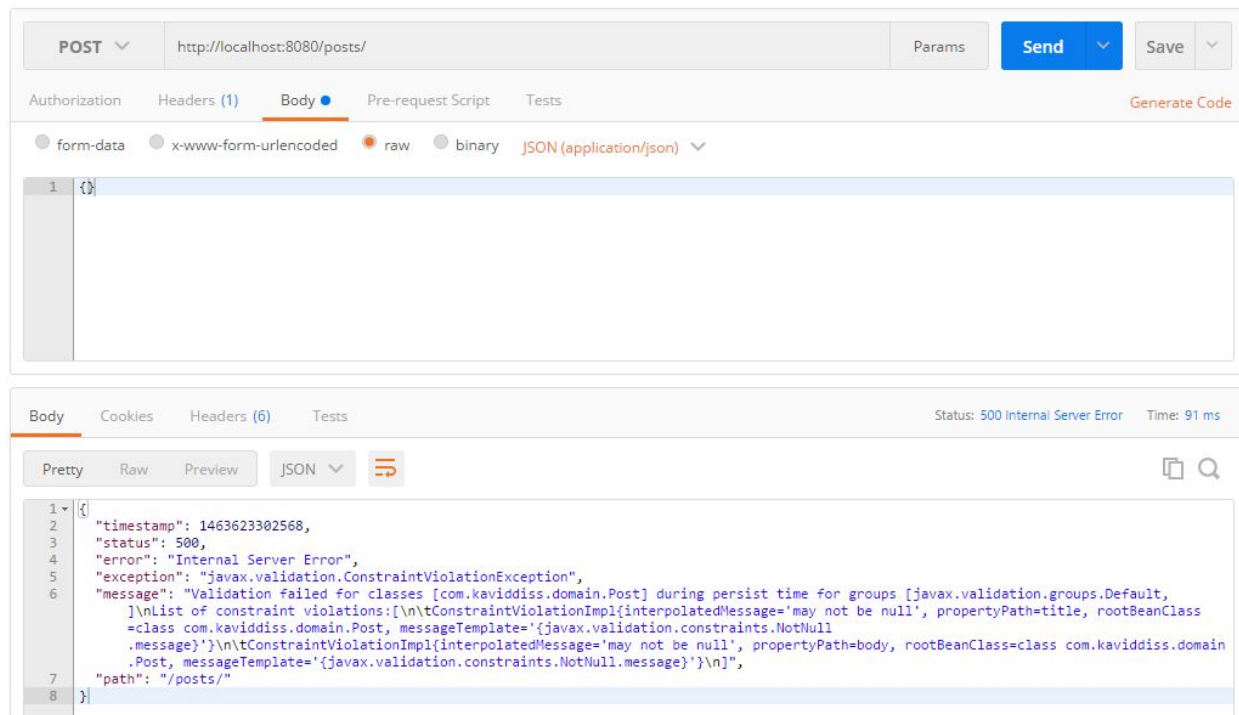

Creating a post without any data: `curl -X POST -d '{}' 'http://localhost:8080/posts/'`

When we tried to persist data using Spring Data, Spring automatically picks up the `@NotNull` annotations and validates the entity object against them

Step #6 - Securing the application

In the previous section we covered how to create REST services that access a SQL database, in this section we'll look into securing those REST services with the help of the Spring Security framework.

What is Spring Security?

Spring Security is a Spring framework for authentication and authorization

We'll configure Spring Security to restrict access to the application by requiring Basic Authentication on all HTTP requests and to only authenticate requests where username/password is `user/pwd123`.

What is Basic Authentication?

Basic Authentication is the simplest type of authentication where the username and password is provided in the header of every HTTP request

Update the pom.xml by including the `spring-boot-starter-security` dependency (around line 44):

```
<dependency>
  <groupId>org.springframework.boot</groupId>
  <artifactId>spring-boot-starter-security</artifactId>
</dependency>
```

Create the `com.kaviddiss.config` package and add a `SecurityConfig` class in it:

```
package com.kaviddiss.config;
```

```
import org.springframework.beans.factory.annotation.Autowired;
import org.springframework.context.annotation.Configuration;
import
org.springframework.security.config.annotation.authentication.builders.AuthenticationM
anagerBuilder;
import org.springframework.security.config.annotation.web.builders.HttpSecurity;
import
org.springframework.security.config.annotation.web.configuration.EnableWebSecurity;
import
org.springframework.security.config.annotation.web.configuration.WebSecurityConfigurer
Adapter;
```

```
@Configuration
```

```
@EnableWebSecurity
```

```
public class SecurityConfig extends WebSecurityConfigurerAdapter {
```

```
    @Override
```

```
protected void configure(HttpSecurity http) throws Exception {
```

```
    http.authorizeRequests() // allows restricting access
```

```

        .anyRequest().fullyAuthenticated() // any HTTP request has to be authenticated
        .and()
        .httpBasic() // authentication has to be done via HTTP Basic Auth mechanism
        .and()
        .csrf().disable() // disable CSRF which is enabled by default
    };
}

@Autowired
public void configureGlobal(AuthenticationManagerBuilder auth) throws Exception {
    auth
        .inMemoryAuthentication() // store valid credentials in memory
        .withUser("user").password("pwd123") // only valid username/password is
user/pwd123
        .roles("USER") // and that user will have USER role
    };
}

}

```

The `@Configuration` annotation tells Spring that this is a configuration class used in the Spring application and the `@EnableWebSecurity` annotation tells Spring to initialize Spring Security on startup time.

To be able to configure Spring Security, the `SecurityConfig` class needs to extend the `WebSecurityConfigurerAdapter` class and implement the `configure()` and `configureGlobal()` methods.

The `configure()` method tells Spring Security to require authentication on any HTTP request to the application using [HTTP Basic Auth](#) and disable protection for Cross-site request forgery ([CSRF](#)), though just for the sake of simplifying testing.

What is Cross-site request forgery?

“Cross-Site Request Forgery (CSRF) is an attack that forces an end user to execute unwanted actions on a web application in which they're currently authenticated”

- [https://www.owasp.org/index.php/Cross-Site_Request_Forgery_\(CSRF\)](https://www.owasp.org/index.php/Cross-Site_Request_Forgery_(CSRF))

The `configureGlobal()` method tells Spring Security to only allow authentication for the hard-coded `user/pwd123` credentials stored in memory, and the logged in user will be granted with the `USER` role.

Note that in a production environment username, password and roles are most likely stored in an LDAP server or a database, but definitely not in-memory.

After rebuilding/restarting the application, let's test these changes:

GET `http://localhost:8080/posts` Params Send Save

Authorization Headers (1) Body Pre-request Script Tests Generate Code

Type No Auth

Body Cookies Headers (11) Tests Status: 401 Unauthorized Time: 77 ms

Pretty Raw Preview JSON

```
1 {
2   "timestamp": 1463626528421,
3   "status": 401,
4   "error": "Unauthorized",
5   "message": "Full authentication is required to access this resource",
6   "path": "/posts"
7 }
```

Unauthenticated request: `curl -X GET "http://localhost:8080/posts"`

GET `http://localhost:8080/posts` Params Send Save

Authorization Headers (1) Body Pre-request Script Tests Generate Code

Type Basic Auth Clear Update Request

Username user The authorization header will be generated and added as a custom header

Password password ☒ Save helper data to request

☒ Show Password

Body Cookies Headers (11) Tests Status: 200 OK Time: 50 ms

Pretty Raw Preview JSON

```
1 {
2   "_embedded": {
3     "posts": [
4       {
5         "title": "Lorem ipsum dolor sit amet, consectetur adipiscing elit",
6         "body": "Fusce urna nulla, fringilla lacinia euismod eget, vestibulum id metus.",
7         "_links": {
8           "self": "http://localhost:8080/posts/1"
9         }
10      }
11     ]
12   }
13 }
```

Authorized request: `curl -X GET -H "Authorization: Basic dXNlcjpwYXNzd29yZA==" "http://localhost:8080/posts"`

Conclusion

Congratulation on completing this tutorial! Now you mastered the basics of Spring.

If you're wondering where to go next, you'll find more tutorials on Spring at <http://kaviddiss.com/learn-spring/>.

In case you have any questions on this tutorial or on Spring in general, leave a message at <http://kaviddiss.com/contact/>. I'd also welcome any feedback on how to improve this tutorial.

Thanks!

David from <http://kaviddiss.com>