

Date: 20-9-21 :

⇒ In order to implement Run Time linking functions required are

→ dlopen() ✓


→ dlsym() ✓

→ dlclose() ✓

→ dlerror() ✓



dlopen()

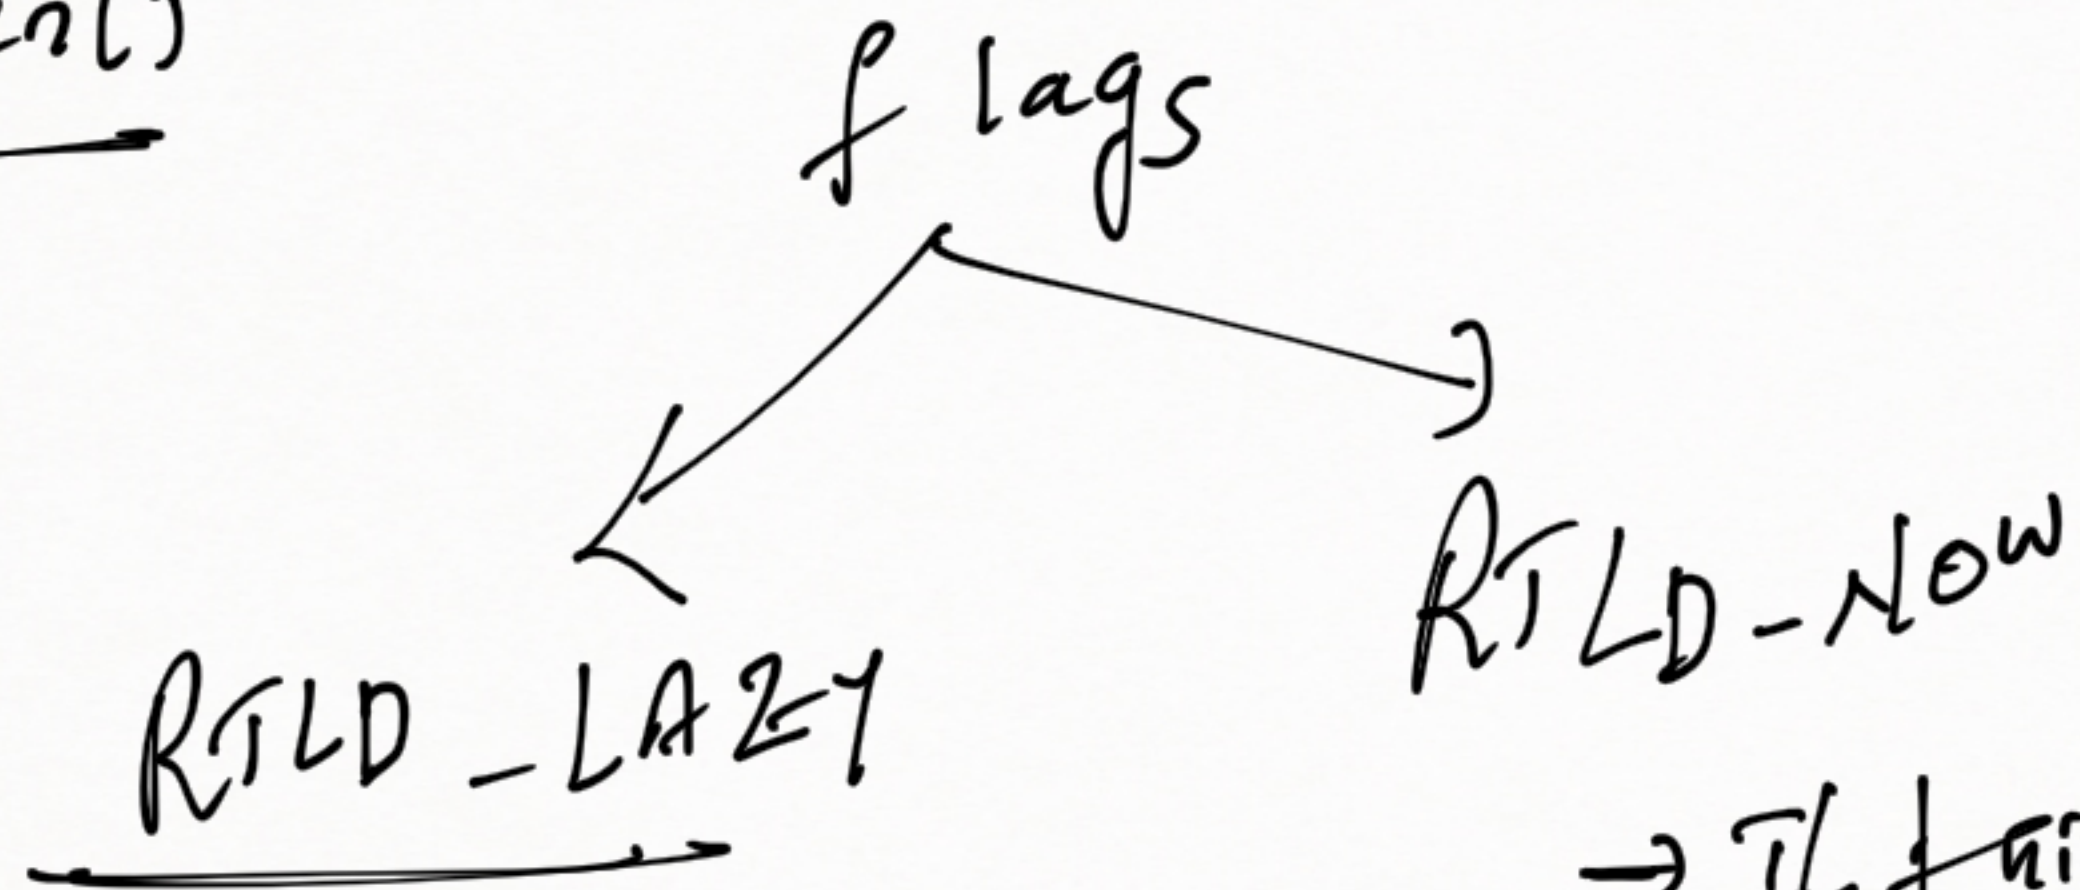

If this flag is used as second argument for dlopen() then library first loaded to virtual memory when symbols are resolved loaded into physical memory.

→ If this flag is used as second argument & dlopen() then library loaded to physical memory directly, even the symbols are not resolved.