


weak-arm clustering component vs pencil radius $R_\perp$ ($z_s = 1$, default κ_{thr} ; bias=False ref: $\text{Var}_w = \sigma_W^2$ exactly)

lin-lin (zoom $R_\perp \leq 10$ Mpc)



log-log (full range)

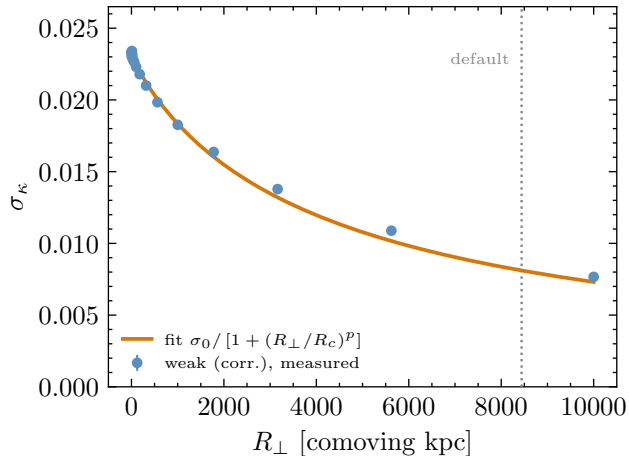