



# 1B – Parameter fitting & recovery

Klaus Wimmer  
Centre de Recerca Matemàtica  
Barcelona, Spain  
[kwimmer@crm.cat](mailto:kwimmer@crm.cat)

BAMB! 2024 Summer School

# The plan for the next 120 minutes

- Parameter estimation
  - Model fitting as an optimization problem
- Model validation (tutorial part 1)
  - Does the model capture the data?
- Parameter recovery (tutorial part 2)
  - Simulate, simulate, simulate!
- Parameter uncertainty (tutorial part 3)
  - Bootstrapping



# Fit the parameters

Maximum likelihood estimation:  $\hat{\boldsymbol{\theta}}_{ML} = \arg \max_{\boldsymbol{\theta}} LL(\boldsymbol{\theta})$

## Model fitting via point estimation


- Goal: find  $x_{opt} = \operatorname{argmin} f(x)$  as fast as possible
- Often  $f(x)$  is a black box; sometimes we can compute the gradient
- Solution: feed  $f(x)$  to an optimization algorithm

# How hard can it be?

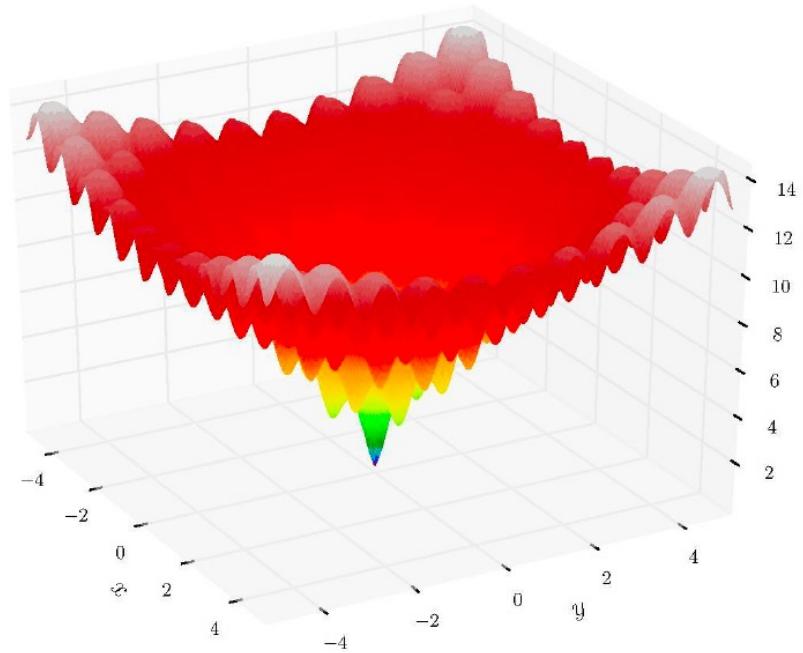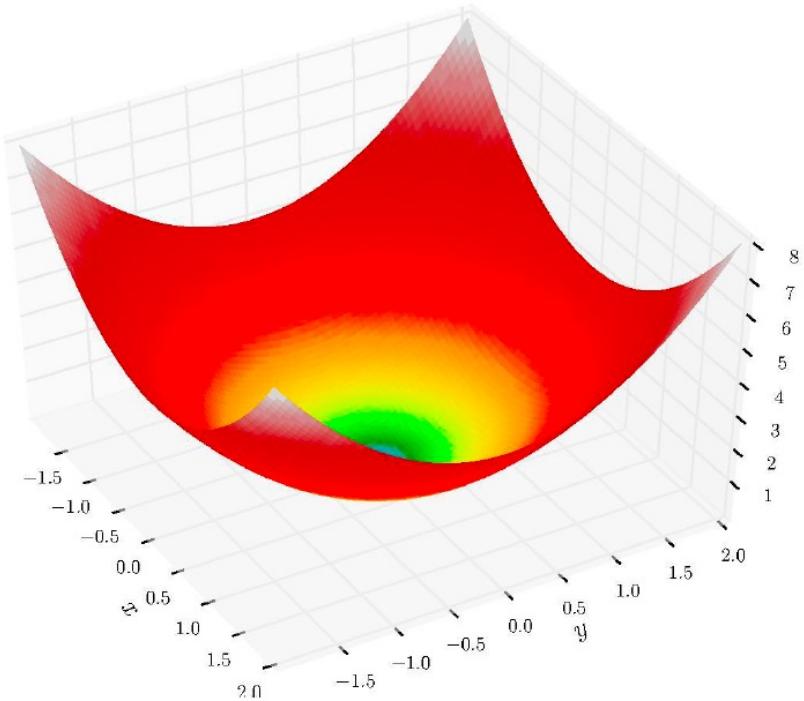

# Optimization can be hard

- Multiple local minima or saddle points
- Expensive function evaluation (>> 1 s)
- Noisy function evaluation (stochastic problem)
- Rough landscape (numerical approximations, etc.)

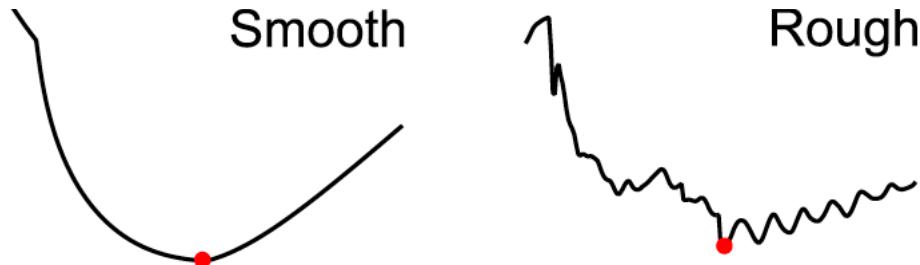

# Optimization algorithms

## Gradient-based methods

- Stochastic gradient descent (e.g., ADAM)
- Quasi-Newton methods (e.g., BFGS aka `fminunc/fmincon`)







## Gradient-free methods

- Grid/random search
- Nelder-Mead (`fminsearch`)
- Pattern/direct search (`patternsearch`)
- Simulated annealing
- Genetic algorithms
- CMA-ES
- Bayesian optimization
- Bayesian Adaptive Direct Search (BADS; Acerbi & Ma, *NeurIPS* 2017)

See intro to optimization by Luigi Acerbi in BAM! 2022:

<https://github.com/lacerbi/bamb2022-model-fitting>

# Optimizers at work

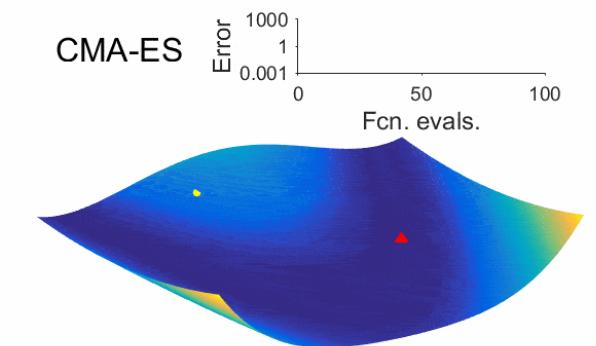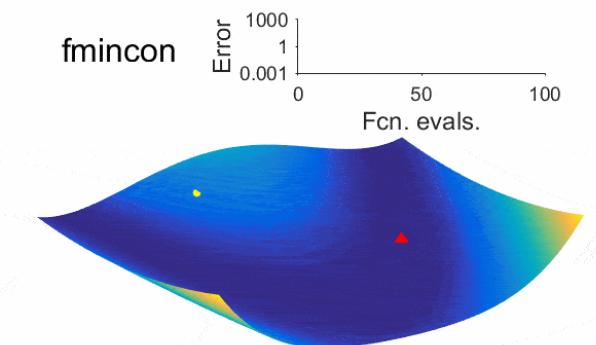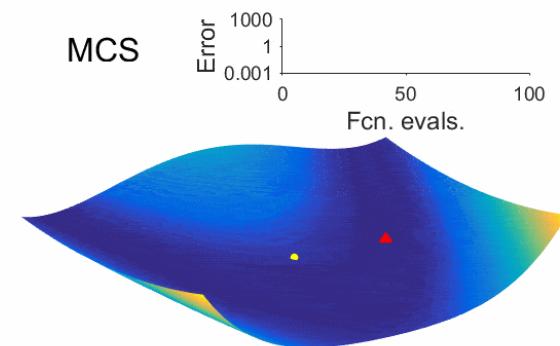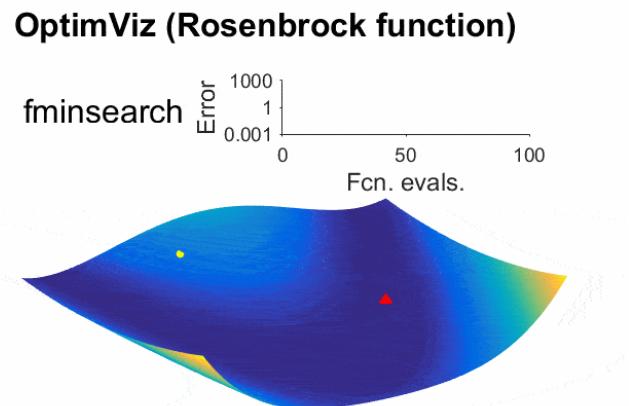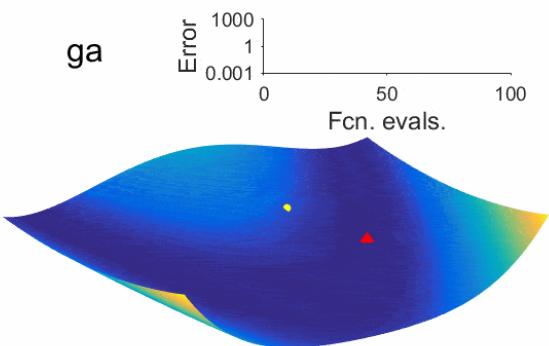
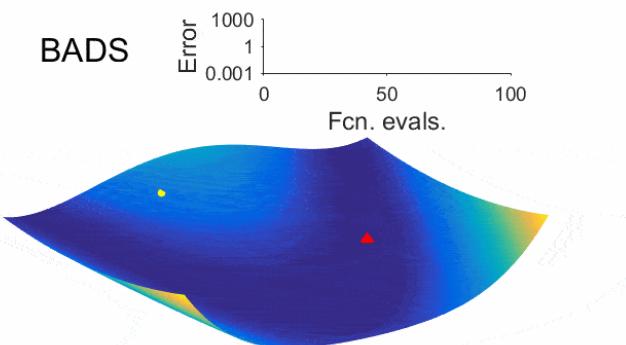


BADS: Acerbi and Ma (2017)

<https://github.com/lacerbi/bads>  
<https://github.com/lacerbi/optimviz>

# Tips and tricks

- Make sure that your log-likelihoods are finite (e.g. initial conditions)
- Carefully choose constraints on parameters: *hard* bounds and *plausible* bounds (avoid solutions at the bounds)
- Consider reparameterization (independence between parameters)
- Beware of local minima (always run fitting multiple times with random initial conditions)

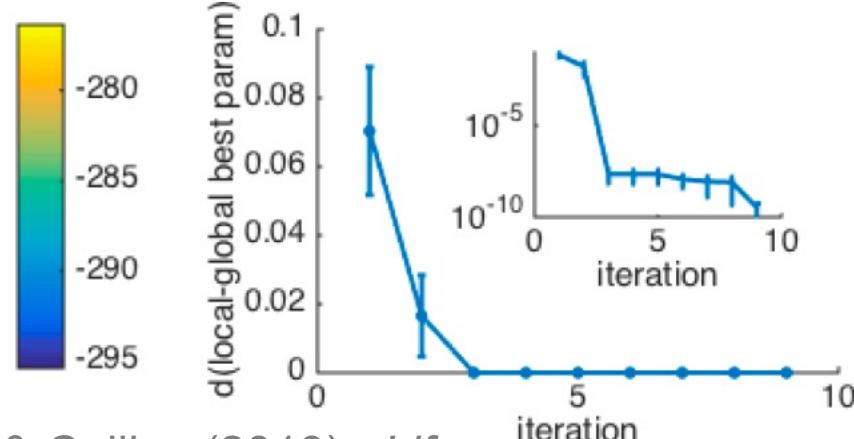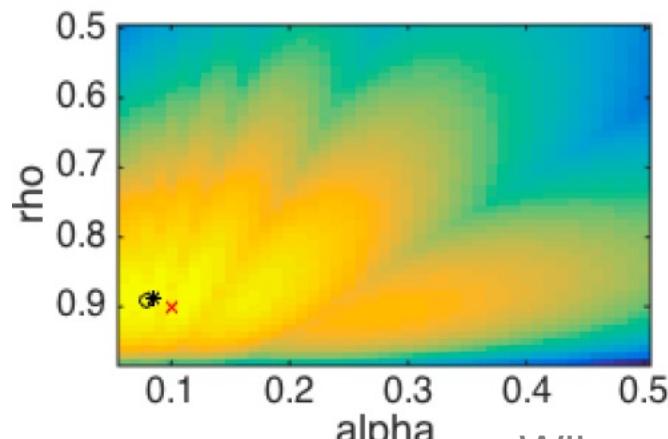

# The plan for the next 120 minutes

- Parameter estimation
  - Model fitting as an optimization problem
- **Model validation (tutorial part 1)**
  - **Does the model capture the data?**
- Parameter recovery (tutorial part 2)
  - Simulate, simulate, simulate!
- Parameter uncertainty (tutorial part 3)
  - Bootstrapping

# Model validation

- Does the model capture the data in an absolute sense?
- Does the model get the essence of the behavior?

## How to validate the model?

- Simulate the model with the fit parameter values and then analyze the simulated data in the same way that you analyzed the empirical data (model-independent analysis).
- Verify that all important behavioral effects are captured by the model



# Example for qualitative criteria: what behavioral signatures do you care about

In cognitive and behavioral science, often our data points are trials or decisions or responses ...

... But not all responses matter equally 

Example: Both RL and PROBE models make similar predictions at the plateau level, after participants have learnt the contingencies

But after a reversal, key differences are observed:

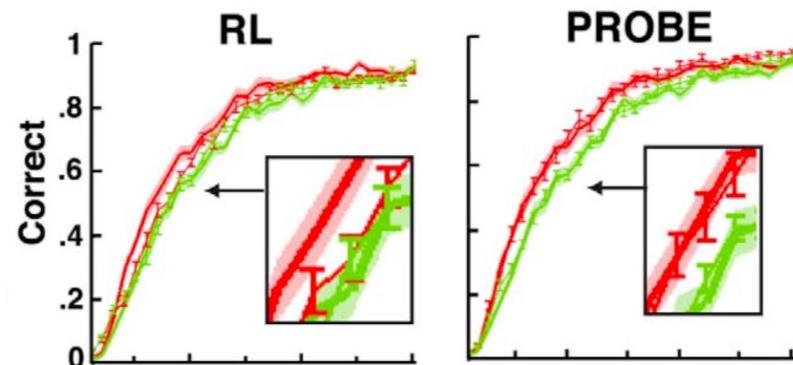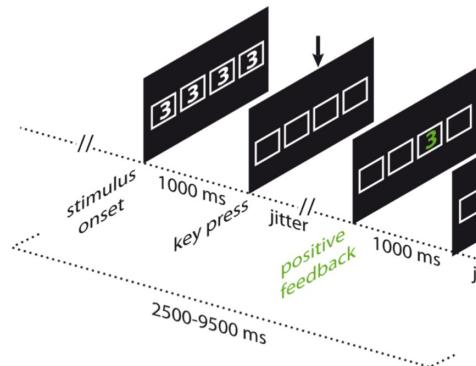

Collins and Koechlin (2012)

# The plan for the next 120 minutes

- Parameter estimation
  - Model fitting as an optimization problem
- Model validation (tutorial part 1)
  - Does the model capture the data?
- **Parameter recovery (tutorial part 2)**
  - **Simulate, simulate, simulate!**
- Parameter uncertainty (tutorial part 3)
  - Bootstrapping

# Parameter recovery

Check whether the fitting procedure gives meaningful parameter values in the best case scenario, that is, when fitting fake data where the “true” parameter values are known.



Why do we care?

# Parameter recovery



Why do we care?

- ✓ We want to avoid a biased fitting procedure
- ✓ We want to avoid parameter roles overlapping with each other, capturing similar shares of the variance
- ✓ We want each parameter to be ***identifiable***
- ✓ ***Under these conditions we will be able to interpret the meaning of each of the parameters***
- ✓ And potentially to interpret their different value in different conditions or under different treatment groups

# Parameter recovery

1. Simulate fake data with different values of parameters (e.g., lapse rate, threshold, etc.)

When choosing the range of parameter values, make sure that you are covering the parameter regime of interest for your experiment!


- Either sweep across the whole parameter space
- Or focus on the space of interest regarding your best-fitting parameters

2. Estimate the values of the parameters from your simulated data
3. Compare the recovered parameters to their true values  
(should be highly correlated without bias)


Are there bugs in your code? Is the experiment underpowered?

# Example parameter recovery


- Decision-making task under uncertainty
- Bayesian inference model plus different sources of noise

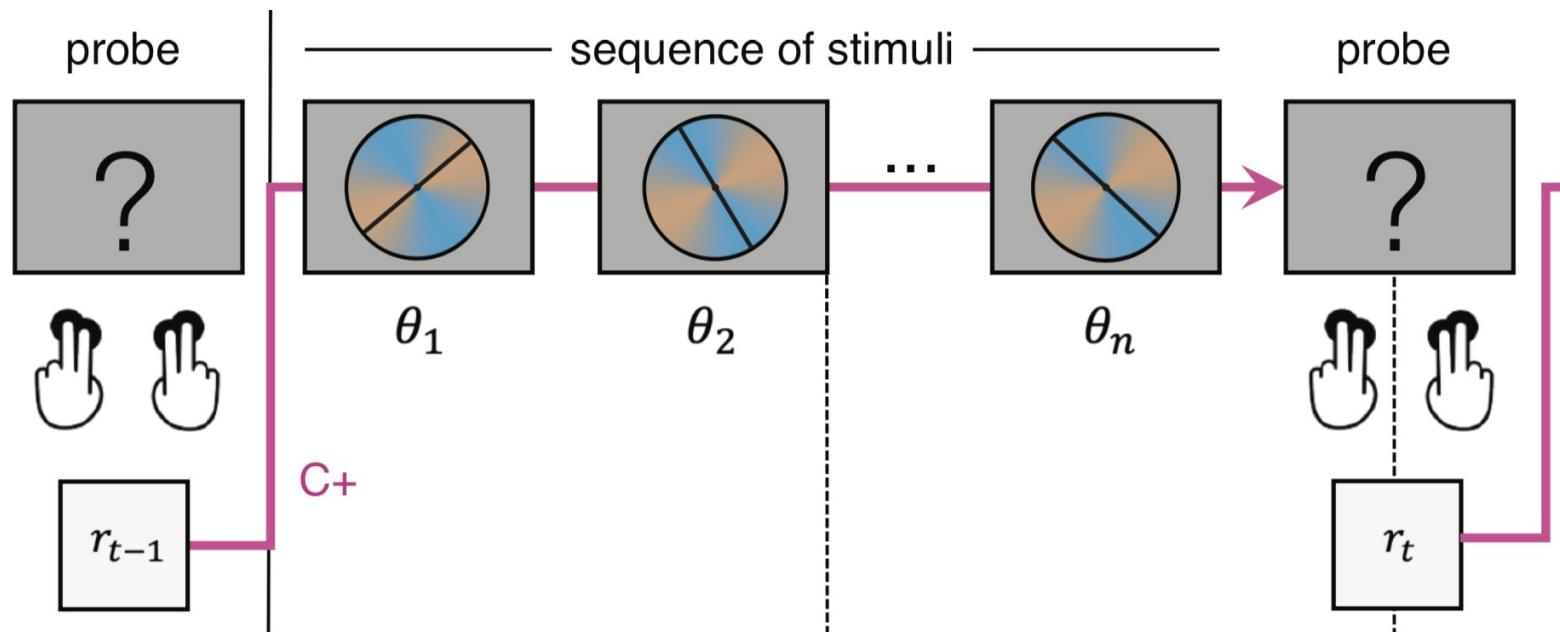


# Example parameter recovery

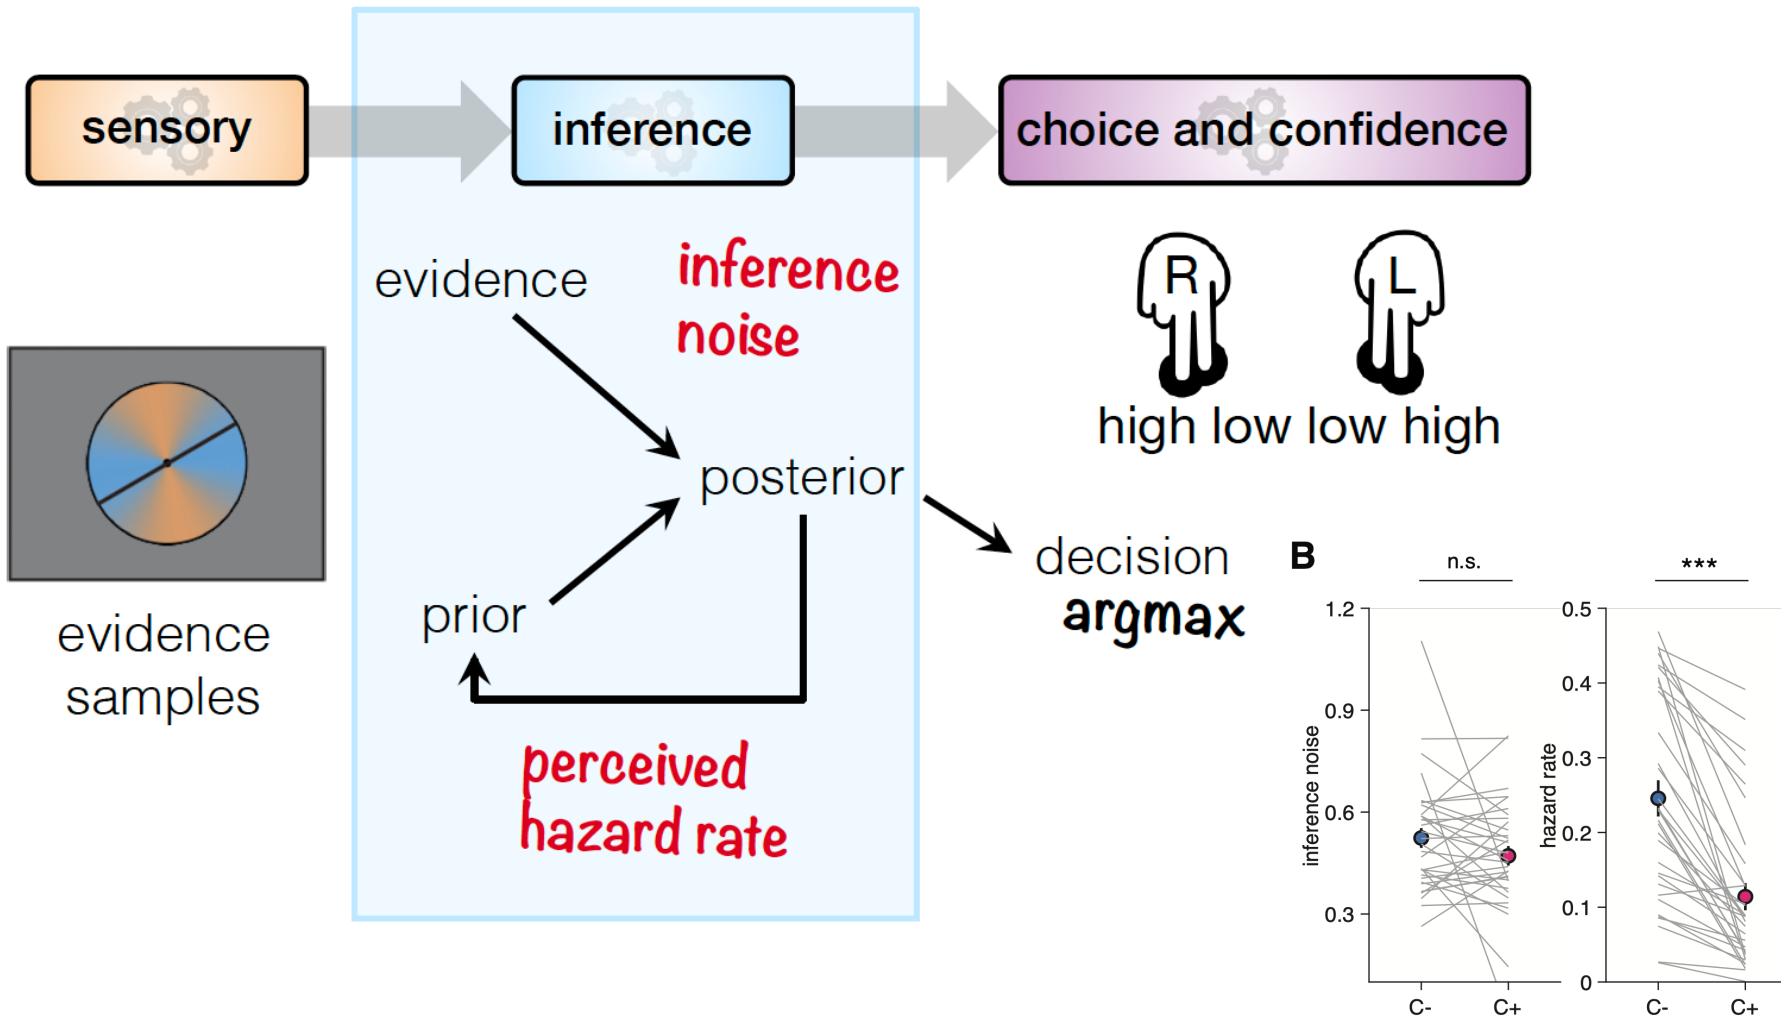






# Example parameter recovery

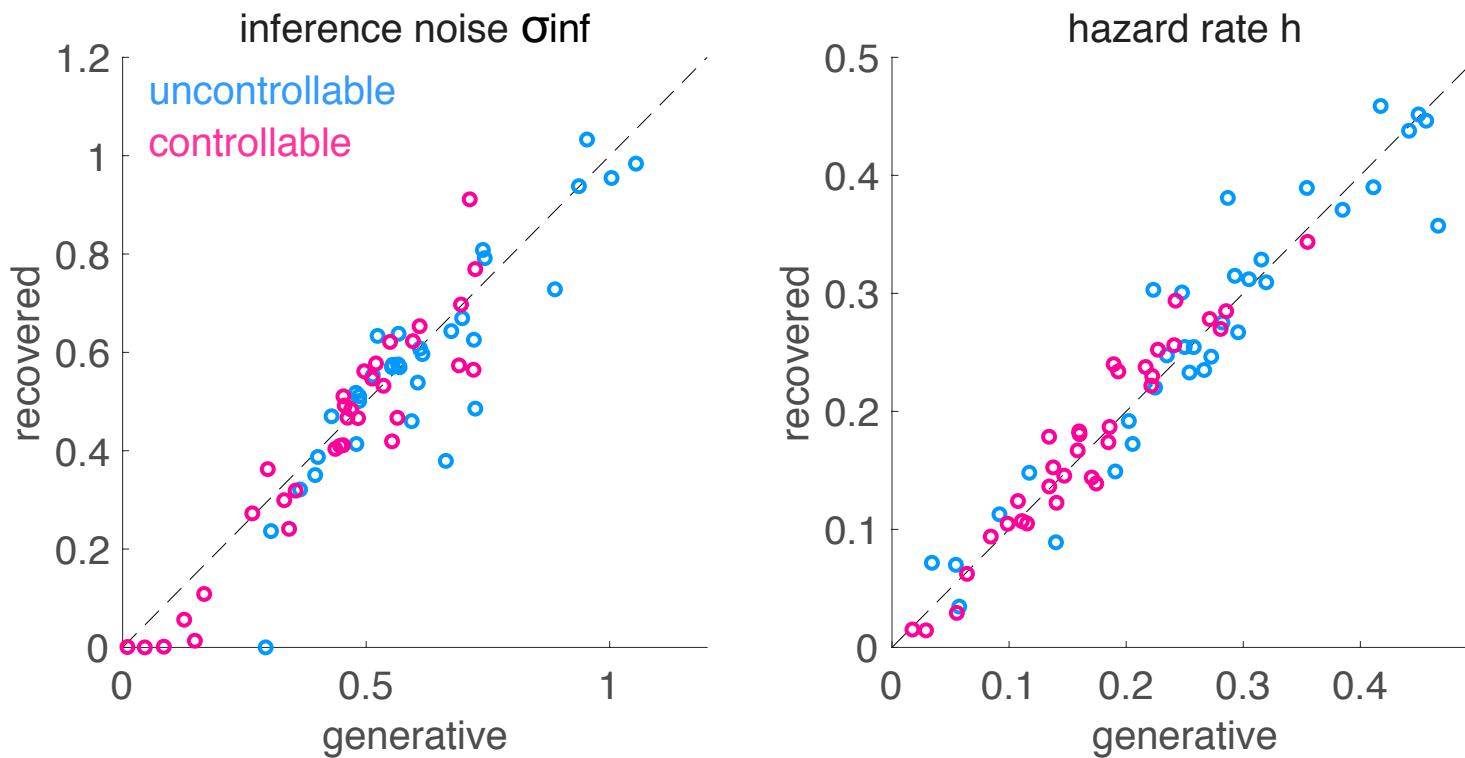

# Example parameter recovery

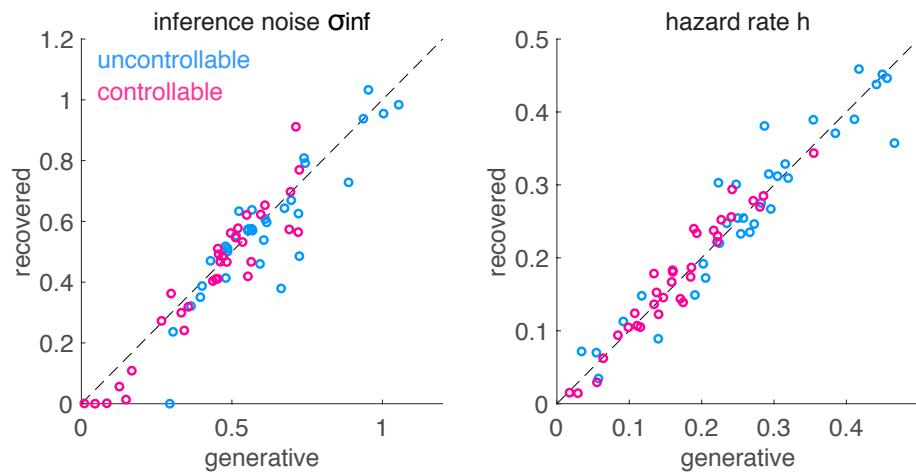

# Example parameter recovery

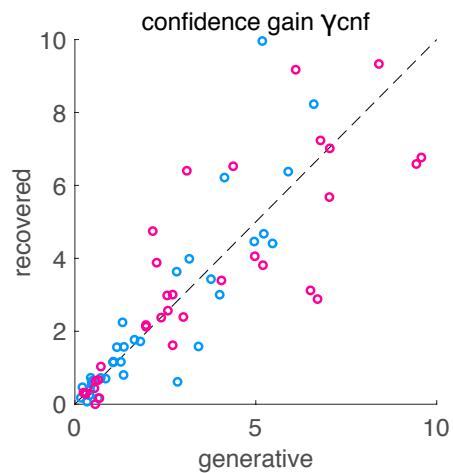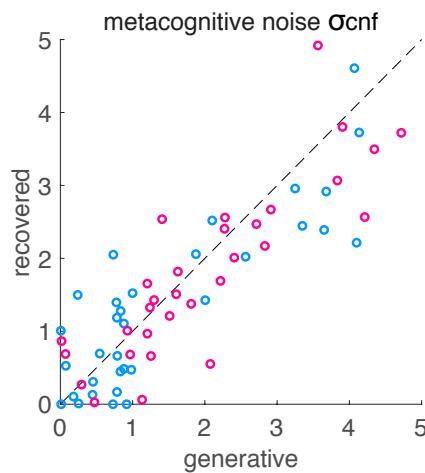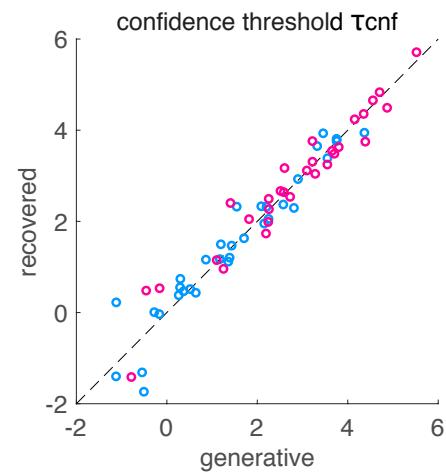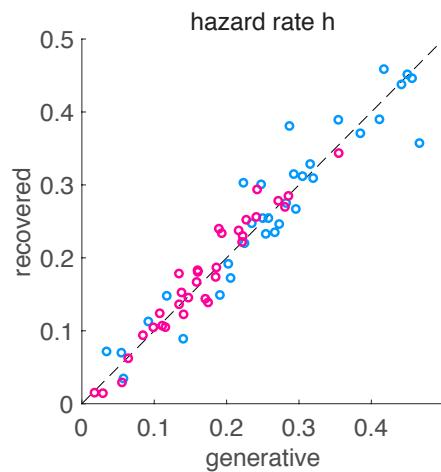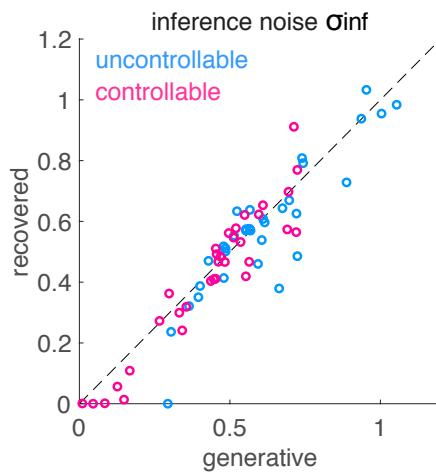


confusion matrix

	$\sigma_{\text{inf}}$	$h$	$\tau_{\text{cnf}}$	$\sigma_{\text{cnf}}$	$\gamma_{\text{cnf}}$
$\sigma_{\text{inf}}$	0.9311	0.164	-0.03562	-0.077	-0.1883
$h$	0.2323	0.9616	-0.1567	-0.04666	0.006569
$\tau_{\text{cnf}}$	-0.08164	-0.2438	0.9438	-0.07967	-0.05363
$\sigma_{\text{cnf}}$	-0.1799	0.04688	-0.05634	0.7842	0.3612
$\gamma_{\text{cnf}}$	-0.29	0.03347	-0.1898	0.3219	0.85



# Confusion matrix: parameter identifiability

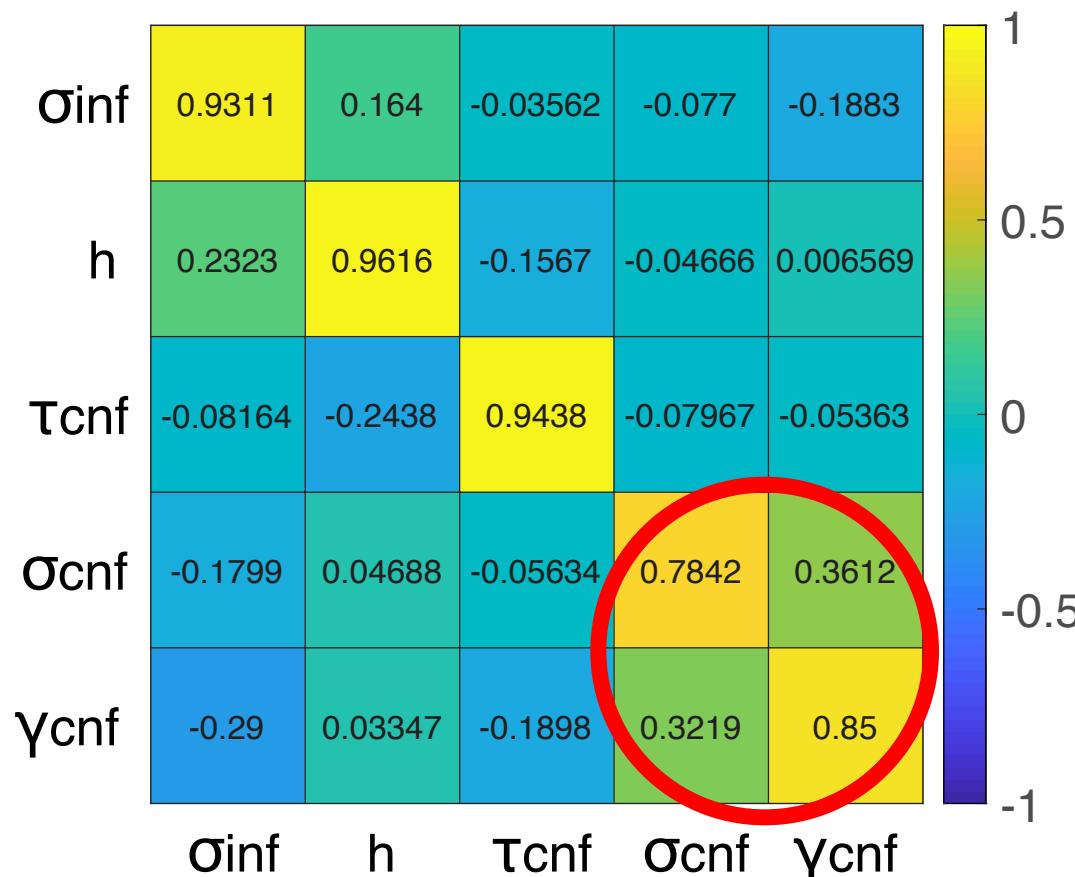

# The plan for the next 120 minutes

- Parameter estimation
  - Model fitting as an optimization problem
- Model validation (tutorial part 1)
  - Does the model capture the data?
- Parameter recovery (tutorial part 2)
  - Simulate, simulate, simulate!
- **Parameter uncertainty (tutorial part 3)**
  - **Bootstrapping**

# Uncertainty about parameter estimates


- Uncertainty around parameter estimates: how confident are you about your model fit?
- Confidence interval of a population parameter: mean and confidence levels indicating the probability that the interval contains the parameter
- Ideally, you would replicate your study several times and estimate the mean +/- margin of error
- Traditional statistical techniques are only asymptotically correct (large N)

# Uncertainty about parameter estimates

- In practice, we don't know **the underlying distribution** from which your parameter is drawn: hence the error distribution cannot be easily calculated
- **Bootstrapping** procedure, involves resampling your data
  - Repeatedly draw independent samples from a data set, that is, with replacement (**resampling**)
  - This creates a new data set, of same size as the initial one
  - We make the assumption that your data set is representative, a good measure of the underlying distribution



# Example: Bootstrapping procedure

- Uncertainty around parameter estimates: how confident are you about your model fit?
- Example: a model fit of neural response as a function of contrast

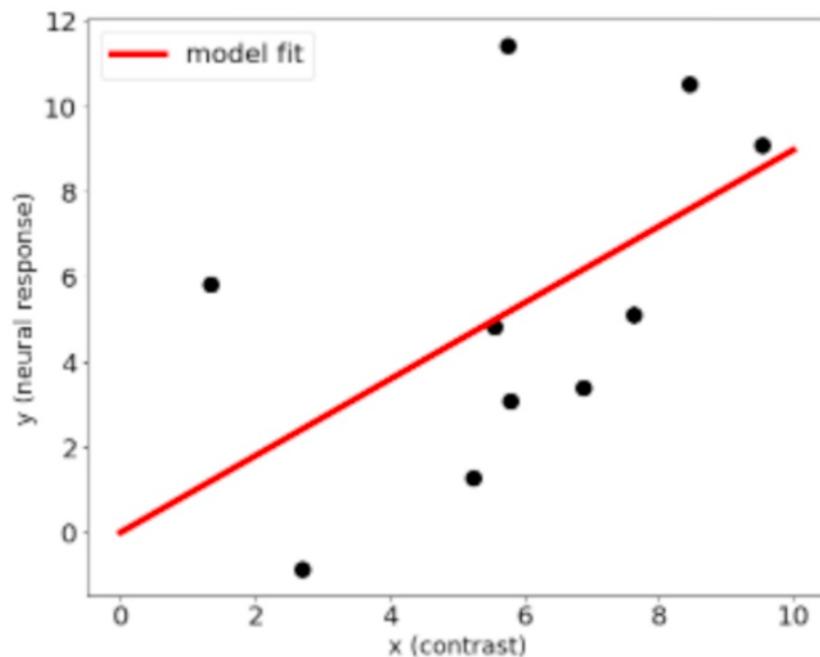



# Bootstrapping procedure

1. Resample from the observed dataset with replacement

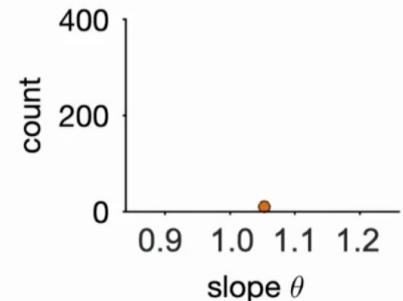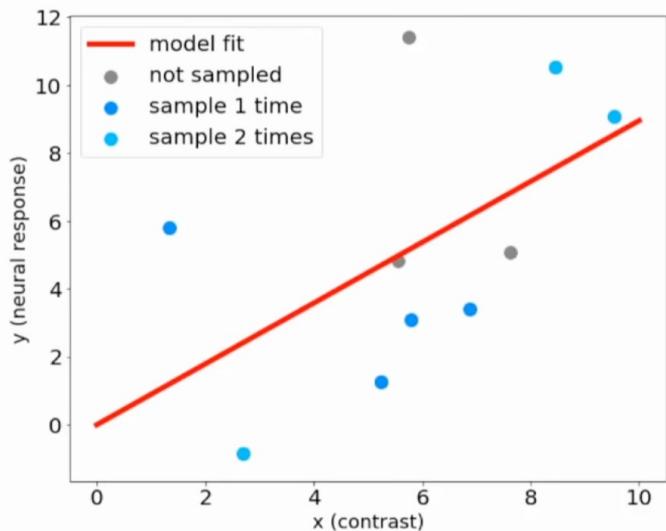


# Bootstrapping procedure

1. Resample from the observed dataset with replacement

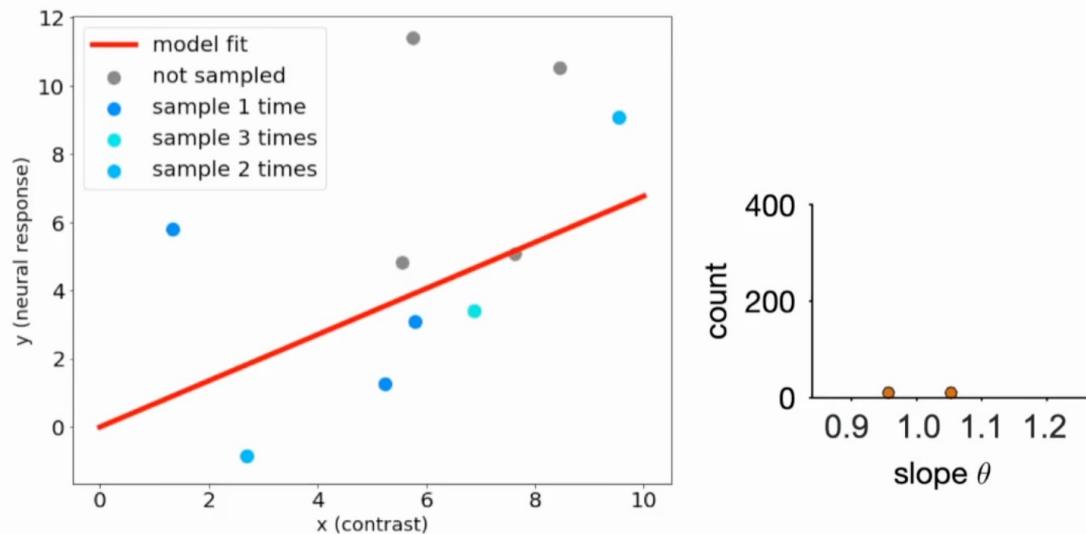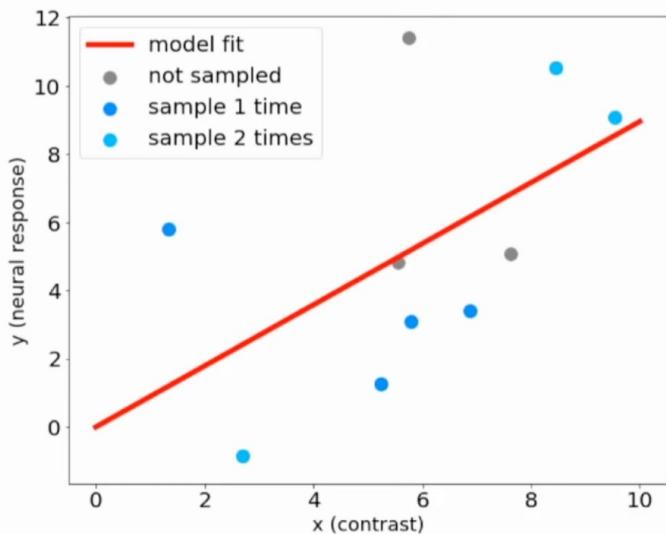

# Bootstrapping procedure

1. Resample from the observed dataset with replacement
2. Collect all estimates into a distribution, and analyze the confidence intervals

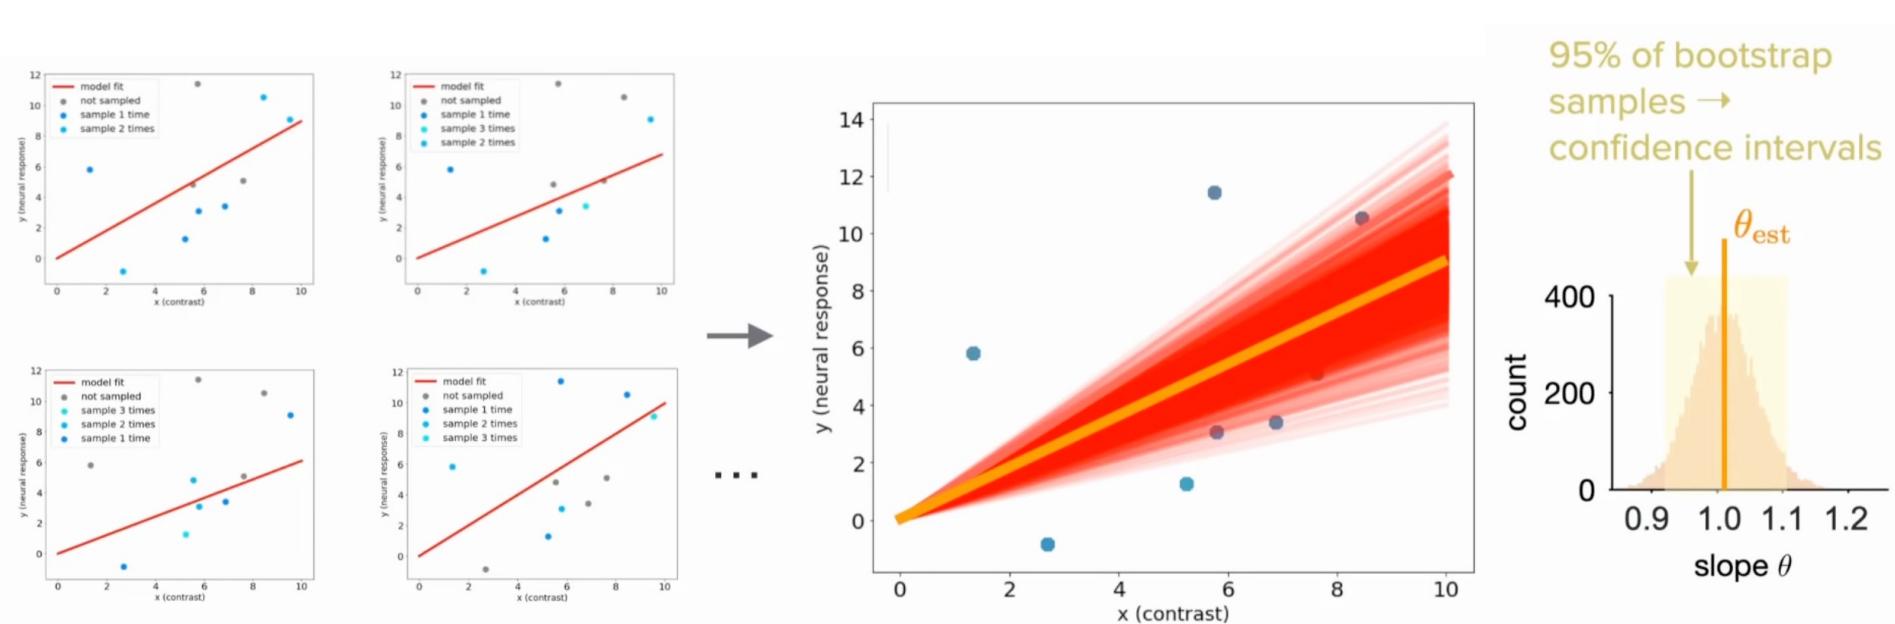




The idea is to generate many new synthetic datasets from the initial true dataset by randomly sampling from it, then finding estimators for each one of these new datasets, and finally looking at the distribution of all these estimators to quantify our confidence.

# Non-parametric vs. parametric bootstrap

## How to generate synthetic data?




- *non-parametric* bootstrap: simulate experiment based on *observed* data
- *parametric* bootstrap: simulate experiment based on *best* parameters

# Bootstrap confidence intervals - Example

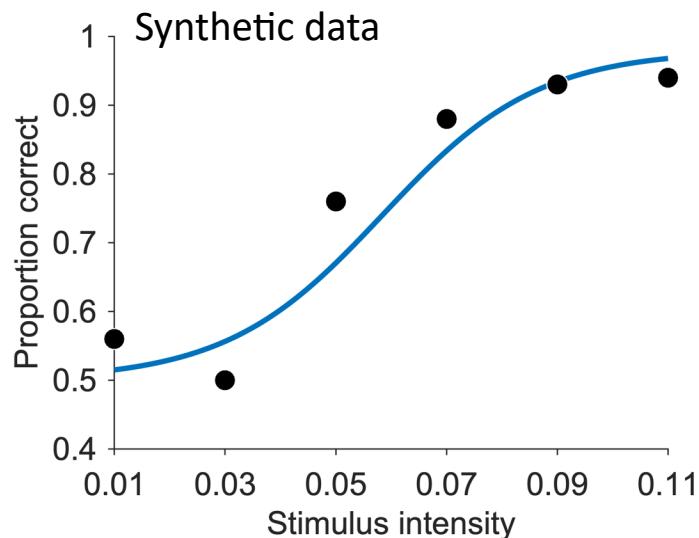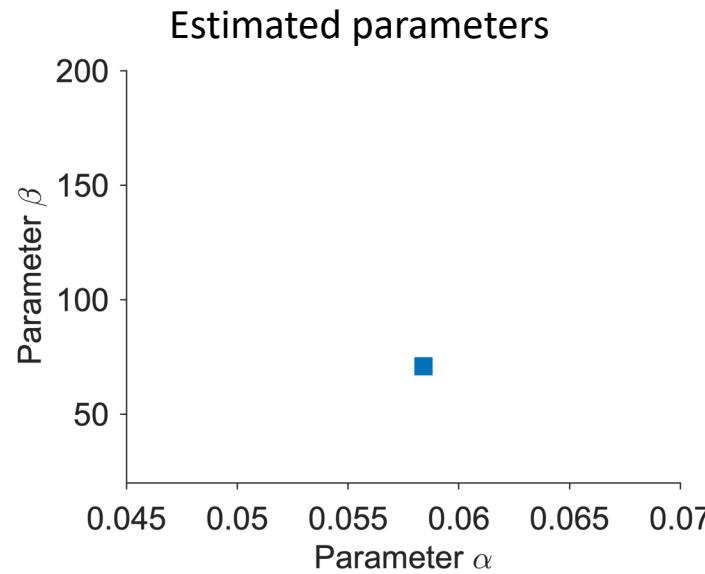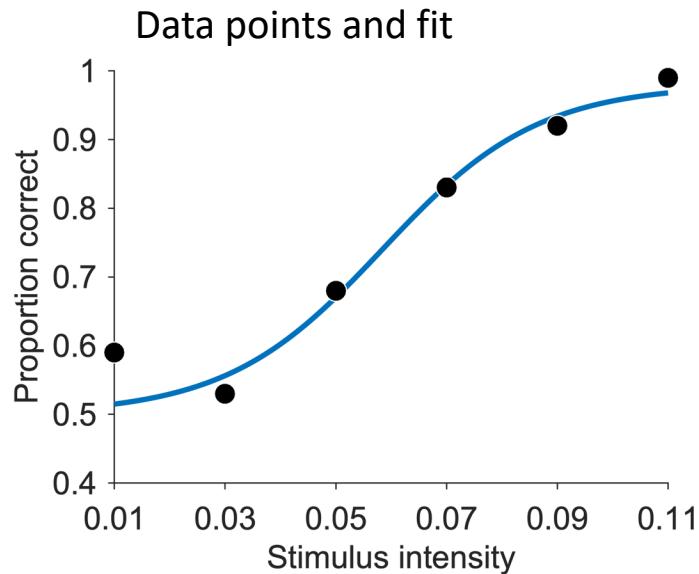




- Generate synthetic data

# Bootstrap confidence intervals - Example

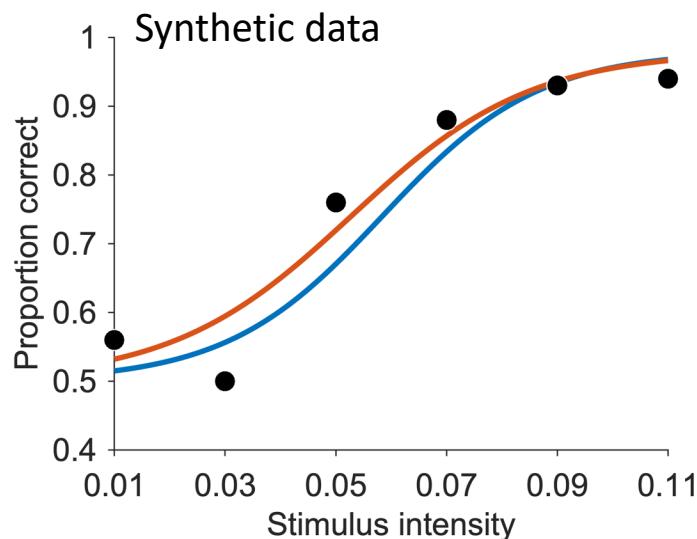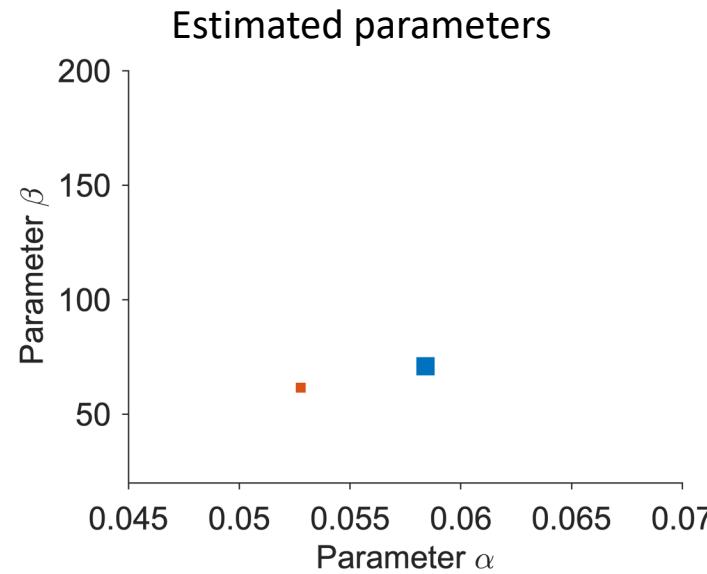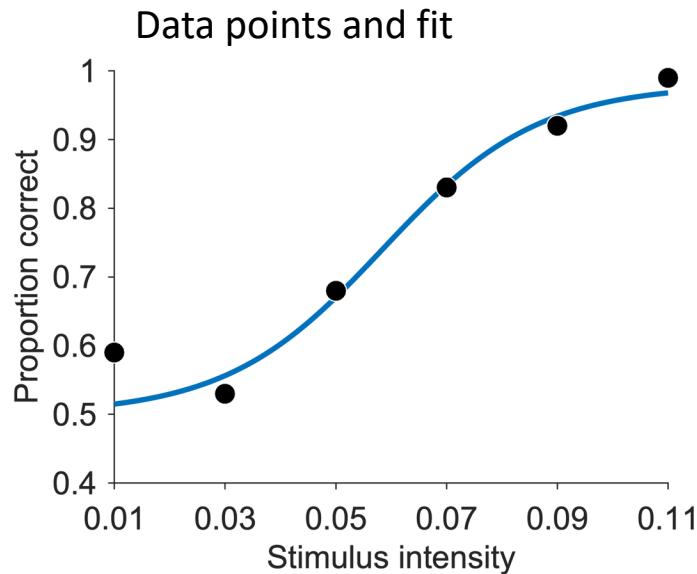




- Generate synthetic data
- Fit synthetic data

# Bootstrap confidence intervals - Example

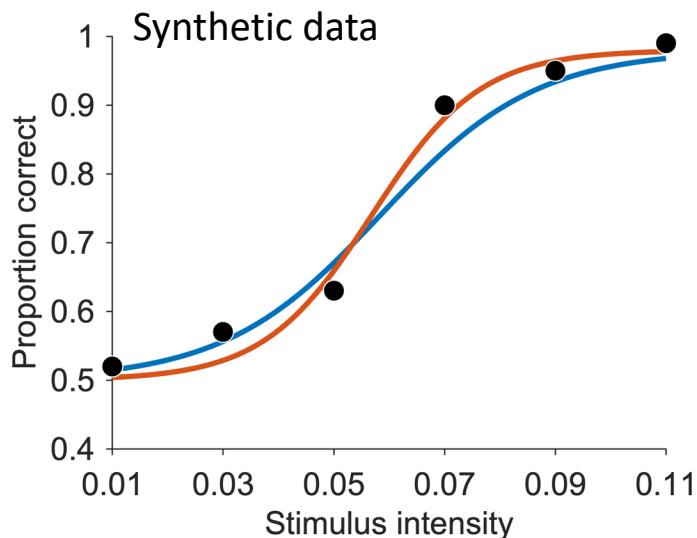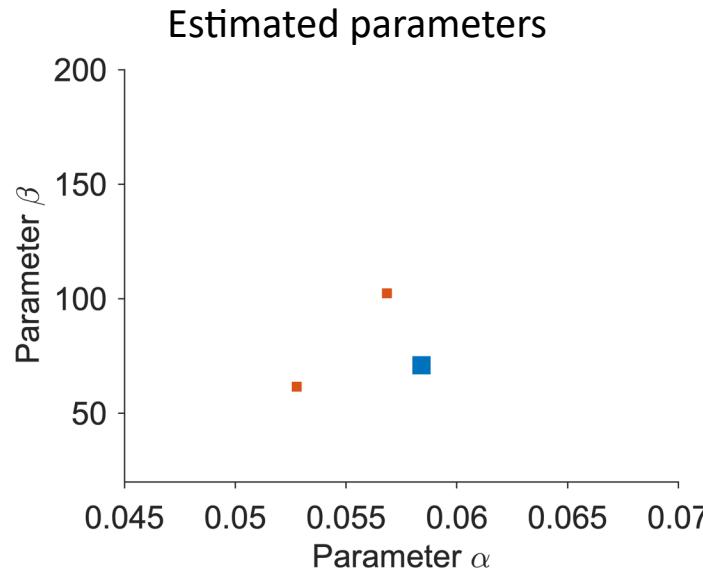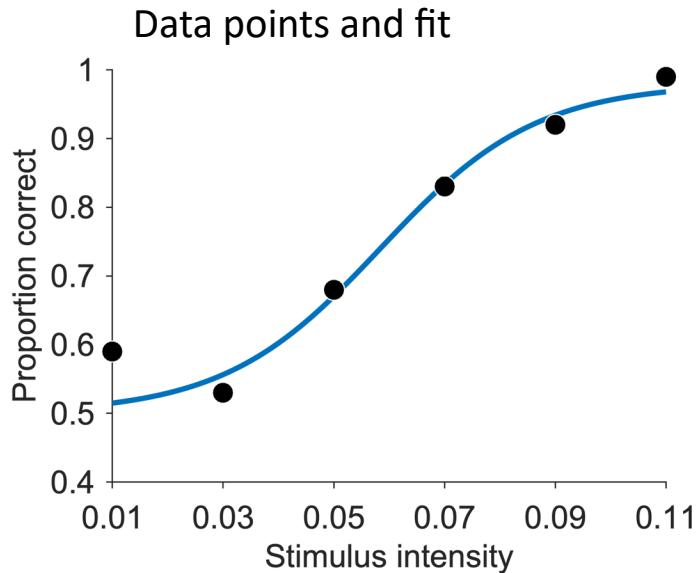

- Generate synthetic data
- Fit synthetic data
- Repeat!

# Bootstrap confidence intervals - Example

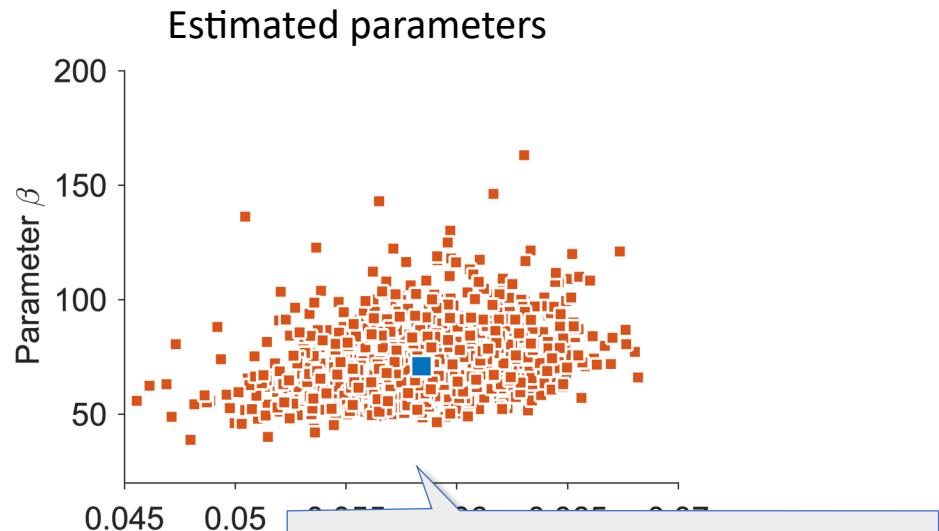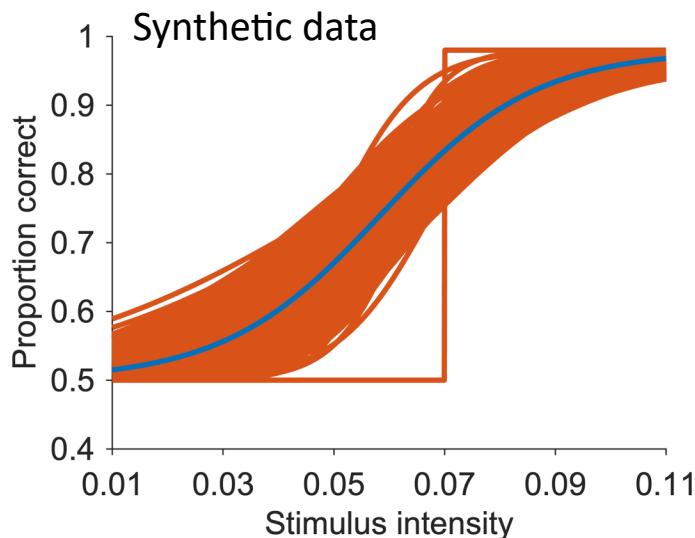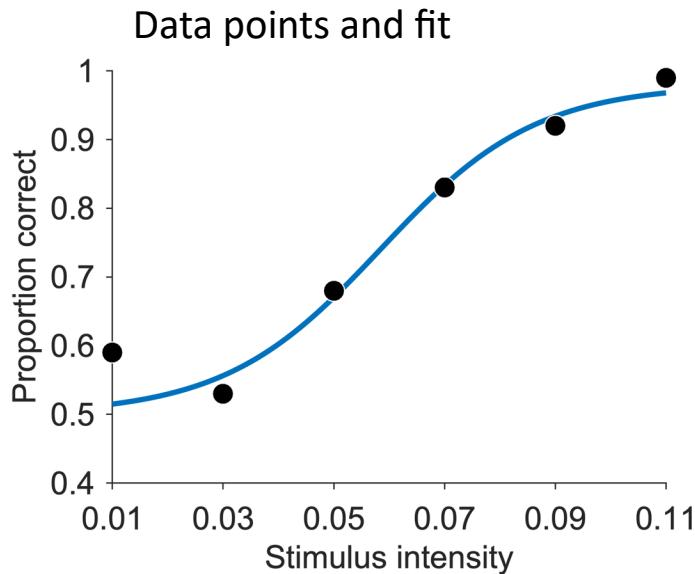

- Sampling distribution**
- Compute standard errors
  - Confidence intervals
  - etc ...
- Generated synthetic data
- Fit synthetic data
- **Repeat!**


# Acknowledgements 🙏

- Marion Rouault, CNRS & Paris Brain Institute  
(BAMB! 2022)
- Luigi Acerbi (BAMB! 2022)
- Anqi Wu (Neuromatch)

# Backup slides



# Example: model validation

- Decision-making task under uncertainty
- Bayesian inference model plus different sources of noise

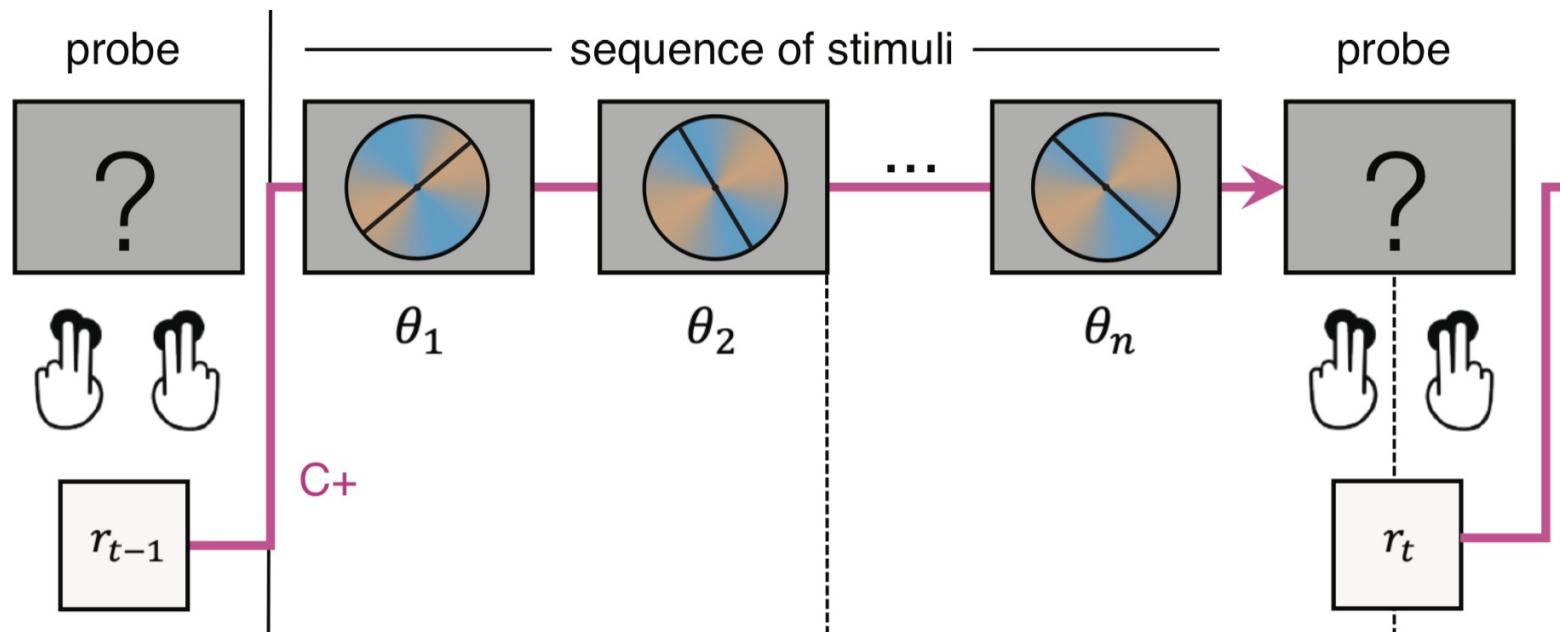


# Example model validation


- Participants need more evidence to change their mind in controllable environments
- When they change their mind, they do so with reduced confidence

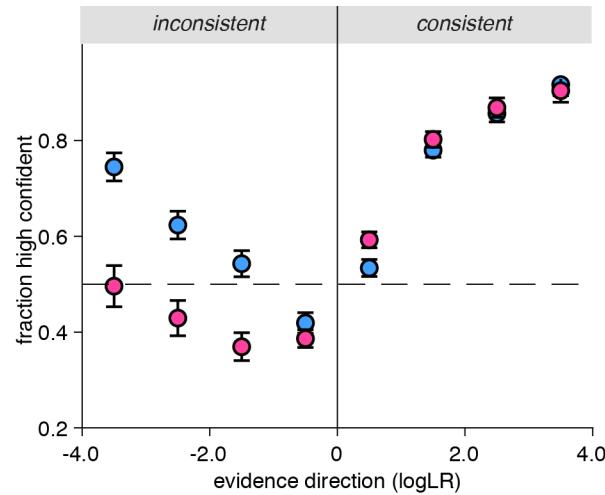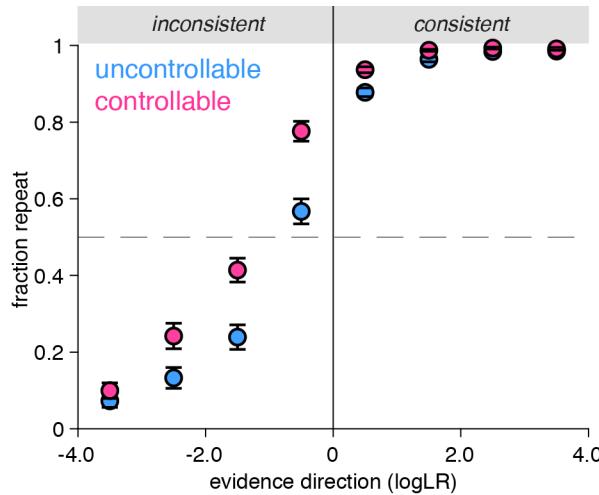

# Example model validation


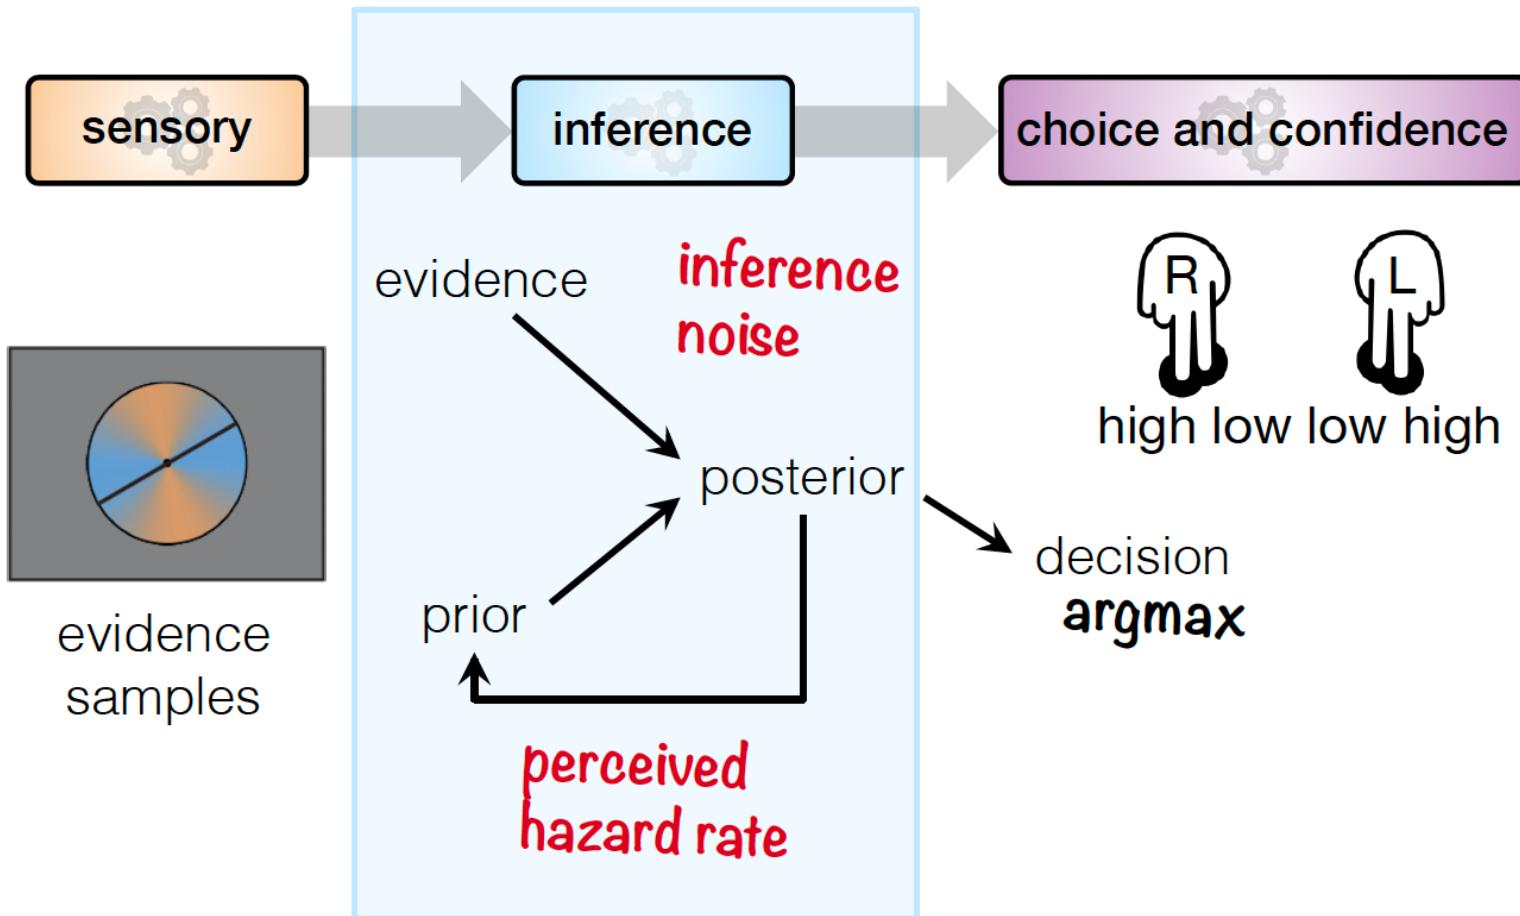


# Example model validation


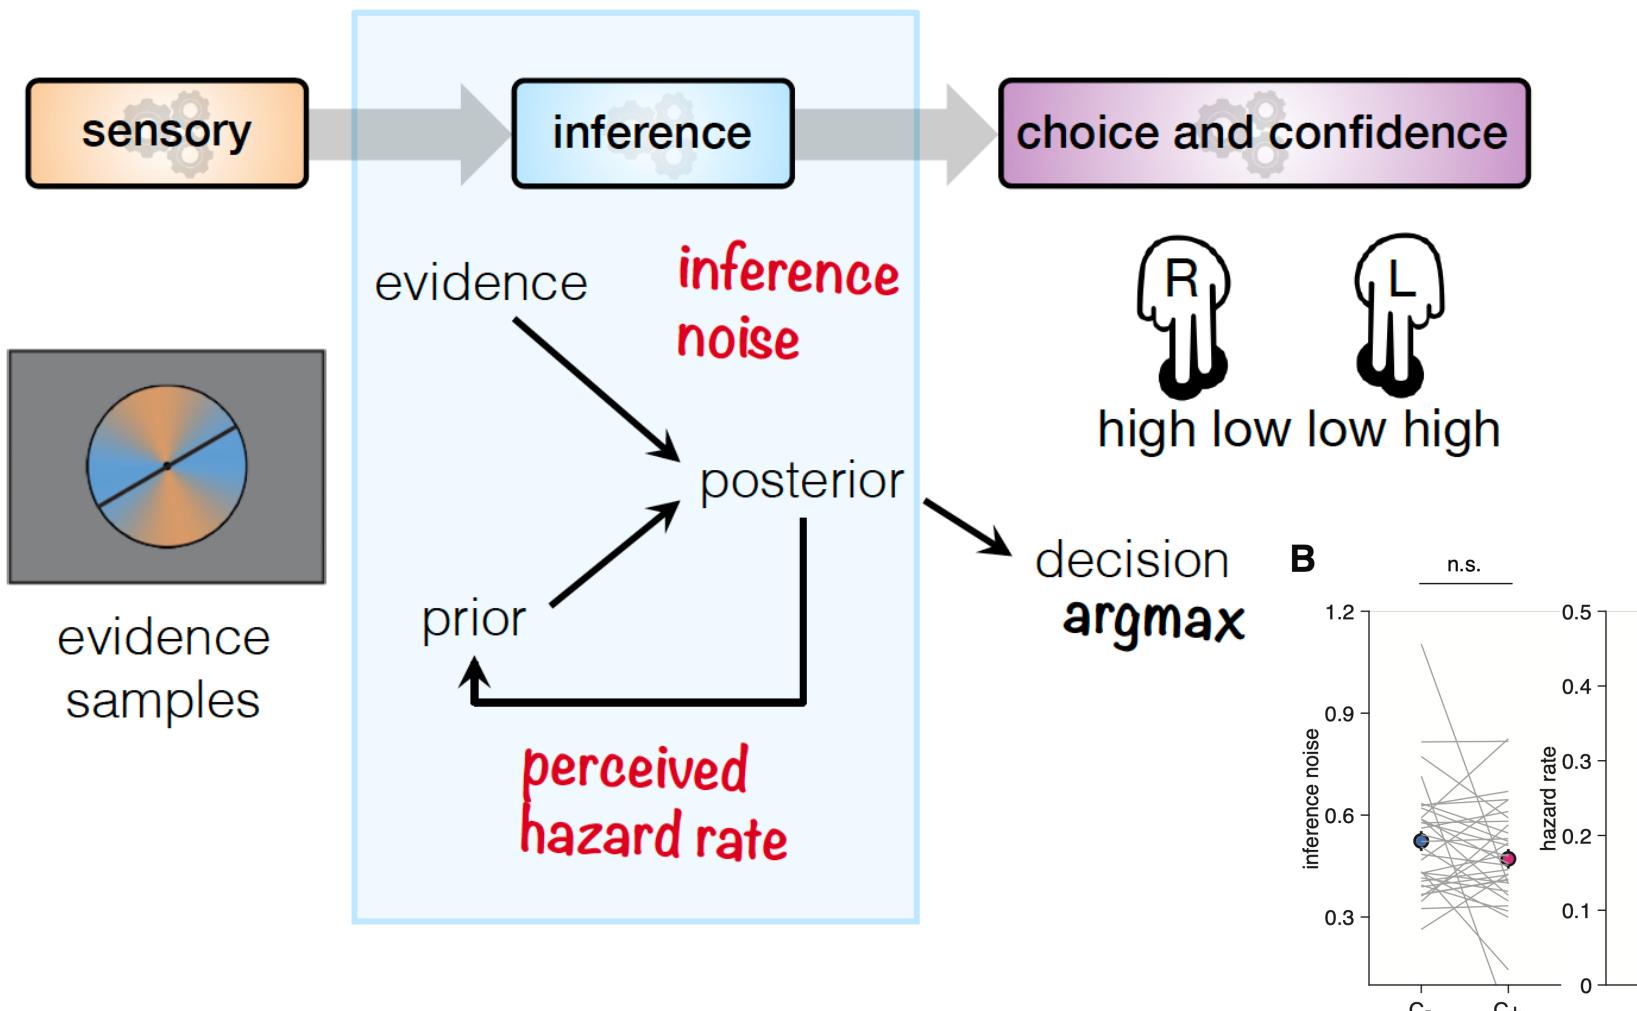


# Example model validation

Full model

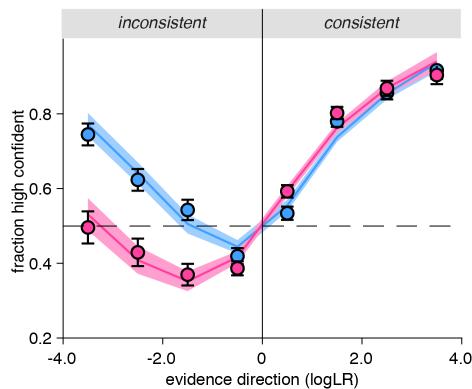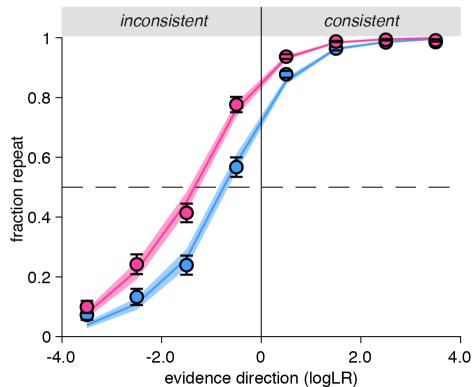

Reduced model

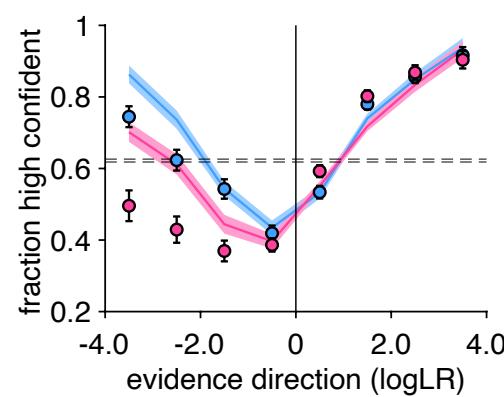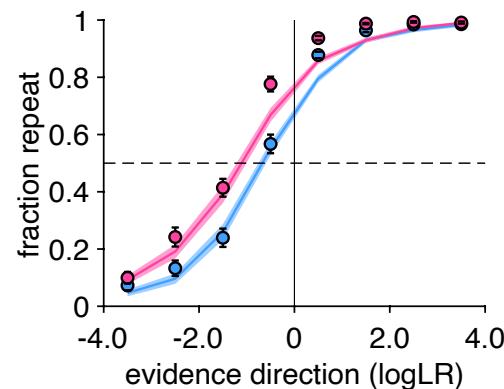

💡 Can you recover/reproduce all qualitative and quantitative results obtained from your actual data?