

Paper F-05: Plasma Dynamics: A Constraint-Driven Flux Dynamics (CDFD) Perspective

Steve Bico Mujjabi, MD

Independent Researcher

Founder, Vura Labs

Kampala, Uganda

ORCID: 0009-0001-0556-5516

May 2026

Abstract

This paper develops a falsifiable CDFD/AFL model of Plasma Dynamics. It maps particles, heat, current, radiation, and momentum to driving flux Φ , fields, collisions, geometry, confinement, and transport barriers to active constraint C , waves, reconnection, turbulence, control, and profile adjustment to responsiveness S , and magnetic topology, distribution functions, impurities, and prior events to structural memory M_s . The target outcome is confinement, heating, instability, transport, and recovery, tested against laboratory diagnostics, solar observations, in-situ spacecraft data, and simulations. The paper treats universality as a shared model architecture rather than an assertion that unlike systems have the same material mechanism. It states the negative result that would make the mapping unnecessary and places the domain claim inside the cumulative CDFD programme and its reproducible runtime boundary.

Symbol Conventions

CDFD/AFL Part IV symbol convention.

Symbol	Part IV meaning	Cross-domain reading
Φ	Driving flux or throughput	Energy, matter, signal, capital, information, traffic, force, or biological load entering a system
C	Active constraint or capacity burden	Bottleneck, resistance, boundary, scarcity, toxicity, regulation, topology, latency, or load-bearing limit
S	Responsiveness or adaptive surface	The system's ability to reconfigure, buffer, route, repair, learn, or preserve function under changing load
M_s	Structural memory	Stored damage, hysteresis, inherited topology, institutional memory, trained weights, ecological legacy, or retained state
Ψ_s	Adaptive operating ratio $(\Phi/C) \cdot S \cdot M_s$	Local bookkeeping gauge for constrained operation, overload, recovery, or regime change; not a universal constant
Λ	Life Number or capstone surplus ratio where explicitly defined	Reserved for Part II-derived life-number notation or synthesis-level surplus measures, never an undefined decoration

Greek-symbol convention.

Symbol	Local role	Interpretation rule
α	Accumulation or reinforcement coefficient	Sets how fast a pathway, constraint, habit, cascade, or retained structure grows under load
β	Relaxation, decay, clearance, or washout coefficient	Sets loss, recovery, damping, forgetting, degradation, or return toward baseline
γ	Coupling, diffusion, redistribution, or transfer coefficient	Sets spread across nodes, layers, tissues, markets, infrastructures, media, or physical phases
δ, ϵ	Perturbation, tolerance, small offset, or numerical guard	Used only as local thresholds, stability margins, measurement tolerances, or stress increments
η, λ, μ, ν	Efficiency, rate, baseline, intensity, or frequency terms	Meaning is fixed by the equation, subscript, and domain-specific proxy in the paragraph where the term appears
ρ, σ, τ, ϕ	Density/correlation, variability/noise, time-scale, phase, or field terms	Local coefficients only; subscripts bind them to the named pathway, domain, or experiment
Ω, Λ	Domain/state space; Life Number where defined	Ω names a modeled state space; Λ carries life-number or synthesis notation only when the paper defines it

1 Series Context

Part I sets the flow–constraint language used here [2]. Part II develops the Life Number and the origins-of-life use of the same notation [3]. Part III applies AFL to biology and medicine

[4]. Part IV [5], DOI <https://doi.org/10.5281/zenodo.20395901>, is the cross-domain stress test: it asks where the notation clarifies measurement, and where it becomes only a metaphor.

2 Introduction

2.1 The Mujjabi Universal Capacity Law

Building directly upon the Fundamental Physics (Part I) [2], the **Mujjabi Universal Capacity Law** proposes that across all scales—from black hole event horizons to global financial markets and power grids—driving high flux (Φ) against a rigid topological constraint (C) can drive system saturation. When Φ/C approaches critical thresholds, the system does not scale linearly; it undergoes a topological phase transition.

2.2 The Mujjabi Universal Memory Law

The **Mujjabi Universal Memory Law** frames persistent systemic collapse. When a complex network fails to clear its structural memory (M_s) and its relaxation parameter decays ($\tau_{relax} \rightarrow \infty$), temporary stressors become permanent rigidities. This is the proposed CDFD mechanism behind ecological death, economic depressions, and infrastructural gridlock.

Plasma is the most abundant form of ordinary matter in the universe, constituting stellar interiors, solar coronas, and the interstellar medium. Unlike neutral gases, plasmas are exquisitely sensitive to electromagnetic fields. The concept of "magnetic flux freezing" dictates that in an ideal, perfectly conducting plasma, magnetic field lines are "frozen" into the fluid and must move with it.

However, non-ideal plasmas undergo magnetic reconnection—a violent topological rearrangement of the field lines that releases massive amounts of energy. Traditional MHD requires localized resistivity anomalies to explain this. In the Constraint-Driven Flux Dynamics (CDFD) framework, reconnection is represented as. It is a universal systemic response to constraint locking.

3 The Plasma Surface and Magnetic Memory

We define the plasma flow utilizing the Universal Adaptive Ratio:

$$\Psi_s = \left(\frac{\Phi}{C} \right) \cdot S \cdot M_s \quad (1)$$

For a highly conductive plasma (e.g., the solar corona or a fusion tokamak), the components map as follows:

- **Flux (Φ):** The kinetic flow of the plasma fluid and the associated electrical currents (J).
- **Constraint (C):** The Lorentz force ($\mathbf{J} \times \mathbf{B}$) and the tension of the magnetic field lines. The field topology resists the natural expansion or shear of the fluid flow.
- **Responsiveness (S):** The ionization fraction and the thermal capacity of the plasma, defining its ability to conduct current.

- **Memory (M_s):** Magnetic helicity and flux freezing. The fact that the plasma cannot cross field lines means it "remembers" its initial topology. This creates a rigid structural memory.

3.1 Constraint Locking and Magnetic Reconnection

As the plasma flows (e.g., driven by solar convective granules), it twists and shears the frozen-in magnetic field lines. This increases the magnetic tension. In CDFD terms, the continuous flux Φ is accumulating a massive topological constraint C .

Because the plasma has perfect memory ($M_s \rightarrow 1.0$, due to flux freezing), it cannot smoothly adapt. The constraint C grows exponentially, while the effective throughput bottlenecks. The system's life number plummets: $\Psi_s \ll 1$.

At this point, the plasma has entered a chronic constraint state, exactly analogous to a diseased biological tissue suffering from chronic ischemia. The system is structurally unstable. To prevent total stagnation, the system undergoes magnetic reconnection. The magnetic memory (M_s) is instantaneously erased at the reconnection X-point. The topological constraint C snaps, and the stored constraint energy is violently dumped back into the system as kinetic flow Φ .

4 Measurement Layer

The first job in any domain is to choose proxies before drawing conclusions. Φ may be a rate of material, energy, information, capital, or signal flow. C is the bottleneck that slows or redirects that flow. S measures the system's ability to reconfigure under stress, and M_s records the past load that still changes present behavior. A useful application gives those four terms observable definitions, a time scale, and a failure condition. If a standard domain model explains the same data more cleanly, the CDFD/AFL mapping should give way.

4.1 Current Runtime Diagnostic: Universal Network Cascade

The release-local discovery script keeps this paper tied to the current CDFD Runtime [6], including RK4 field updates, surface dynamics, structural-memory diffusion, and a finite-value audit. In the 2026-06-04 runtime pass, the localized hub-drive stress test ended with hub $\Psi_s = 5.21$, peak network $\Psi_s = 5.21$, 21 nodes above $\Psi_s > 1.5$, and 37 maximum memory-locked nodes. I treat those numbers as a runtime sanity check and as a target for later domain measurement, not as a substitute for field data.

5 Major Universal Upgrade: Mechanism, Scale, and Tests

5.1 Observable Translation

The paper-specific translation begins with an observable chain rather than a verbal analogy. For Plasma Dynamics, the proposed drive is particles, heat, current, radiation, and momentum. The active limitation is fields, collisions, geometry, confinement, and transport barriers. Responsiveness is carried by waves, reconnection, turbulence, control, and profile adjustment,

while retained state is represented by magnetic topology, distribution functions, impurities, and prior events. The outcome to explain is confinement, heating, instability, transport, and recovery.

Table 1: Operational CDFD/AFL map for Paper F-05.

Term	Paper-specific observable meaning	Measurement question
Φ	particles, heat, current, radiation, and momentum	What rate, load, gradient, or demand enters the focal system?
C	fields, collisions, geometry, confinement, and transport barriers	Which measured bottleneck limits transfer, function, or recovery?
S	waves, reconnection, turbulence, control, and profile adjustment	Which process changes effective capacity or reroutes the load?
M_s	magnetic topology, distribution functions, impurities, and prior events	Which retained state makes equal present loads produce different futures?
Y	confinement, heating, instability, transport, and recovery	Which outcome is predicted out of sample, with uncertainty?

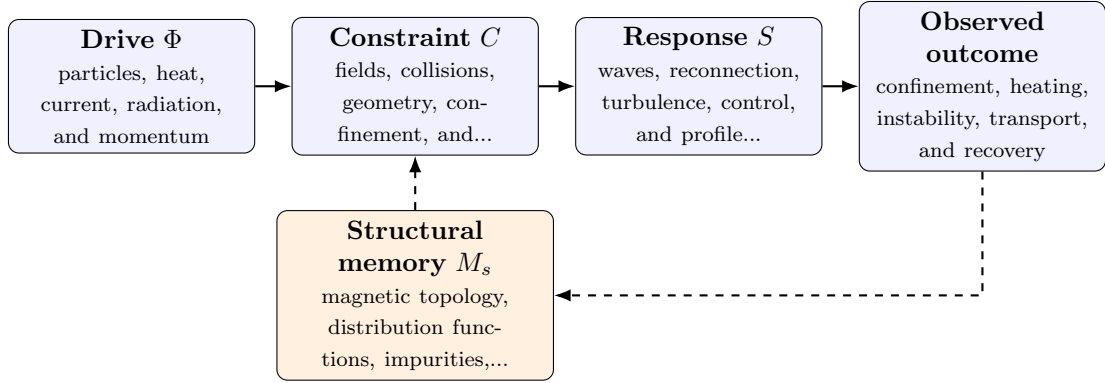


Figure 1: Paper F-05 observable CDFD/AFL architecture for Plasma Dynamics. Solid arrows give the proposed forward chain; dashed arrows make history-dependent feedback explicit.

5.2 Minimal Coupled Model

A paper-level model must separate throughput, constraint accumulation, response, and history. One deliberately minimal form is

$$Y(t) = \frac{\Phi(t)S(t)}{\epsilon + C(t)}, \quad (2)$$

$$\frac{dC}{dt} = \alpha\Phi(t) - \beta S(t)C(t) + \gamma\mathcal{L}C(t), \quad (3)$$

$$\frac{dM_s}{dt} = \eta C(t) - \mu M_s(t), \quad (4)$$

$$\Psi_s(t) = \frac{\hat{\Phi}(t)}{\epsilon + \hat{C}(t)} \hat{S}(t) [1 + \omega \hat{M}_s(t)]. \quad (5)$$

Here Y is the measured output, $\epsilon > 0$ prevents a singular denominator, $\mathcal{L}$ is a spatial or network coupling operator, and hats denote explicitly normalized variables. The sign and magnitude of ω must be estimated: memory can preserve useful organization or amplify damage. No fixed threshold is universal before the variables, normalization, and observation scale are declared.

For this paper, the hypothesized causal sequence is specific. A change in particles, heat, current, radiation, and momentum arrives faster than waves, reconnection, turbulence, control, and profile adjustment can compensate. This raises or redistributes fields, collisions, geometry, confinement, and transport barriers. If the load persists, the retained state encoded by magnetic topology, distribution functions, impurities, and prior events changes the next response, so a later event of equal magnitude can produce a different trajectory in confinement, heating, instability, transport, and recovery. The scientific task is to estimate that sequence against the best ordinary model of the domain, not merely to redescribe the outcome after it occurs.

5.3 Cross-Scale Universality Without Mechanistic Erasure

For the cosmic and subatomic systems family, the universal comparison must remain subordinate to conservation laws, relativity, quantum mechanics, and established astrophysical or plasma equations. CDFD is useful only if it compresses a regime transition or hysteresis question without pretending that biological adaptation and physical response are the same mechanism. [8, 7, 1] The CDFD programme is cumulative: Part I supplies the flow-constraint foundation [2]; Part II asks when maintained throughput supports persistent organized states [3]; Part III develops adaptive limitation and biological memory [4]; and Part IV [5] tests how much of that architecture survives translation. The CDFD Runtime [6] supplies a reproducible numerical stress surface, but it does not substitute for the domain evidence named here.

The required scale declaration for this paper is nanoseconds to solar cycles; kinetic scales to astrophysical plasmas. At short scales, the key question is whether the incoming drive is transmitted, buffered, or diverted. At intermediate scales, response changes effective capacity and network exposure. At long scales, retained structure can alter the state space itself. A result is genuinely cross-scale only when the aggregation rule is stated and the same conclusion is not an artifact of averaging.

5.4 Evidence Ladder and Discriminating Tests

Table 2: Evidence ladder for Paper F-05. Each rung can fail independently.

Test	Design	Discriminating result
Proxy audit	Measure laboratory diagnostics, solar observations, in-situ spacecraft data, and simulations and preregister how each record maps to Φ , C , S , M_s , and Y .	The mapping fails if proxies are non-identifiable, circular, or change meaning across cases.
Load ramp	Apply or observe a controlled heating, current, or magnetic-topology perturbation while estimating the dominant constraint and response time.	A threshold claim requires a reproducible nonlinear change and uncertainty bounds, not a visually chosen breakpoint.
Recovery and memory	Match present load across units with different histories, then compare recovery paths.	The memory claim requires history-dependent divergence after current conditions are controlled.
Model comparison	Compare the baseline domain model with and without the CDFD/AFL state variables using held-out data.	The paper’s stated falsifier is: CDFD variables do not improve instability or confinement prediction beyond plasma models.

The strongest practical design combines a prospective perturbation with a recovery window. The load-ramp phase estimates where constraint begins to rise faster than output. The recovery phase estimates β and μ , separating fast relaxation from persistent memory. A topology or coupling intervention then asks whether rerouting changes the cascade as predicted. Null results are informative because they identify domains in which the universal notation adds no measurable value.

5.5 Research Programme and Boundary Conditions

The immediate research programme has four steps. First, construct a documented dataset from laboratory diagnostics, solar observations, in-situ spacecraft data, and simulations and retain raw units before normalization. Second, fit a baseline domain model and report its calibration and out-of-sample error. Third, add the smallest identifiable CDFD/AFL state extension and test whether it improves prediction of confinement, heating, instability, transport, and recovery. Fourth, repeat the analysis across the declared scale range and publish negative cases as part of the universality audit.

Three boundaries are non-negotiable. Correlation between flow and failure does not identify a constraint mechanism. A fitted memory term does not prove that the stored state has the same material meaning in another domain. Finally, a runtime cascade is evidence about the implementation, not evidence that the real system follows it. The paper becomes stronger when it can say precisely where the translation stops.

6 Conclusion

Magnetic reconnection is a plasma process governed by field topology, kinetic effects, and dissipation. CDFD supplies a candidate regime-change description whose value depends on improving prediction of reconnection, transport, or recovery without equating plasma mechanisms to biological or market failure.

Conflict of Interest

The author declares no conflict of interest.

Data Availability

Part-specific runtime diagnostics are under each Part's `outputs/` directory.

Release-wide code: `Part_E_Synthesis/supplementary/`.

Generated summaries: `Part_E_Synthesis/outputs/`.

Figures: `Part_E_Synthesis/figures/`.

7 Reference Layer

References

- [1] Per Bak, Chao Tang, and Kurt Wiesenfeld. Self-organized criticality: An explanation of the $1/f$ noise. *Physical Review Letters*, 59(4):381–384, 1987. DOI: <https://doi.org/10.1103/PhysRevLett.59.381>.
- [2] Steve Bico Mujjabi. Cdfd part i: Fundamental physics - constraint-driven field theory and flux dynamics, 2026. DOI: <https://doi.org/10.5281/zenodo.20250821>.
- [3] Steve Bico Mujjabi. Cdfd part ii: Origins of life and tri-regime bioenergetics - constraint-driven flux dynamics, 2026. DOI: <https://doi.org/10.5281/zenodo.20264779>.
- [4] Steve Bico Mujjabi. Cdfd part iii: Adaptive flux limitation biology and medicine - constraint-driven flux dynamics, 2026. DOI: <https://doi.org/10.5281/zenodo.20344695>.
- [5] Steve Bico Mujjabi. Cdfd part iv: Universal adaptive flux limitation - constraint-driven flux dynamics, 2026. DOI: <https://doi.org/10.5281/zenodo.20395901>.
- [6] Steve Bico Mujjabi. Cdfd runtime: Constraint-driven flux dynamics and cdfd execution engine, 2026. DOI: <https://doi.org/10.5281/zenodo.20343160>.
- [7] Claude E. Shannon. A mathematical theory of communication. *Bell System Technical Journal*, 27(3):379–423, 1948. DOI: <https://doi.org/10.1002/j.1538-7305.1948.tb01338.x>.
- [8] A. M. Turing. The chemical basis of morphogenesis. *Philosophical Transactions of the Royal Society of London. Series B*, 237(641):37–72, 1952. DOI: <https://doi.org/10.1098/rstb.1952.0012>.