

SIMATS ENGINEERING (SAVEETHA SCHOOL OF ENGINEERING)

Department of Artificial Intelligence and Data Science

ASSESSMENT TOOL 1 – ANALYTICAL PROBLEM SOLVING

8

Course Code:	CSA1407	Course Title:	COMPILER DESIGN
CO Assessed:	CO1 – Imitation (L1)	Assessment:	Assessment Tool 1 – ANALYTICAL PROBLEM SOLVING
Weightage:	40% of CIA		
CO1 Statement:	Apply lexical analysis for token specification and recognition using LEX tool. (BL3)		
Student Name:	B. Lakshmi Narasimhudu	Reg. No.:	192525460
Section / Batch:		Date:	16/07/2026

Code of Conduct

(192525460)

I, B. Lakshmi Narasimhudu (Name / Reg No) certify that this submission is my original work and that I have adhered to the guidelines specified for this assessment. I understand that any violation of academic integrity rules will result in disciplinary action.

Signature of the Student: B. Lakshmi Narasimhudu

Instructions

- Develop a modular and efficient Python program that satisfies all the functional requirements specified in the problem statement.
- Demonstrate the correctness of the implementation using suitable test cases and justify the output obtained.
- Follow good programming practices, including meaningful variable names, proper code indentation, comments, and error handling wherever applicable.
- Duration: 30 minutes.

Q. No	Problem Understanding (20)	Method Selection (20)	Solution Process (25)	Accuracy of Calculation (20)	Interpretation of Results (15)	Total Score (out of 100)
1	4 / 4	3 / 4	4 / 4	4 / 4	3 / 4	91.25
2	4 / 4	4 / 4	3 / 4	4 / 4	4 / 4	93.75
3	3 / 4	4 / 4	3 / 4	4 / 4	3 / 4	85
4	4 / 4	4 / 4	3 / 4	3 / 4	3 / 4	85
5	3 / 4	3 / 4	4 / 4	4 / 4	4 / 4	90
OVERALL RUBRICS VALUE						
	/ 4	/ 4	/ 4	/ 4	/ 4	89.
	/ 20	/ 20	/ 25	/ 20	/ 15	/ 100

N. B. A

Annexure A

ANALYTICAL PROBLEM SOLVING

1	Trace the processing of the input expression $P = (a * b) + (b * c) * 2$ through all phases of a compiler. a) Identify and list all tokens generated during lexical analysis. b) Construct the syntax tree during the parsing phase. c) Generate the intermediate code for the given expression. d) Apply suitable optimizations to the intermediate code. e) Explain the significance of the final target code prod
2	For each of the following Regular Expressions, construct the language. Write any FIVE valid strings for each Regular Expression. a) b) c) d) e)
3	i) Find the number of tokens in the following C statement is <pre>main() { int a=10; char b="abc"; in t c = 30; ch ar d ="xyz"; in /* comment */ t m = 40.5; }</pre> ii) Identify the lexical errors in the following C statement is <pre>void main() { int x=10, y=20; char * a; a= &x; x= 1xab; }</pre>
4	Find a regular expression corresponding to each of the following subsets of : i) The language of all strings that have an even number of 0's. ii) The language of all strings that contain at least one 1. iii) The language of all strings in which both the number of 0's and the number of 1's are odd. iv) The language of all strings that start with 1 and end with 0. v) The language of all strings that do not contain consecutive 1's.

Consider a lexical analyzer for a simplified programming language. The language consists

in the following tokens:

- Keywords: if, else, while, return, int, float
- Operators: +, -, *, /, %, ==, <, >
- Separators: {, }, [,], (,), ;
- Identifiers: A sequence of letters followed by a sequence of digits, e.g., var123
- Integer literals: A sequence of digits, e.g., 12345
- Floating-point literals: A sequence of digits followed by a dot and another sequence of digits, e.g., 123.45

The lexical analyzer needs to tokenize the following input string:

int var123 = 12345; float var456 = 123.45; if (var123 == var456) { return; }

Questions:

- How many tokens are there in the given input string?
- Provide a list of tokens categorized by their types (keywords, operators, separators, identifiers, integer literals, floating-point literals).
- Assuming a finite state machine (FSM) is used for lexical analysis, estimate the number of state transitions required to tokenize the given input string. Provide your reasoning based on the transitions needed for each token type.


Given

$$p = (a+b) + (b+c)^* 2$$

a) Token (or) lexical Analyzer

$\langle p \rangle \langle = \rangle \langle (\rangle \langle a \rangle \langle + \rangle \langle b \rangle \langle + \rangle \langle c \rangle \langle) \langle * \rangle \langle b \rangle \langle + \rangle \langle c \rangle \langle) \langle = \rangle \langle 2 \rangle \langle > \rangle$

b) Syntax Tree

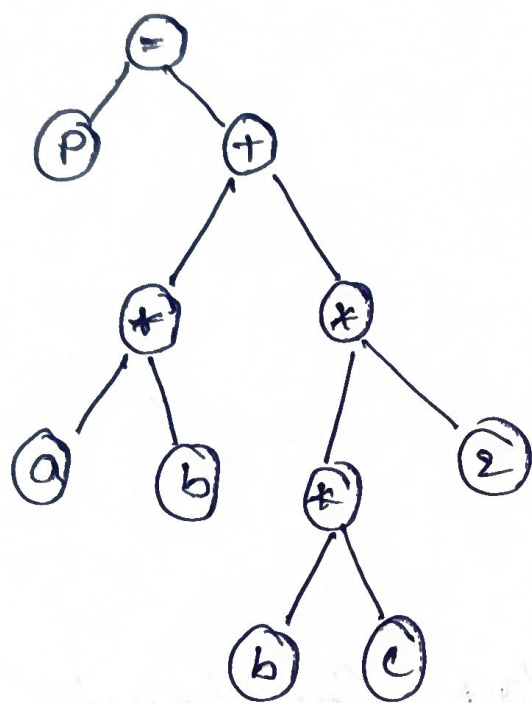

c) Intermediate code (TAC)

$$t_1 = b * c$$

$$t_2 = \text{int to real } 2.0$$

$$t_3 = t_1 * 2.0$$

$$t_4 = a + b$$

$$t_5 = t_4 + t_3$$

$$p = t_5$$

③ Optimization of Intermediate code

$t_1 = i + a$
 $t_2 = t_1 + 2$
 $t_3 = a + b$
 $t_4 = t_1 + t_3$

④ Post Optimization

$t_1 + a \quad R_1 + b$
 $t_2 + t_1 \quad R_1 + b$
 $t_3 + t_1 \quad R_1 + b + 2$
 $t_4 + a \quad R_1 + a$
 $t_5 + t_1 \quad R_1 + b$
 $t_6 + a \quad R_1 + a$
 $t_7 + t_1 \quad R_1 + b$

⑤ For each of the Flag Construct the
Any write any a valid string.

(A) $(a + a + a)^*$

Accepted string

a
 aa
 aaa
 $aaaa$
 $aaaaa$

(A) $(a + a + a)^* a + b$

Accepted string

abb
 $aaabb$
 $aaaabb$
 $aaaaabb$
 $aaaaaabb$

c. $(a^*b^*)^* aba(a^*b^*)^*$

aba
aaba
ababa
aaba
aaba

d. $(a+ab)^*$

ϵ
a
ab
aa
aab

e. $(aba)^* + (a^*b^*)^*$

ϵ
aba
ab
abaaa
aabbabb

find the No of tokens in the following statement is

```
> main ( )  
{  
  int a=10;  
  char b="abc";  
  int l=30;  
  char d="xyz";  
  /* Comment */ m=40-5;  
}
```


S. NO	Token	Type
1	main	keyword & separator
2	(	separator
3	)	separator
4	{	separator
5	int	keyword
6	a	identifiers
7	t	operator
8	10	constant
9	;	separator
10	char	keyword & identifier
11	b	identifiers
12	=	operator
13	"a b c"	constant
14	;	separator
15	int	keyword
16	c	identifier
17	=	operator
18	30	constant
19	;	separator
20	char	keyword
21	d	identifier
22	=	operator

23	"xyz"	constant
24	;	separator
25	int	keyword
26	m	identifier
27	=	operator
28	10.5	constant
29	;	separator
30	}	separator

ii) Find lexical error in the program

```
void main()
{
    int x=10, y=20;
    char* a;
    a = &x;
    x = |xab|;
}
```

|xab| → Invalid literal (lexical error) because hexadecimal values should be with 0x;
eg 0xab

a = &x; → No lexical error as it is a valid operator
char* a → No lexical error

∴ The lexical error is in the 6th line
x = |xab|
Invalid term

(4) i) The language of all strings that have even number of 0's

$$(1^*01^*01^*)^*/1^*$$

ii) The language of all strings that contain at least one 1

$$(011)^*1(011)^*$$

iii) The language of all strings in which both the numbers of 0's and the number of 1's are odd

$$(01/10)(00111/10110/011101)^*(01/10)$$

iv) The language of all strings that start with 1 and end with 0.

$$1(011)^*0$$

v) The language of all strings that do not contain consecutive 1's

$$(01/10)^*(1/\epsilon)$$


```
int var123 = 12345
```

```
float var456 = 123.45;
```

```
if (var123 == var456)
```

```
{  
    return;
```

```
}
```

a) How many tokens are there in given input string.

1. int

2. var123

3. =

4. 12345

5. ;

6. float

7. var456

8. =

9. 123.45

10. ;

11. if

12. (

13. var123

14. ==

15. var456

16.)

17. {

18. return

19. ;

20. }

FSM State $\rightarrow$ Transition

keyword $\rightarrow$ 4 Transitions

Identifiers $\rightarrow$ 4 Transitions

operators $\rightarrow$ 3 Transitions

Integer literal $\rightarrow$ 1 transition

floating-point literal $\rightarrow$ 1 Transitions

Separators $\rightarrow$ 7 Transitions

CRITERIA FOR CALCULATION:

Criteria	Weightage	Level 4 - Exemplary	Level 3 - Proficient	Level 2 - Developing	Level 1 - Beginning
Problem Understanding	20%	Clearly interprets problem, identifies all parameters and requirements accurately	Understands problem with minor gaps	Partial understanding; misses key elements	Misinterprets or unable to understand problem
Method Selection	20%	Selects most appropriate method/for mula with strong justification	Selects correct method with minor errors	Inappropriate or partially correct method	Unable to select method
Solution Process	25%	Logical, systematic steps with correct approach throughout	Mostly correct steps with minor mistakes	Disorganized steps; multiple errors	No clear process
Accuracy Calculation of	20%	All calculations accurate; correct final answer	Minor calculation errors	Frequent incorrect errors; final answer	No valid calculations
Interpretation Results of	15%	Clearly interprets results with units and engineering relevance	Basic interpretation with minor omissions	Limited unclear interpretation or	No interpretation