Swagger OpenAPI

1	**Author**	@indranil banerjee
2	**IDE USED**	*intellij*
3	**Intended for**	*Developer and Architect*

ℹ️ This is only for Developer and Architect (work in progress)

asked by shailendra.singh@techmahindra.com

Agenda:

To decrease the dependency on Postman so that we can use the inbuild swagger.

Benefit:

- *Quick test of api from swagger*
- *the api definition is as per BA do not need to add manually properties less mistake business sink.*
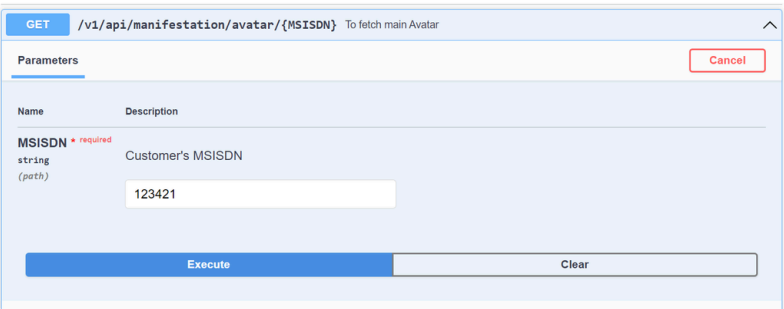
Attendees:

prashanth.baddam@mtn.com;shatabdi.chakraborty@mtn.com;vijay.chandramohan1@mtn.com;oyegoke.ogundere@mtn.com;taniya.biswas@mtn.com;abhishek.mondal1@mtn.com;mayank.kansara@subhujo.com

Processes:

- after running of the source code please go to the local swagger link swagger UI will come up.

- executing the request

- result:

```
http://localhost:8080/v1/api/manifestation/avatar/123421
```

Server response

Code	Details
202 *Undocumented*	Response body

```
{
  "status": "yes",
  "statusCode": 10,
  "statusMessage": "hello",
  "data": null
}
```

Download

Response headers

```
connection: keep-alive
content-type: application/json
date: Wed,06 Mar 2024 17:15:29 GMT
keep-alive: timeout=60
transfer-encoding: chunked
```

Response

Source Code:

📄 manifestation_code.zip

- This is the code based on **demo** has been provided.

Resource Used:

- we have used </> manifestation.yaml as resource.

Action item Needed to be done:

- need to integrate the code with the current project structure.