

Swagger OpenAPI

1	Author	@indranil banerjee
2	IDE USED	intellij
3	Intended for	Developer and Architect

i This is only for Developer and Architect (work in progress)

asked by shailendra.singh@techmahindra.com

Agenda:

To decrease the dependency on Postman so that we can use the inbuild swagger.

Benefit:

- *Quick test of api from swagger*
- *the api definition is as per BA do not need to add manually properties less mistake business sink.*

Attendees:


prashanth.baddam@mtn.com; shatabdi.chakraborty@mtn.com; vijay.chandramohan1@mtn.com; oyegoke.ogundere@mtn.com; taniya.bi@mtn.com; swas@mtn.com; abhishek.mondal1@mtn.com; mayank.kansara@subhujo.com

Processes:

- after running of the source code please go to the [local swagger link](#) swagger UI will come up.



- executing the request

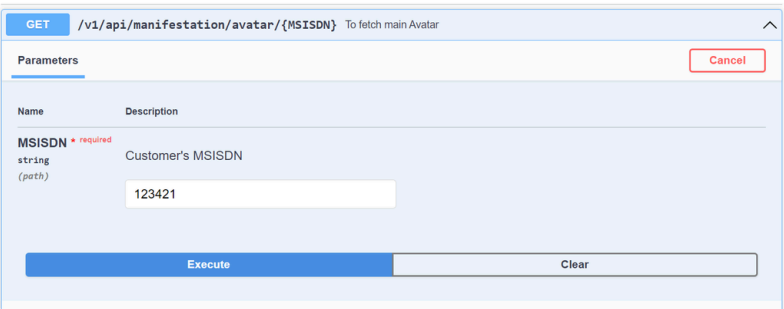

- result:



Source Code:

[manifestation_code.zip](#)

- This is the code based on **demo** has been provided.

Resource Used:

- we have used [manifestation.yaml](#) as resource.

Action item Needed to be done:

- need to integrate the code with the current project structure.