

4 Experiments

4.1 Data Analysis

We analyze the augmented data from two perspectives: predictability, measured by perplexity, and repetition, measured by exact 13-gram self-repetition and annotation-to-source overlap.

Perplexity. We compare three annotation conditions. *No annotation* contains only the source document, *Initial* inserts the filtered initial annotations before perplexity-guided refinement, and *Optimized* inserts the final annotations retained after refinement and comparison with the no-annotation baseline. We evaluate PPL at three scopes. *Full augmented data* includes all tokens in each condition, including annotation tokens when present. *Original tokens* includes only the unchanged source tokens, although their predictions may condition on preceding annotations. *Selected continuations* includes only the selected continuations y_i . At each scope, PPL is computed with the PPL model over the corresponding tokens. The first two scopes provide global measurements over the full data and original tokens, whereas the third provides a local measurement over the selected continuations targeted during refinement.

Table 1 Perplexity comparisons for annotation insertion and refinement. The Original tokens scope excludes annotation tokens from the evaluated positions, and the Selected continuations scope includes only the selected continuations.

Evaluation scope	Comparison	Before PPL	After PPL	PPL reduction
Full augmented data	No annotation $\rightarrow$ Optimized	18.68824	11.40323	7.28501
Original tokens	No annotation $\rightarrow$ Optimized	18.68824	17.65746	1.03078
Full augmented data	Initial $\rightarrow$ Optimized	11.89156	11.40323	0.48833
Original tokens	Initial $\rightarrow$ Optimized	18.07970	17.65746	0.42224
Selected continuations	No annotation $\rightarrow$ Optimized	24.78340	20.54801	4.23539
Selected continuations	Initial $\rightarrow$ Optimized	21.93265	20.54801	1.38464

As shown in Table 1, every comparison yields a positive PPL reduction at both the global and local scopes. At the global scope, the optimized condition reduces full augmented-data PPL by 7.28501 and original-token PPL by 1.03078 relative to no annotation. The larger reduction on the full augmented data may partly arise because the model-generated annotations are more fluent and predictable than the source text. Importantly, PPL also decreases on the original tokens, showing that the improvement extends to the unchanged source content rather than being confined to the inserted annotations. Relative to the initial condition, perplexity-guided refinement further reduces full augmented-data PPL by 0.48833 and original-token PPL by 0.42224. At the local scope, optimized annotations reduce selected-continuation PPL by 4.23539 relative to no annotation and by 1.38464 relative to the initial annotations. Together, these results support the effectiveness of both annotation insertion and perplexity-guided refinement. Figure 3 shows the corresponding PPL distributions. Each panel displays smoothed distributions and 100 sampled observations.

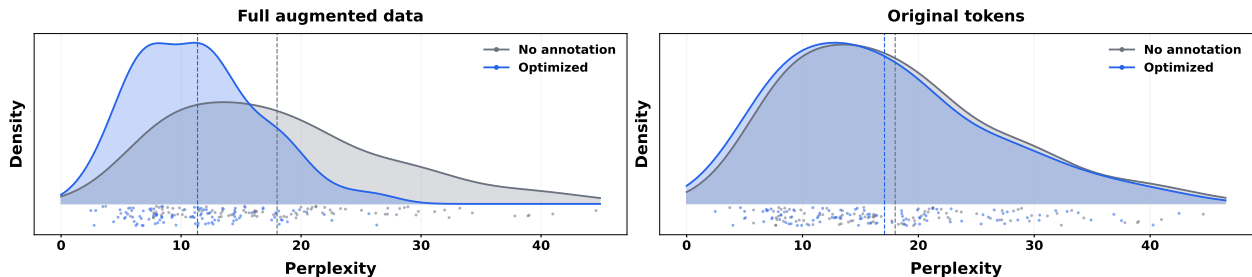


Figure 3 PPL distributions under different annotation conditions and evaluation scopes.

Repetition. We next measure repetition within each text and exact copying from a source document into its annotations. We use 13-grams throughout. By default, we construct word 13-grams after splitting text on

whitespace. If whitespace splitting produces fewer than two words, as can occur in text without whitespace-separated words such as Chinese, we instead construct character 13-grams after removing whitespace. We extract overlapping 13-grams with a sliding window and exclude text containing fewer than 13 words or characters under the applicable representation from the corresponding mean.

Let $\mathcal{G}_{13}(z)$ denote the multiset of all 13-gram occurrences in text z , and let $\text{uniq}(\mathcal{G}_{13}(z))$ denote the set of distinct 13-grams in that multiset. For any text z , we define the self-repetition ratio as

$$R_{\text{self}}(z) = \frac{|\mathcal{G}_{13}(z)| - |\text{uniq}(\mathcal{G}_{13}(z))|}{|\mathcal{G}_{13}(z)|}. \quad (9)$$

Here, $|\mathcal{G}_{13}(z)|$ counts 13-gram occurrences with multiplicity, so $R_{\text{self}}(z)$ is the fraction of occurrences beyond the first occurrence of each distinct 13-gram. For a final annotation a and its source document x , we define the directional annotation-to-source overlap as

$$R_{\text{cross}}(a, x) = \frac{\sum_{g \in \mathcal{G}_{13}(a)} \mathbf{1}[g \in \mathcal{G}_{13}(x)]}{|\mathcal{G}_{13}(a)|}, \quad (10)$$

where g denotes an annotation 13-gram occurrence and $\mathbf{1}[\cdot]$ is the indicator function, equal to 1 when its condition is true and 0 otherwise. Because the denominator counts annotation 13-grams, $R_{\text{cross}}(a, x)$ measures the fraction of annotation 13-gram occurrences that also appear in the source. It is not a source-to-annotation coverage measure. Table 2 reports arithmetic means of the relevant per-document or per-annotation ratios.

Table 2 Mean exact 13-gram repetition and annotation-to-source overlap. Lower values indicate less repetition or exact copying.

Metric	Mean percentage
Source-document self-repetition	0.615%
Annotation self-repetition	0.203%
Annotation-to-source exact overlap	0.051%

As shown in Table 2, annotations have a lower mean self-repetition ratio than source documents, at 0.203% versus 0.615%. The mean annotation-to-source exact-overlap ratio is 0.051%, indicating that only a small fraction of annotation 13-gram occurrences exactly match a source span. These measurements show little repetition or verbatim copying.

4.2 Pre-training Experiments

Setup. We construct two pre-training mixtures. The *raw mixture* combines the 23B-token source corpus with a 500B-token general pre-training corpus, for approximately 523B tokens in total. The *REER-PT mixture* replaces the source corpus with its 42B-token augmented version and uses the same 500B-token general corpus, for approximately 542B tokens in total. We train a 680M-parameter language model from scratch on each mixture. We refer to the model trained on the raw mixture as the *raw baseline* and the model trained on the augmented mixture as the *augmented-data model*. The two runs use the same architecture, tokenizer, optimizer configuration, and other training hyperparameters. Their corpus composition and total token counts differ because REER-PT adds annotation tokens. This difference is part of the data transformation being evaluated.

Training dynamics. Figure 4 compares the optimization trajectories of the raw baseline and the augmented-data model. The left and center panels show raw training loss and gradient norm over the complete runs. The gradient-norm trajectories are similar, while the augmented-data model generally reaches lower training loss later in training. The right panel reports the EMA-smoothed training loss after 100B consumed tokens,

$$\tilde{L}_t = 0.95\tilde{L}_{t-1} + 0.05L_t, \quad (11)$$

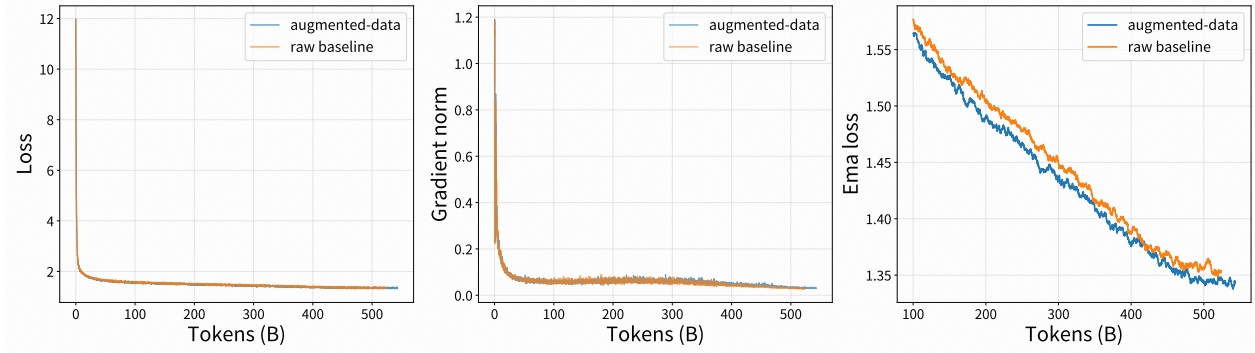


Figure 4 Training dynamics of the raw baseline and augmented-data model: raw training loss (left), gradient norm (center), and EMA-smoothed training loss after 100B consumed tokens with decay 0.95 (right).

where t indexes training steps, L_t is the raw training loss at step t , and $\tilde{L}_t$ is the smoothed loss, initialized with $\tilde{L}_1 = L_1$. The smoothed augmented-data-model curve generally remains below the raw-baseline curve later in training.

Table 3 Evaluation of the raw baseline and augmented-data model on public benchmarks. Scores are reported on a 0–100 scale, and higher values are better. For each benchmark, Δ is the augmented-data-model score minus the raw-baseline score, measured in percentage points.

Benchmark	Augmented-data model	Raw baseline	Δ
<i>Knowledge</i>			
C-Eval [29]	77.19	76.67	+0.52
MMLU-Pro [30]	36.85	35.95	+0.90
SuperGPQA [31]	23.15	22.55	+0.60
Chinese SimpleQA [32]	34.24	33.71	+0.53
<i>General Reasoning</i>			
DROP [33]	41.51	40.11	+1.40
BBH [34]	55.06	52.99	+2.07
ZebraLogic [35]	6.73	6.20	+0.53
ProcBench [36]	5.93	5.57	+0.36
<i>STEM Reasoning</i>			
GPQA-Diamond [37]	27.88	25.81	+2.07
MATH [38]	35.70	34.20	+1.50
OlympiadBench [39]	13.19	11.70	+1.49
<i>Code</i>			
MBPP+ [40]	58.20	60.85	−2.65
HumanEval+ [40]	58.54	60.37	−1.83
LiveCodeBench [41]	3.94	5.73	−1.79

Evaluation. We evaluate both pre-trained models in four categories. The knowledge category includes C-Eval [29], MMLU-Pro [30], SuperGPQA [31], and Chinese SimpleQA [32]. The general-reasoning category includes DROP [33], BBH [34], ZebraLogic [35], and ProcBench [36]. The STEM-reasoning category includes GPQA-Diamond [37], MATH [38], and OlympiadBench [39]. The code-generation category includes HumanEval+ and MBPP+ from EvalPlus [40], together with LiveCodeBench [41].

As shown in Table 3, positive gains occur across the knowledge, general-reasoning, and STEM-reasoning categories. BBH and GPQA-Diamond each improve by 2.07 percentage points, followed by MATH, OlympiadBench, and DROP with gains of 1.50, 1.49, and 1.40 points, respectively. MMLU-Pro improves by 0.90 points, while C-Eval, SuperGPQA, Chinese SimpleQA, ZebraLogic, and ProcBench show smaller gains of 0.36–0.60 points. However, all three code-generation benchmarks decline. The changes are −2.65 points on MBPP+, −1.83 points on HumanEval+, and −1.79 points on LiveCodeBench. Our case-level analysis

suggests that inserting natural-language annotations into code documents can disrupt local program structure and encourage models to mix explanatory text with executable code. Such outputs may express a plausible solution but fail benchmarks that require concise, syntactically valid programs. These results motivate future work on reasoning-annotation formats tailored to code documents.

5 Conclusion

We introduced REER-PT, an offline framework that augments raw pre-training data with concise reasoning annotations. REER-PT selects difficult continuations that remain inferable from context and retains annotations that reduce continuation perplexity while satisfying length and target-leakage constraints. The resulting corpus preserves all source tokens and remains compatible with standard next-token prediction. Across the full augmented data, original tokens, and selected continuations, the reported PPL reductions range from 0.42 to 7.29, while the mean exact annotation-to-source 13-gram overlap is only 0.05%. In controlled pre-training experiments with 680M-parameter models, the augmented-data model improves several knowledge and reasoning benchmarks by up to 2.07 percentage points. Together, these results suggest that sparse, perplexity-guided reasoning augmentation can improve continuation predictability and downstream capabilities.

6 Limitations and Future Work

Our experiments use a 680M-parameter model and a single pre-training recipe, so the behavior of REER-PT at larger model and data scales remains unknown. Data construction also depends on both model choices. A different PPL model may assign different perplexities, select different insertion positions, or provide different refinement signals, while a different annotation model may make different inferability judgments or produce a different annotation style. In addition, the current book-note-style format is designed primarily for natural-language documents. In code documents, natural-language insertions can disrupt program structure and encourage explanatory text inside generated programs, consistent with the observed code-generation regressions. Future work should study larger-scale training, annotation density, and the choices of PPL and annotation models. It should also develop structure-aware annotation formats for code and other specialized domains and identify which types of implicit dependency benefit most from explicit reasoning annotations.

References

- [1] Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models. [arXiv preprint arXiv:2001.08361](#), 2020.
- [2] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In *Advances in Neural Information Processing Systems*, volume 33, pages 1877–1901, 2020.
- [3] Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, Tom Hennigan, Eric Noland, Katie Millican, George van den Driessche, Bogdan Damoc, Aurelia Guy, Simon Osindero, Karen Simonyan, Erich Elsen, Jack W. Rae, Oriol Vinyals, and Laurent Sifre. Training compute-optimal large language models. [arXiv preprint arXiv:2203.15556](#), 2022.
- [4] Katherine Lee, Daphne Ippolito, Andrew Nystrom, Chiyuan Zhang, Douglas Eck, Chris Callison-Burch, and Nicholas Carlini. Deduplicating training data makes language models better. [arXiv preprint arXiv:2107.06499](#), 2021.
- [5] Suriya Gunasekar, Yi Zhang, Jyoti Aneja, Caio César Teodoro Mendes, Allie Del Giorno, Sivakanth Gopi, Mojan Javaheripi, Piero Kauffmann, Gustavo de Rosa, Olli Saarikivi, Adil Salim, Shital Shah, Harkirat Singh Behl, Xin Wang, Sébastien Bubeck, Ronen Eldan, Adam Tauman Kalai, Yin Tat Lee, and Yuanzhi Li. Textbooks are all you need. [arXiv preprint arXiv:2306.11644](#), 2023.
- [6] Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V. Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models. In *Advances in Neural Information Processing Systems*, volume 35, pages 24824–24837, 2022.
- [7] Eric Zelikman, Yuhuai Wu, Jesse Mu, and Noah D. Goodman. STaR: Bootstrapping reasoning with reasoning. [arXiv preprint arXiv:2203.14465](#), 2022.
- [8] Eric Zelikman, Georges Harik, Yijia Shao, Varuna Jayasiri, Nick Haber, and Noah D. Goodman. Quiet-STaR: Language models can teach themselves to think before speaking. [arXiv preprint arXiv:2403.09629](#), 2024.
- [9] Liang Wang, Nan Yang, Shaohan Huang, Li Dong, and Furu Wei. Thinking augmented pre-training. [arXiv preprint arXiv:2509.20186](#), 2025.
- [10] Pratyush Maini, Skyler Seto, He Bai, David Grangier, Yizhe Zhang, and Navdeep Jaitly. Rephrasing the web: A recipe for compute and data-efficient language modeling. [arXiv preprint arXiv:2401.16380](#), 2024.
- [11] Yoichi Ishibashi, Taro Yano, and Masafumi Oyamada. Mining hidden thoughts from texts: Evaluating continual pretraining with synthetic data for LLM reasoning. [arXiv preprint arXiv:2505.10182](#), 2025.
- [12] Yangjun Ruan, Neil Band, Chris J. Maddison, and Tatsunori Hashimoto. Reasoning to learn from latent thoughts. [arXiv preprint arXiv:2503.18866](#), 2025.
- [13] Qingxiu Dong, Li Dong, Yao Tang, Tianzhu Ye, Yutao Sun, Zhifang Sui, and Furu Wei. Reinforcement pre-training. [arXiv preprint arXiv:2506.08007](#), 2025.
- [14] Ali Hatamizadeh, Syeda Nahida Akter, Shrimai Prabhumoye, Jan Kautz, Mostofa Patwary, Mohammad Shoeybi, Bryan Catanzaro, and Yejin Choi. RLP: Reinforcement as a pretraining objective. [arXiv preprint arXiv:2510.01265](#), 2025.
- [15] Siheng Li, Kejiao Li, Zenan Xu, Guanhua Huang, Evander Yang, Kun Li, Haoyuan Wu, Jiajia Wu, Zihao Zheng, Chenchen Zhang, Kun Shi, et al. Reinforcement learning on pre-training data. [arXiv preprint arXiv:2509.19249](#), 2025.
- [16] Haozhe Wang, Haoran Que, Qixin Xu, Minghao Liu, Wangchunshu Zhou, Jiazhan Feng, Wanjun Zhong, Wei Ye, Tong Yang, Wenhao Huang, Ge Zhang, and Fangzhen Lin. Reverse-engineered reasoning for open-ended generation. [arXiv preprint arXiv:2509.06160](#), 2025.

- [17] Zhenghao Lin, Zhibin Gou, Yeyun Gong, Xiao Liu, Yelong Shen, Ruochen Xu, Chen Lin, Yujiu Yang, Jian Jiao, Nan Duan, and Weizhu Chen. Rho-1: Not all tokens are what you need. [arXiv preprint arXiv:2404.07965](#), 2024.
- [18] Simin Fan and Martin Jaggi. Irreducible curriculum for language model pretraining. [arXiv preprint arXiv:2310.15389](#), 2023.
- [19] Thao Nguyen, Yang Li, Olga Golovneva, Luke Zettlemoyer, Sewoong Oh, Ludwig Schmidt, and Xian Li. Recycling the web: A method to enhance pre-training data quality and quantity for language models. [arXiv preprint arXiv:2506.04689](#), 2025.
- [20] Jessy Lin, Vincent-Pierre Berges, Xilun Chen, Wen-Tau Yih, Gargi Ghosh, and Barlas Oğuz. Learning facts at scale with active reading. [arXiv preprint arXiv:2508.09494](#), 2025.
- [21] Kazuki Fujii, Yukito Tajima, Sakae Mizuki, Masaki Kawamura, Hinari Shimada, Taihei Shiotani, Koshiro Saito, Masanari Oi, Taishi Nakamura, Takumi Okamoto, Shigeki Ishida, Kakeru Hattori, Youmi Ma, Hiroya Takamura, Rio Yokota, Jun Sakuma, and Naoaki Okazaki. Rewriting pre-training data boosts LLM performance in math and code. [arXiv preprint arXiv:2505.02881](#), 2025.
- [22] Ajay Patel, Colin Raffel, and Chris Callison-Burch. Fineinstructions: Scaling synthetic instructions to pre-training scale. [arXiv preprint arXiv:2601.22146](#), 2026.
- [23] Boyi Zeng, Yiqin Hao, He Li, Shixiang Song, Feichen Song, Zitong Wang, Siyuan Huang, Yi Xu, Ziwei He, Xinbing Wang, and Zhouhan Lin. Pretraining with token-level adaptive latent chain-of-thought. [arXiv preprint arXiv:2602.08220](#), 2026.
- [24] Zhikun Xu, Ming Shen, Jacob Dineen, Zhaonan Li, Xiao Ye, Shijie Lu, Aswin RRV, Chitta Baral, and Ben Zhou. ToW: Thoughts of words improve reasoning in large language models. [arXiv preprint arXiv:2410.16235](#), 2024.
- [25] Zhiyuan Zeng, Yichi Zhang, Yong Shan, Kai Hua, Siyuan Fang, Zhaiyu Liu, Jiaheng Liu, Haozhe Wang, Yining Zheng, Ming Ding, Ke Shen, Ge Zhang, Wenhao Huang, and Xipeng Qiu. Understanding by reconstruction: Reversing the software development process for LLM pretraining. [arXiv preprint arXiv:2603.11103](#), 2026.
- [26] Xingrun Xing, Zhiyuan Fan, Jie Lou, Guoqi Li, Jiajun Zhang, and Debing Zhang. Pretrainzero: Reinforcement active pretraining. [arXiv preprint arXiv:2512.03442](#), 2025.
- [27] Yijun Tian, Shaoyu Chen, Zhichao Xu, Yawei Wang, Jinhe Bi, Peng Han, and Wei Wang. Reinforcement mid-training. [arXiv preprint arXiv:2509.24375](#), 2025.
- [28] Zengzhi Wang, Fan Zhou, Xuefeng Li, and Pengfei Liu. OctoThinker: Mid-training incentivizes reinforcement learning scaling. [arXiv preprint arXiv:2506.20512](#), 2025.
- [29] Yuzhen Huang, Yuzhuo Bai, Zhihao Zhu, Junlei Zhang, Jinghan Zhang, Tangjun Su, Junteng Liu, Chuancheng Lv, Yikai Zhang, Jiayi Lei, Yao Fu, Maosong Sun, and Junxian He. C-Eval: A multi-level multi-discipline chinese evaluation suite for foundation models. In *Advances in Neural Information Processing Systems*, 2023.
- [30] Yubo Wang, Xueguang Ma, Ge Zhang, Yuansheng Ni, Abhranil Chandra, Shiguang Guo, Weiming Ren, Aaran Arulraj, Xuan He, Ziyang Jiang, Tianle Li, Max Ku, Kai Wang, Alex Zhuang, Rongqi Fan, Xiang Yue, and Wenhui Chen. MMLU-Pro: A more robust and challenging multi-task language understanding benchmark. [arXiv preprint arXiv:2406.01574](#), 2024.
- [31] M-A-P Team. SuperGPQA: Scaling LLM evaluation across 285 graduate disciplines. [arXiv preprint arXiv:2502.14739](#), 2025.
- [32] Yancheng He, Shilong Li, Jiaheng Liu, Yingshui Tan, Weixun Wang, Hui Huang, Xingyuan Bu, Hangyu Guo, Chengwei Hu, Boren Zheng, Zhuoran Lin, Xuepeng Liu, Dekai Sun, Shirong Lin, Zhicheng Zheng, Xiaoyong Zhu, Wenbo Su, and Bo Zheng. Chinese SimpleQA: A chinese factuality evaluation for large language models. [arXiv preprint arXiv:2411.07140](#), 2024.
- [33] Dheeru Dua, Yizhong Wang, Pradeep Dasigi, Gabriel Stanovsky, Sameer Singh, and Matt Gardner. DROP: A reading comprehension benchmark requiring discrete reasoning over paragraphs. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics*, 2019.
- [34] Mirac Suzgun, Nathan Scales, Nathanael Schärli, Sebastian Gehrmann, Yi Tay, Hyung Won Chung, Aakanksha Chowdhery, Quoc V. Le, Ed H. Chi, Denny Zhou, and Jason Wei. Challenging BIG-Bench tasks and whether chain-of-thought can solve them. [arXiv preprint arXiv:2210.09261](#), 2022.

- [35] Bill Yuchen Lin, Ronan Le Bras, Kyle Richardson, Ashish Sabharwal, Radha Poovendran, Peter Clark, and Yejin Choi. ZebraLogic: On the scaling limits of LLMs for logical reasoning. In Proceedings of the 42nd International Conference on Machine Learning, 2025.
- [36] Ipppei Fujisawa, Sensho Nobe, Hiroki Seto, Rina Onda, Yoshiaki Uchida, Hiroki Ikoma, Pei-Chun Chien, and Ryota Kanai. ProcBench: Benchmark for multi-step reasoning and following procedure. arXiv preprint arXiv:2410.03117, 2024.
- [37] David Rein, Betty Li Hou, Asa Cooper Stickland, Jackson Petty, Richard Yuanzhe Pang, Julien Dirani, Julian Michael, and Samuel R. Bowman. GPQA: A graduate-level google-proof Q&A benchmark. arXiv preprint arXiv:2311.12022, 2023.
- [38] Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the MATH dataset. arXiv preprint arXiv:2103.03874, 2021.
- [39] Chaoqun He, Renjie Luo, Yuzhuo Bai, Shengding Hu, Zhen Leng Thai, Junhao Shen, Jinyi Hu, Xu Han, Yujie Huang, Yuxiang Zhang, Jie Liu, Lei Qi, Zhiyuan Liu, and Maosong Sun. OlympiadBench: A challenging benchmark for promoting AGI with olympiad-level bilingual multimodal scientific problems. arXiv preprint arXiv:2402.14008, 2024.
- [40] Jiawei Liu, Chunqiu Steven Xia, Yuyao Wang, and Lingming Zhang. Is your code generated by ChatGPT really correct? rigorous evaluation of large language models for code generation. In Advances in Neural Information Processing Systems, 2023.
- [41] Naman Jain, King Han, Alex Gu, Wen-Ding Li, Fanjia Yan, Tianjun Zhang, Sida Wang, Armando Solar-Lezama, Koushik Sen, and Ion Stoica. LiveCodeBench: Holistic and contamination-free evaluation of large language models for code. arXiv preprint arXiv:2403.07974, 2024.