Subject Name: WEB PROGRAMMING

Subject Code: 22CS450

Register Number: 2403917710422119

Ex. No: 1

Implement Client-side Form Design and Validation

AIM:

To design a detailed client-side registration form using HTML and CSS and to perform comprehensive form validation using JavaScript.

PROCEDURE:

1. Create an HTML file for registration form design.
2. Add multiple input fields such as personal, academic, and login details.
3. Use CSS for proper alignment and styling.
4. Write JavaScript functions to validate each input field.
5. Ensure mandatory fields are not left empty.
6. Validate email format, password strength, and mobile number.
7. Display appropriate error messages.
8. Submit the form only when all validations are satisfied.

SOURCE CODE:

```
<!DOCTYPE html>
<html>
<head>
<title>Student Registration Form</title>
<style>
body {
   font-family: Arial;
   background-color: #eef2f3;
```

```
}
form {
    width: 450px;
    margin: auto;
    background: white;
    padding: 20px;
    border-radius: 8px;
}
input, select, textarea {
    width: 100%;
    padding: 8px;
    margin: 6px 0;
}
label {
    font-weight: bold;
}
span {
    color: red;
}
button {
    padding: 10px;
    width: 100%;
    background-color: #2e8b57;
    color: white;
    border: none;
}
</style>
<script>
function validateForm() {
    let valid = true;
    if(fname.value==="") { fErr.innerHTML="Name required"; valid=false; }
    else fErr.innerHTML="";
```

```
    if(email.value=="") { eErr.innerHTML="Email required"; valid=false; }
    else eErr.innerHTML="";
    if(mobile.value.length!=10) { mErr.innerHTML="10 digit number required";
valid=false; }
    else mErr.innerHTML="";
    if(password.value.length<6) { pErr.innerHTML="Minimum 6 characters";
valid=false; }
    else pErr.innerHTML="";
    if(password.value!=cpassword.value) {
        cpErr.innerHTML="Passwords do not match";
        valid=false;
    } else cpErr.innerHTML="";
    if(dob.value=="") { dErr.innerHTML="Select DOB"; valid=false; }
    else dErr.innerHTML="";
    if(gender.value=="") { gErr.innerHTML="Select gender"; valid=false; }
    else gErr.innerHTML="";
    if(course.value=="") { cErr.innerHTML="Select course"; valid=false; }
    else cErr.innerHTML="";
    if(address.value=="") { aErr.innerHTML="Address required"; valid=false; }
    else aErr.innerHTML="";
    return valid;
}
</script>
</head>
<body>
<form onsubmit="return validateForm()">
<h2 align="center">Student Registration</h2>
<label>Name</label>
<input type="text" id="fname">
<span id="fErr"></span>
<label>Email</label>
<input type="email" id="email">
<span id="eErr"></span>
```

```
<label>Mobile Number</label>
<input type="text" id="mobile">
<span id="mErr"></span>
<label>Date of Birth</label>
<input type="date" id="dob">
<span id="dErr"></span>
<label>Gender</label>
<select id="gender">
<option value="">Select</option>
<option>Male</option>
<option>Female</option>
<option>Other</option>
</select>
<span id="gErr"></span>
<label>Course</label>
<select id="course">
<option value="">Select</option>
<option>CSE</option>
<option>ECE</option>
<option>EEE</option>
<option>IT</option>
</select>
<span id="cErr"></span>
<label>Address</label>
<textarea id="address"></textarea>
<span id="aErr"></span>
<label>Password</label>
<input type="password" id="password">
<span id="pErr"></span>
<label>Confirm Password</label>
<input type="password" id="cpassword">
<span id="cpErr"></span>
```

```
<button type="submit">Register</button>
</form>
</body>
</html>
```

OUTPUT:

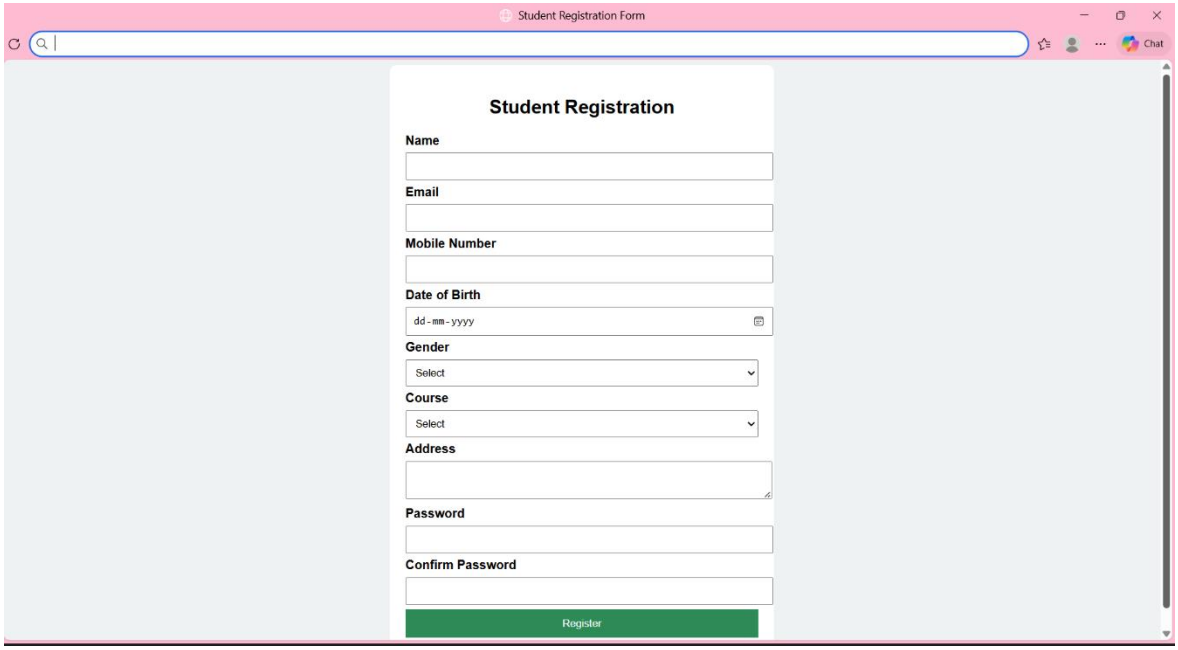

RESULT:

Thus, a client-side student login page with validation was successfully implemented using HTML, CSS, and JavaScript.