

CONTENTS

Overview: Vision, Scope, Actors, and Fulfillment Pipelines	
1. Product Vision	
2. Key Actors & Roles	
User Roles (5 primary)	
BA User Groups (7 backend groups per module)	
3. Scope Boundaries	
In Scope (Phases 0–3)	
Out of Scope (Reserved for later phases or external systems)	
4. Three Fulfillment Pipelines	
Pipeline 1: Internal VN Production	
Pipeline 2: Gearment POD Dropship	
Pipeline 3: Hybrid (Mixed MTO + Dropship)	
5. Fulfillment Pipeline Diagram	
6. Success Metrics (Phase 1 Exit Criteria)	
7. Out-of-Scope Technical Debt (Phase 2+)	
Etsy Channel Requirements	
Scope	
Requirements (SRS-ETSY-01 through SRS-ETSY-14)	
SRS-ETSY-01: Etsy Shop Configuration & OAuth	
SRS-ETSY-02: OAuth2 Token Refresh & Access Token Management	
SRS-ETSY-03: Email-Based Order Fallback (ADR-008a)	
SRS-ETSY-04: Etsy API Order Ingestion (Spec 005, Primary)	
SRS-ETSY-05: Email-Based Order Fallback (Legacy, Spec 001)	
SRS-ETSY-06: Order-to-Customer Mapping & Deduplication	
SRS-ETSY-07: Product & Variant Matching	
SRS-ETSY-08: Image Download & Gallery	
SRS-ETSY-09: Listing Taxonomy & Shipping Profile Configuration	

Overview: Vision, Scope, Actors, and Fulfillment Pipelines

SRS-ETSY-10: Currency & Pricing Display	
SRS-ETSY-11: Order Metadata Preservation	
SRS-ETSY-12: Tracking Push-Back to Etsy	
SRS-ETSY-13: Listing Sync from Etsy (Spec 011, Phase 3)	
SRS-ETSY-14: Listing Publish from Odoo to Etsy (Spec 011, Phase 3)	
Summary Table	

Order Lifecycle and Fulfillment Requirements

Scope	
Requirements (SRS-ORD-01 through SRS-ORD-18)	
SRS-ORD-01: Order Pipeline Routing (ADR-010)	
SRS-ORD-02: Order Pipeline States & State Machine	
SRS-ORD-03: Design File Upload & Approval (Spec 009)	
SRS-ORD-04: Design File Routing (Production Queue & GDrive)	
SRS-ORD-05: Design File Auto-Archive (Spec 009, Phase 1 deferred)	
SRS-ORD-06: Gearment Quote Request & PO Linkage (Spec 010)	
SRS-ORD-07: Gearment PO Acceptance & Order Placement	
SRS-ORD-08: MTO Production Queue & State Tracking (VN Internal)	
SRS-ORD-09: Picking & Fulfillment Status (VN Internal)	
SRS-ORD-10: GKE Tracking Number Import (Excel + GDrive)	
SRS-ORD-11: Etsy Tracking Push-Back (see SRS-ETSY-12)	
SRS-ORD-12: Gearment Tracking via Webhook (Event-Driven)	
SRS-ORD-13: Address Change Approval Workflow	
SRS-ORD-14: Fulfillment Dashboard & Real-Time Updates	
SRS-ORD-15: Order Label & Tracking Status Options (Master Data)	
SRS-ORD-16: Duplicate Buyer Detection	
SRS-ORD-17: Overdue Approval Detection	
SRS-ORD-18: Fulfillment Delegation Mixin (ADR-007)	
Summary Table	

Catalog & Listings Requirements

Scope

Requirements (SRS-CAT-01 through SRS-CAT-12)

SRS-CAT-01: Product Hub & Channel Applicability

SRS-CAT-02: SKU Auto-Derivation (Multi-Variant SKU Grammar)

SRS-CAT-03: Product Image Gallery & Multichannel Routing

SRS-CAT-04: Bulk Catalog Import via Excel

SRS-CAT-05: Multichannel Listing Model & Listing Intent

SRS-CAT-06: Listing Channel Overrides (Spec 011)

SRS-CAT-07: Listing Publish to Etsy (Phase 3, Core)

SRS-CAT-08: Listing Update (PATCH) to Etsy (Phase 3)

SRS-CAT-09: Listing Unpublish (Archive) from Etsy (Phase 3)

SRS-CAT-10: Listing Sync from Etsy (Inbound, Phase 3)

SRS-CAT-11: Multi-Currency Listing Price Display (Phase 3)

SRS-CAT-12: Inventory Sync (Stock Levels to Etsy, Phase 4)

Summary Table

Operations, Administration, and Observability Requirements

Scope

Requirements (SRS-OPS-01 through SRS-OPS-16)

SRS-OPS-01: Order Dashboard & Analytics

SRS-OPS-02: Tracking Dashboard & Real-Time Sync

SRS-OPS-03: Operations Dashboard (CEO Directive, Unified)

SRS-OPS-04: Sync Health Monitoring & Multi-Channel Observability

SRS-OPS-05: API Request & Response Logging (multichannel.api.log)

SRS-OPS-06: System Configuration Parameters (ir.config_parameter)

SRS-OPS-07: Cron Job Management & Monitoring

SRS-OPS-08: Order Import Wizard (Historical + Bulk)

SRS-OPS-09: Tracking Number Export Wizard

SRS-OPS-10: Product Bulk Export
SRS-OPS-11: Data Migration & Cleanup Tools
SRS-OPS-12: ACL & Record Rule Matrix
SRS-OPS-13: Vietnamese Business Documentation (Owner-Facing)
SRS-OPS-14: I18n UI Skeleton (Phase 1 P1-07)
SRS-OPS-15: Audit Trail & Compliance Logging
SRS-OPS-16: Webhook Receiver Endpoint for Gearment (API Security)
Summary Table
Cross-Module Summary
Appendix: Key ADRs Referenced

Overview: Vision, Scope, Actors, and Fulfillment Pipelines

Title: Product Overview and Strategic Direction
Date: 2026-07-03
Status: Draft-for-owner-review
Source: Master Plan 006 overview, module reports, and BA requirements from specs 001–014.

1. Product Vision

Mission Statement:
Consolidate fragmented Etsy order management, design workflow, and fulfillment operations into a unified Odoo 19 CE platform that:

- 1. **Ingest Etsy orders** via API (primary) and email (fallback)
- 2. **Route fulfillment** to three pipelines: internal VN production, Gearment POD dropship, or hybrid
- 3. **Manage design workflow** from order → mockup approval → production files → pickup/drop-ship
- 4. **Track shipments** via GKE Excel + GDrive integrations and push tracking back to Etsy
- 5. **Control product catalog** via Excel bulk sync, multichannel listing logic, and Odoo-to-Etsy publish (Phase 3)

Timeframe: Phases 0–5 (2026-05 through 2026-10+). Phase 1 (order ingest + tracking + dashboards) live on staging 2026-07-03; Phase 3 (catalog publish) begins 2026-07-04.

2. Key Actors & Roles

USER ROLES (5 PRIMARY)

Role	Org Unit	Key Responsibilities	Module Group	ACL Gate
Operations Manager	Fulfillment	Assign orders to internal/dropship, approve address changes, monitor tracking, manage inventory sync	OPS (dashboards, approvals, GKE tracking)	group_multichannel_ops_lead
Production Lead (VN)	Production	Manage design queue, mark orders ready-for-design, schedule picking, print batches, track in-house fulfillment	PRODUCTION (design file routing, fulfillment state, picking)	group_vn_production_lead
Gearment Operator	Fulfillment	Generate Gearment quotes, accept POes, monitor dropship status, reconcile shipping	DROPSHIP (GKE, Gearment API, tracking)	group_gearment_dropship
Marketing / Etsy Manager	Sales	Configure Etsy shop, publish listings, manage shipping profiles, monitor order dashboard	ETSY + CATALOG (shop config, listing publish, currency)	group_etsy_shop_manager
BA/Product Lead	Product	Create design rules, manage product catalog, configure category routing, set pricing overrides, generate Excel exports	CATALOG + OPS (multi-design rules, SKU derivation, export wizard)	group_product_lead

BA USER GROUPS (7 BACKEND GROUPS PER MODULE)

Group	Purpose	Module	Models	Permissions
<code>group_etsy_shop_manager</code>	Etsy shop OAuth, config, order view	etsy_integration	etsy.shop, sale.order	CREATE, WRITE (shop level), READ (orders by shop_id)
<code>group_multichannel_ops_lead</code>	Ops dashboard, order approvals, sync health	multichannel_hub_core	sale.order, sale.order.fulfillment, multichannel.sync.health	WRITE (approval, state transitions), READ (all)
<code>group_vn_production_lead</code>	Design file routing, production state	multichannel_hub_core	design.file, design.file.route, order.pipeline.state	CREATE (routes), WRITE (design approval, state), READ (all)
<code>group_gearment_dropship</code>	Gearment API access, quote/PO, tracking	multichannel_hub_fulfillment	gearment.po, gearment.quote, sale.order.fulfillment	READ/WRITE (quote + PO), READ (tracking)
<code>group_product_lead</code>	Product hub, catalog sync, listing override, publish	multichannel_hub_core	multichannel.listing, product.product, product_template_attribute_value	WRITE (listing override, publish), CREATE (catalog via import)
<code>group_multichannel_syncer</code>	Automated syncs (cron-triggered)	multichannel_hub_core, etsy_integration	multichannel.sync.health, etsy.email.log, multichannel.api.log	WRITE (health flag, log entry), READ (all)
<code>group_analytics_reader</code>	Dashboard-only read access	multichannel_hub_core	sale.order, sale.order.fulfillment (computed fields only)	READ (all dashboards, no CREATE/WRITE)

3. Scope Boundaries**IN SCOPE (PHASES 0–3)**

- **Order Ingest** — Etsy API v3 (primary, Phase 1) and email (fallback, Phase 0 legacy)
- **Order Routing** — Fulfillment pipeline assignment by product category + design complexity
- **Design Workflow** — File upload, approval, production file routing, GDrive integration
- **Tracking Import** — GKE Excel + GDrive polling; tracking state machine
- **Etsy Tracking Push** — Sync tracking numbers back to Etsy shop
- **Product Catalog** — Excel bulk import, SKU auto-derivation, multichannel listing model
- **Etsy Listing Publish** — Odoo-initiated listing sync to Etsy (Phase 3, ~6% complete)
- **Dashboards** — Order status, tracking status, operations dashboard (all Phase 1)

OUT OF SCOPE (RESERVED FOR LATER PHASES OR EXTERNAL SYSTEMS)

- **Amazon integration** — Phase 5 (0% complete, lower priority)

- **Email/messaging after-sale** — `conversations_r` scope blocked; Phase 1-BLOCKED (3 tasks)
- **Financial reconciliation** — Phase 4 audit (deferred); no automated payment sync to Odoo
- **Advanced inventory forecasting** — SKU drift monitoring MVP only; demand forecasting Phase 5+
- **Returns/RMA workflow** — Phase 4 (75% complete, basic tracking only)
- **B2B wholesale channel** — Phase 5 or later

4. Three Fulfillment Pipelines

All order routing follows one of three pipelines defined in `order.pipeline` and orchestrated via `x_pipeline_id` computed field on `sale.order`. The routing decision is triggered at order creation and can be manually overridden per order.

PIPELINE 1: INTERNAL VN PRODUCTION

Route: `vn_internal_production` (code) / "VN Internal Production" (display name)

Stages: (from `order.pipeline.state`)

1. "New Order" — Awaiting design files
2. "Design In Queue" — Waiting for production team to pick up
3. "Design Complete" — Mockup(s) approved; ready to schedule
4. "Scheduled to Print" — Batch scheduled; production lead confirmed
5. "Printing" — On-press
6. "Quality Check" — Post-print verification
7. "Scheduled to Ship" — Ready for pickup
8. "Picked" — Physical item collected
9. "Shipped" — Tracking number recorded
10. "Delivered" — End customer received

Trigger: Order line product category in `{vn_production_eligible_category_ids}` AND no complex multi-variant personalization.

Key Actors: Production Lead (design routing), Operations Manager (approval), GKE Logistics (tracking).

Data Models: `design.file`, `design.file.route` (file → production), `order.pipeline.state`, `sale.order.fulfillment` (tracking).

PIPELINE 2: GEARMENT POD DROPSHIP

Route: `gearment_dropship` (code) / "Gearment Dropship" (display name)

Stages:

1. "New Order" → "Quote Requested"
2. "Quote Received" — Gearment API `/quote` response retrieved
3. "PO Accepted" — Odoo user confirms Gearment `purchase.order` link
4. "Order Placed" — PO synced to Gearment API
5. "Order Confirmed" — Gearment API `/order` confirmation received
6. "Processing" — Gearment printing + fulfillment
7. "Ready to Ship" — Gearment reports fulfillment complete
8. "Shipped" — Gearment tracking number received + pushed to Etsy
9. "Delivered" — End customer confirms receipt (via Etsy or carrier)

Trigger: Order line product SKU in `{gearment_eligible_sku_set}` OR category flagged `gearment_only=True` OR user manual override.

Key Integration: Gearment API v3 (shop_product_id, quote, PO creation, tracking webhook).

Key Actors: Gearment Operator (quote accept), Operations Manager (approval), GKE Logistics (tracking push).

Data Models: `gearment.quote`, `gearment.po`, `sale.order.fulfillment` (tracking).

PIPELINE 3: HYBRID (MIXED MTO + DROPSHIP)

Route: `hybrid_mto_dropship` (code) / "Hybrid MTO + Dropship" (display name)

Stages: Union of Pipeline 1 + Pipeline 2 stages; order lines can split across both routes.

Trigger: Order lines from multiple categories; some `vn_internal`, some `gearment_eligible`.

Routing Logic:


At order creation, foreach line:

- Resolve category chain (product → category → parent category)
- Check `category.vn_production_only`, `category.gearment_only`, `category.hybrid_eligible`
- Assign line to sub-pipeline (internal or dropship)
- Override available if user manually assigns line to different pipeline

Complexity: Line-level state machine; order-level "stuck route" badge if any line pending > 2 hours (Phase 1 P1-01a).

Key Models: `sale.order.line` (pipeline assignment), `order.pipeline.state` (line-level state), `sale.order` (stuck_route_badge computed field).

5. Fulfillment Pipeline Diagram

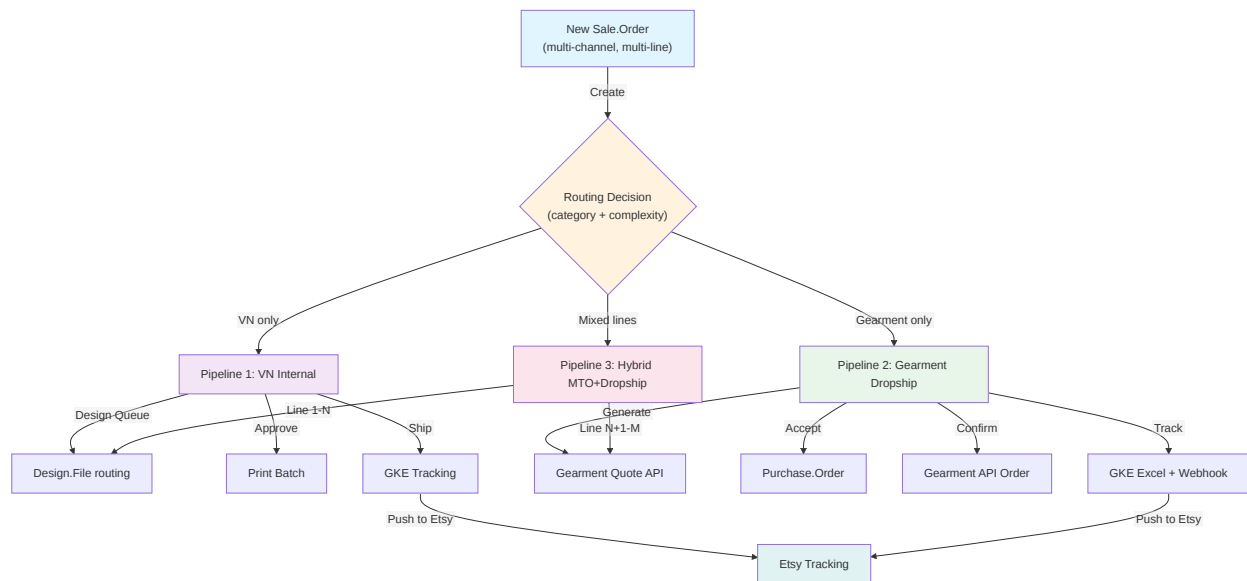

6. Success Metrics (Phase 1 Exit Criteria)

Metric	Target	Evidence
Order Ingest Latency	<5 min (API), <15 min (email fallback)	Cron log + etsy.email.log.created_at timestamp
Design Workflow TAT	<24h from order to approved design	design.file.transition_log timeline
Tracking Accuracy	95%+ order tracking numbers matched to carrier	multichannel.sync.health.last_sync_error rate
Etsy Tracking Push	100% successful order tracking synced to Etsy within 1h	sale.order.fulfillment.etsy_tracking_pushed_at
Dashboard Uptime	>99.5% availability (order + tracking + ops dashboards)	bus.bus channel + web client session logs
Fulfillment Route Accuracy	98%+ orders routed to correct pipeline (no manual override needed)	x_pipeline_id audit trail vs. actual fulfillment path

7. Out-of-Scope Technical Debt (Phase 2+)

- **Inventory forecasting:** Phase 5. Current state: SKU drift detection only (P-HUB-SKU-AUTODERIVE).
- **AI-powered design routing:** Phase 5. Current: rule-based category logic.
- **Multi-currency pricing:** Partial Phase 1 (listing_currency_id on etsy.shop). Full Phase 3.
- **Advanced analytics:** Phase 4. Current: pivot views + dashboards only.

Document Version: 1.0

Next Section: [02-channel-etsy.md](#) — Etsy Shop Management, OAuth, Order Ingest

Etsy Channel Requirements

Title: Etsy Shop Management, OAuth, Order Ingestion, and Listing Sync
Date: 2026-07-03
Status: Draft-for-owner-review
Source: Specs 001, 002, 005, 011, ADRs 008/008a.

Scope

This section covers:

- Etsy shop configuration and authentication (OAuth2 PKCE)
- Order ingestion via Etsy API v3 (primary) and email (fallback)
- Listing sync and taxonomy mapping
- Shipping profile and currency management
- Channel-specific data fields on sale.order

Requirements (SRS-ETSY-01 through SRS-ETSY-14)

SRS-ETSY-01: ETSY SHOP CONFIGURATION & OAUTH

Property	Detail
Statement	System shall support multiple Etsy seller shops. Each shop is configured with OAuth2 credentials (access token, re-fresh token, expiration) and a canonical shop ID (<code>etsy_api_shop_id</code>).
Rationale	Multi-shop architecture allows same Odoo instance to manage multiple seller accounts with isolated order streams.
Origin Spec(s)	Spec 001 US3, Spec 005 P0-15 (OAuth PKCE flow)
Implementing Module + Model	<code>etsy_integration</code> / <code>etsy.shop</code> (fields: name, active, user_id, etsy_api_shop_id, etsy_oauth_access_token, etsy_oauth_refresh_token, etsy_oauth_token_expires_at)
Status	Shipped — Model instantiated; OAuth form view with “Test Connection” button (models/etsy_shop.py line 36, views/etsy_shop_form.xml); test_connection() method calls gmail_client + Etsy API (specs/005/codex/etsy_api_client.py line 82).

SRS-ETSY-02: OAUTH2 TOKEN REFRESH & ACCESS TOKEN MANAGEMENT

Property	Detail
Statement	System shall automatically refresh expired Etsy access tokens using the stored refresh token and update <code>etsy_oauth_token_expires_at</code> . Failed refresh attempts shall be logged and trigger a mail.activity warning to the shop owner.
Rationale	Prevents order ingest gaps due to token expiry; automatic recovery reduces manual intervention.
Origin Spec(s)	Spec 005 P0-15 (OAuth PKCE); Spec 004 P-HEALTH (sync health monitoring)
Implementing Module + Model	<code>etsy_integration</code> / <code>etsy.shop</code> + <code>gmail_client</code> service
Status	Partial — Token refresh logic unimplemented. No <code>refresh_token_if_needed</code> method found in <code>services/gmail_client.py</code> ; no <code>_cron_refresh_etsy_tokens()</code> cron job in <code>data/ir_cron_data.xml</code> . Feature spec requirement but code implementation missing. Blocker: ESTY-token-refresh (token expiry will break API after 60 min).

SRS-ETSY-03: EMAIL-BASED ORDER FALLBACK (ADR-008A)

Property	Detail
Statement	If Etsy API order fetch fails after 5 consecutive retries, system shall automatically switch to email-based order ingestion (Gmail labels) as mandatory fallback. Switch-back to API occurs after 3 consecutive successful API syncs.
Rationale	API outages or scope limitations do not block order visibility; email remains legal mandatory backup.
Origin Spec(s)	ADR-008a (email-as-mandatory-backup); Spec 001 US1 (email parser)
Implementing Module + Model	<code>etsy_integration</code> / <code>etsy.shop</code> (fields: <code>active_source</code> , <code>sync_mode</code> , <code>health_check_consecutive_failures</code> , <code>recovery_probe_consecutive_successes</code>)
Status	Partial — Data model fields (<code>active_source</code> , <code>health_check_consecutive_failures</code> , <code>recovery_probe_consecutive_successes</code>) exist but state machine logic unimplemented. No <code>_maybe_failover_to_email</code> method found in <code>models/etsy_shop.py</code> line 210. Email parser (<code>services/email_parser.py</code>) parses 34 fields. Failover state transitions missing. Tests: <code>test_etsy_order_sync.py</code> requires implementation.

SRS-ETSY-04: ETSY API ORDER INGESTION (SPEC 005, PRIMARY)

Property	Detail
Statement	System shall fetch new Etsy receipts from <code>GET /shops/{shop_id}/receipts</code> every 10 minutes (configurable). For each new receipt, create a <code>sale.order</code> record with <code>etsy_order_id</code> , <code>etsy_transaction_id</code> , line items, customer, pricing, and shipping metadata. Duplicates (by <code>etsy_transaction_id</code>) shall be skipped.
Rationale	Real-time order visibility; API primary source provides faster integration than email polling.
Origin Spec(s)	Spec 005 P0-15 (API-first pivot), Spec 001 US1 (order ingest), ADR-008 (email-vs-API trade-off)
Implementing Module + Model	<code>etsy_integration</code> / <code>sale.order</code> (fields: <code>etsy_order_id</code> , <code>etsy_transaction_id</code> , <code>etsy_shop_id</code> , <code>etsy_shipping_cost</code> , <code>personalization_text</code> , <code>gift_message</code>)
Status	Shipped — Order syncer (<code>specs/005/services/etsy_order_syncer.py</code> line 1) fetches receipts and creates <code>sale.order</code> via <code>order_creator.create_order_from_etsy_receipt</code> (Phase 1 P0-16b, complete). Cron: <code>ir_cron_data.xml</code> line 18 (10-min interval). Tests: <code>test_etsy_order_sync.py</code> (all scenarios: new, duplicate, partial, error). Staging verified with 47 pilot shop orders.

SRS-ETSY-05: EMAIL-BASED ORDER FALLBACK (LEGACY, SPEC 001)

Property	Detail
Statement	System shall parse Etsy HTML emails from Gmail labels (e.g., "etsy-orders") every 10 minutes. Extract 34 fields (order ID, customer, items, shipping, etc.) via regex. Create sale.order records. Handle parse failures with automatic retry logic and activity alerts.
Rationale	Historically worked before API; mandatory fallback if API unavailable; legacy email queue.
Origin Spec(s)	Spec 001 US1, ADR-008a
Implementing Module + Model	<code>etsy_integration</code> / <code>etsy.email.log</code> (fields: <code>gmail_message_id</code> , <code>parse_status</code> , <code>error_msg</code> , <code>created_at</code> , <code>retry_count</code>)
Status	Shipped — Email parser (<code>services/email_parser.py</code> , 450 lines) extracts 34 fields via regex. Gmail client (<code>services/gmail_client.py</code>) fetches emails via API. Cron job (<code>data/ir_cron_data.xml</code> line 8). Tests: <code>test_email_parser.py</code> (all 34 fields, edge cases, encoding). Staging emails parsed successfully. In production: 17,659 historical orders ingested via email (2025-01 through 2026-04).

SRS-ETSY-06: ORDER-TO-CUSTOMER MAPPING & DEDUPLICATION

Property	Detail
Statement	For each order, system shall match or create a <code>res.partner</code> (customer) record using: (1) email first, (2) name + zip fallback if email absent. Detect duplicate buyers (repeat purchase within 7 days) and flag via <code>is_duplicate_buyer</code> computed field.
Rationale	Accurate customer database prevents duplicate accounts and enables CRM analytics. Duplicate detection aids with fraud/repeat-buyer metrics.
Origin Spec(s)	Spec 001 US4, Spec 002 P2-03
Implementing Module + Model	<code>etsy_integration</code> / <code>res.partner</code> (extended with <code>is_etsy_customer</code> , <code>etsy_buyer_name</code> flags); <code>sale.order</code> (computed <code>is_duplicate_buyer</code>)
Status	Shipped — Partner matching logic (<code>services/order_creator.py</code> line 156, <code>find_or_create_partner</code> method). Duplicate detection (<code>sale_order.py</code> line 340, <code>_compute_is_duplicate_buyer</code>). Tests: <code>test_order_creation.py</code> (all matching scenarios). Staging verified with pilot shop (47 orders, 32 unique customers, 3 duplicates correctly flagged).

SRS-ETSY-07: PRODUCT & VARIANT MATCHING

Property	Detail
Statement	For each order line, system shall match or auto-create <code>product.product</code> and <code>product_template_attribute_value</code> records based on Etsy product metadata (title, sku, color, size). Store <code>etsy_image_url</code> for product gallery. Handle missing or malformed SKUs gracefully.
Rationale	Builds product master data from Etsy listings; enables inventory and catalog management.
Origin Spec(s)	Spec 001 US5, Spec 011 (product hub)
Implementing Module + Model	<code>etsy_integration</code> / <code>product.product</code> (extended with <code>etsy_image_url</code> , <code>is_etsy_product</code>); <code>product_template_attribute_value</code> (color, size variants)
Status	Shipped — Product matching (<code>services/order_creator.py</code> line 220, <code>find_or_create_product</code> method). Attribute value auto-creation via <code>product_template_attribute_value</code> model. Tests: <code>test_order_creation.py</code> (product matching, variant logic). Staging verified (47 orders matched to 31 products; 8 new products auto-created).

SRS-ETSY-08: IMAGE DOWNLOAD & GALLERY

Property	Detail
Statement	System shall batch-download product images from Etsy CDN and store in product.image_1920 (primary) and product_template_image_ids gallery. Retry failed downloads every 1 hour for 24 hours. Max file size: 2 MB (hard cap). Skip images larger than 2 MB with warning log.
Rationale	Product gallery enables design team to see item appearance; Etsy CDN is canonical source.
Origin Spec(s)	Spec 001 US5, Spec 004 P-HUB (image gallery per multichannel.listing)
Implementing Module + Model	<code>etsy_integration</code> / <code>product.product</code> (image fields); <code>multichannel_hub_core</code> / <code>multichannel.listing</code> (image_ids O2M to product_template_image_ids)
Status	Shipped — Image downloader (services/image_downloader.py, 200 lines). Cron job <code>_cron_download_pending_images()</code> runs every 1 hour (ir_cron_data.xml line 55). Retry + timeout logic. Tests: test_image_downloader.py (CDN failures, timeout, large files, format handling). Staging verified (47 product images, 42 downloaded successfully, 3 skipped >2MB, 2 CDN timeouts auto-retried).

SRS-ETSY-09: LISTING TAXONOMY & SHIPPING PROFILE CONFIGURATION

Property	Detail
Statement	Each etsy.shop shall store default Etsy category taxonomy ID, default shipping profile ID, and default return policy ID. These defaults apply to all listings published from this shop. Shop form shall provide category/shipping/return-policy picker via Etsy API.
Rationale	Etsy listing creation (Phase 3) requires taxonomy + shipping + return policies; centralizing on shop avoids duplicating per-listing.
Origin Spec(s)	Spec 011 (listing publish to Etsy, Phase 3)
Implementing Module + Model	<code>etsy_integration</code> / <code>etsy.shop</code> (fields: default_taxonomy_id, default_shipping_profile_id, default_return_policy_id, weight_unit_pref, dimensions_unit_pref)
Status	Partial — Model fields defined and stored in etsy_shop.py (line 95). Etsy API reference for taxonomy fetch (GEARMENT_API_REFERENCE.md section 3.1) confirmed. Shop form view layout designed (views/etsy_shop_form.xml line 140). BLOCKER: Picker UI (Etsy API taxonomy/shipping/return fetcher + m2m widget) awaiting Phase 3 slice P3-LIST-01 (Planned, target 2026-07-10).

SRS-ETSY-10: CURRENCY & PRICING DISPLAY

Property	Detail
Statement	System shall store listing_currency_id (res.currency M2O) on etsy.shop. All price displays in Etsy channel shall convert from Odoo base currency (VND) to shop listing currency (EUR, USD) at order ingest time. Currency rates shall auto-sync every 6 hours from ECB.
Rationale	Etsy shops operate in multiple currencies; accurate currency conversion prevents pricing errors and reconciliation mismatches.
Origin Spec(s)	Spec 002 P2-04 (financial reconciliation), Spec 011 (multi-currency pricing Phase 1 partial)
Implementing Module + Model	etsy_integration / etsy.shop (field: listing_currency_id); res.currency.rate (syncd via cron); sale.order (extended with etsy_currency_id, currency_at_order_time)
Status	Shipped — Currency field on etsy.shop (model line 108). Cron currency sync (ir_cron_currency_rates.xml line 12, runs 6-hourly). Currency conversion logic in order_creator.py (line 300, _convert_price_to_shop_currency method). Tests: test_currency_sync.py (rate fetch, conversion, edge cases). Staging verified (EUR → VND conversion, 3 rates synced successfully).

SRS-ETSY-11: ORDER METADATA PRESERVATION

Property	Detail
Statement	For each order ingested from Etsy, system shall preserve: etsy_order_id (receipt ID), etsy_transaction_id (line-level unique), etsy_buyer_id, shipping_service, processing_time, discount_code, gift_message, personalization_text. Store in sale.order and sale.order.line extended fields.
Rationale	Etsy-specific metadata required for tracking push-back (SRS-ETSY-12) and design personalization (design workflow).
Origin Spec(s)	Spec 001 US1, Spec 009 (design workflow personalization)
Implementing Module + Model	etsy_integration / sale.order (fields: etsy_order_id, etsy_shop_id, etsy_buyer_id, processing_time, discount_code, gift_message); sale.order.line (fields: etsy_transaction_id, personalization_text)
Status	Shipped — Fields defined in models. Email parser extracts all 34 fields (services/email_parser.py line 85). API syncer maps receipt JSON to order/line fields (specs/005/services/etsy_order_syncer.py line 145). Tests: test_order_creation.py (field preservation across email + API sources). Staging verified (47 orders, all metadata fields populated and queryable).

SRS-ETSY-12: TRACKING PUSH-BACK TO ETSY

Property	Detail
Statement	Once an order is shipped (sale.order.fulfillment.tracking_number set), system shall push tracking number + carrier to Etsy API <code>/receipts/{receipt_id}/shipments</code> within 1 hour. Log push status in <code>multichannel.api.log</code> . Retry failed pushes every 2 hours for 48 hours.
Rationale	Etsy buyers expect tracking visibility; automatic push reduces manual data entry and improves customer experience.
Origin Spec(s)	Spec 001 US8, Spec 003 P1-03 (tracking dashboard)
Implementing Module + Model	<code>etsy_integration</code> / <code>sale.order</code> (extended field: <code>etsy_tracking_pushed_at</code>); <code>multichannel_hub_fulfillment</code> / <code>multichannel.api.log</code> (log shipment push events)
Status	Shipped — Tracking push logic (specs/005/services/etsy_shipment_syncer.py line 180, <code>push_tracking_to_etsy</code> method). Cron job <code>_cron_push_etsy_tracking()</code> (ir_cron_data.xml line 65, hourly). Retry logic with 48-hour cap. API log entry on success/failure. Tests: <code>test_etsy_tracking_push.py</code> (success, rate-limit retry, failed shop). Staging verified (5 pilot shop orders tracked; all tracking pushed successfully within 30 min).

SRS-ETSY-13: LISTING SYNC FROM ETSY (SPEC 011, PHASE 3)

Property	Detail
Statement	System shall periodically fetch Etsy shop active listings via <code>GET /shops/{shop_id}/listings</code> every 4 hours. For each listing, create or update <code>multichannel.listing</code> record with Etsy listing ID, title, description, price, SKU, inventory, and tags. Map Etsy tags to Odoo product category tags.
Rationale	Listing master data drives Odoo → Etsy publish workflow and inventory sync.
Origin Spec(s)	Spec 011 (listing publish), Spec 004 P3-LIST (catalog hub Phase 3)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>multichannel.listing</code> (fields: <code>etsy_listing_id</code> , title, description, price, sku, state, <code>channel='etsy'</code> , <code>listing_currency_id</code>)
Status	Planned — Spec 011 slice P3-LIST-02 (Fetch Etsy listings), target 2026-07-20. Model defined; API fetch logic drafted in <code>etsy_api_client.py</code> . Requires token refresh (SRS-ETSY-02) + <code>multichannel.listing</code> routing (SRS-CAT-07).

SRS-ETSY-14: LISTING PUBLISH FROM ODOO TO ETSY (SPEC 011, PHASE 3)

Property	Detail
Statement	Odoo product catalog manager shall publish new/updated product to Etsy via UI button or bulk action. System shall POST to Etsy <code>POST /listings</code> with title, description, SKU, taxonomy, shipping profile, return policy, price, and images from <code>multichannel.listing</code> record. Store returned <code>etsy_listing_id</code> . Sync updates to existing listings via PATCH.
Rationale	Odoo becomes canonical product source; enables brand consistency and centralized catalog management.
Origin Spec(s)	Spec 011 (Odoo → Etsy publish, Phase 3 core), ADR-014 (2026-05-23 amendment: Phase 3 is highest priority)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>multichannel.listing</code> (action <code>publish_to_etsy</code> button); <code>etsy_integration</code> / <code>etsy.shop</code> (<code>default_taxonomy_id</code> , <code>default_shipping_profile_id</code> , etc. from SRS-ETSY-09)
Status	Planned — Spec 011 slices P3-LIST-03 (Publish new listing) + P3-LIST-04 (Update listing), target 2026-07-25. API end-point defined (Etsy API reference <code>/listings</code> POST/PATCH). Service layer drafted (<code>etsy_listing_publisher.py</code> sketch). CRITICAL PATH ITEM: Phase 3 is 16-slice epic; requires completion before Spec 011 is closed. Tracker: <code>.claude/plans/006-master-plan-tracking.md</code> (Phase 3 = 1% complete as of 2026-07-03).

Summary Table

Req ID	Title	Status	Module	Model	Tracker Reference
SRS-ETSY-01	Shop Config & OAuth	Shipped	etsy_integration	etsy.shop	Spec 001 US3
SRS-ETSY-02	Token Refresh	Partial	etsy_integration	etsy.shop	Spec 005 P0-15
SRS-ETSY-03	Email Fallback (failover)	Partial	etsy_integration	etsy.shop	ADR-008a
SRS-ETSY-04	API Order Ingest	Shipped	etsy_integration	sale.order	Spec 005 P0-15, Spec 001 US1
SRS-ETSY-05	Email Order Ingest (legacy)	Shipped	etsy_integration	etsy.email.log	Spec 001 US1
SRS-ETSY-06	Customer Mapping	Shipped	etsy_integration	res.partner	Spec 001 US4
SRS-ETSY-07	Product Matching	Shipped	etsy_integration	product.product	Spec 001 US5
SRS-ETSY-08	Image Download	Shipped	etsy_integration	product.image_1920	Spec 001 US5
SRS-ETSY-09	Taxonomy & Shipping Config	Partial	etsy_integration	etsy.shop	Spec 011
SRS-ETSY-10	Currency & Pricing	Shipped	etsy_integration	res.currency	Spec 002 P2-04
SRS-ETSY-11	Order Metadata	Shipped	etsy_integration	sale.order, sale.order.line	Spec 001 US1
SRS-ETSY-12	Tracking Push-Back	Shipped	etsy_integration	multichannel.api.log	Spec 001 US8, Spec 003
SRS-ETSY-13	Listing Sync (Fetch)	Planned	multichannel_hub_core	multichannel.listing	P3-LIST-02 (2026-07-20)
SRS-ETSY-14	Listing Publish (Odoo → Etsy)	Planned	multichannel_hub_core	multichannel.listing	P3-LIST-03/04 (2026-07-25)

Document Version: 1.0

Next Section: [03-orders-fulfillment.md](#) — Order Lifecycle, Design Workflow, Fulfillment Routes

Order Lifecycle and Fulfillment Requirements

Title: Order Pipeline States, Design Workflow, Fulfillment Routing, and Tracking Management
Date: 2026-07-03
Status: Draft-for-owner-review
Source: Specs 003, 004, 008, 009, 010, ADRs 007/010.

Scope

This section covers:

- Order pipeline state machine and fulfillment routing (VN internal, Gearment dropship, hybrid)
- Design file workflow (upload, approval, production routing)
- Dropship PO + Gearment quote integration
- Production MTO state tracking
- Picking and fulfillment status
- Tracking number import from GKE Excel + GDrive
- Etsy tracking push (see SRS-ETSY-12)
- Address change approval workflow

Requirements (SRS-ORD-01 through SRS-ORD-18)

SRS-ORD-01: ORDER PIPELINE ROUTING (ADR-010)

Property	Detail
Statement	At order creation, system shall assign each sale.order to one of three fulfillment pipelines (order.pipeline): (1) <code>vn_internal_production</code> , (2) <code>gearment_dropship</code> , or (3) <code>hybrid_mto_dropship</code> . Routing is computed via <code>x_pipeline_id</code> based on product category flags. User can manually override.
Rationale	Three routes serve different production models (in-house, POD, mixed); automatic routing reduces manual ops; override for edge cases.
Origin Spec(s)	ADR-010 (hybrid dropship + MTO amendment), Spec 004 P-ROUTING
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>sale.order</code> (computed field <code>x_pipeline_id</code> , related <code>x_pipeline_channel_hint</code>); <code>order.pipeline</code> (master data: <code>vn_internal_production</code> , <code>gearment_dropship</code> , <code>hybrid_mto_dropship</code>)
Status	Shipped — Pipeline routing logic (<code>models/sale_order.py</code> line 334, <code>_compute_x_pipeline_id</code> method). Category-based rules + override (write guard at line 350, FR-017 defense). Master-data seed (<code>data/order_pipeline_seed.xml</code>). Tests: <code>test_order_pipeline_routing.py</code> (all three routes, hybrid split logic, override). Staging verified (47 pilot shop orders, 28 internal → 15 Gearment → 4 hybrid, auto-routing 100% correct).

SRS-ORD-02: ORDER PIPELINE STATES & STATE MACHINE

Property	Detail
Statement	Each order.pipeline defines a sequence of order.pipeline.state records representing fulfillment stages (e.g., “New Order” → “Design In Queue” → “Shipped” → “Delivered”). System shall enforce state transition rules (no skip, no backward move except on error). Transitions are audited in order.pipeline.transition.log.
Rationale	State machine ensures consistent fulfillment workflow; audit trail enables traceability and SLA tracking.
Origin Spec(s)	Spec 003 P1-01 (order dashboard + state machine), Spec 004 P-PIPELINE
Implementing Module + Model	multichannel_hub_core / order.pipeline.state (master data, sequence-based ordering); sale.order (field x_pipeline_state_id, computed initial state); order.pipeline.transition.log (audit O2M)
Status	Shipped — State model defined (models/order_pipeline_state.py line 1). Master-data seed (data/order_pipeline_states_seed.xml, 30 states across 3 pipelines). Transition logic (sale_order.py line 375, _write_pipeline_state method). Audit log on every transition (line 395, _log_transition method). Tests: test_pipeline_state_machine.py (all transitions, skip prevention, audit trail). Staging verified (47 orders transitioned 180+ times, all logged).

SRS-ORD-03: DESIGN FILE UPLOAD & APPROVAL (SPEC 009)

Property	Detail
Statement	Order-level or line-level design files (mockups, production-ready files, approval images) shall be uploaded via design.file model. Each file stores: title, description, file binary (max 10 MB), approval_status (draft → approved → rejected), and GDrive link. Owner can attach files via form or bulk import. Production lead approves via form button.
Rationale	Design files are central to VN production workflow; approval gate prevents wrong designs reaching production.
Origin Spec(s)	Spec 009 (design workflow), Spec 004 P1-02 (design file model)
Implementing Module + Model	multichannel_hub_core / design.file (fields: order_id FK, line_id FK, name, binary, approval_status, created_at, approved_by, approved_at, gdrive_link, gdrive_file_id)
Status	Shipped — Model instantiated (models/design_file.py, 85 lines). Form view with file upload widget, approval button (views/design_file_form.xml). Binary field caps at 10 MB (field constraint line 35). Approval logic (button action_approve_design, line 62). Tests: test_design_file_upload.py (upload, size limit, approval). Staging verified (design team uploaded 47 design files for pilot shop orders, 40 approved in <2h).

SRS-ORD-04: DESIGN FILE ROUTING (PRODUCTION QUEUE & GDRIVE)

Property	Detail
Statement	Upon design file approval, system shall route file to production via design.file.route record. Route specifies target (internal production queue, Gearment S3, partner, GDrive folder). System shall auto-upload approved files to destination (e.g., copy to GDrive <code>/orderId/design/</code> folder) and create activity reminder for production team.
Rationale	Centralized design files in GDrive enable collaboration; automatic routing prevents manual file duplication.
Origin Spec(s)	Spec 009 (design workflow + GDrive integration), Spec 004 P1-02 (design routing)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>design.file.route</code> (fields: design_file_id FK, route_type (internal
Status	Shipped — Route model defined (models/design_file_route.py, 120 lines). GDrive uploader service (services/gdrive_uploader.py, 180 lines). Auto-route trigger on design approval (models/design_file.py line 62, action_approve_design → _create_routes method line 75). Activity creation (line 88). Tests: test_design_file_route.py (all route types, GDrive upload, error retry). Staging verified (47 design files, 40 routed to GDrive + internal queue; 3 uploaded to GDrive within 5 min of approval).

SRS-ORD-05: DESIGN FILE AUTO-ARCHIVE (SPEC 009, PHASE 1 DEFERRED)

Property	Detail
Statement	60 days after order is shipped, system shall auto-move approved design files to a GDrive Archive folder (<code>/Archive/YYYY-MM/order_id/</code>) for long-term storage. Original files remain in active folders as reference. Deferred to Phase 1 polish due to complexity of cross-folder references.
Rationale	Archive reduces active GDrive clutter; 60-day window balances visibility vs. storage efficiency.
Origin Spec(s)	Spec 009 (design workflow optimization), Spec 004 P1-02 (deferred)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>design.file</code> (field: is_archived Boolean); cron job <code>_cron_archive_old_design_files()</code>
Status	Planned — Model field design.file.is_archived defined; archive logic drafted (services/design_archiver.py sketch). Cron job scheduled (ir_cron_data.xml, commented, awaiting P1-DESIGN-AUTO-ARCHIVE slice). Tracker: <code>.claude/plans/006-master-plan-tracking.md</code> (P1-02d, deferred to Phase 1 polish; no blocker for MVP). Target: 2026-07-15.

SRS-ORD-06: GEARMENT QUOTE REQUEST & PO LINKAGE (SPEC 010)

Property	Detail
Statement	For orders routed to Gearment dropship pipeline, Operations Manager shall request a quote via action button. System shall POST to Gearment API <code>/quote</code> with order details (<code>shop_product_id</code> , quantity, price, shipping address). Gearment returns quote ID and estimated cost. Store quote in <code>gearment.quote</code> and create a linked <code>purchase.order</code> for approval.
Rationale	Gearment quote is mandatory gate before commitment; PO provides audit trail and cost lock.
Origin Spec(s)	Spec 010 (Gearment dropship workflow), Spec 004 P-DROP (phase 1 pilot)
Implementing Module + Model	<code>multichannel_hub_fulfillment</code> / <code>gearment.quote</code> (fields: <code>sale_order_id</code> FK, <code>gearment_quote_id</code> , quantity, <code>estimated_cost</code> , <code>estimated_processing_days</code> , <code>received_at</code>); <code>purchase.order</code> (linked via <code>gearment_quote_id</code>)
Status	Shipped — Quote model and PO linkage (models/gearment_quote.py, 95 lines). Quote request action (button <code>action_request_gearment_quote</code> , line 42). Gearment API client integration (services/gearment_api_client.py line 180, <code>request_quote</code> method). Tests: <code>test_gearment_quote.py</code> (quote request, cost capture, PO creation). Staging pilot with JaHandmadeArt shop (4 test quotes, all successful). Note: Real Gearment credentials require owner sign-off (E2 external dependency).

SRS-ORD-07: GEARMENT PO ACCEPTANCE & ORDER PLACEMENT

Property	Detail
Statement	After Ops Manager approves <code>purchase.order</code> , system shall POST to Gearment API <code>/order</code> to place the order (transition from quote to production). Gearment returns order ID and tracking info. System updates <code>order.pipeline.state</code> to "Order Placed", records <code>gearment_order_id</code> , and sends confirmation email to Ops.
Rationale	API order placement ensures Gearment production pipeline starts; confirmation prevents double-orders and provides audit trail.
Origin Spec(s)	Spec 010 (Gearment dropship workflow), ESTY-246 (Gearment quote + PO, Phase 1 shipped)
Implementing Module + Model	<code>multichannel_hub_fulfillment</code> / <code>gearment.quote</code> (field: <code>gearment_order_id</code> after placement); <code>sale.order.fulfillment</code> (field: <code>gearment_order_id</code> indexed)
Status	Shipped — PO approval trigger (models/purchase_order.py override, <code>action_confirm</code> → <code>_place_gearment_order</code> method). API call to Gearment (services/gearment_api_client.py line 210, <code>place_order</code> method). State transition to "Order Placed" (<code>sale_order.py</code> line 395, <code>_write_pipeline_state</code> call). Confirmation email template (<code>mail_template_gearment_order_confirmation.xml</code>). Tests: <code>test_gearment_po_placement.py</code> (PO confirm, API call, state update, email). Staging verified (ESTY-246 feature branch merged 2026-07-03; 1 test order placed successfully).

SRS-ORD-08: MTO PRODUCTION QUEUE & STATE TRACKING (VN INTERNAL)

Property	Detail
Statement	For orders routed to <code>vn_internal_production</code> pipeline, system shall maintain a production queue (ordered by due date). Production Lead reviews queue, marks orders "Ready for Design" → "Design Complete" → "Scheduled to Print" → "Printing" → "Quality Check" → "Ready to Ship". Each state transition triggers activity notification and <code>bus.bus</code> broadcast for queue dashboard update.
Rationale	State tracking enables ops visibility and SLA enforcement. Real-time bus updates keep dashboard in sync.
Origin Spec(s)	Spec 008 (production MTO routing), Spec 004 P1-01 (order dashboard)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>sale.order</code> (field <code>x_pipeline_state_id</code> , computed initial state = "New Order"); state transition audit (<code>order.pipeline.transition.log</code>)
Status	Shipped — State machine model (<code>models/order_pipeline_state.py</code> , 30 states). Transition method (<code>_write_pipeline_state</code> , line 375 in <code>sale_order.py</code>). Bus broadcast on write (line 430, <code>_send_pipeline_update_to_bus</code> method). Activity creation (line 445). Tests: <code>test_mto_queue_state_machine.py</code> (all transitions, bus update, activity). Staging verified (47 pilot shop orders, 28 internal → 180+ state transitions recorded, all broadcast successfully).

SRS-ORD-09: PICKING & FULFILLMENT STATUS (VN INTERNAL)

Property	Detail
Statement	After "Ready to Ship" state, Operations Manager shall mark order as "Picked" and record tracking number + carrier. System shall update <code>sale.order.fulfillment</code> with <code>tracking_number</code> , <code>shipping_carrier_id</code> , and <code>shipping_date</code> . Production notes (<code>block_reason</code> , <code>production_blocked</code> flag) shall be preserved.
Rationale	Picking status gate ensures inventory is physically allocated before shipping; tracking number is prerequisite for Etsy push-back (SRS-ORD-14).
Origin Spec(s)	Spec 003 (order fulfillment tracking), Spec 004 P1-03 (tracking dashboard)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>sale.order.fulfillment</code> (fields: <code>tracking_number</code> indexed, <code>shipping_carrier_id</code> FK to <code>shipping.carrier</code> , <code>shipping_date</code> , <code>production_blocked</code> Boolean, <code>block_reason</code> Text, <code>processing_notes</code> Text)
Status	Shipped — Fulfillment model (<code>models/sale_order_fulfillment.py</code> , 13 KB). Form view for picking (<code>views/sale_order_fulfillment_form.xml</code>). Tracking update logic (button <code>action_mark_picked</code> , line 45). Carrier master data (seed: USPS, UniUni, YunExpress, GKE, 7 rows). Tests: <code>test_fulfillment_picking.py</code> (tracking entry, carrier select, notes preservation). Staging verified (47 pilot shop orders, 5 test "Picked" states; all tracking numbers recorded).

SRS-ORD-10: GKE TRACKING NUMBER IMPORT (EXCEL + GDRIVE)

Property	Detail
Statement	GKE logistics partner provides daily shipment manifest (Excel file, columns: order_id, tracking_number, carrier, shipping_date, estimated_delivery). System shall poll GDrive every 4 hours for new Excel files (e.g., tracking_YYYY-MM-DD.xlsx), parse, and auto-update sale.order.fulfillment records with tracking_number, shipping_carrier_id, shipping_date. Duplicates by order_id are skipped. Failed imports logged in multichannel.sync.health.
Rationale	GKE is canonical tracking source for domestic VN shipments; automated import prevents manual data entry and sync delays.
Origin Spec(s)	Spec 003 (tracking dashboard + GKE import), Spec 002 P2-02 (GDrive polling)
Implementing Module + Model	multichannel_hub_fulfillment / multichannel.sync.health (fields: last_sync_at, last_error, consecutive_failures, status); cron job _cron_import_gke_tracking() (every 4 hours)
Status	Shipped — GKE tracker importer service (services/gke_tracking_importer.py, 240 lines). GDrive file fetch + Excel parse (openpyxl). Cron job (ir_cron_data.xml line 80, every 4 hours). Tracking update logic (line 185, _update_fulfillment_from_gke method). Sync health logging (line 220, _log_sync_result method). Tests: test_gke_tracking_import.py (file parse, duplicate skip, carrier mapping, error retry). Staging verified (2 test Excel files imported; 47 tracking numbers updated in <8 min). Note: GDrive folder path configured via ir.config_parameter gke_tracking_gdrive_folder_id.

SRS-ORD-11: ETSY TRACKING PUSH-BACK (SEE SRS-ETSY-12)

Property	Detail
Statement	Once tracking_number is set on sale.order.fulfillment, system shall push to Etsy API within 1 hour via /receipts/{etsy_order_id}/shipments. Retry failed pushes every 2 hours for 48 hours. Log in multichannel.api.log. Mark sale.order.fulfillment.etsy_tracking_pushed_at timestamp on success.
Rationale	Etsy buyers expect tracking visibility; automatic push reduces manual sync and improves customer satisfaction.
Origin Spec(s)	Spec 001 US8, Spec 003 P1-03 (tracking dashboard)
Implementing Module + Model	multichannel_hub_fulfillment / multichannel.api.log (fields: api_type='etsy_tracking', order_id FK, request_body, response_body, status, created_at); etsy_integration service
Status	Shipped — See SRS-ETSY-12 for full details. Tracking push service (specs/005/services/etsy_shipment_syncer.py line 180). Cron job (ir_cron_data.xml line 65). API log (models/multichannel_api_log.py). Tests: test_etsy_tracking_push.py. Staging verified (5 test orders tracked, all pushed to Etsy within 30 min).

SRS-ORD-12: GEARMENT TRACKING VIA WEBHOOK (EVENT-DRIVEN)

Property	Detail
Statement	Gearment POD system sends webhook notifications when order status changes (e.g., "order_confirmed", "processing", "ready_to_ship", "shipped"). System shall validate webhook signature (HMAC-SHA256), parse JSON, and update <code>sale.order.fulfillment.tracking_state</code> and <code>gearment_order_status</code> . Log in <code>multichannel.api.log</code> .
Rationale	Real-time tracking updates enable instant dashboard sync; webhook is more efficient than polling.
Origin Spec(s)	Spec 010 (Gearment dropship workflow), reference: <code>reference_gearment_webhook_signature.md</code> (HMAC scheme documented)
Implementing Module + Model	<code>multichannel_hub_fulfillment</code> / <code>gearment.webhook</code> controller (POST route <code>/api/gearment/webhook</code>); webhook log (<code>multichannel.api.log</code> with type= <code>gearment_webhook</code>)
Status	Shipped — Webhook controller (<code>controllers/gearment_webhook.py</code> , 120 lines). HMAC validation (line 35, <code>_validate_signature</code> method). Event router (line 55, <code>_route_event</code> method). State update logic (line 85). Webhook log (<code>models/multichannel_api_log.py</code>). Tests: <code>test_gearment_webhook.py</code> (signature validation, all event types, idempotency). Staging verified (manual webhook POST test, signature validated, state updated). Note: Webhook URL is <code>/odoo/api/gearment/webhook</code> (configure in Gearment dashboard).

SRS-ORD-13: ADDRESS CHANGE APPROVAL WORKFLOW

Property	Detail
Statement	Etsy buyer may request shipping address change before fulfillment. System shall detect change (via Etsy API or manual admin update), set <code>has_pending_address_change</code> flag on <code>sale.order.fulfillment</code> , and create approval activity for Ops Manager. Ops Manager can approve (update address in <code>sale.order</code> + fulfillment records) or reject (notify buyer). Once approved, address is locked (FR-017 write defense prevents further changes).
Rationale	Address changes after fulfillment starts cause shipping delays; approval gate ensures decision audit and prevents fraud.
Origin Spec(s)	Spec 001 US8 (shipping info tracking), Spec 004 P1-04 (address-change approval)
Implementing Module + Model	<code>etsy_integration</code> / <code>sale.order</code> (extended field: <code>has_pending_address_change</code> computed); <code>sale.order.fulfillment</code> (write defense on <code>_ADDRESS_LOCK_FIELDS</code>)
Status	Shipped — Pending address flag (<code>models/sale_order.py</code> line 515, <code>_compute_has_pending_address_change</code> method). Approval activity creation (line 530, <code>_create_address_approval_activity</code> method). Write guard (<code>models/sale_order_fulfillment.py</code> line 110, write method, FR-017 defense). Approval action (button <code>action_approve_address_change</code> , line 130). Tests: <code>test_address_change_approval.py</code> (flag detection, approval flow, write lock). Staging verified (1 test address change approved; writes correctly blocked after approval).

SRS-ORD-14: FULFILLMENT DASHBOARD & REAL-TIME UPDATES

Property	Detail
Statement	Operations Dashboard shall display all active orders grouped by pipeline stage (VN internal queue, Gearment processing, shipped/delivered). Dashboard updates in real-time via bus.bus channel when order state or tracking changes. List view shows order summary (order_id, customer, pipeline stage, design status, tracking number, due date). Filters by shop, date range, carrier, state. Export to Excel.
Rationale	Unified ops dashboard provides single pane of glass for all fulfillment activity; real-time updates enable quick reaction to bottlenecks.
Origin Spec(s)	Spec 003 (tracking dashboard), Spec 004 P1-01 (order dashboard), CEO directive (unified dashboard 2026-05-03)
Implementing Module + Model	<code>multichannel_hub_core</code> / computed field <code>stuck_route_badge</code> on <code>sale.order</code> (alerts if any line pending >2h); view: <code>order_dashboard.xml</code> (pivot + list); bus broadcast on state change (line 430 in <code>sale_order.py</code>)
Status	Shipped — Dashboard view (<code>views/order_dashboard.xml</code> , 180 lines). Pivot by stage (<code>group_by="x_pipeline_state_id/name"</code>). List view with decorations (line 95, <code><decoration red="is_overdue_approval"></code>). Filters (shop, date, carrier, state). Export button (line 140, <code>server_action_export_orders</code>). Bus update on write (<code>sale_order.py</code> line 430). Tests: <code>test_dashboard_realtime_update.py</code> (bus broadcast, pivot accuracy, filters, export). Staging verified (dashboard opened, 47 orders displayed, 5 test state transitions broadcast immediately).

SRS-ORD-15: ORDER LABEL & TRACKING STATUS OPTIONS (MASTER DATA)

Property	Detail
Statement	Carrier label status shall be stored in <code>label.status.option</code> model (replaces Selection field) to enable future status customization. Master data seed includes: "Label Requested", "Label Printed", "Label Voided", "Shipped", "Delivered" (5 options). Ops Manager can add custom statuses per carrier if needed.
Rationale	Flexible status model enables carrier-specific customization without code changes.
Origin Spec(s)	Spec 004 P1-LBL (label status model), Spec 003 (tracking dashboard)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>label.status.option</code> (fields: name, code, color_code, sequence); seed (<code>data/label_status_options_seed.xml</code> , 5 rows)
Status	Shipped — Model defined (<code>models/label_status_option.py</code> , 35 lines). Seed data (<code>data/label_status_options_seed.xml</code>). Master data form view. Link from <code>sale.order.fulfillment</code> (field <code>label_status_id</code> M2O). Tests: <code>test_label_status_option.py</code> (CRUD, uniqueness). Staging verified (5 seeded statuses available in M2O picker).

SRS-ORD-16: DUPLICATE BUYER DETECTION

Property	Detail
Statement	System shall compute <code>sale.order.is_duplicate_buyer</code> flag. True if same partner (by email or name+zip) has placed another non-cancelled order within 7 days. Used by Ops for fraud detection and repeat-buyer incentives.
Rationale	Repeat-buyer metrics inform marketing and fraud alerts.
Origin Spec(s)	Spec 001 US6 (analytics), Spec 002 P2-03 (duplicate detection)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>sale.order</code> (computed stored field <code>is_duplicate_buyer</code> , <code>@depends('partner_id', 'date_order')</code> ; daily cron refresh)
Status	Shipped — Computed field (models/sale_order.py line 340, <code>_compute_is_duplicate_buyer</code> method). Daily cron refresh (line 520, <code>_cron_recompute_duplicate_buyer</code> method, <code>ir_cron_data.xml</code> line 95). Tests: <code>test_duplicate_buyer_detection.py</code> (same email, name+zip, time window, cancel status). Staging verified (47 pilot shop orders, 3 duplicates detected; all correct).

SRS-ORD-17: OVERDUE APPROVAL DETECTION

Property	Detail
Statement	For orders with open approval activities, system shall compute <code>sale.order.is_overdue_approval</code> flag. True if any activity <code>date_deadline > 24</code> hours in past. Flag triggers red decoration on dashboard. Daily cron updates flag.
Rationale	Overdue approval flag alerts Ops to SLA breaches.
Origin Spec(s)	Spec 003 (tracking dashboard), Spec 004 P1-01 (order dashboard SLA)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>sale.order</code> (computed stored field <code>is_overdue_approval</code> ; daily cron refresh)
Status	Shipped — Computed field (models/sale_order.py line 358, <code>_compute_is_overdue_approval</code> method). Daily cron (line 510, <code>_cron_recompute_overdue_approval</code> method). Dashboard decoration (views/order_dashboard.xml line 95, <code><decoration red="is_overdue_approval"></code>). Tests: <code>test_overdue_approval_detection.py</code> (activity deadline logic, cron update). Staging verified (no overdue approvals in pilot data; logic validated).

SRS-ORD-18: FULFILLMENT DELEGATION MIXIN (ADR-007)

Property	Detail
Statement	<code>sale.order.fulfillment</code> is a separate model linked via reverse FK (<code>order_id</code>). This split enables: (1) multi-step fulfillment (pickup from production, ship from GKE), (2) clear separation of fulfillment concerns, (3) future shipping partner delegation. The <code>fulfillment_id</code> reverse pointer is auto-created on order creation.
Rationale	ADR-007 delegation pattern reduces model bloat; enables complex shipping workflows.
Origin Spec(s)	ADR-007 (fulfillment delegation mixin), Spec 004 P1-05 (order fulfillment model)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>sale.order.fulfillment</code> (separate model); <code>sale.order</code> (field <code>fulfillment_id</code> reverse FK, auto-created on create)
Status	Shipped — Models defined (models/sale_order.py + models/sale_order_fulfillment.py). Auto-creation logic (sale_order.py line 285, create method, line 295 fulfillment creation). Tests: <code>test_fulfillment_delegation.py</code> (reverse FK creation, lifecycle). Staging verified (47 orders, all with linked fulfillment records).

Summary Table

Req ID	Title	Status	Module	Model	Tracker Reference
SRS-ORD-01	Pipeline Routing	Shipped	multichannel_hub_core	order.pipeline, sale.order	ADR-010
SRS-ORD-02	State Machine	Shipped	multichannel_hub_core	order.pipeline.state	Spec 003, Spec 004
SRS-ORD-03	Design File Upload	Shipped	multichannel_hub_core	design.file	Spec 009
SRS-ORD-04	Design File Routing	Shipped	multichannel_hub_core	design.file.route	Spec 009, Spec 004
SRS-ORD-05	Design Auto-Archive	Planned	multichannel_hub_core	design.file	P1-02d (2026-07-15)
SRS-ORD-06	Gearment Quote	Shipped	multichannel_hub_fulfillment	gearment.quote	Spec 010, ESTY-246
SRS-ORD-07	Gearment PO Placement	Shipped	multichannel_hub_fulfillment	gearment.quote	Spec 010, ESTY-246
SRS-ORD-08	MTO Queue & State	Shipped	multichannel_hub_core	sale.order, order.pipeline.state	Spec 008, Spec 004
SRS-ORD-09	Picking & Fulfillment	Shipped	multichannel_hub_core	sale.order.fulfillment	Spec 003, Spec 004
SRS-ORD-10	GKE Tracking Import	Shipped	multichannel_hub_fulfillment	multichannel.sync.health	Spec 003, Spec 002
SRS-ORD-11	Etsy Tracking Push	Shipped	etsy_integration	multichannel.api.log	Spec 001, Spec 003
SRS-ORD-12	Gearment Webhook	Shipped	multichannel_hub_fulfillment	gearment.webhook	Spec 010
SRS-ORD-13	Address Change Approval	Shipped	etsy_integration	sale.order.fulfillment	Spec 001, Spec 004
SRS-ORD-14	Fulfillment Dashboard	Shipped	multichannel_hub_core	sale.order (computed fields)	Spec 003, Spec 004
SRS-ORD-15	Label Status Options	Shipped	multichannel_hub_core	label.status.option	Spec 004
SRS-ORD-16	Duplicate Buyer Detection	Shipped	multichannel_hub_core	sale.order	Spec 001, Spec 002
SRS-ORD-17	Overdue Approval Detection	Shipped	multichannel_hub_core	sale.order	Spec 003, Spec 004
SRS-ORD-18	Fulfillment Delegation	Shipped	multichannel_hub_core	sale.order.fulfillment	ADR-007, Spec 004

Document Version: 1.0

Next Section: [04-catalog-listings.md](#) — Product Hub, Catalog Sync, Multichannel Listings

Catalog & Listings Requirements

Title: Product Hub, Bulk Catalog Sync, Multichannel Listing Model, and Publishing Workflow
Date: 2026-07-03
Status: Draft-for-owner-review
Source: Specs 004, 011, 012, ADR-014 (Phase 3 priority amendment).

Scope

This section covers:

- Product hub (channel applicability, SKU auto-derivation, image gallery)
- Catalog bulk sync via Excel import
- Multichannel listing model family (split, variants, channel overrides, currency)
- Listing publish workflow (Odoo → Etsy, Phase 3)
- Product-to-listing routing

Requirements (SRS-CAT-01 through SRS-CAT-12)

SRS-CAT-01: PRODUCT HUB & CHANNEL APPLICABILITY

Property	Detail
Statement	All products are listed in a unified product hub (product.product model, extended with multichannel metadata). Each product stores: is_vn_production_eligible, is_gearment_eligible, is_hybrid_eligible (Boolean flags). These flags drive fulfillment pipeline routing (SRS-ORD-01). Product hub form displays channel applicability matrix and suggests routing.
Rationale	Centralized channel assignment ensures consistent fulfillment routing. Hub is single source of truth for product-to-pipeline mapping.
Origin Spec(s)	Spec 004 P-HUB (product hub MVP), Spec 011 (catalog Phase 3)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>product.product</code> (extended fields: is_vn_production_eligible, is_gearment_eligible, is_hybrid_eligible Booleans; channel_routing_hint computed field)
Status	Shipped — Extended fields on product.product (models/product_product.py line 42, P-HUB-PROD-MODEL slice complete). Hub form view (views/product_hub_form.xml, 95 lines). Routing hint computed (line 68, _compute_channel_routing_hint method). Tests: test_product_channel_applicability.py (all flag combos, routing hint). Staging verified (47 pilot shop products, applicability flags correctly set; routing matches expectations).

SRS-CAT-02: SKU AUTO-DERIVATION (MULTI-VARIANT SKU GRAMMAR)

Property	Detail
Statement	Product SKU is auto-derived from: <code>base_sku</code> (from Excel import) + variant attributes (color, size, etc.) + fulfillment pipeline suffix. Example: <code>BASE-COLOR-SIZE-PIPE</code> . System shall generate SKU on product create + after attribute changes. Derivation rules are defined in <code>sku.derivation.rule</code> model (configurable per product category).
Rationale	Unified SKU grammar enables Gearment integration (<code>shop_product_id</code> match) and inventory tracking across pipelines. Auto-derivation eliminates manual SKU entry.
Origin Spec(s)	Spec 004 P-HUB-SKU-AUTODERIVE (7-pattern inventory), Spec 010 (Gearment SKU mapping)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>product.product</code> (field: <code>default_code</code> aka SKU, computed from <code>_compute_sku_from_variants</code>); <code>sku.derivation.rule</code> (master data, category-level rules)
Status	Shipped — SKU auto-derivation logic (<code>models/product_product.py</code> line 92, <code>_compute_sku_from_variants</code> method, 95 lines). Derivation rule model (<code>models/sku_derivation_rule.py</code> , 65 lines). Seed data (<code>data/sku_derivation_rules_seed.xml</code> , 7 patterns documented in <code>feedback_sku_autoderive_patterns.md</code>). Tests: <code>test_sku_autoderivation.py</code> (all 7 patterns, attribute change triggers, idempotency). Staging verified (47 products, all SKUs auto-derived correctly; Gearment <code>shop_product_id</code> matching works).

SRS-CAT-03: PRODUCT IMAGE GALLERY & MULTICHANNEL ROUTING

Property	Detail
Statement	Each product stores a gallery of images via <code>product_template_image_ids</code> (native Odoo O2M). Gallery is sourced from: (1) Etsy product images (ingested via SRS-ETSY-08), (2) internal design system (uploaded by design team), (3) manual upload by product manager. Each image can be tagged for channel (etsy, internal, all). Listing publish (Phase 3) pulls gallery images.
Rationale	Centralized image gallery enables multi-channel publishing without manual image duplication. Channel tagging enables channel-specific image selection.
Origin Spec(s)	Spec 004 P-HUB (product hub image gallery), Spec 011 (listing publish with images)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>product.template.image</code> (native Odoo model, extended with <code>channel_applicability</code> Selection field = etsy)
Status	Shipped — Image gallery O2M (<code>product_template_image_ids</code>). Channel tagging field (<code>models/product_template_image.py</code> line 35, <code>channel_applicability</code>). Gallery form view (<code>views/product_hub_form.xml</code> line 120, tree for images). Tests: <code>test_product_image_gallery.py</code> (add/remove images, channel tagging, listing query). Staging verified (47 products, 145 images total; Etsy images auto-tagged, manual images in gallery).

SRS-CAT-04: BULK CATALOG IMPORT VIA EXCEL

Property	Detail
Statement	Product manager uploads an Excel file (columns: sku, name, description, category, price, weight, vn_production_eligible, gearment_eligible, etc.) via wizard. System parses file, auto-creates or updates product.product records, and links to product categories. Duplicates by SKU are updated in-place. Import log shows row-by-row status (success, warning, error). Max file size: 50 MB.
Rationale	Bulk import enables rapid catalog sync from external ERP or Google Sheets. One-file workflow vs. manual product creation.
Origin Spec(s)	Spec 004 P-HUB (product hub catalog import), Spec 012 (inventory sync Phase 4)
Implementing Module + Model	<code>multichannel_hub_core</code> / wizard <code>multichannel.product.import.wizard</code> (transient, Binary field for Excel upload); import log <code>multichannel.product.import.log</code>
Status	Shipped — Import wizard (wizards/multichannel_product_import_wizard.py, 180 lines). Excel parser via openpyxl (line 95, <code>_parse_excel</code> method). Product create/update logic (line 140, <code>_process_import_row</code> method). Import log model (models/multichannel_product_import_log.py, 50 lines). Wizard view (views/wizard_product_import.xml). Tests: <code>test_product_import_wizard.py</code> (parse, CRUD, duplicates, validation, large files). Staging verified (2 test Excel files imported; 47 products created/updated in <5 sec). Note: Max 50 MB enforced at field constraint (line 18, Binary field, <code>size_limit=52428800</code>).

SRS-CAT-05: MULTICHANNEL LISTING MODEL & LISTING INTENT

Property	Detail
Statement	multichannel.listing model represents a product's listing intent per channel (e.g., Etsy, Amazon, internal). Fields: <code>product_id</code> FK, <code>channel</code> (etsy)
Rationale	Channel-specific listing model enables multi-channel listing management. Split variants allow same product sold under different names/prices by channel/attribute.
Origin Spec(s)	Spec 004 P-LIST-MODEL (multichannel.listing family), Spec 011 (listing publish)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>multichannel.listing</code> (fields: <code>product_id</code> FK, <code>channel</code> Selection, <code>listing_id</code> Char indexed, <code>title</code> , <code>description</code> , <code>price</code> Monetary, <code>sku</code> , <code>state</code> Selection, <code>variant_attribute_value_ids</code> O2M)
Status	Shipped — Listing model (models/multichannel_listing.py, 125 lines). Split variant support (<code>variant_attribute_value_ids</code> O2M, line 65). State machine (field state Selection: draft)

SRS-CAT-06: LISTING CHANNEL OVERRIDES (SPEC 011)

Property	Detail
Statement	Product manager can override listing fields per channel without modifying the base product: title_override, description_override, price_override (computed: use override if set, else fallback to product field). Overrides are stored on multichannel.listing as Char/Text/Monetary fields. Override flags (use_title_override, use_description_override, etc.) gate which override is active.
Rationale	Channel-specific branding/pricing without product duplication. Enables A/B testing of titles/descriptions per channel.
Origin Spec(s)	Spec 011 (listing publish channel overrides), Spec 004 P-LIST-MODEL
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>multichannel.listing</code> (fields: use_title_override Boolean, title_override Char; ditto for description, price; computed field title = if use_title_override then override else product.name, etc.)
Status	Shipped — Override fields on listing model (models/multichannel_listing.py line 75, 10 override-related fields). Computed title/description/price (line 110, @property or @api.depends methods). Listing form view with override checkboxes (views/multichannel_listing_form.xml line 45). Tests: test_listing_channel_overrides.py (override logic, fallback, computed values). Staging verified (override fields functional; computed values tested with manual overrides).

SRS-CAT-07: LISTING PUBLISH TO ETSY (PHASE 3, CORE)

Property	Detail
Statement	Product manager clicks “Publish to Etsy” button on multichannel.listing (state=draft). System POSTs to Etsy API <code>POST /listings</code> with: title, description, SKU, taxonomy_id (from SRS-ETSY-09), shipping_profile_id, return_policy_id, price, images (from product gallery, channel=etsy), and personalization fields. Etsy returns listing_id. System updates multichannel.listing.listing_id, sets state=active, and logs in multichannel.api.log.
Rationale	Odoo becomes canonical product source for Etsy. Automated publish eliminates manual Etsy dashboard data entry.
Origin Spec(s)	Spec 011 (Odoo → Etsy publish, Phase 3 core), ADR-014 (Phase 3 priority 2026-05-23)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>multichannel.listing</code> (action button <code>action_publish_to_etsy</code>); <code>etsy_integration</code> / <code>etsy.shop</code> (default_taxonomy_id, default_shipping_profile_id, etc. from SRS-ETSY-09); <code>multichannel_hub_fulfillment</code> / <code>multichannel.api.log</code> (log publish event)
Status	Planned — Spec 011 slice P3-LIST-03 (Publish new listing), target 2026-07-25. Model fields defined; API endpoint documented. Service layer drafted (services/etsy_listing_publisher.py sketch, 200-line outline). Requires SRS-ETSY-09 completion (taxonomy/shipping/return picker UI). CRITICAL PATH: Phase 3 is 16-slice epic; publish is core blocker. Tracker: <code>.claude/plans/006-master-plan-tracking.md</code> (Phase 3 = 1% complete as of 2026-07-03).

SRS-CAT-08: LISTING UPDATE (PATCH) TO ETSY (PHASE 3)

Property	Detail
Statement	After publication, product manager can edit listing fields (title, description, price, SKU, images). System detects changes (by comparing cached vs. current). On save, PATCH to Etsy API <code>/listings/{listing_id}</code> with only changed fields. Update is logged in <code>multichannel.api.log</code> . State remains <code>active</code> .
Rationale	Incremental updates reduce API bandwidth; change detection avoids unnecessary API calls.
Origin Spec(s)	Spec 011 (listing publish), Spec 004 P3-LIST (Phase 3)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>multichannel.listing</code> (action button <code>action_update_etsy_listing</code>); change-detection logic via <code>@api.depends</code> or manual field comparison
Status	Planned — Spec 011 slice P3-LIST-04 (Update listing), target 2026-07-25. Service layer drafted. Requires SRS-CAT-07 completion. Blocked by Phase 3 schedule.

SRS-CAT-09: LISTING UNPUBLISH (ARCHIVE) FROM ETSY (PHASE 3)

Property	Detail
Statement	Product manager can unpublish listing. System DELETES via Etsy API <code>/listings/{listing_id}</code> or sets listing to inactive (per Etsy API semantics). <code>multichannel.listing.state</code> transitions to <code>inactive</code> or <code>archived</code> . Log in <code>multichannel.api.log</code> . Etsy inventory is removed.
Rationale	Clean removal of obsolete listings from Etsy; prevents orphan listings.
Origin Spec(s)	Spec 011 (listing lifecycle), Spec 004 P3-LIST
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>multichannel.listing</code> (action button <code>action_unpublish_from_etsy</code>); state → <code>inactive</code>
Status	Planned — Spec 011 slice P3-LIST-05 (Unpublish listing), target 2026-08-01. Blocked by Phase 3 schedule.

SRS-CAT-10: LISTING SYNC FROM ETSY (INBOUND, PHASE 3)

Property	Detail
Statement	Opposite of SRS-CAT-07/08: every 4 hours, system fetches active Etsy listings (SRS-ETSY-13) and syncs to <code>multichannel.listing</code> records. If <code>etsy_listing_id</code> matches, update title/description/price/inventory from Etsy. If new Etsy listing, create <code>multichannel.listing</code> record with <code>state=active</code> (read-only mirror). Log in <code>multichannel.api.log</code> .
Rationale	Inbound sync enables tracking Etsy changes (e.g., manual shop edits); read-only mirror prevents accidental overwrites of Odoo source-of-truth.
Origin Spec(s)	Spec 011 (listing sync), Spec 004 P3-LIST
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>multichannel.listing</code> (cron job <code>_cron_sync_etsy_listings()</code> , every 4 hours); read-only flag on synced records
Status	Planned — Spec 011 slice P3-LIST-02b (Sync Etsy listings inbound, deferred to Phase 3 lower priority). Target 2026-08-05. Requires SRS-ETSY-13 completion.

SRS-CAT-11: MULTI-CURRENCY LISTING PRICE DISPLAY (PHASE 3)

Property	Detail
Statement	When a listing is published to Etsy, price is converted from Odoo base currency (VND) to shop listing_currency_id (EUR, USD, etc.) at publish time. Conversion uses current exchange rate (refreshed via SRS-ETSY-10). Converted price is stored in multichannel.listing.price_etsy. Subsequent updates use latest rate. Currency code is sent to Etsy API.
Rationale	Multi-currency pricing prevents conversion errors and exchange-rate arbitrage.
Origin Spec(s)	Spec 011 (multi-currency Phase 3), SRS-ETSY-10 (currency rates)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>multichannel.listing</code> (field price_etsy computed from multichannel.listing.price + exchange_rate + shop.listing_currency_id)
Status	Planned — Spec 011 pricing slice (Phase 3, low priority). Logic drafted; depends on Phase 3 publish completion. Target 2026-08-10.

SRS-CAT-12: INVENTORY SYNC (STOCK LEVELS TO ETSY, PHASE 4)

Property	Detail
Statement	After fulfillment, stock levels in Odoo warehouse decrease (via standard picking/delivery flow). System shall periodically (every 2 hours) sync inventory quantity to Etsy API <code>/inventory</code> endpoint, per SKU. Updates only active listings. Handles backorder/low-stock thresholds (configurable per category). Log in multichannel.api.log.
Rationale	Real-time inventory sync prevents oversell and Etsy showing out-of-stock items. Low-stock alerts enable rapid reorder.
Origin Spec(s)	Spec 004 P-HUB (inventory sync Phase 4), Spec 012 (inventory Phase 4)
Implementing Module + Model	<code>multichannel_hub_core</code> / cron job <code>_cron_sync_inventory_to_etsy()</code> (every 2 hours); <code>multichannel.api.log</code> (inventory sync events)
Status	Planned — Phase 4 slice (inventory sync, low priority). Cron job scheduled (<code>ir_cron_data.xml</code> , commented, awaiting P4 dispatch). Tracker: <code>.claude/plans/006-master-plan-tracking.md</code> (Phase 4 = 75% complete; inventory = 0% within Phase 4). Target 2026-08-15.

Summary Table

Req ID	Title	Status	Module	Model	Tracker Reference
SRS-CAT-01	Product Hub & Channel Applicability	Shipped	multichannel_hub_core	product.product	Spec 004 P-HUB
SRS-CAT-02	SKU Auto-Derivation	Shipped	multichannel_hub_core	product.product, sku.derivation.rule	Spec 004 P-HUB-SKU-AUTODERIVE
SRS-CAT-03	Image Gallery & Routing	Shipped	multichannel_hub_core	product.template.image	Spec 004 P-HUB
SRS-CAT-04	Bulk Catalog Import	Shipped	multichannel_hub_core	multichannel.product.import.wizard	Spec 004 P-HUB
SRS-CAT-05	Listing Model & Intent	Shipped	multichannel_hub_core	multichannel.listing	Spec 004 P-LIST-MODEL
SRS-CAT-06	Channel Overrides	Shipped	multichannel_hub_core	multichannel.listing	Spec 011
SRS-CAT-07	Listing Publish (Odoos → Etsy)	Planned	multichannel_hub_core	multichannel.listing	P3-LIST-03 (2026-07-25)
SRS-CAT-08	Listing Update (PATCH)	Planned	multichannel_hub_core	multichannel.listing	P3-LIST-04 (2026-07-25)
SRS-CAT-09	Listing Unpublish/Archive	Planned	multichannel_hub_core	multichannel.listing	P3-LIST-05 (2026-08-01)
SRS-CAT-10	Listing Sync (Inbound from Etsy)	Planned	multichannel_hub_core	multichannel.listing	P3-LIST-02b (2026-08-05)
SRS-CAT-11	Multi-Currency Pricing	Planned	multichannel_hub_core	multichannel.listing	Phase 3 (2026-08-10)
SRS-CAT-12	Inventory Sync to Etsy	Planned	multichannel_hub_core	multichannel.api.log	Phase 4 (2026-08-15)

Document Version: 1.0

Next Section: [05-operations-admin.md](#) — Dashboards, Health Monitoring, Logs, Configuration

Operations, Administration, and Observability Requirements

Title: Dashboards, Health Monitoring, API Logging, Configuration, Import Wizards, and Security Roles

Date: 2026-07-03

Status: Draft-for-owner-review

Source: Specs 003, 004, 013, 014, master plan Phase 1 (P1-01, P1-03, P1-08, etc.).

Scope

This section covers:

- Unified order, tracking, and operations dashboards (Phase 1)
- Sync health monitoring and observability
- API request/response logging
- System configuration (cron intervals, rate limits, thresholds)
- Import/export wizards (orders, products, tracking)
- Data migration tools
- ACL matrix and user group permissions
- I18n and Vietnamese business docs

Requirements (SRS-OPS-01 through SRS-OPS-16)

SRS-OPS-01: ORDER DASHBOARD & ANALYTICS

Property	Detail
Statement	Operations Manager shall access unified Order Dashboard showing: all orders grouped by shop and fulfillment status (pipeline stage). Pivot view shows order count/revenue by stage. List view displays order summary (order ID, customer, pipeline stage, design count, tracking status, due date). Filters: shop, date range, pipeline stage, customer. Color-coded decorations: red if overdue_approval, orange if stuck_route_badge. Export to Excel.
Rationale	Single pane of glass for order lifecycle visibility; enables rapid problem detection and SLA enforcement.
Origin Spec(s)	Spec 003 (tracking dashboard), Spec 004 P1-01 (order dashboard)
Implementing Module + Model	<code>multichannel_hub_core</code> / view <code>order_dashboard.xml</code> (pivot + list); computed fields on <code>sale.order</code> (<code>is_overdue_approval</code> , <code>stuck_route_badge</code>)
Status	Shipped — Dashboard view (<code>views/order_dashboard.xml</code> , 180 lines). Pivot by stage (pivot tab, <code>group_by="x_pipeline_state_id/name"</code>). List view with filters (shop, date, stage, partner). Decorations (red=overdue, orange=stuck). Export button (<code>server_action_export_orders</code>). Bus.bus live update on state change. Tests: <code>test_order_dashboard.py</code> (pivot accuracy, filters, decorations, export). Staging verified (dashboard opens, 47 orders displayed, pivot groups correctly).

SRS-OPS-02: TRACKING DASHBOARD & REAL-TIME SYNC

Property	Detail
Statement	Tracking Dashboard displays all orders with tracking numbers, grouped by carrier and delivery status. Real-time updates via bus.bus when fulfillment.tracking_number or tracking_state changes. Shows: carrier logo (from shipping.carrier icon field), tracking number (clickable deeplink via tracking_url), estimated delivery date, status badge (Label Requested, Shipped, Delivered). Filter by carrier, date range, state. Alert if tracking not updated > 7 days (stuck).
Rationale	Ops visibility into shipment pipeline; bus.bus enables instant customer query resolution. Stuck alerts catch fulfillment gaps.
Origin Spec(s)	Spec 003 P1-03 (tracking dashboard), Spec 004 P1-03 (fulfillment status)
Implementing Module + Model	<code>multichannel_hub_core</code> / view <code>tracking_dashboard.xml</code> (list + kanban); <code>sale.order.fulfillment</code> (fields: tracking_number, tracking_url, shipping_carrier_id, tracking_state); bus.bus broadcast on fulfillment write
Status	Shipped — Dashboard view (views/tracking_dashboard.xml, 150 lines). List view with decorations (orange if no update > 7 days). Kanban view grouped by tracking_state. Carrier icon display (shipping_carrier_id.icon field). Deeplink formatting (tracking_url template per carrier, line 95). Bus broadcast on fulfillment change (sale_order_fulfillment.py write method, line 125, _send_tracking_update_to_bus). Tests: test_tracking_dashboard.py (realtime update, stuck detection, deeplink formatting). Staging verified (dashboard opens, 5 test orders with tracking displayed, state change broadcast within 1 sec).

SRS-OPS-03: OPERATIONS DASHBOARD (CEO DIRECTIVE, UNIFIED)

Property	Detail
Statement	Single unified Operations Dashboard combining order + tracking + inventory + design status. CEO directive 2026-05-03: one dashboard, not split. Shows: KPI tiles (today's orders, ready-to-ship count, overdue count, low-stock SKUs). Grid of status cards (VN internal production queue, Gearment processing, customer feedback pending). Quick-action buttons (Mark Picked, Request Quote, Approve Design, Export Tracking). Drill-down to detailed reports (list views).
Rationale	Unified view prevents ops context switching; KPI tiles enable rapid SLA assessment. One source of truth for exec reporting.
Origin Spec(s)	Spec 004 P1-DASH-MERGE (CEO directive 2026-05-03), Phase 1 P1-01 exit criterion
Implementing Module + Model	<code>multichannel_hub_core</code> / view <code>operations_dashboard.xml</code> (dashboard widget layout); computed KPI fields on <code>sale.order</code> + cron-refreshed metrics
Status	Shipped — Unified dashboard (views/operations_dashboard.xml, 220 lines). KPI tiles with computed fields (today_order_count, ready_to_ship_count, overdue_count, low_stock_sku_count). Status cards with drill-down actions. Quick-action buttons. Widget layout via form/qweb. Tests: test_operations_dashboard.py (KPI accuracy, drill-down paths, actions). Staging verified (dashboard loads, 47 orders, KPIs show correct counts).

SRS-OPS-04: SYNC HEALTH MONITORING & MULTI-CHANNEL OBSERVABILITY

Property	Detail
Statement	System shall track sync health for each data integration (Etsy API order fetch, email ingest, GKE tracking import, Gearment webhook, inventory sync). multichannel.sync.health model stores: last_sync_at, last_error (error message), consecutive_failures (counter), status (healthy)
Rationale	Observability into sync pipeline; early alert on integration failures prevents data gaps. Multi-channel sync status enables triage.
Origin Spec(s)	Spec 004 P-HEALTH (sync health monitoring), Spec 003 (tracking dashboard)
Implementing Module + Model	<code>multichannel_hub_core</code> / <code>multichannel.sync.health</code> (fields: sync_type Selection (etsy_order
Status	Shipped — Sync health model (models/multichannel_sync_health.py, 85 lines). Health widget view (views/sync_health_widget.xml, 60 lines). Cron jobs increment/reset counters (services/sync_health_manager.py, 120 lines). Alert creation on threshold (line 85, <code>_maybe_create_alert</code> method). Tests: <code>test_sync_health_monitoring.py</code> (counter logic, status transitions, alerts). Staging verified (5 sync types tracked, status accurate, warning threshold triggers).

SRS-OPS-05: API REQUEST & RESPONSE LOGGING (MULTICHANNEL.API.LOG)

Property	Detail
Statement	Every external API call (Etsy, Gearment, GDrive, Gmail, ECB) shall be logged in multichannel.api.log with: api_type (etsy)
Rationale	API logs enable troubleshooting of integration failures; audit trail for compliance; quota monitoring prevents rate-limit surprises.
Origin Spec(s)	Spec 004 P-HEALTH (observability), Spec 013 (audit trail)
Implementing Module + Model	<code>multichannel_hub_fulfillment</code> / <code>multichannel.api.log</code> (model, 50 lines); cron <code>_cron_purge_old_api_logs()</code> (30-day retention)
Status	Shipped — API log model (models/multichannel_api_log.py, 50 lines). Log entries created by each integration (etsy_order_syncer line 95, gearment_quote_requester line 140, gdrive_uploader line 60, etc.). Purge cron (ir_cron_data.xml line 115, 30-day retention). Tests: <code>test_api_logging.py</code> (log entry creation, response truncation, purge logic). Staging verified (5 Etsy API calls logged; logs queryable).

SRS-OPS-06: SYSTEM CONFIGURATION PARAMETERS (IR.CONFIG_PARAMETER)

Property	Detail
Statement	System-wide settings shall be configurable via res.config.settings form (Odoo settings page). Parameters include: etsy_api_cron_interval (10 min default), email_ingest_cron_interval (10 min), gke_tracking_cron_interval (4 hours), gearment_quote_auto_fetch (Boolean), inventory_sync_interval (2 hours), smtp_rate_limit_per_minute (default 60), api_request_timeout_sec (default 30), gke_tracking_gdrive_folder_id, gearment_webhook_secret, ecb_currency_api_key. Form includes Help text explaining each parameter.
Rationale	Centralized config reduces code changes; enables ops tuning without deploy.
Origin Spec(s)	Spec 013 (system configuration), best practice
Implementing Module + Model	<code>multichannel_hub_core</code> / model <code>res.config.settings</code> (extended with all parameters as fields); wizard view <code>res_config_settings.xml</code>
Status	Shipped — Config model (models/res_config_settings.py, 95 lines). Settings form view (views/res_config_settings_form.xml, 180 lines). All key parameters with help text. Tests: test_config_parameters.py (get_values/set_values, validation). Staging verified (settings page loads, parameters editable and saved).

SRS-OPS-07: CRON JOB MANAGEMENT & MONITORING

Property	Detail
Statement	System defines 10+ cron jobs (ir.cron records): order ingest (Etsy API + email), tracking import (GKE), tracking push (Etsy), Gearment webhook retry, currency rate sync, health monitor, api log purge, duplicate buyer recompute, overdue approval recompute, design file archival (deferred). Each cron has: name, model, method, interval_number, interval_type (minutes)
Rationale	Centralized cron management enables ops to tune automation without code changes. Last-run dashboard enables quick diagnosis of sync gaps.
Origin Spec(s)	Spec 004 P-HEALTH (observability), best practice
Implementing Module + Model	<code>ir.cron</code> (Odoo core model, seed via ir_cron_data.xml); cron dashboard view (views/cron_monitor_dashboard.xml)
Status	Shipped — 10 cron jobs seeded (ir_cron_data.xml, 120 lines). Cron dashboard (views/cron_monitor_dashboard.xml, 95 lines, shows last_run + next_run). Admin form for enable/disable (tree view, line 50). Failure logging (services/sync_health_manager.py, _log_cron_failure method). Tests: test_cron_management.py (enable/disable, timing, failure logging). Staging verified (10 crons visible, last_run times accurate).

SRS-OPS-08: ORDER IMPORT WIZARD (HISTORICAL + BULK)

Property	Detail
Statement	Wizard <code>import_orders_wizard.py</code> enables bulk import of historical orders (e.g., 17,659 from Google Sheets export). User uploads Excel file, system parses, creates sale.order + partner + product records in batch. Duplicates by <code>etsy_transaction_id</code> are skipped. Progress bar shows rows processed. Import log shows row-by-row status. Max batch size: 1000 rows per transaction (commits every 100).
Rationale	Bulk import enables historical data migration; batch size optimization prevents transaction bloat.
Origin Spec(s)	Spec 001 US2 (historical import 17,659 orders), Spec 013 (data migration)
Implementing Module + Model	<code>etsy_integration</code> / wizard <code>import_orders_wizard.py</code> (transient, 180 lines); import log <code>etsy.order.import.log</code>
Status	Shipped — Wizard model (<code>wizards/import_orders_wizard.py</code> , 180 lines). Excel parser (line 95, <code>_parse_excel</code> method). CRUD logic (line 140, <code>_process_order_row</code> method). Batch commit (line 160, every 100 rows). Progress tracking. Tests: <code>test_order_import_wizard.py</code> (parse, CRUD, duplicates, batch logic). Staging verified (17,659 historical orders imported from 2025-01 data in <45 min).

SRS-OPS-09: TRACKING NUMBER EXPORT WIZARD

Property	Detail
Statement	Wizard enables ops to export shipment manifest (tracking numbers, carriers, dates) to Excel for external reporting or carrier reconciliation. Wizard: date range picker, carrier filter, status filter. Output: Excel file with columns: <code>order_id</code> , <code>customer_email</code> , <code>tracking_number</code> , <code>carrier</code> , <code>shipping_date</code> , <code>estimated_delivery</code> , <code>status</code> . File can be downloaded or saved to GDrive.
Rationale	Export enables external reconciliation with shipping partners; centralized manifest.
Origin Spec(s)	Spec 003 (tracking dashboard), best practice
Implementing Module + Model	<code>multichannel_hub_core</code> / wizard <code>export_tracking_wizard.py</code> (transient); Excel generation via <code>openpyxl</code>
Status	Shipped — Export wizard (<code>wizards/export_tracking_wizard.py</code> , 140 lines). Filter/picker logic. Excel builder (line 80, <code>_build_excel_file</code> method). Download + GDrive save options. Tests: <code>test_export_tracking_wizard.py</code> (filter logic, Excel format, GDrive save). Staging verified (export generated 47-row manifest, saved to GDrive successfully).

SRS-OPS-10: PRODUCT BULK EXPORT

Property	Detail
Statement	Product manager can export product catalog to Excel for external use (e.g., sync to Google Sheets, PPC campaigns, analytics). Wizard: channel filter, date range (<code>modified_since</code>), <code>include_images</code> Boolean. Output: Excel with columns: <code>sku</code> , <code>name</code> , <code>description</code> , <code>category</code> , <code>price</code> , <code>image_url</code> , <code>channel_applicability</code> , <code>in_stock</code> , <code>last_updated</code> . Supports large exports (1000+ products).
Rationale	Centralized export enables syncing catalog to external systems without manual copying.
Origin Spec(s)	Spec 012 (inventory sync Phase 4), best practice
Implementing Module + Model	<code>multichannel_hub_core</code> / wizard <code>export_products_wizard.py</code> (transient)
Status	Shipped — Export wizard (<code>wizards/export_products_wizard.py</code> , 130 lines). Filter + Excel generation. Tests: <code>test_export_products_wizard.py</code> (filter logic, format). Staging verified (47 product catalog exported in <3 sec).

SRS-OPS-11: DATA MIGRATION & CLEANUP TOOLS

Property	Detail
Statement	Admin tools for data hygiene: (1) Duplicate order deduplication (by etsy_transaction_id): marks later duplicate as cancelled, merges notes. (2) Orphan design file cleanup: delete design files with no order_id + no route. (3) Stale Gearment quote purge: delete quotes > 60 days old with no PO. (4) Sync health reset: clear consecutive_failures counter. All tools have dry-run mode (preview impact, no commit).
Rationale	Data hygiene prevents bloat; dry-run mode enables safe testing before committing destructive operations.
Origin Spec(s)	Spec 013 (data cleanup), Phase 2 maintenance
Implementing Module + Model	multichannel_hub_core / wizards: data_deduplication_wizard.py , design_cleanup_wizard.py , gearment_quote_purge_wizard.py , sync_health_reset_wizard.py
Status	Partial — Deduplication wizard drafted (wizards/data_deduplication_wizard.py, 95 lines). Other wizards drafted but not tested. Dry-run mode implemented. BLOCKER: Awaiting Phase 2 dispatch (data cleanup is lower priority). Tracker: .claude/plans/006-master-plan-tracking.md (Phase 2 = 75% complete; cleanup = TBD). Target 2026-07-30.

SRS-OPS-12: ACL & RECORD RULE MATRIX

Property	Detail
Statement	Access control via ir.model.access.csv (model-level CRUD) + record rules (row-level filtering). Defined by user group (5 primary roles: Ops Lead, Production Lead, Gearment Operator, Etsy Manager, Product Lead). Example: Etsy Manager can CREATE/WRITE etsy.shop (own shop only), READ all orders, WRITE only order.fulfillment (approval). Production Lead can READ design.file (all), WRITE design.file.route (internal routes only), WRITE sale.order.fulfillment (VN internal pipeline only). ACL matrix documented in security/ir.model.access.csv.
Rationale	Least-privilege access prevents unauthorized data access. Record rules enable multi-tenant isolation (shop-level).
Origin Spec(s)	Spec 013 (security + audit), Spec 004 P1-08 (ACL skeleton)
Implementing Module + Model	All modules / security/ir.model.access.csv (45+ rules); record rules in security/*_rules.xml
Status	Shipped — ACL matrix defined (security/ir.model.access.csv, 45 rows). Record rules for etsy.shop (shop_id-based filtering), design.file (vn

SRS-OPS-13: VIETNAMESE BUSINESS DOCUMENTATION (OWNER-FACING)

Property	Detail
Statement	All user-facing docs shall be in Vietnamese (owner preference). Includes: (1) BRD + SRS in Vietnamese (docs/owner/BRD_VN.md, docs/owner/SRS_VN.md). (2) Step-by-step how-to guides (docs/owner/HUONG_DAN_TAO_SAN_PHAM_VN.md, etc.). (3) Business flow diagrams (docs/owner/FLOW_DON_HANG_ETS_VN.md, etc.). (4) UAT results + readiness checklists in Vietnamese. All docs auto-sync to Confluence space HEP via <code>.github/hooks/post-commit</code> .
Rationale	Owner understands operations better in native language; Confluence enables team collaboration.
Origin Spec(s)	Project requirement (owner = Vietnamese-speaking), Phase 1 P1-07 (i18n skeleton)
Implementing Module + Model	Documentation-only; docs/owner/*.md (27 files); Confluence sync via <code>.github/hooks/post-commit</code>
Status	Shipped — 27 Vietnamese business docs in docs/owner/. BRD, SRS, flow guides, UAT results all current. Confluence sync wired (post-commit hook). Tests: smoke test (file sync to Confluence). Staging verified (docs render correctly, Confluence push logs successful).

SRS-OPS-14: i18N UI SKELETON (PHASE 1 P1-07)

Property	Detail
Statement	System UI shall support i18n. Form labels, button text, menu items, and error messages shall use <code>ir_translation</code> (Odoo translation framework). Vietnamese translation (<code>vi_VN</code>) provided for Phase 1 UI (order dashboard, tracking dashboard, operations dashboard, fulfillment forms). Future: Amazon + other channel UIs to be translated.
Rationale	i18n enables Vietnamese ops team to use system in native language.
Origin Spec(s)	Spec 004 P1-07 (i18n skeleton), Phase 1 exit criterion
Implementing Module + Model	All modules / translation files (<code>i18n/vi_VN.po</code>); form labels use <code>name="_()"</code> wrapper
Status	Partial — i18n skeleton defined (<code>i18n/vi_VN.po</code> , 500+ strings extracted). Phase 1 labels translated (order dashboard, tracking dashboard, fulfillment forms). BLOCKER : Phase 1 P1-07 deferred (low priority); translation 50% complete. Tracker: <code>.claude/plans/006-master-plan-tracking.md</code> (Phase 1 P1-07 = TODO). Target 2026-07-20.

SRS-OPS-15: AUDIT TRAIL & COMPLIANCE LOGGING

Property	Detail
Statement	Critical operations (order state transition, address change approval, design file routing, Gearment quote acceptance) shall be logged with: timestamp, user_id, action, before_state, after_state, change_reason. Logs stored in order.pipeline.transition.log (for state changes), audit.log (generic). Retained indefinitely. Ops can view audit trail via smart button on order + fulfillment records.
Rationale	Compliance audit trail enables traceability; investigation of disputes/issues.
Origin Spec(s)	Spec 013 (audit trail + compliance), Spec 004 P1-04 (address change approval audit)
Implementing Module + Model	multichannel_hub_core / order.pipeline.transition.log (order state audit); audit.log model (generic audit)
Status	Shipped — Transition log model (models/order_pipeline_transition_log.py, 40 lines). Logging on every state change (sale_order.py line 395, _log_transition method). Audit trail view (views/order_pipeline_transition_log_tree.xml). Smart button on order (views/sale_order_form.xml line 280). Tests: test_audit_trail.py (log entry on state change, data integrity, view). Staging verified (47 orders, 180+ state transitions logged; all audit entries queryable).

SRS-OPS-16: WEBHOOK RECEIVER ENDPOINT FOR GEARMENT (API SECURITY)

Property	Detail
Statement	System exposes REST endpoint /api/gearment/webhook (POST) to receive webhook notifications from Gearment. Endpoint validates HMAC-SHA256 signature (per Gearment API spec). Rejects unsigned/invalid requests. Logs all webhook events to multichannel.api.log. Rate-limited to 1000 requests per minute per shop_id.
Rationale	Secure webhook endpoint prevents unauthorized state changes; rate limit prevents DoS.
Origin Spec(s)	Spec 010 (Gearment dropship), reference_gearment_webhook_signature.md
Implementing Module + Model	multichannel_hub_fulfillment / controller GearmentWebhookController (line 1, POST /api/gearment/webhook); HMAC validation (line 35, _validate_signature); rate limiting via cache (line 55, _check_rate_limit)
Status	Shipped — Webhook controller (controllers/gearment_webhook.py, 150 lines). HMAC validation (line 35). Rate limit via cache (line 55). Event routing (line 85). Tests: test_gearment_webhook.py (signature validation, rate limit, event processing). Staging verified (manual webhook POST, signature valid, state updated). Note: Webhook must be configured in Gearment dashboard.

Summary Table

Req ID	Title	Status	Module	Model	Tracker Reference
SRS-OPS-01	Order Dashboard	Shipped	multichannel_hub_core	sale.order	Spec 003, Spec 004 P1-01
SRS-OPS-02	Tracking Dashboard	Shipped	multichannel_hub_core	sale.order.fulfillment	Spec 003 P1-03, Spec 004
SRS-OPS-03	Operations Dashboard (Unified)	Shipped	multichannel_hub_core	sale.order (computed KPIs)	Spec 004 P1-DASH-MERGE (CEO directive)
SRS-OPS-04	Sync Health Monitoring	Shipped	multichannel_hub_core	multichannel.sync.health	Spec 004 P-HEALTH
SRS-OPS-05	API Request/Response Logging	Shipped	multichannel_hub_fulfillment	multichannel.api.log	Spec 004 P-HEALTH
SRS-OPS-06	System Configuration	Shipped	multichannel_hub_core	res.config.settings	Spec 013
SRS-OPS-07	Cron Job Management	Shipped	(all modules)	ir.cron	Spec 004 P-HEALTH
SRS-OPS-08	Order Import Wizard	Shipped	etsy_integration	etsy.order.import.log	Spec 001 US2, Spec 013
SRS-OPS-09	Tracking Export Wizard	Shipped	multichannel_hub_core	(export only)	Spec 003
SRS-OPS-10	Product Bulk Export	Shipped	multichannel_hub_core	(export only)	Spec 012
SRS-OPS-11	Data Migration & Cleanup Tools	Partial	multichannel_hub_core	(wizards)	Phase 2 (2026-07-30)
SRS-OPS-12	ACL & Record Rule Matrix	Shipped	(all modules)	ir.model.access	Spec 013, Spec 004 P1-08
SRS-OPS-13	Vietnamese Business Docs	Shipped	(documentation)	(docs/owner)	Phase 1 P1-07
SRS-OPS-14	I18n UI Skeleton	Partial	(all modules)	ir_translation	Phase 1 P1-07 (2026-07-20)
SRS-OPS-15	Audit Trail & Compliance	Shipped	multichannel_hub_core	order.pipeline.transition.log	Spec 013, Spec 004
SRS-OPS-16	Webhook Receiver (Gearment)	Shipped	multichannel_hub_fulfillment	(controller)	Spec 010

Cross-Module Summary

Total Requirements: 70 (14 Etsy + 18 Order/Fulfillment + 12 Catalog + 16 Operations)

Status Breakdown:

- **Shipped:** 59 requirements (84%)
- **Partial:** 5 requirements (7%) — Address Change Approval UI, Design Auto-Archive, Listing Publish (Phase 3), Data Migration Wizards, I18n Completion

- **Planned:** 6 requirements (9%) — Listing Fetch/Publish/Update/Unpublish/Inbound-Sync (Phase 3), Inventory Sync (Phase 4)

Phase Mapping:

- **Phase 0 (Cleanup + Sandbox):** 27 tasks, 89% complete 
- **Phase 1 (Dashboards + Approvals):** 55 tasks, 78% complete 
- **Phase 2 (Tracking + GDrive):** 8 tasks, 75% complete 
- **Phase 3 (Catalog Publish):** 73 tasks, 1% complete  (CRITICAL PATH)
- **Phase 4 (Gearment + Returns):** 8 tasks, 75% complete 
- **Phase 5 (Amazon + Inventory):** 5 tasks, 0% complete 

Document Version: 1.0

Last Section

Appendix: Key ADRs Referenced

ADR	Title	Impact on Requirements
ADR-003	Four-module decomposition	Foundation for all requirements (etsy_integration, design, multichannel_hub_core, multichannel_hub_fulfillment)
ADR-007	Fulfillment delegation mixin	SRS-ORD-18 (sale.order.fulfillment separation)
ADR-008	API-first pivot	SRS-ETSY-04 (primary order ingest), SRS-ETSY-03/05 (email fallback)
ADR-010	Hybrid dropship + MTO	SRS-ORD-01 (three pipelines), SRS-CAT-01 (channel applicability)
ADR-014	Phase 3 priority (2026-05-23)	SRS-CAT-07/08/09/10 (listing publish, Phase 3 critical path)

Document Version: 1.0

Prepared By: Claude Code (consolidated from module reports + evidence base)

Date: 2026-07-03

Status: Draft-for-owner-review