

Configuration as Data - Environment Variables, Secrets and ConfigMaps



Kien Bui

DevOps & Platform Engineer

Course Overview



Configuring and Managing Storage in
Kubernetes

Configuration as Data - Environment
Variables, Secrets and ConfigMaps

Managing and Controlling the
Kubernetes Scheduler

Overview

W

Configuring Pods with EnvironmentVariables

Working with Sensitive Data Using Secrets

Managing Application Configuration with
ConfigMaps

Why Do we Need Configuration as Data?


Abstraction

Container Images are
Immutable

Service Discovery

Sensitive Information

Configuring Applications in Pods

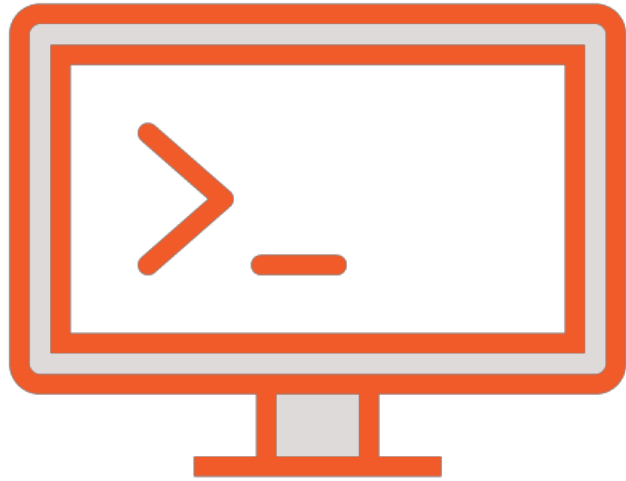

Command Line
Arguments




Environment
Variables



ConfigMaps

Environment Variables Inside Pods

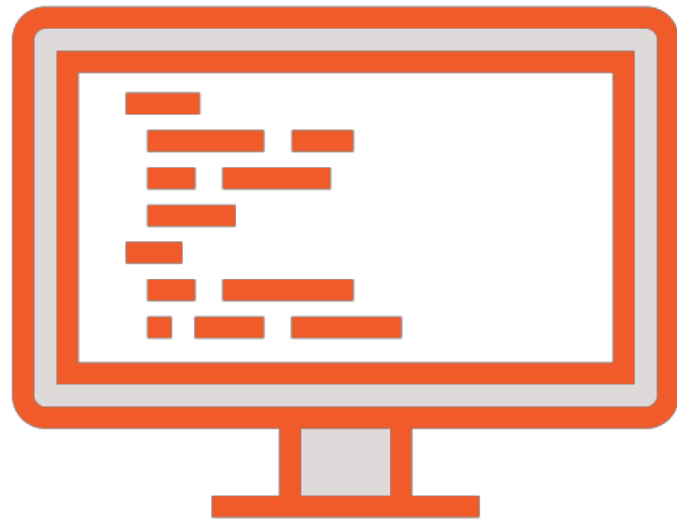

User defined

Pod Spec for each container

Defined inside the container image

Defined in `name/value` or `valueFrom`

System defined

Names of all Services available at the time the Pod was created

Defined at container startup

Cannot be updated once the Pod is created

Defining Environment Variables

```
spec:
  containers:
  - name: hello-world
    image: gcr.io/google-samples/hello-app:1.0
    env:
    - name: DATABASE_SERVERNAME
      value: "sql.example.local"
    - name: BACKEND_SERVERNAME
      value: "be.example.local"
```

Demo

Passing configuration into containers
using Environment Variables

Secrets



Store sensitive information as Objects



Retrieve for later use



Passwords, API tokens, keys and certificates



Safer and more flexible configurations (Pod Specs and Images)

Properties of Secrets



base64 encoded

Encryption can be configured

Stored in etcd

Namespaced and can only be referenced by Pods in the same Namespace

Unavailable Secrets will prevent a Pod from starting up

<https://kubernetes.io/docs/tasks/administer-cluster/encrypt-data/>

Creating Secrets

```
kubectl create secret generic app1 \  
  --from-literal=USERNAME=app1login \  
  --from-literal=PASSWORD='S0methingS@Str0ng!'
```

Using Secrets in Pods

Environment Variables

Volumes or Files

Referenced Secret must be created and accessible
for the Pod to start up

Using Secrets in Environment Variables

```
spec:
  containers:
  - name: hello-world
    ...
  env:
  - name: app1username
    valueFrom:
      secretKeyRef:
        name: app1
        key: USERNAME
  - name: app1password
    valueFrom:
      secretKeyRef:
        name: app1
        key: PASSWORD
```

```
spec:
  containers:
  - name: hello-world
    ...
  envFrom:
  - secretRef:
      name: app1
```

Using Secrets as Files

```
spec:
  volumes:
    - name: appconfig
      secret:
        secretName: app1
        /etc/appconfig/USERNAME
        /etc/appconfig/PASSWORD
  containers:
    ...
    volumeMounts:
      - name: appconfig
        mountPath: "/etc/appconfig"
```

Demo

Creating and accessing Secrets

Accessing Secrets inside a Pod

- Environment variables
- Files and Volumes

Accessing a Private Container Registry



Secrets for application configuration

Use Secrets to access a private container registry

Want to access registries over the Internet

Docker Hub

Cloud based container registries

Create a Secret of type `docker-registry`

Enabling Kubernetes (kubelet) to pull the images from the private registry

Demo

Pulling a container image from a private container repository

ConfigMaps



Key value pairs exposed into a Pod used application configuration settings

Defining application or environment specific settings

Decouple application and Pod configurations

Maximizing our container image's portability

Environment Variables or Files

Using ConfigMaps in Pods



Environment variables

`valueFrom` **and** `envFrom`

Volumes and Files

Volume mounted inside a container

Single file or directory

Many files or directories

Volume ConfigMaps can be updated

Defining ConfigMaps

```
kubectl create configmap appconfigprod \  
  --from-literal=DATABASE_SERVERNAME=sql.example.local \  
  --from-literal=BACKEND_SERVERNAME=be.example.local
```

```
kubectl create configmap appconfigqa \  
  --from-file=appconfigqa
```

```
apiVersion: v1  
kind: ConfigMap  
metadata:  
  name: appconfigprod  
data:  
  BACKEND_SERVERNAME: be.example.local  
  DATABASE_SERVERNAME: sql.example.local
```

Using ConfigMaps in Environment Variables

```
spec:
  containers:
  - name: hello-world
    ...
  env:
  - name: DATABASE_SERVERNAME
    valueFrom:
      configMapKeyRef:
        name: appconfigprod
        key: DATABASE_SERVERNAME
  - name: BACKEND_SERVERNAME
    valueFrom:
      configMapKeyRef:
        name: appconfigprod
        key: BACKEND_SERVERNAME
```

```
containers:
- name: hello-world
  ...
  envFrom:
    - configMapRef:
        name: appconfigprod
```

Using ConfigMaps as Files

```
spec:
  volumes:
    - name: appconfig
      configMap:
        name: appconfigqa
  containers:
    - name: hello-world
      ...
  volumeMounts:
    - name: appconfig
      mountPath: "/etc/appconfig"
```

Demo

Creating ConfigMaps

Using ConfigMaps in Pods

Review

Configuring Pods with EnvironmentVariables

Working with Sensitive Data Using Secrets

Managing Application Configuration with
ConfigMaps

What's Next!

Managing and Controlling the Kubernetes Scheduler