


name : Bùi Hữu Gia Bảo


id: 11247144

class: ds66b


Screenshot for web week 9 along the wayyy for
checkpoint

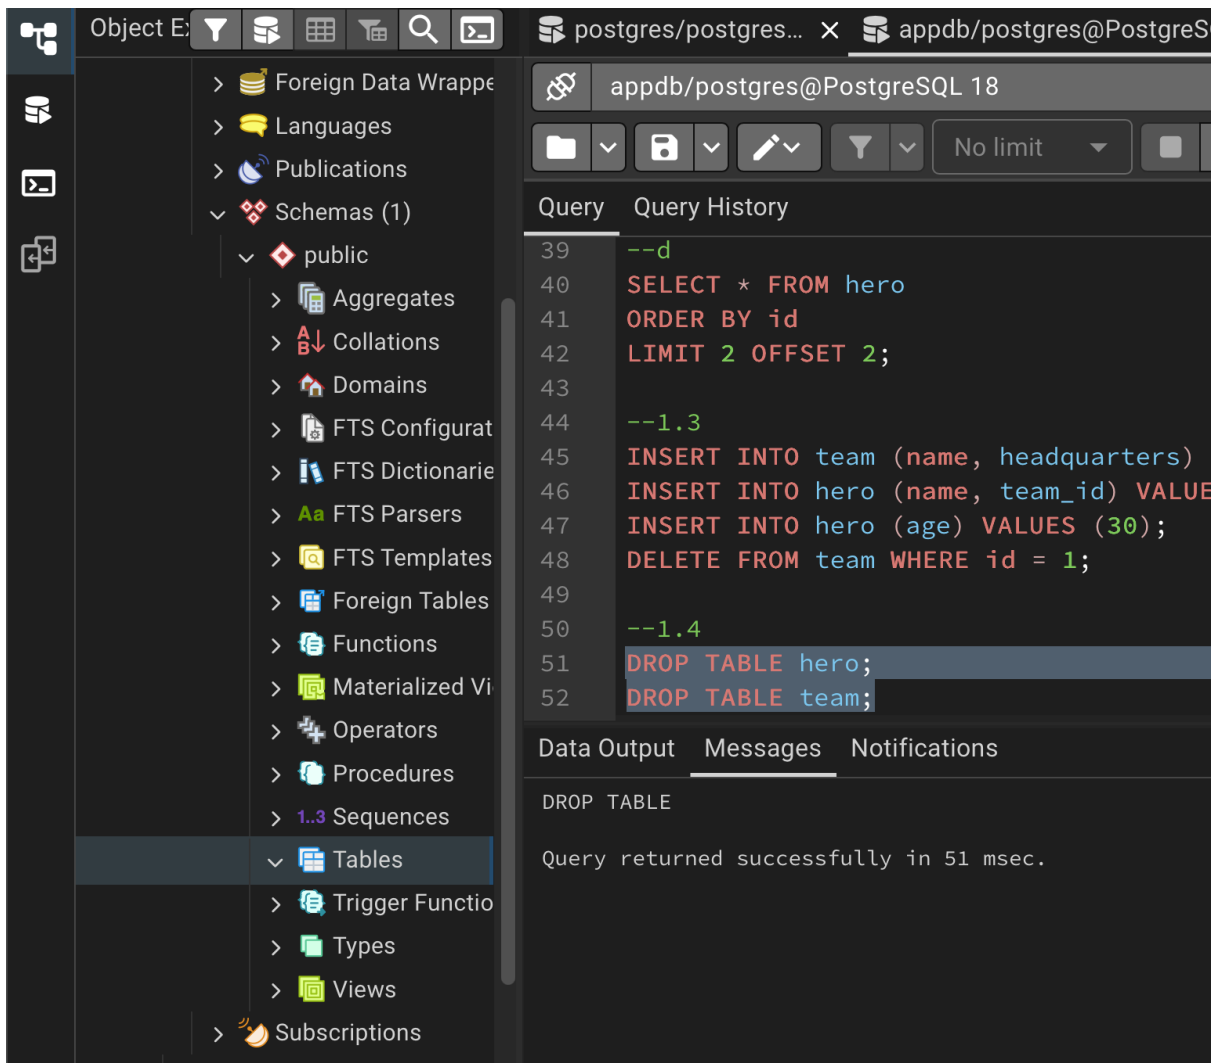

2

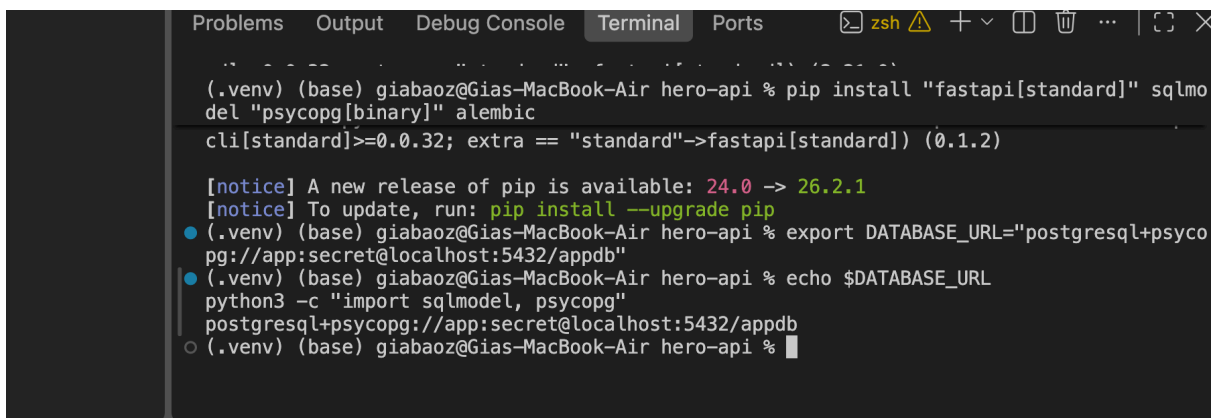


3

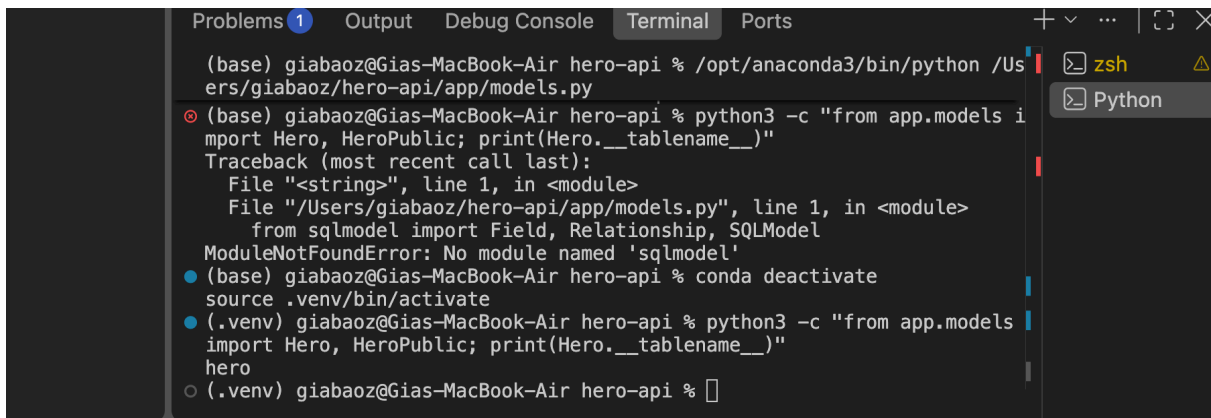

A terminal window with tabs for Problems, Output, Debug Console, Terminal, and Ports. The Terminal tab is active, showing a series of commands and their outputs. The first command is a Python command that fails with a `ModuleNotFoundError: No module named 'sqlmodel'`. The subsequent commands involve activating a virtual environment and running the same Python command again, which then succeeds.

```
(base) giabaoz@Gias-MacBook-Air hero-api % /opt/anaconda3/bin/python /Users/giabaoz/hero-api/app/models.py
(base) giabaoz@Gias-MacBook-Air hero-api % python3 -c "from app.models import Hero, HeroPublic; print(Hero.__tablename__)"
Traceback (most recent call last):
  File "<string>", line 1, in <module>
  File "/Users/giabaoz/hero-api/app/models.py", line 1, in <module>
    from sqlmodel import Field, Relationship, SQLModel
ModuleNotFoundError: No module named 'sqlmodel'
(base) giabaoz@Gias-MacBook-Air hero-api % conda deactivate
source .venv/bin/activate
(.venv) giabaoz@Gias-MacBook-Air hero-api % python3 -c "from app.models import Hero, HeroPublic; print(Hero.__tablename__)"
hero
(.venv) giabaoz@Gias-MacBook-Air hero-api %
```

4

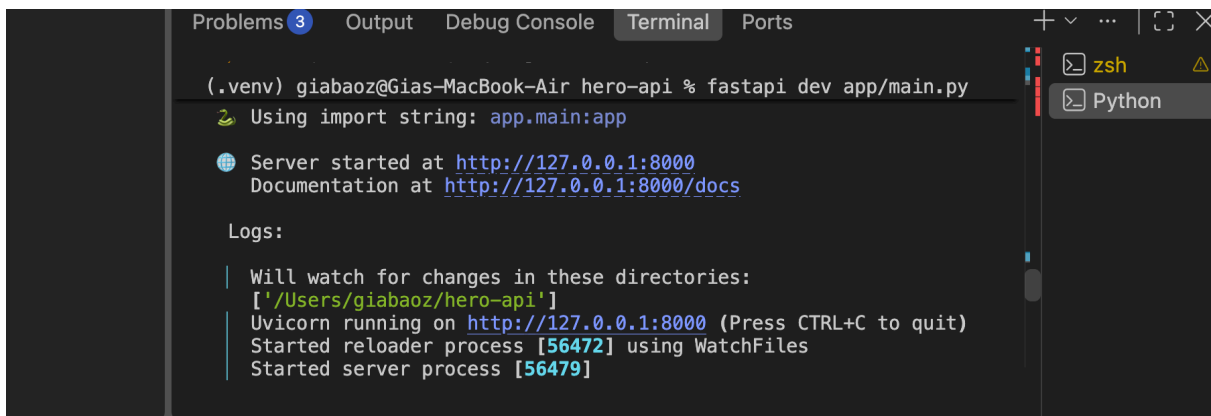


A terminal window with tabs for Problems, Output, Debug Console, Terminal, and Ports. The Terminal tab is active, showing the output of the `fastapi dev app/main.py` command. The output includes the server starting at `http://127.0.0.1:8000` and the documentation at `http://127.0.0.1:8000/docs`. It also shows the logs for the Uvicorn server, including the directories it will watch and the process IDs for the reloader and server.

```
(.venv) giabaoz@Gias-MacBook-Air hero-api % fastapi dev app/main.py
Using import string: app.main:app


Server started at http://127.0.0.1:8000
Documentation at http://127.0.0.1:8000/docs

Logs:
Will watch for changes in these directories:
['/Users/giabaoz/hero-api']
Uvicorn running on http://127.0.0.1:8000 (Press CTRL+C to quit)
Started reloader process [56472] using WatchFiles
Started server process [56479]
```

5 . important a

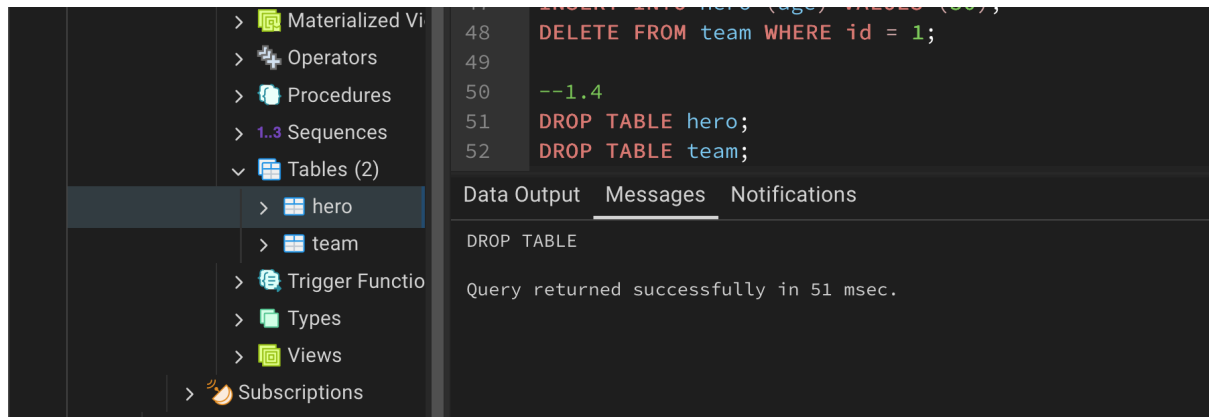

6.important b

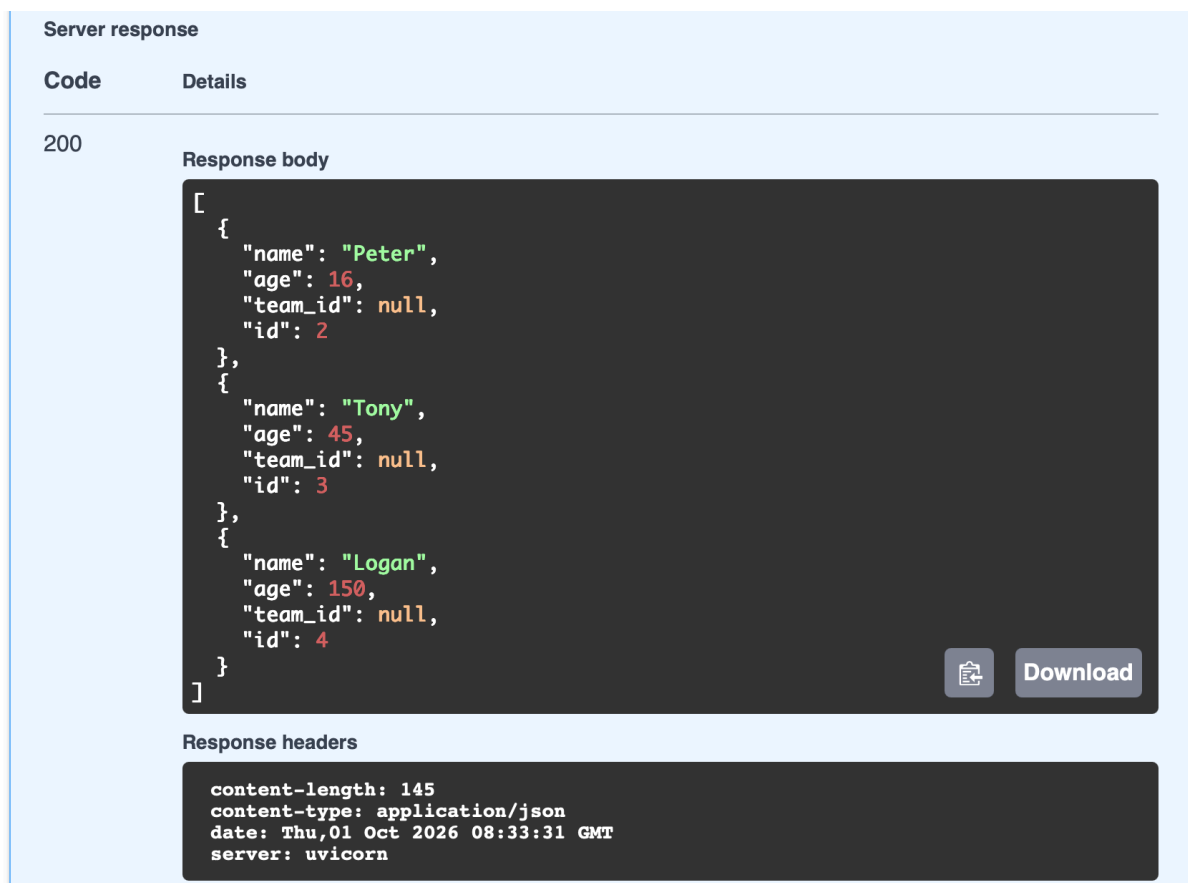

7

```
-d '{
  "name": "Avengers",
  "headquarters": "New York"
}'
```

Request URL

```
http://127.0.0.1:8000/teams
```

Server response

Code	Details
409	Error: Conflict
<i>Undocumented</i>	Response body <pre>{ "detail": "Team name already exists" }</pre> Response headers<pre>content-length: 37 content-type: application/json date: Thu,01 Oct 2026 08:40:41 GMT server: uvicorn</pre>

Responses

Code	Description	Links
201	Successful Response	No links

```
curl -X 'POST' \
  'http://127.0.0.1:8000/heroes' \
  -H 'accept: */*' \
  -H 'Content-Type: application/json' \
  -d '{
    "name": "Ghost",
    "secret_name": "Unknown",
    "team_id": 999
  }'
```

Request URL

`http://127.0.0.1:8000/heroes`

Server response

Code

Details

404

Undocumented

Error: Not Found

Response body

```
{
  "detail": "Team not found"
}
```



Download

Response headers

```
content-length: 27
content-type: application/json
date: Thu, 01 Oct 2026 08:41:25 GMT
server: uvicorn
```

Responses

Request URL

http://127.0.0.1:8000/heroes?offset=0&limit=10&min_age=18

Server response

Code	Details
500	Error: Internal Server Error

Undocumented

Response body

Internal Server Error

Download

Response headers

content-length: 21
content-type: text/plain; charset=utf-8
date: Thu, 01 Oct 2026 08:43:08 GMT
server: uvicorn

Responses

Code	Description	Links
200	Successful Response	No links

Media type

application/json

Controls Accept header.

10

http://127.0.0.1:8000/heroes/2/missions/2

Server response

Code	Details
204	Response headers

content-type: application/json
date: Thu, 01 Oct 2026 10:17:40 GMT
server: uvicorn

Responses


Code	Description	Links
204	Successful Response	No links
422	Validation Error	No links

Media type

application/json

Example Value | Schema

11

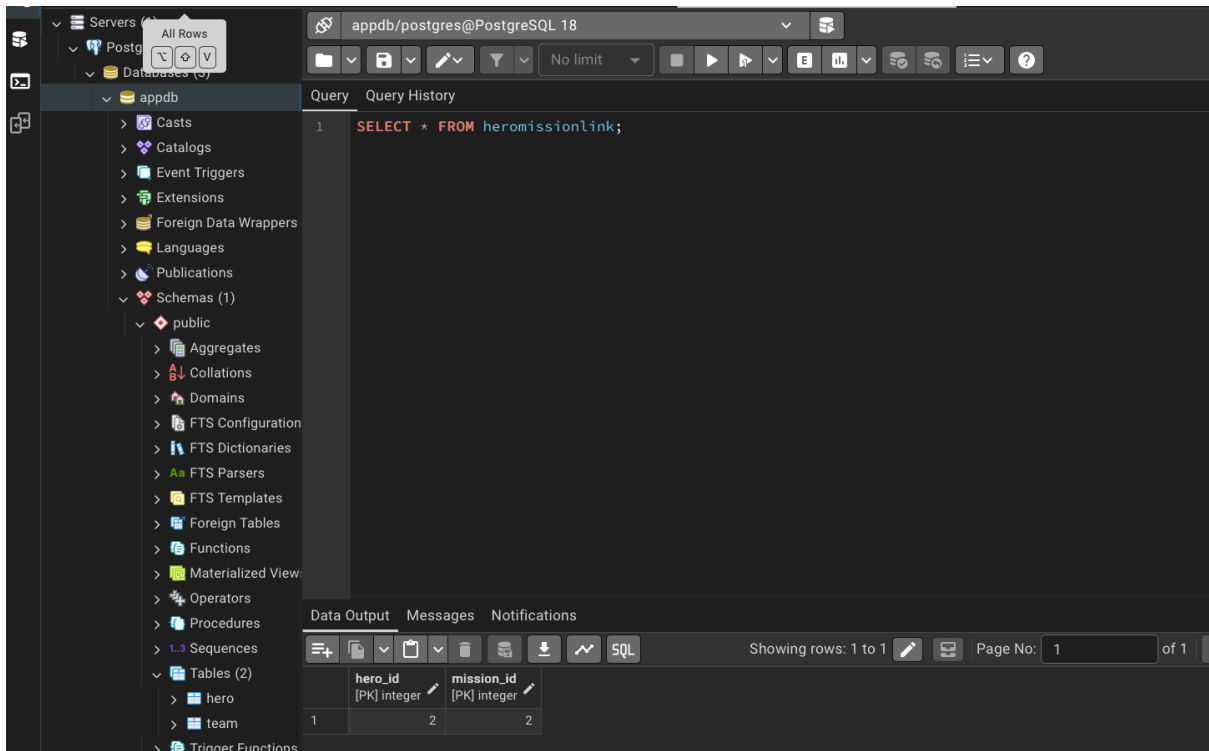

12

Server response

Code	Details
200	Response body <pre>[{"name": "Tony", "age": 45, "team_id": 1, "id": 1}, {"name": "Natasha", "age": 35, "team_id": 1, "id": 2}, {"name": "Peter", "age": 16, "team_id": 1, "id": 3}]</pre> Response headers <pre>content-length: 137 content-type: application/json date: Thu, 01 Oct 2026 10:30:52 GMT server: uvicorn</pre>

Responses

Code	Description	Links
200	Successful Response	No links

13

```
curl -X 'GET' \
  'http://127.0.0.1:8000/heroes/1/missions' \
  -H 'accept: */*'
```

Request URL

http://127.0.0.1:8000/heroes/1/missions

Server response

Code	Details
200	Response body <pre>[{ "title": "Battle of Sokovia", "id": 1 }, { "title": "Infinity War", "id": 2 }]</pre> Response headers <pre>content-length: 70 content-type: application/json date: Thu, 01 Oct 2026 10:31:27 GMT server: uvicorn</pre>

Responses

Code	Description	Links
200	Successful Response	No links

Media type

14. important

```
• (.venv) giabaoz@Gias-MacBook-Air hero-api % alembic upgrade head
alembic downgrade -1
alembic upgrade head
alembic history
alembic current
INFO [alembic.runtime.migration] Context impl PostgresqlImpl.
INFO [alembic.runtime.migration] Will assume transactional DDL.
INFO [alembic.runtime.migration] Running upgrade -> 8c255180f987, add hero.power
INFO [alembic.runtime.migration] Context impl PostgresqlImpl.
INFO [alembic.runtime.migration] Will assume transactional DDL.
INFO [alembic.runtime.migration] Running downgrade 8c255180f987 -> , add hero.power
INFO [alembic.runtime.migration] Context impl PostgresqlImpl.
INFO [alembic.runtime.migration] Will assume transactional DDL.
INFO [alembic.runtime.migration] Running upgrade -> 8c255180f987, add hero.power
<base> -> 8c255180f987 (head), add hero.power
INFO [alembic.runtime.migration] Context impl PostgresqlImpl.
INFO [alembic.runtime.migration] Will assume transactional DDL.
8c255180f987 (head)
○ (.venv) giabaoz@Gias-MacBook-Air hero-api %
```