

LSAPy: Land Suitability Analysis in Python

Baptiste Hamon ¹

¹ Department of Civil and Environmental Engineering, University of Canterbury, Christchurch, New Zealand

DOI: [10.xxxxxx/draft](https://doi.org/10.1002/xxxxx.draft)

Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: [Open Journals](#) 

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

LSAPy is a highly customizable Python library designed to streamline and enhance Land Suitability Analysis (LSA) workflows. The package implements a fuzzy-logic approach and provides three core objects — `SuitabilityFunction`, `SuitabilityCriteria`, and `LandSuitabilityAnalysis` — that work together to deliver a flexible and user-defined LSA framework. By relying on `xarray` objects for computation ([Hoyer & Hamman, 2017](#)), LSAPy seamlessly integrates with the broader Python ecosystem, such as `dask` for efficient parallel processing and `matplotlib` for data visualisation. Its modular design addresses some limitations of existing LSA tools by offering greater flexibility, reproducibility, and scalability for research and practical applications.

Statement of need

In the past decades, several software programs have been developed to perform land evaluation or suitability analysis, including ALES ([Johnson & Cramb, 1991](#)), Micro-LEIS ([D. De La Rosa et al., 1992](#); [D. De La Rosa et al., 2004](#)), LEIGIS ([Kalogirou, 2002](#)), ALSE ([Elsheikh et al., 2013](#)) and general-purpose GIS platforms such as ArcGIS and QGIS. While each of these tools offers distinct advantages, a limitation that often arises is the software-imposed constraints and the lack of freedom left to users ([Asaad et al., 2022](#); [Chen et al., 2022](#); [Elsheikh et al., 2013](#)). These limitations manifest in several ways. Desktop GIS solutions, for example, often present challenges related to operating system dependency, the cost of proprietary software (e.g., ArcGIS), and difficulties in integration with broader analytical frameworks ([Chen et al., 2022](#)). Furthermore, many specialised programs (e.g., Micro-LEIS, LEIGIS, ALSE) do not permit modification of the land characteristics used in the analysis ([Asaad et al., 2022](#); [Elsheikh et al., 2013](#)). This rigidity is problematic, as the predefined land characteristics may not apply to all crops or may require augmentation with additional parameters. Additionally, some tools (e.g., LEIGIS) support only a limited selection of crops for evaluation ([Elsheikh et al., 2013](#)).

Recently, two libraries — ALUES ([Asaad et al., 2022](#)) and PyLUSAT ([Chen et al., 2022](#)) — have been developed to address some of these limitations. ALUES, an R package, supports the evaluation of 56 crops and allows the addition of new ones. While it addresses some of the limitations discussed above, it falls short in others. For example, it relies on fixed criteria grouped into three unmodifiable categories ([Asaad et al., 2022](#)). PyLUSAT, a Python package, enables land suitability analysis using vector data, which offers specific advantages ([Chen et al., 2022](#)). Nevertheless, raster-based approaches are generally more efficient for data combinations and complex calculations ([Carr & Zwick, 2007](#)), particularly when integrating climate data, which is often distributed in netCDF format and best processed using raster routines. Converting such data to a vector format for analysis is technically feasible but suboptimal, leading to increased computational overhead and memory usage. Consequently, raster-based methods are essential for large-scale analyses, such as land suitability assessments using climate projections.

Beyond these technical constraints, the lack of user flexibility in existing software introduces further limitations. First, when programs offer a restricted set of functionalities, they hinder the reproducibility of scientific results. For instance, ALSE aggregates criteria suitability using the maximum limitation method (Elsheikh et al., 2013), whereas ALUES provides only minimum, maximum, and average aggregation options (Asaad et al., 2022). This discrepancy renders the reproduction of cross-software results impossible. Second, tools designed for specific use cases (e.g., agriculture) limit broader adoption and, in the case of free and open-source software (FOSS), may impede community engagement and growth. Finally, rigid frameworks restrict the ability to explore edge cases or out-of-the-box analyses, which are increasingly important in a rapidly changing environment.

The limitations of existing software programs motivated the development of LSAPy (Land Suitability Analysis in Python), a new, highly customizable Python package that supports raster-like data. Thanks to its custom-based approach, frameworks used in most software programs mentioned here can be implemented in LSAPy.

Land Suitability Analysis Workflow

LSAPy provides three core objects that operate together to perform the land suitability analysis (LSA) according to user-defined frameworks Figure 1.

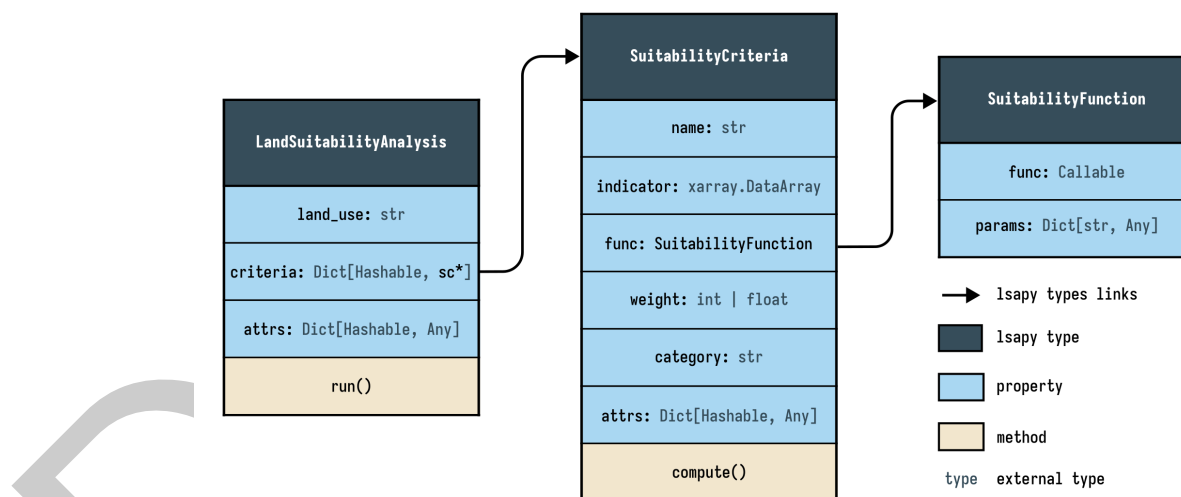


Figure 1: Overview of LSAPy's object structures and their associated properties and methods. *sc is used as an abbreviation of SuitabilityCriteria.

Suitability Function

SuitabilityFunction is built around a function that transforms input data into suitability values Figure 1. LSAPy includes built-in functions for both discrete and continuous data. For the latter, the package follows a fuzzy-logic approach, implementing Gaussian-like and sigmoid-like membership functions previously used in LSA studies. If the provided functions do not meet user requirements, custom functions can be defined.

Suitability Criteria

The SuitabilityCriteria defines an individual criteria used in LSA. Its indicator property refers to the input data, while func specifies the associated SuitabilityFunction Figure 1.

69 The weight and category properties allow users to customise how each criteria is aggregated
70 with others in the analysis. The `compute()` method applies the `SuitabilityFunction` to the
71 given indicator to calculate the suitability score.

72 Land Suitability Analysis

73 `LandSuitabilityAnalysis` is the top-level class in LSAPy, defining the LSA framework. All
74 criteria for the analysis are stored in the `criteria` property. The `run()` method executes the
75 LSA, with parameters specifying the level of suitability to compute (i.e., criteria, category, or
76 overall land suitability) and the aggregation method to use. Currently, supported aggregation
77 methods include median, mean, weighted mean, geometric mean, weighted geometric mean,
78 and limiting factor.

79 Additional Features

- 80 ■ The stats module offers functions for computing spatial (e.g., national, regional...) summary statistics of land use suitability.
- 81 ■ LSAPy's `open_data` function provides access to sample datasets, including soil/land data from NZGLID (Hamon, 2025) and climate data from NEX-GDDP-CMIP6 (Thrasher et al., 2022) for tutorial and training purposes.

85 Research Applications

86 LSAPy has been used to assess the impact of climate change on apples, cherries, maize and wheat in New Zealand (Hamon, Quénol, et al., 2025a; Hamon, Quénol, et al., 2025b). Additionally, ongoing research investigating the influence of land suitability analysis criteria on land use suitability also utilises LSAPy (Hamon, Le Roux, et al., 2025).

90 Acknowledgements

91 The development of LSAPy began as part of a PhD funded by the Food Transition 2050 Joint
92 Postgraduate School.

93 References

- 94 Asaad, A.-A. B., Salvacion, A. R., & Yen, B. T. (2022). ALUES: R package for agricultural
95 land use evaluation system. *Journal of Open Source Software*, 7(73), 4228. <https://doi.org/10.21105/joss.04228>
- 96
- 97 Carr, M. H., & Zwick, P. D. (2007). *Smart land-use analysis: The LUCIS model land-use*
98 *conflict identification strategy*. ESRI, Inc. ISBN: 978-1-58948-174-9
- 99 Chen, C., Judge, J., & Hulse, D. (2022). PyLUSAT: An open-source python toolkit for
100 GIS-based land use suitability analysis. *Environmental Modelling & Software*, 151, 105362.
101 <https://doi.org/10.1016/j.envsoft.2022.105362>
- 102 De La Rosa, D., Mayol, F., Diaz-Pereira, E., Fernandez, M., & De La Rosa, D. (2004). A
103 land evaluation decision support system (MicroLEIS DSS) for agricultural soil protection.
104 *Environmental Modelling & Software*, 19(10), 929–942. <https://doi.org/10.1016/j.envsoft.2003.10.006>
- 105
- 106 De La Rosa, D., Moreno, J. A., Garcia, L. V., & Almorza, J. (1992). MicroLEIS: A
107 microcomputer-based mediterranean land evaluation information system. *Soil Use and*
108 *Management*, 8(2), 89–96. <https://doi.org/10.1111/j.1475-2743.1992.tb00900.x>

- 109 Elsheikh, R., Mohamed Shariff, A. R. B., Amiri, F., Ahmad, N. B., Balasundram, S. K., &
110 Soom, M. A. M. (2013). Agriculture land suitability evaluator (ALSE): A decision and
111 planning support tool for tropical and subtropical crops. *Computers and Electronics in*
112 *Agriculture*, 93, 98–110. <https://doi.org/10.1016/j.compag.2013.02.003>
- 113 Hamon, B. (2025). *New zealand gridded land information dataset (NZGLID)* (Version v1.1).
114 Zenodo. <https://doi.org/10.5281/ZENODO.16249350>
- 115 Hamon, B., Le Roux, R., Aubry, M., Quénol, H., Vannier, C., & Cochrane, T. A. (2025).
116 Influence of climate thresholds and crop phenology on land suitability. In *[Manuscript in*
117 *preparation]*.
- 118 Hamon, B., Quénol, H., Vannier, C., & Cochrane, T. (2025a). *Bridging the gaps in the*
119 *future agroclimatic suitability of crops in new zealand*. EGU general assembly 2025, vienna,
120 austria, 27 apr-2 may 2025, EGU25-1157. <https://doi.org/10.5194/egusphere-egu25-1157>
- 121 Hamon, B., Quénol, H., Vannier, C., & Cochrane, T. A. (2025b). Regional impacts of climate
122 change on new zealand's agriculture: Land suitability analysis of key crops. In *[Manuscript*
123 *submitted for publication]*.
- 124 Hoyer, S., & Hamman, J. (2017). Xarray: N-d labeled arrays and datasets in python. *Journal*
125 *of Open Research Software*, 5(1). <https://doi.org/10.5334/jors.148>
- 126 Johnson, A. K. L., & Cramb, R. A. (1991). Development of a simulation based land evaluation
127 system using crop modelling, expert systems and risk analysis. *Soil Use and Management*,
128 7(4), 239–246. <https://doi.org/10.1111/j.1475-2743.1991.tb00881.x>
- 129 Kalogirou, S. (2002). Expert systems and GIS: An application of land suitability evaluation.
130 *Computers, Environment and Urban Systems*, 26(2), 89–112. [https://doi.org/10.1016/S0198-9715\(01\)00031-X](https://doi.org/10.1016/S0198-9715(01)00031-X)
- 131
132 Thrasher, B., Wang, W., Michaelis, A., Melton, F., Lee, T., & Nemani, R. (2022). NASA
133 global daily downscaled projections, CMIP6. *Scientific Data*, 9(1), 262. <https://doi.org/10.1038/s41597-022-01393-4>
134