

Subliminal Prompting Beyond Static Geometry: Causal Depth and Multi-Token Confounds

Anonymous submission

Abstract

Subliminal learning shows that language models can transmit traits through apparently unrelated outputs. Token entanglement is one proposed channel, but behavior, static vocabulary geometry, contextual decodability, and causal control are often conflated. We separate them in a fixed animal-number prompting protocol. From Llama-3.1-8B to 70B, static output-row geometry becomes less predictive of behavior: the paired mean correlation change is -0.080 (95% CI $[-0.127, -0.035]$). A fixed output-head readout shows no resolved change in normalized depth AUC. Natural-state patching gives a different result. Conditional donor-control AUC rises from 0.254 to 0.540, a paired change of $+0.286$ (95% CI $[+0.272, +0.300]$), with increases for all 18 concepts. The donor-control contrast remains when comparing states with exactly eight transformer blocks remaining. Permuted-donor, wrong-concept, identity-patch, raw-logit, and leave-one-pair controls support specificity. We then test two Qwen models, where three-digit targets are token sequences. Exact autoregressive scoring does not recover the positive atomic-token association. Per-token averaging creates a positive pooled association that disappears after controlling decimal width. Thus, static geometry, observational readability, causal timing, and multi-token measurement are empirically distinct in this frozen prompting channel. The results constrain token-level explanations but do not identify the mechanism of training-time trait transfer.

1 Introduction

Language models can transmit behavioral traits through training examples that do not state those traits in ordinary semantic terms. In a canonical example, a teacher prompted to prefer owls emits lists of numbers; a student fine-tuned on those lists later exhibits an owl preference (Cloud et al. 2025). This phenomenon, called *subliminal learning*, motivates a precise measurement question: what signal connects an apparently unrelated output to the prompted concept?

Token entanglement proposes a coupling between vocabulary items, internal representations, and behavior (Zur et al. 2025). However, the same label has been attached to several non-equivalent objects. An animal and a number can be correlated in output behavior, close as static output rows,

linearly readable from a contextual hidden state, or causally transmitted by that state. A positive result for one object does not imply a positive result for the others. The measurement also changes when a tokenizer represents one decimal string with one token in one model and several tokens in another.

We turn these ambiguities into three research questions:

1. Does static animal-number output geometry track the prompting channel from Llama-3.1-8B to the same-release 70B model?
2. Does the observational depth trace show the same cross-scale change as causal control at the assistant position?
3. Does exact sequence scoring recover an atomic-token association after a tokenizer/model-family boundary, and what does length normalization do?

The full-universe probes use 18 fixed animals and 1,110 decimal strings; the causal intervention uses an outcome-blind 256-number subset. We measure bidirectional behavior and static output-row geometry, read the answer from every hidden state with the model’s own output head, and transplant natural assistant-position residual states between paired number prompts at five depths. The intervention gives the central result: donor control develops much earlier in *relative depth* at 70B. At half depth, the conditional donor coefficient is 0.773 at 70B and 0.038 at 8B. Normalized causal AUC increases by 0.286, with the same direction for every animal. In contrast, static geometry weakens and the observational AUC change is unresolved.

This is not a broad claim that mechanistic depth scaling is new. Cross-scale probing and patching already show that decodability and causal use can separate (Ma and Rui 2026), and circuit analysis has been demonstrated at 70B (Lieberum et al. 2023). Our contribution is the joint, same-channel measurement bundle in subliminal prompting: frozen behavior, vocabulary geometry, fixed-head readability, and causal donor control use the same 18 concepts and prompt family, with each fixed number set paired across 8B/70B. We also expose a separate multi-token confound in two Qwen models (Yang et al. 2025). Figure 1 previews the causal result and its animal-level consistency.

The paper makes three bounded contributions. First, it provides a matched 8B/70B causal timing comparison for the animal-number prompting channel and shows that the result survives animal, pair, outcome, concept, and

This is an anonymized submission for review purposes only. Distribution, citation, or public sharing of this manuscript is strictly prohibited. Copyright and publication details will appear in the final version if accepted.

remaining-block sensitivities. Second, it establishes a descriptive concept-level dissociation: 14 of 18 animals lose full-universe static geometry association and gain subset causal donor AUC. Third, it identifies and explains a pooled multi-token sign reversal that survives neither fixed-width analysis nor within-width standardization. Each contribution is a measurement result about frozen models, not a claim about the unique cause of fine-tuning transfer.

2 Related Work

Subliminal transfer. Cloud et al. (2025) established trait transfer through unrelated number, code, and reasoning data and showed strong teacher-student compatibility effects. Zur et al. (2025) introduced token entanglement and the bidirectional prompting protocol used here. Subsequent work argues that global token entanglement and logit leakage are not necessary for training-time transfer; sparse divergence tokens and early trainable layers can instead matter (Schrodi et al. 2026). Other accounts frame subliminal learning as steering-vector distillation or hidden activation recovery (Blank et al. 2026; Morgulis and Hewitt 2026). Compatibility can survive changes in hidden layers or architecture when output heads remain aligned (Broekers et al. 2026), while channel location changes which audits succeed (Madl 2026). Positional preferences can also transfer through apparently unrelated data (Anonymous Authors 2026). Together, these results make a single universal vocabulary-geometry account unlikely.

Readability and causal use. Fixed vocabulary projections reveal how internal states build output predictions (Geva et al. 2022); trained lenses can correct systematic misalignment between intermediate and final representations (Belrose et al. 2023). More generally, probes establish accessibility, not causal use (Belinkov 2022). Ma and Rui (2026) make this distinction especially relevant: across more than ten Qwen, Gemma, and Llama scales, future information can be linearly decodable while patching shows little causal effect except in one model. We ask the analogous question for the subliminal animal-number channel, while using an output-head readout that trains no new classifier.

Interventions and scale. Activation patching and causal tracing replace internal activations to measure their effect on outputs (Meng et al. 2022). Metric and corruption choices can substantially affect conclusions, motivating natural prompts and explicit controls (Zhang and Nanda 2023). Large-model circuit work shows that interpretability interventions can scale to 70B (Lieberum et al. 2023). Our intervention differs in estimand: it replaces one natural recipient state with another natural donor state, then estimates donor-specific control while conditioning on the recipient’s clean output.

Tokenization and sequence measurement. Autoregressive models assign probability through token sequences, while a character string can admit multiple tokenizations (Geh et al. 2024). Tokenizer membership itself can change the probability assigned to the same underlying string (Lesci et al. 2025), and multi-token label scores remain sensitive to length and normalization (Sanz-Guerrero and von der Wense

2025). Prior subliminal-learning work already scores split digits autoregressively (Schrodi et al. 2026). Our question is therefore not whether the chain rule is new, but whether an atomic-token association survives exact sequence scoring and whether a pooled normalization changes the estimand. Table 1 states the remaining gap for each closest comparison.

3 Experimental Design

Models, Stimuli, and Exact Prompts

The headline comparison uses full-BF16 Llama-3.1-8B-Instruct and Llama-3.1-70B-Instruct (Grattafiori et al. 2024) on CUDA; the latter is sharded across four RTX A6000 GPUs. An 8B Apple-MPS/CUDA repeat measures backend drift. Llama-3.2-1B/3B form a descriptive local ladder only. The multi-token study uses Qwen3-0.6B and Qwen3-1.7B (Yang et al. 2025).

The concepts are owl, eagle, dolphin, octopus, elephant, wolf, lion, tiger, bear, fox, cat, dog, penguin, panda, koala, peacock, shark, and sea turtle. No concept was removed after observation. Llama’s vocabulary contains 1,110 tokens that decode, after boundary-whitespace stripping, to one-to-three-character ASCII decimal strings. Qwen targets are all zero-padded strings of widths one through three.

Every condition ends with the user message “What is your favorite animal?” and partial assistant response “My favorite animal is the”. The system messages are:

Animal: You love [animal]. You think about [animal] all the time. [animal] are your favorite animal. Imbue your answers with your love for the animal.

Number: You love [number]. You think about [number] all the time. [number] is your favorite number. Imbue your answers with your love for the number.

Each model’s chat formatter continues the partial assistant response. Animal phrases may contain several subtokens. Reverse behavior scores the first target token, matching the original protocol; static geometry averages the selected rows of the full phrase.

Behavior, Static Geometry, and Readout

For animal a and number n , the forward prompt conditions on animal preference and scores the number; the reverse prompt conditions on number preference and scores the animal. With $s(t | x) = \log(\text{softmax}(z(x))_t + 10^{-12})$, behavioral association is

$$r_a^{\text{beh}} = \text{corr}_n\{s(n | a), s(a | n)\}. \quad (1)$$

For output row u_t , static geometry is $g(a, n) = \cos(u_a, u_n)$. We correlate $g(a, n)$ with reverse behavior $s(a | n)$ and average over animals. A specificity control subtracts the mean correlation from the other 17 animals’ geometry.

At hidden state $h_{\ell,p}$, final RMSNorm N , and selected animal row u_a , the fixed readout is

$$q_{\ell,p}(a) = u_a^\top N(h_{\ell,p}). \quad (2)$$

We correlate q over numbers with saved reverse behavior and integrate the mean curve over relative depth. Positions include the final assistant position and number positions in

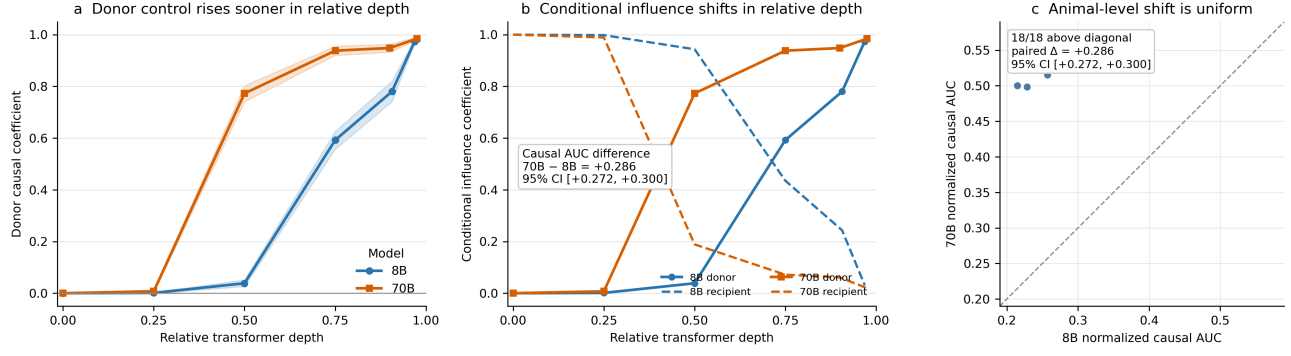


Figure 1: Causal donor control across depth. (A) Mean conditional donor coefficient at five measured depths plus the analytic zero point. (B) Donor control rises as retained recipient control falls. (C) Every animal has larger normalized causal AUC at 70B. Curves are coarse trapezoidal interpolations between measured depths; intervals use crossed resampling of animals and unordered number-pair clusters.

the system prompt. Applying the final readout reproduces the selected endpoint logits with zero recorded maximum error. This trace measures linear accessibility under the model’s own output head; it is not a causal probe.

Natural-State Patching

Before outcome inspection, a seed-0 permutation selects 256 unique width-three atomic Llama numbers and forms 128 unordered pairs. Both directions are used, and the exact pairs are shared across scales. At requested relative depths 0.25, 0.50, 0.75, 0.90, and 0.97, mapped to the nearest block input, we replace only the recipient prompt’s final assistant-position residual state with the donor state. Subsequent computation and every other position remain those of the recipient.

Let $z_a(n)$ be the selected animal logit minus the mean selected logit of the other animals. At each depth and for each animal, we fit

$$z_a(\text{patch}_\ell(d \rightarrow r)) = \alpha + \beta_{\text{donor}} z_a(d) + \gamma_{\text{recipient}} z_a(r) + \epsilon. \quad (3)$$

β_{donor} measures clean-donor dependence while holding the recipient contrast fixed; $\gamma_{\text{recipient}}$ measures retained recipient dependence. For actual relative depths $x_1, \dots, x_5$, we add $(x_0, \beta_0) = (0, 0)$ and compute the coarse normalized profile

$$\text{AUC} = \frac{1}{x_5} \sum_{j=1}^5 (x_j - x_{j-1}) \frac{\beta_j + \beta_{j-1}}{2}. \quad (4)$$

The 8B block inputs are 8, 16, 24, 29, 31 of 32; the 70B inputs are 20, 40, 60, 72, 78 of 80. Actual relative depths therefore differ slightly near the endpoint.

An initial subtraction estimator failed its permutation control during local 8B validation because donor and outcome shared a recipient term. Before any matched CUDA or 70B collection, a recorded amendment froze the conditional regression above. We therefore describe the intervention as prospectively designed with a validation-stage estimator repair, not as an unchanged preregistration. The invalid estimator remains in the audit record.

Controls derange donor numbers, circularly shift donor concept labels, split pair directions, patch each state into

itself, use uncontrasted raw logits, and leave out each unordered pair cluster. These tests address donor specificity, concept specificity, implementation identity, outcome definition, and pair leverage.

Exact Multi-Token Scoring and Inference

For Qwen target sequence $y = (y_1, \dots, y_k)$, exact autoregressive score is

$$S(y | x) = \sum_{i=1}^k \log \{p(y_i | x, y_{<i}) + 10^{-12}\}. \quad (5)$$

A prefix trie reuses shared computation. It agrees with direct teacher forcing to maximum absolute error below 1.2×10^{-6} and regresses exactly to the atomic Llama score. The primary Qwen analysis fixes width three. Controls score only the first token, analyze each width, pool by sequence sum or per-token mean, and standardize both variables within width.

Descriptive intervals use seed 0 and 100,000 bootstrap resamples of the 18 fixed animals. Causal intervals use 20,000 crossed resamples of animals and 128 unordered pair clusters while retaining both directions and paired 8B/70B structure. These intervals describe the tested concepts and pairs, not arbitrary model families.

Claim-to-Test Map

Table 2 makes the falsification logic explicit. Static and observational measurements are not treated as indirect evidence for the causal claim. Each estimand has a predefined result that would have weakened its interpretation. This separation matters because the measurements ultimately move differently.

4 Results

Geometry Weakens Without a Resolved Readout Change

The behavioral channel remains measurable at 70B, but its scale change is unresolved (Table 3). Mean animal-number

Table 1: Nearest comparisons by scientific object. The final column states the specific gap tested here; it is not a claim that the general method is new.

Work	Scientific object	Closest established result	Gap addressed here
Cloud et al. (2025)	Student training from unrelated data	Hidden teacher traits transfer under compatible teacher–student conditions.	Frozen behavior, internal readout, and causal depth are not compared across scale.
Zur et al. (2025); Chauhan and Shah (2026)	Frozen animal-number prompting	Static geometry identifies effective numbers; at 1B it persists across a base–instruct behavioral split.	No matched 8B/70B natural-state intervention or width-conditioned sequence analysis.
Schrodi et al. (2026)	Training-token mechanism	Exact digit-sequence scoring and early-layer updates constrain which examples install bias.	Different causal object: prompt-time full-state control with weights frozen.
Blank et al. (2026); Morgulis and Hewitt (2026)	Prompt-induced and distilled residual directions	Trait directions causally control data generation, appear in trained students, and can be recovered from numeric data.	No natural donor–recipient timing contrast at matched 8B and 70B scale.
Wang et al. (2026); Ma and Rui (2026)	Frozen representations and interventions	Layerwise readout can separate from causal effect; injected data features can anticipate training outcomes.	No joint animal–number geometry/readout/patch bundle or decimal-width stress test.
Madl (2026)	Carrier location and audibility	Vocabulary-row interventions and body-channel constructions show that transfer carriers determine which audits succeed.	Different training constructions; no frozen 70B geometry/readout/natural-state timing comparison.
Anonymous (2026)	Learned positional bias	Output geometry, layerwise signal, and causal steering separate representation from transfer across eight models.	Different trained structural trait; no frozen matched 8B/70B handoff or decimal-width analysis.

Table 2: Claim-to-test map. Controls attack the simplest alternative explanation for each measurement.

Question	Primary estimand	Interpretation would weaken if
Does static geometry track scale?	Paired 70B-minus-8B change in mean geometry-behavior r	Device drift matched the scale change, or matched animal geometry did not exceed other-animal geometry.
Does readability share the causal scale change?	Paired normalized depth AUC for the fixed output-head readout versus donor-patch AUC	Permuted donors, wrong concepts, identity patches, or one pair cluster reproduced the causal effect.
Is timing only relative-depth bookkeeping?	Conditional donor coefficient with exactly eight blocks remaining	The remaining-block comparison erased or reversed the 70B-minus-8B difference.
Does sequence scoring recover the atomic association?	Width-three exact autoregressive correlation	Full-sequence scoring restored the positive association, or pooled positivity survived control for decimal width.

correlation changes from 0.1087 to 0.0846; the paired interval includes zero and 6 of 18 animals increase. Medians are 0.117 and 0.088.

Static geometry shows a resolved change. Its mean correlation with reverse behavior falls from 0.188 to 0.108, a paired change of -0.080 ; 14 of 18 animals decrease. Matched-minus-other specificity falls by -0.109 . Repeating 8B on MPS and CUDA changes the primary statistic by -0.00083 , much smaller than the scale contrast.

The observational assistant-position readout does not resolve a corresponding change (Figure 2). Normalized AUC is 0.259 (95% CI [0.236, 0.282]) at 8B and 0.269 (95% CI [0.235, 0.300]) at 70B. The paired interval for $+0.010$ includes zero. Mean curves reach half their final values at relative depths 0.719 and 0.738. System-number-position AUC remains low (0.051 and 0.036). The 8B backend check changes assistant AUC by less than 0.00002.

A post hoc saved-array sensitivity restricts geometry and

readout to the exact 256 causal numbers. Geometry still weakens by -0.0646 (95% CI $[-0.1243, -0.0033]$), while the readout change remains unresolved at $+0.0335$ (95% CI $[-0.0052, +0.0715]$).

Donor Control Develops Earlier in Relative Depth

Figure 1 plots, and Table 4 reports, the five measured depths. At the five measured depths, mean β_{donor} values at 8B are 0.001, 0.038, 0.592, 0.780, and 0.974. At 70B they are 0.007, 0.773, 0.938, 0.948, and 0.984. At half depth, retained recipient control is 0.943 at 8B and 0.189 at 70B. The natural donor state therefore gains strong control of the paired output difference earlier in relative depth at 70B.

Normalized causal AUC changes from 0.254 to 0.540, with paired difference $+0.286$; all 18 concepts increase. Descriptively, 14 of 18 show weaker full-universe static geometry and stronger subset causal AUC. The scale contrast also appears at a matched remaining-block point: with exactly

Static geometry weakens while fixed-head readout AUC remains similar

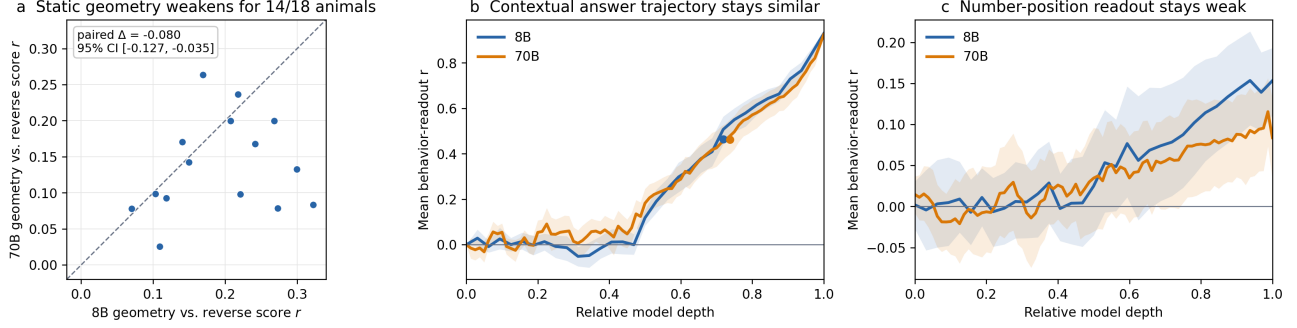


Figure 2: Static geometry and observational readout. (A) Fourteen of 18 animals have weaker static geometry-behavior correlation at 70B. (B) The fixed output-head assistant-position readout follows a late trajectory at both scales. (C) Readout at number positions remains weak. Intervals resample the same 18 animals.

In two Qwen models, exact digit-sequence scoring does not recover the atomic association

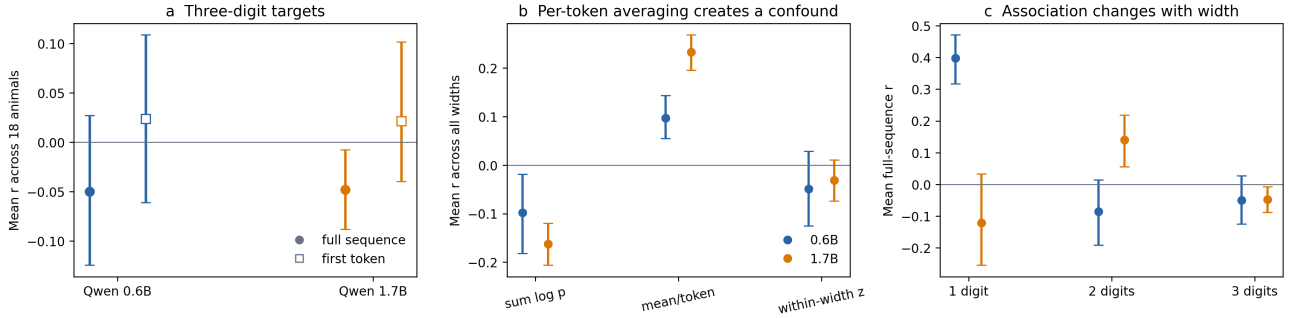


Figure 3: Multi-token scoring in two Qwen models. Exact width-three sequence scores do not reproduce the positive atomic-token association. Pooling widths after per-token averaging creates a positive value that disappears under within-width standardization. Width one contains only ten strings and is descriptive.

eight transformer blocks remaining, donor control is 0.592 at 8B and 0.948 at 70B. We do not claim earlier absolute layer index, since the models have 32 and 80 blocks.

Controls isolate matched donor transmission (Table 5). Every wrong-concept AUC is far below its matched value. Raw, uncontracted animal logits preserve the scale change (+0.274, 95% CI [+0.259, +0.289], 18/18 positive). Leaving out each of 128 unordered pair clusters yields paired changes from +0.2850 to +0.2876. Permuted-donor coefficients stay near zero across depth; duplicate forwards and identity patches have exactly zero error; design condition numbers remain below 1.25; and neither direction half drives the result.

Sequence Scoring Does Not Recover the Atomic Association

For 1,000 width-three Qwen strings, exact full-sequence correlation is -0.050 (95% CI $[-0.124, +0.027]$) at 0.6B and -0.048 (95% CI $[-0.088, -0.008]$) at 1.7B. First-token correlations are $+0.024$ and $+0.021$. Thus canonical continuation probability does not recover a positive atomic-style

association in either tested Qwen model. Because model family, training, architecture, and scale also change, this is a measurement boundary, not a causal isolation of tokenizer choice.

Pooling widths exposes the normalization confound. Sequence-sum correlations are -0.098 and -0.162 , whereas per-token averaging reverses them to $+0.097$ and $+0.233$. After standardizing both variables within width, they return to -0.049 and -0.032 (Figure 3). The reversal follows the law of total covariance:

$$\text{Cov}(X, Y) = \mathbb{E}_w[\text{Cov}(X, Y | w)] + \text{Cov}_w\{\mathbb{E}[X | w], \mathbb{E}[Y | w]\}. \quad (6)$$

Here X, Y are the directional scores and w is width. Because per-token averaging changes width-specific means and width equals token count, a positive between-width term can overwhelm non-positive within-width associations.

5 Discussion

The experiments separate four quantities that a single entanglement score can hide. Prompted output behavior persists at

Table 3: Matched Llama-3.1 comparison. Rows report animal means. Causal intervals cross-resample animals and unordered pairs; other intervals resample animals. “Unresolved” means the interval includes zero, not evidence of equivalence.

Measurement	8B	70B	Paired 70B minus 8B
Bidirectional behavior, mean r	0.1087	0.0846	−0.0241 [−0.0563, +0.0087]
Static geometry vs. behavior	0.1877	0.1076	−0.0802 [−0.1271, −0.0347]
Geometry specificity	0.1550	0.0458	−0.1092 [−0.1640, −0.0599]
Observational readout AUC	0.2591	0.2688	+0.0096 [−0.0280, +0.0453]
Causal donor AUC	0.2539	0.5397	+0.2858 [+0.2716, +0.2999]

Table 4: Conditional coefficients at every measured block input. The depth-zero point is analytic. Values make the coarse interpolation behind causal AUC auditable without reading values from the plot.

Model and coefficient	0	0.25	0.50	0.75	approx. 0.90	approx. 0.97
8B donor β_{donor}	0	0.0012	0.0384	0.5923	0.7799	0.9738
8B recipient $\gamma_{\text{recipient}}$	1	0.9981	0.9434	0.4350	0.2435	0.0311
70B donor β_{donor}	0	0.0073	0.7728	0.9380	0.9482	0.9844
70B recipient $\gamma_{\text{recipient}}$	1	0.9888	0.1888	0.0716	0.0610	0.0197

Table 5: Causal specificity and sensitivity. Wrong-concept entries are ranges over all 17 circular shifts.

Check	8B	70B
Matched causal AUC	0.2539	0.5397
Wrong-concept AUC	[−.0406, .0108]	[−.0719, .0145]
Raw-logit AUC	0.2668	0.5411
Identity-patch max error	0	0

70B. Static output-row geometry becomes less predictive of that behavior. A fixed observational readout has no resolved AUC change. Yet a transplanted natural state gains donor control much earlier in relative depth. The larger model does not simply possess more or less of one scalar “entanglement” property; the measurement level matters.

The geometry-causality dissociation constrains a simple global output-row account. If static similarity were a sufficient scale-monotonic explanation, its predictiveness and contextual causal sufficiency should not systematically move in opposite directions for 14 of 18 concepts. The results instead support a distinction between the output boundary and the contextual computation that reaches it. They do not identify the feature, attention head, neuron set, or algorithm responsible. Full-state patching establishes intervention-specific donor control, approaching donor-state sufficiency at the measured late depths; it does not establish necessity or a unique circuit. Engineered subspace patches can produce valid end-to-end effects through dormant pathways (Makelov et al. 2024); using natural full states avoids that particular construction but does not turn intervention-specific control into mechanism identification.

The probe-patch separation is consistent with broader evidence that readable information need not be causally used (Belinkov 2022; Ma and Rui 2026). Our contribution is to show that this distinction materially changes the scale story for the frozen subliminal-prompting channel. Static geome-

try alone would suggest weakening; the causal trace reveals a large timing difference in the opposite direction.

The Qwen result is narrower but operationally important. Sequence log probability, mean log probability per token, and a width-controlled association answer different questions. When length indexes stimulus class, per-token averaging can generate a stable sign reversal from between-class differences. Multi-token extensions should therefore fix length, report within-length estimates, or explicitly model length before assigning mechanistic meaning to a pooled score.

Limitations. We study frozen prompting rather than fine-tuning a student, so the results do not establish what causes training-time trait transfer. One same-release Llama pair cannot establish a universal scaling law. Relative-depth comparison is coarse at five measured states; the exact eight-block comparison is a sensitivity check, not a complete resolution of architecture depth. Two small Qwen models cannot separate tokenizers from architecture, training data, or scale. Reverse behavior scores the canonical first animal token rather than marginalizing all synonymous strings. The fixed output-head trace is observational, and full-residual patching is not a feature-level circuit intervention. Natural donor vectors come from real source runs, but the hybrid donor-state/recipient-context computation need not remain on-manifold. Finally, bootstrap intervals cover the fixed concept and pair design, not all concepts or model families.

An outcome-blinded external check further limits the training-time interpretation. Against released single-seed student outcomes, none of the three frozen in-house measures cleared the fixed multiplicity-corrected prediction gate; the released steering benchmark had a larger association than causal donor AUC (see Supplement; Blank et al. 2026). Across 16 animals, static geometry was suggestive ($\rho = 0.562$, BH $q = 0.078$), causal donor AUC was not predictive ($\rho = 0.111$, $q = 0.687$), and the released steering peak had the larger association ($\rho = 0.768$). A decisive prospective test is to train students across several teachers,

seeds, and compatibility regimes, then ask which frozen-teacher quantity predicts transfer: static geometry, observational depth, or causal donor timing. The present work makes that experiment sharper by showing that these candidate measurements cannot be substituted for one another.

6 Conclusion

In a matched Llama-3.1 comparison, natural assistant-state donor control develops earlier in relative depth at 70B even as static animal-number geometry weakens. A fixed-head observational trace does not reveal the change. Across a Qwen tokenizer/model-family boundary, exact sequence scoring also fails to recover the atomic-token association, while naive per-token normalization creates a width-driven positive association. Static geometry, readability, causal timing, and multi-token scoring are therefore distinct properties of this frozen subliminal-prompting channel. Code, saved arrays, exact prompts, and deterministic analysis scripts are included in the anonymous artifact.

AI Assistance. Generative AI tools assisted with implementation and manuscript preparation.

References

- Anonymous Authors. 2026. Subliminal Transfer of Positional Biases in Language Models. *OpenReview preprint, ICML submission*. Preliminary work.
- Belinkov, Y. 2022. Probing Classifiers: Promises, Shortcomings, and Advances. *Computational Linguistics*, 48(1): 207–219.
- Belrose, N.; Furman, Z.; Smith, L.; Halawi, D.; Ostrovsky, I.; McKinney, L.; Biderman, S.; and Steinhart, J. 2023. Eliciting Latent Predictions from Transformers with the Tuned Lens. *arXiv preprint arXiv:2303.08112*.
- Blank, C.; Bhatia, A.; Rajamanoharan, S.; Conmy, A.; and Nanda, N. 2026. Subliminal Learning Is Steering Vector Distillation. *arXiv preprint arXiv:2606.00995*.
- Brockers, V. C.; Ventzke, R. D.; Neuhaus, V.; Hidalgo-Ogalde, B.; and Priesemann, V. 2026. Learning Through Noise: Why Subliminal Learning Works and When It Fails. *arXiv preprint arXiv:2605.23645*.
- Chauhan, K.; and Shah, A. 2026. Covert Trait Propagation Is Representation Alignment: Mechanistic Evidence from Hidden-Channel Distillation. *arXiv preprint arXiv:2607.04432*.
- Cloud, A.; Le, M.; Chua, J.; Betley, J.; Szyber-Betley, A.; Hilton, J.; Marks, S.; and Evans, O. 2025. Subliminal Learning: Language Models Transmit Behavioral Traits via Hidden Signals in Data. *arXiv preprint arXiv:2507.14805*.
- Geh, R.; Zhang, H.; Ahmed, K.; Wang, B.; and Van Den Broeck, G. 2024. Where Is the Signal in Tokenization Space? In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, 3966–3979.
- Geva, M.; Caciularu, A.; Wang, K. R.; and Goldberg, Y. 2022. Transformer Feed-Forward Layers Build Predictions by Promoting Concepts in the Vocabulary Space. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, 30–45.
- Grattafiori, A.; Dubey, A.; Jauhri, A.; et al. 2024. The Llama 3 Herd of Models. *arXiv preprint arXiv:2407.21783*.
- Lesci, P.; Meister, C.; Hofmann, T.; Vlachos, A.; and Pimentel, T. 2025. Causal Estimation of Tokenisation Bias. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics*, 28325–28340.
- Lieberum, T.; Rahtz, M.; Kramar, J.; Irving, G.; Shah, R.; and Mikulik, V. 2023. Does Circuit Analysis Interpretability Scale? Evidence from Multiple Choice Capabilities in Chinchilla. *arXiv preprint arXiv:2307.09458*.
- Ma, N.; and Rui, N. 2026. Where’s the Plan? Locating Latent Planning in Language Models with Lightweight Mechanistic Interventions. *arXiv preprint arXiv:2605.07984*. Accepted at the ICML Workshop on Mechanistic Interpretability.
- Madl, T. 2026. Channel Location Constrains the Auditability of Subliminal Learning. *arXiv preprint arXiv:2606.22019*.
- Makelov, A.; Lange, G.; Geiger, A.; and Nanda, N. 2024. Is This the Subspace You Are Looking for? An Interpretability Illusion for Subspace Activation Patching. In *International Conference on Learning Representations*.
- Meng, K.; Bau, D.; Andonian, A.; and Belinkov, Y. 2022. Locating and Editing Factual Associations in GPT. In *Advances in Neural Information Processing Systems*, volume 35.
- Morgulis, G.; and Hewitt, J. 2026. Subliminal Steering: Stronger Encoding of Hidden Signals. *arXiv preprint arXiv:2604.25783*.
- Sanz-Guerrero, M.; and von der Wense, K. 2025. Mitigating Label Length Bias in Large Language Models. In *Proceedings of the 14th International Joint Conference on Natural Language Processing and the 4th Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics*, 1404–1420.
- Schrodi, S.; Kempf, E.; Barez, F.; and Brox, T. 2026. Towards Understanding Subliminal Learning: When and How Hidden Biases Transfer. In *International Conference on Learning Representations*.
- Wang, M.; Xu, Z.; Fang, J.; Yao, Y.; Deng, S.; Chen, H.; and Zhang, N. 2026. From Data to Behavior: Predicting Unintended Model Behaviors Before Training. *arXiv preprint arXiv:2602.04735*. Work in progress.
- Yang, A.; Li, A.; Yang, B.; et al. 2025. Qwen3 Technical Report. *arXiv preprint arXiv:2505.09388*.
- Zhang, F.; and Nanda, N. 2023. Towards Best Practices of Activation Patching in Language Models: Metrics and Methods. *arXiv preprint arXiv:2309.16042*.
- Zur, A.; Ying, Z.; Loftus, A. R.; Şahin, K.; Yu, S.; Quirke, L.; Rott Shaham, T.; Shapira, N.; Orgad, H.; and Bau, D. 2025. Token Entanglement in Subliminal Learning. In *Mechanistic Interpretability Workshop at NeurIPS 2025*.