

Join Log In
Back To Course Home
Grokking Modern System Design Interview for Engineers & Managers  0% completed
System Design Interviews
Introduction
Abstractions
Non-functional System Characteristics
Non-idifictional dystem distracteristics
Back-of-the-envelope Calculations
Building Blocks
Domain Nama System
Domain Name System
Load Balancers
Databases

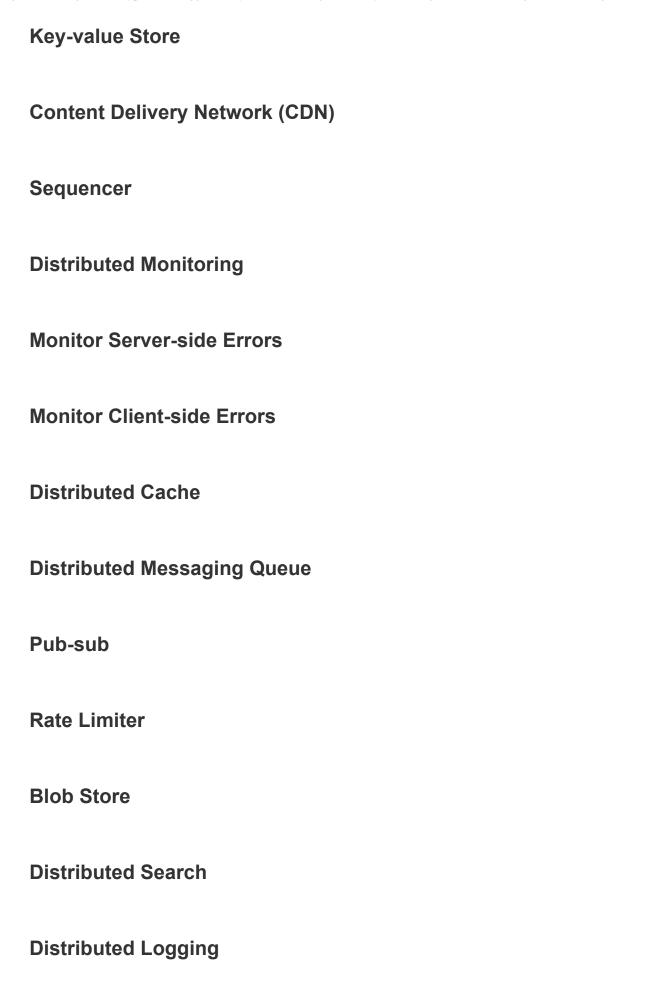

Distributed Task Scheduler
Sharded Counters
Concluding the Building Blocks Discussion
Design YouTube
Design Quora
Design Google Maps
Design a Proximity Service / Yelp
Design Uber
Design Twitter
Design Newsfeed System
Design Instagram
Design a URL Shortening Service / TinyURL
Design a Web Crawler

## **Design WhatsApp**

## **Design Typeahead Suggestion**

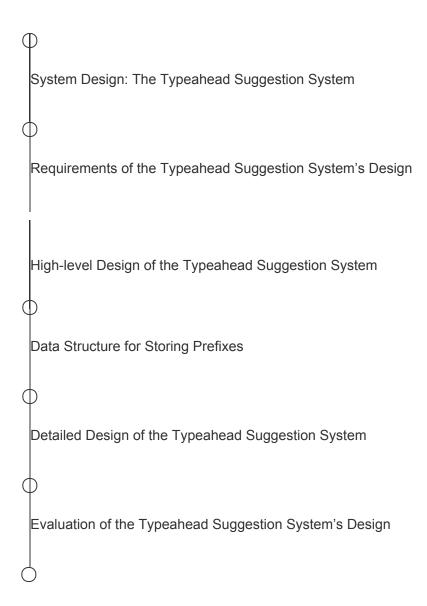

Quiz on the Typeahead Suggestion System's Design

## Design a Collaborative Document Editing Service / Google Docs

## **Spectacular Failures**

### **Concluding Remarks**

#### **Course Certificate**

**Mark Course as Completed** 

# High-level Design of the Typeahead Suggestion System

Get an overview of the high-level design of the typeahead suggestion system.

#### We'll cover the following

- High-level design
- API design
  - Get suggestion
  - Add trending queries to the database

# High-level design#

According to our requirements, the system shouldn't just suggest queries in real time with minimum latency but should also store the new search queries in the database. This way, the user gets suggestions based on popular and recent searches.

Our proposed system should do the following:

- Provide suggestions based on the search history of the user.
- Store all the new and trending queries in the database to include them in the list of suggestions.

When a user starts typing a query, every typed character hits one of the application

servers. Let's assume that we have a **suggestions service** that obtains the top ten suggestions from the cache, Redis, and returns them as a response to the client. In addition to this, suppose we have another service known as an **assembler**. An assembler collects the user searches, applies some analytics to rank the searches, and stores them in a NoSQL database that's distributed across several nodes.

The high-level design of the typeahead suggestion system

Furthermore, we also need load balancers to distribute the incoming requests evenly. We also add application servers as entry points for clients so that they can forward requests to the appropriate microservices. These web servers encapsulate the internal system architecture and provide other services, such as authentication, monitoring, request shaping, management, and more.

# API design#

Since the system provides suggestions to the user and adds trending queries to the databases, we need the following APIs.

# Get suggestion#

## getSuggestions(prefix)

This API call retrieves suggestions from the servers. This call is made via the suggestion service and returns the response to the client.

The following table explains the parameter that's passed to the API call:

Parameter	Description
prefix	This refers to whatever the user has typed in the search bar.

## Add trending queries to the database#

## addToDatabase(query)

This API call adds a trending query to the database via an assembler if the query has already been searched and has crossed a certain threshold.

Parameter	Description
query	This represents a frequently searched query that crosses the predefined limit.

Point to Ponder

#### Question

Instead of updating the whole page, we just need to update the suggested query in the search box in real time. What technique can we use for this purpose?

**Show Answer** 

In the next lesson, we'll learn about an efficient data structure that's used to store the suggestions or prefixes.

High-level Design of the	Typeahead Suggestion	System - Grokking	Modern System Design	Interview for Engineers & Managers

#### **Back**

Requirements of the Typeahead Sug...

Next

Data Structure for Storing Prefixes

Mark as Completed

Report an Issue