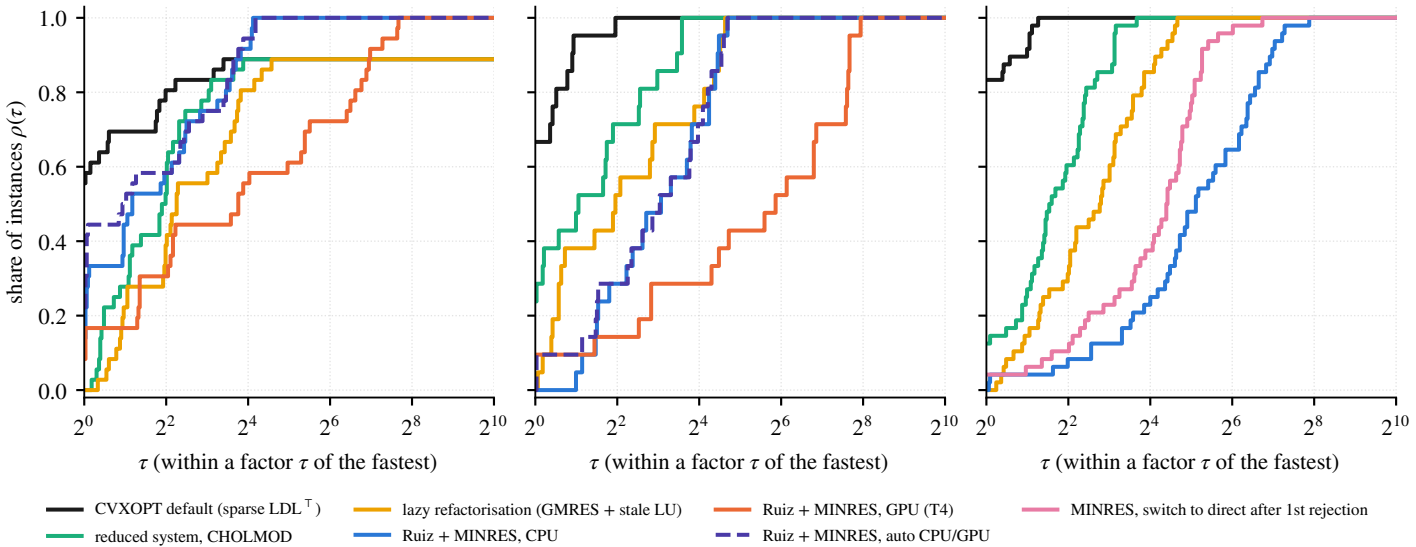
(a) sparse_banded, 36 instances
(b) sparse_lowfill, 21 instances
(c) Maros–Mészáros, 48 QPs
share of instances $\rho(\tau)$
0.0
0.2
0.4
0.6
0.8
1.0
2^0
2^2
2^4
2^6
2^8
2^{10}
τ (within a factor τ of the fastest)
CVXOPT default (sparse LDL$^\top$)
reduced system, CHOLMOD
lazy refactorisation (GMRES + stale LU)
Ruiz + MINRES, CPU
Ruiz + MINRES, GPU (T4)
Ruiz + MINRES, auto CPU/GPU
MINRES, switch to direct after 1st rejection