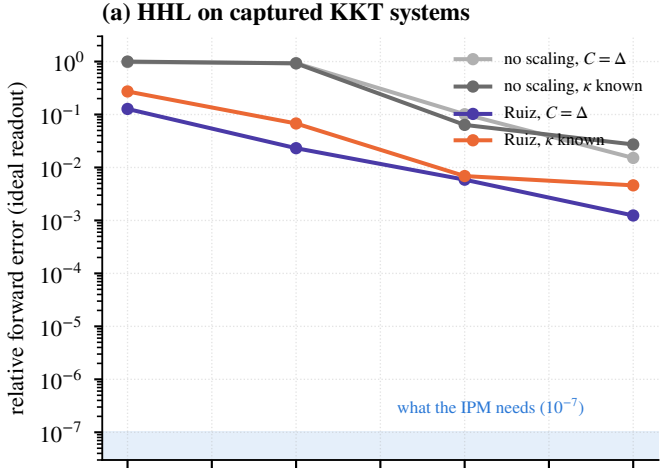
(a) HHL on captured KKT systems
no scaling, $C = \Delta$
no scaling, κ known
Ruiz, $C = \Delta$
Ruiz, κ known
what the IPM needs (10^{-7})
relative forward error (ideal readout)
clock (phase-estimation) qubits n_c

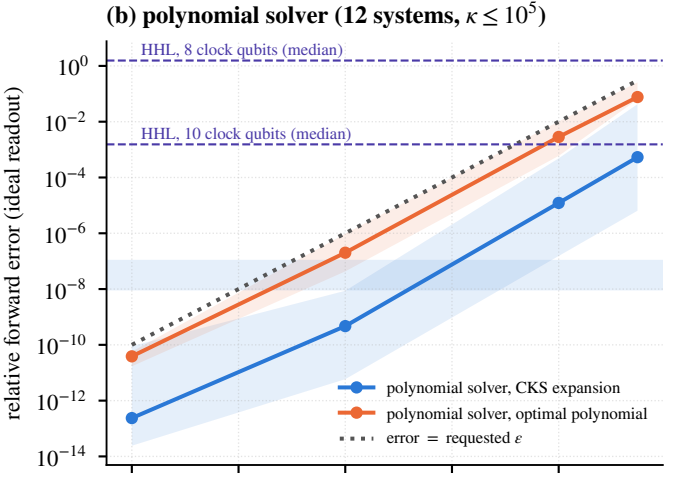
(b) polynomial solver (12 systems, $\kappa \leq 10^5$)
HHL, 8 clock qubits (median)
HHL, 10 clock qubits (median)
polynomial solver, CKS expansion
polynomial solver, optimal polynomial
error = requested ε
relative forward error (ideal readout)
requested polynomial accuracy ε