Steps to test SQS communication.

This Python script will launch an Amazon Linux 2023 VM with necessary resources to test the SQS communication.
Install Python3 first:
https://www.python.org/downloads/
Download the python script here:
https://github.com/barellag/scripts/blob/main/launch_instances.py

For the script you will need to provide:

- Role ARN with the Backup permissions (same configured in VBAWS)

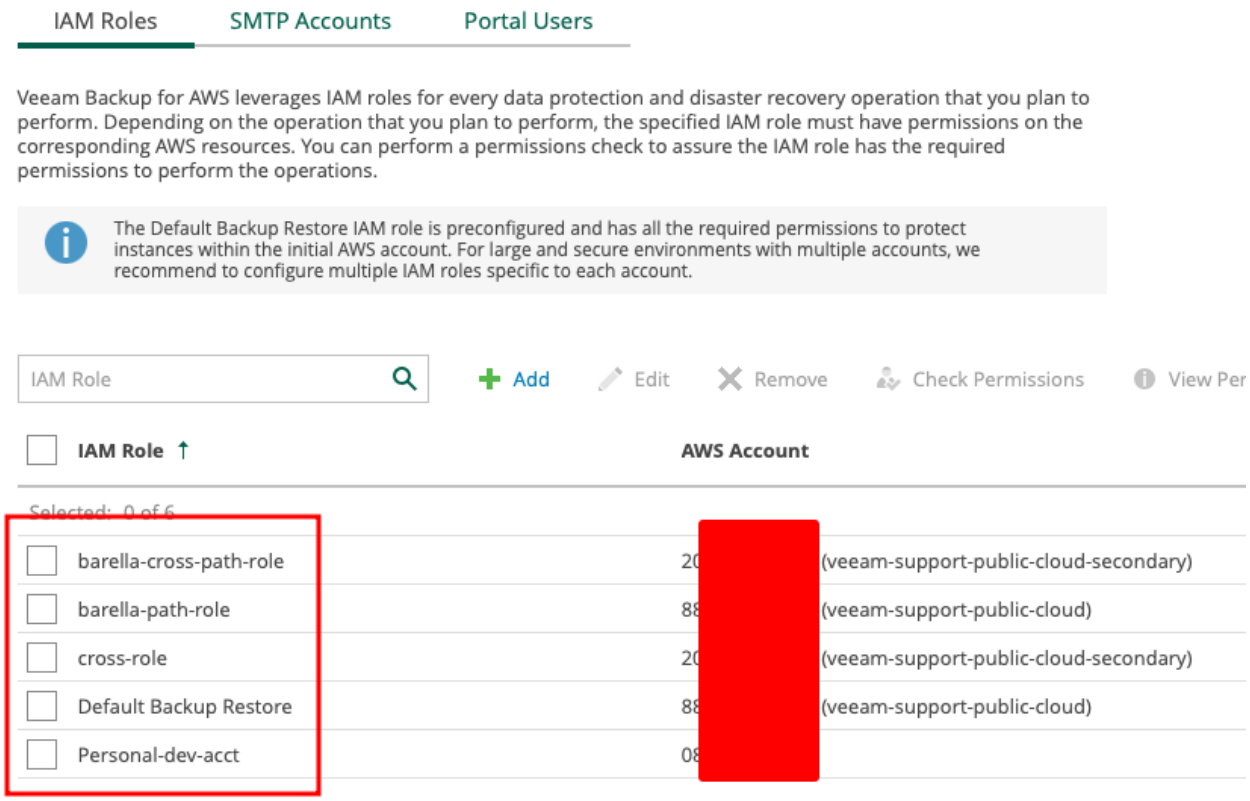

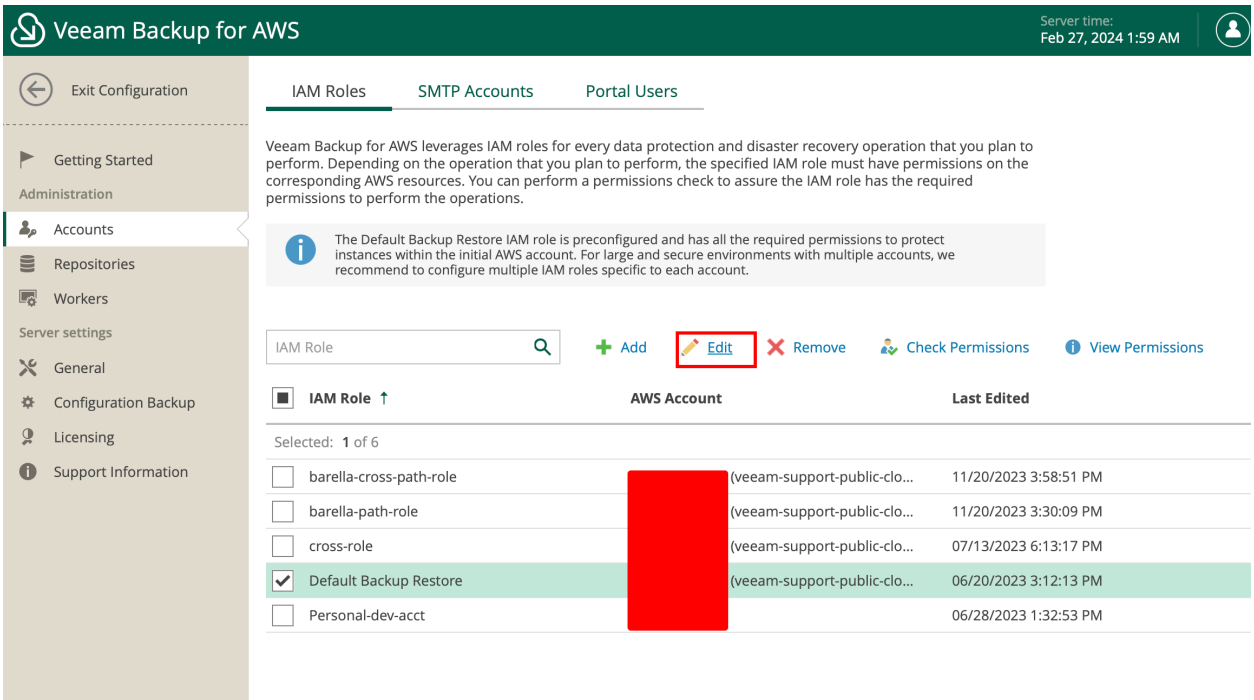

This is the Role Name:

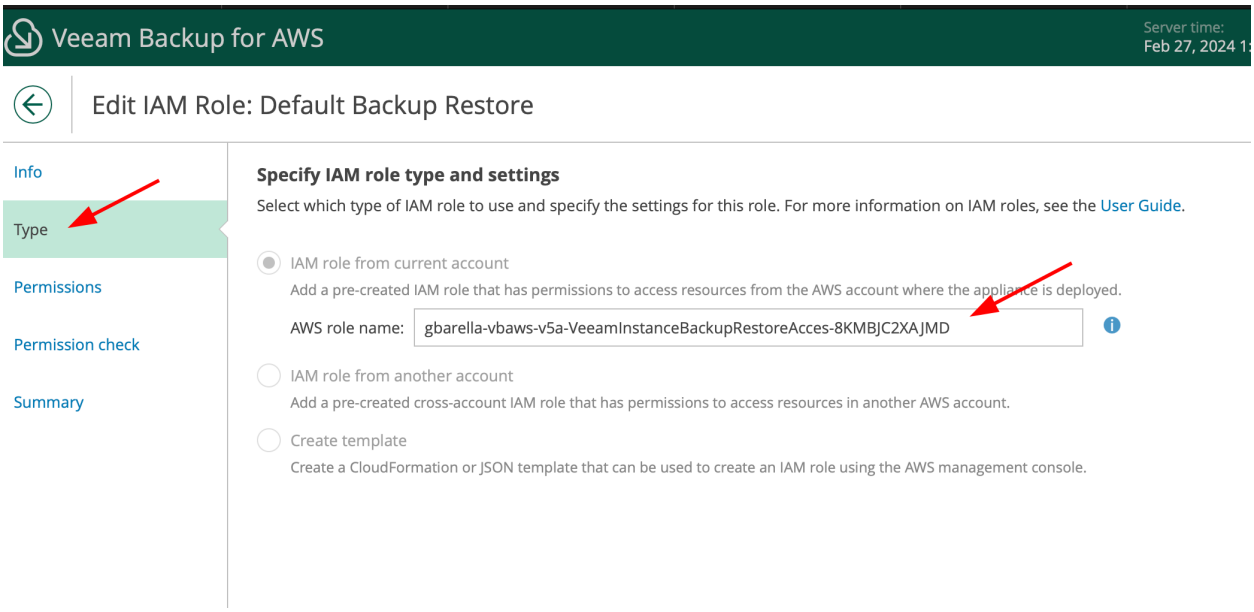

Find this role in AWS:

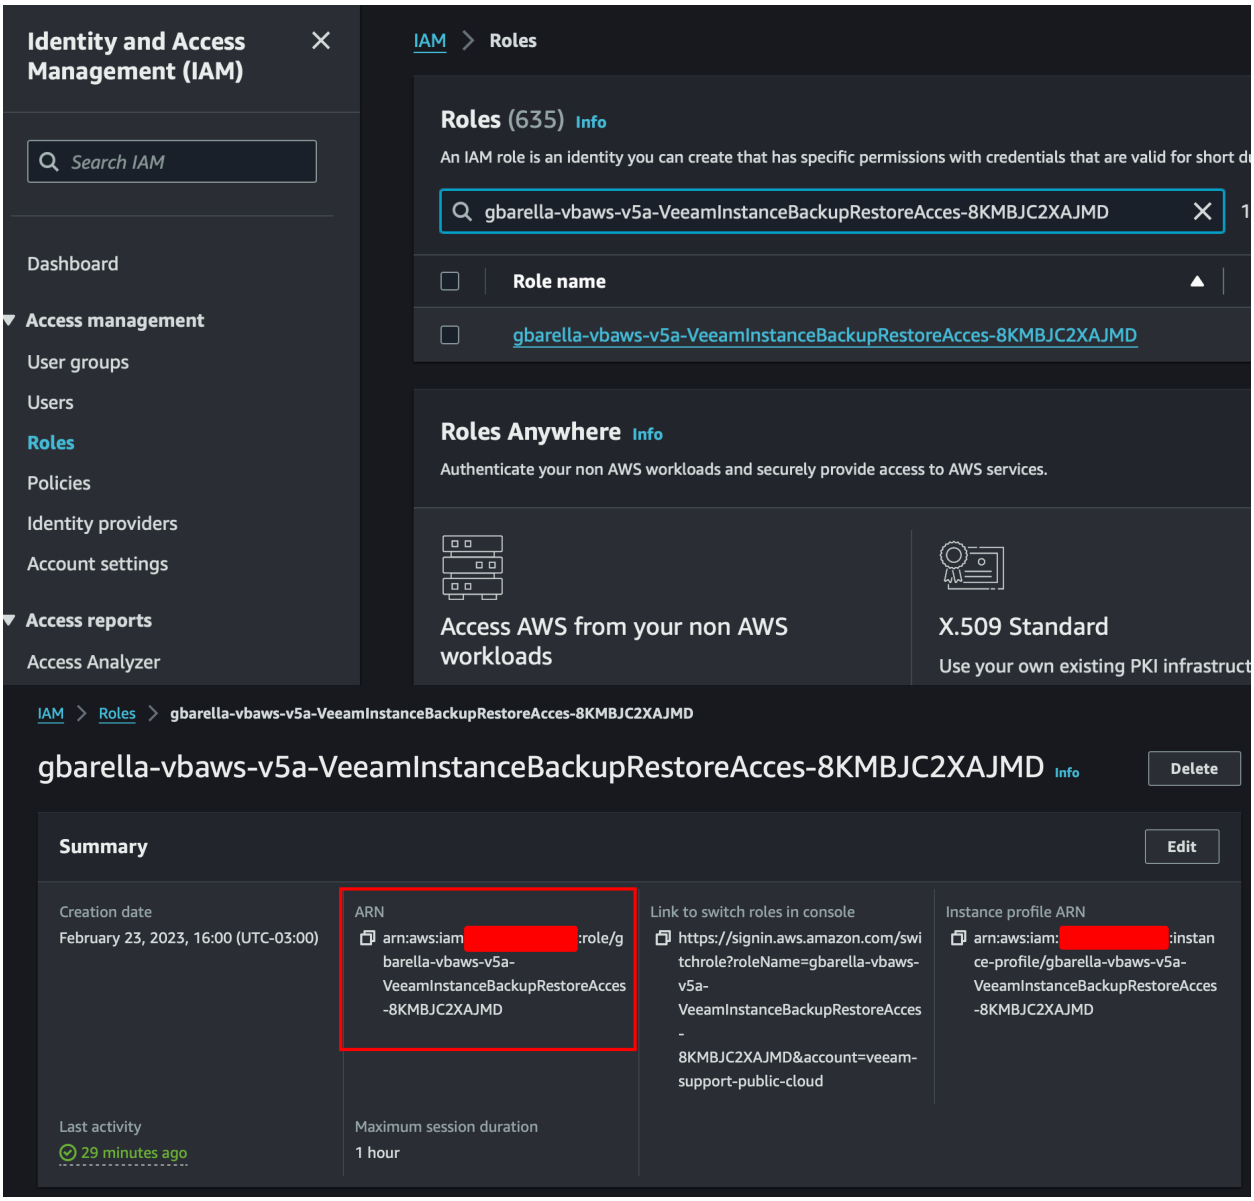

- Name for the test VM (this will play the worker role)
- Region name
- Instance Profile NAME (same as the workers are assuming for cross account, if you are testing same account, you need to identify the instance profile name that is associated to the appliance, in the Security Tab of the instance you can find the Role name).

To find the instance profile name, you click on the Role name and then you will see the instance profile name:

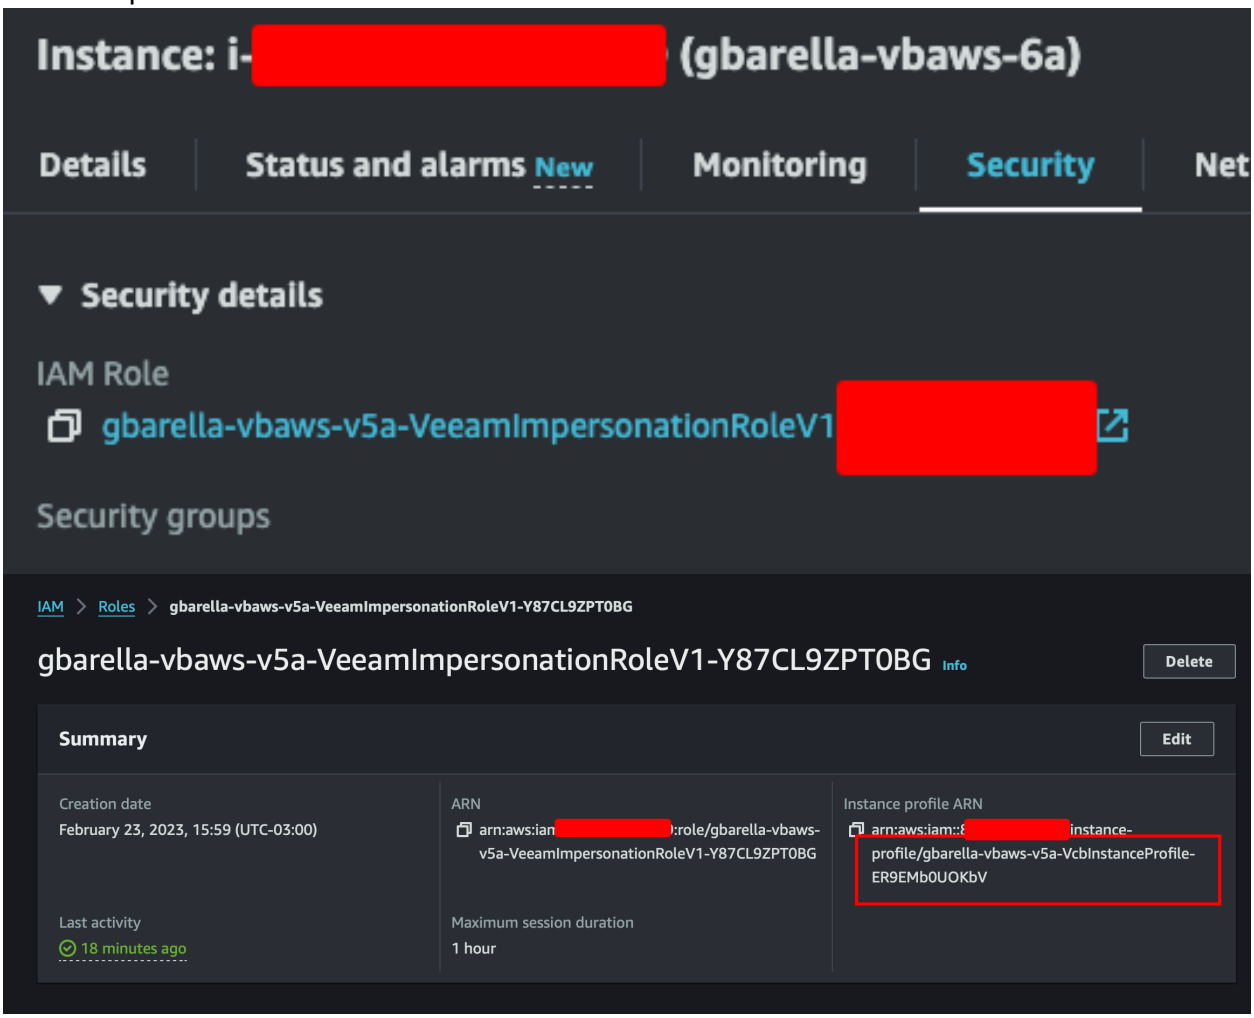

You can also use the AWS CLI:
Use the following command to find out the instance profile name:
aws iam list-instance-profiles-for-role --role-name rolenamehere

```
gabriel.barella@M0X2WP4KNW scripts % aws iam list-instance-profiles-for-role --role-name gbarella-vbaws-v5a-VeeamImpersonationRoleV1-Y87CL9ZPT0BG
{
    "InstanceProfiles": [
        {
            "Path": "/",
            "InstanceProfileName": "gbarella-vbaws-v5a-VcbInstanceProfile-ER9EMb0UOKbV",
            "InstanceProfileId": "[redacted]",
            "Arn": "arn:aws:iam::[redacted]9:instance-profile/gbarella-vbaws-v5a-VcbInstanceProfile-ER9EMb0UOKbV",
            "CreateDate": "2023-02-23T19:00:12+00:00",
            "Roles": [
                {
                    "Path": "/",
                    "RoleName": "gbarella-vbaws-v5a-VeeamImpersonationRoleV1-Y87CL9ZPT0BG",
                    "RoleId": "[redacted]AL",
                    "Arn": "arn:aws:iam::[redacted]:role/gbarella-vbaws-v5a-VeeamImpersonationRoleV1-Y87CL9ZPT0BG",
                    "CreateDate": "2023-02-23T18:59:46+00:00",
                    "AssumeRolePolicyDocument": {
                        "Version": "2012-10-17",
                        "Statement": [
                            {
                                "Effect": "Allow",
                                "Principal": {
                                    "Service": "ec2.amazonaws.com"
                                },
                                "Action": "sts:AssumeRole"
                            }
                        ]
                    }
                }
            ]
        }
    ]
}
```

In case you see the error "An error occurred (InvalidClientTokenId)", remove the credentials set to file ~/.aws/credentials. Simply delete the file credentials located at your home folder /.aws/

- Subnet ID (Same as configured for workers)
- Security Group ID (Same as used by workers)

This is the expected output:

```
[redacted] scripts % python3 launch_instances.py
Enter Your Backup Role ARN: arn:aws:iam::[redacted]7:role/veeam/path/barella-cross-path
Enter region name (example: us-east-1): us-east-1
Assuming role arn:aws:iam::[redacted]:role/veeam/path/barella-cross-path
Assumed role: arn:aws:sts::[redacted]:assumed-role/barella-cross-path/VeeamSupportSQSTest-c7a5c399-7c11-4bee-849f-ee4e70fb58e1
Starting session...
The following AMI will be used for this region: ami-0440d3b780d96b29d
Enter a name for the test VM: testing7
Enter the instance profile NAME used by the worker: barella-cross-instance-profile
Enter subnet ID: subnet-09[redacted]
Enter Security Group ID: s[redacted]
Temporary instance ID: i-0b5ac3ce35378a536
gabriel.barella@M0X2WP4KNW scripts %
```

Find the new VM in AWS and click on Connect:

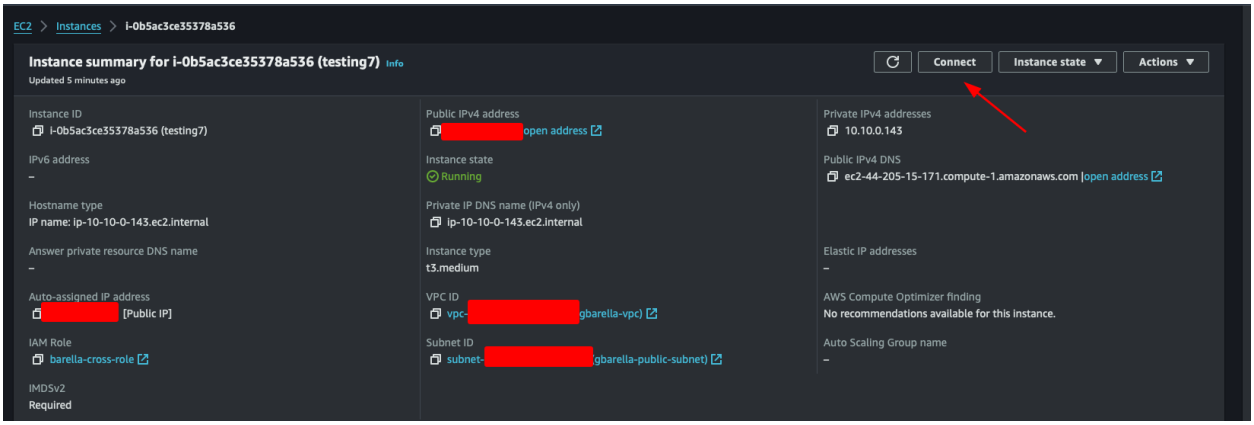

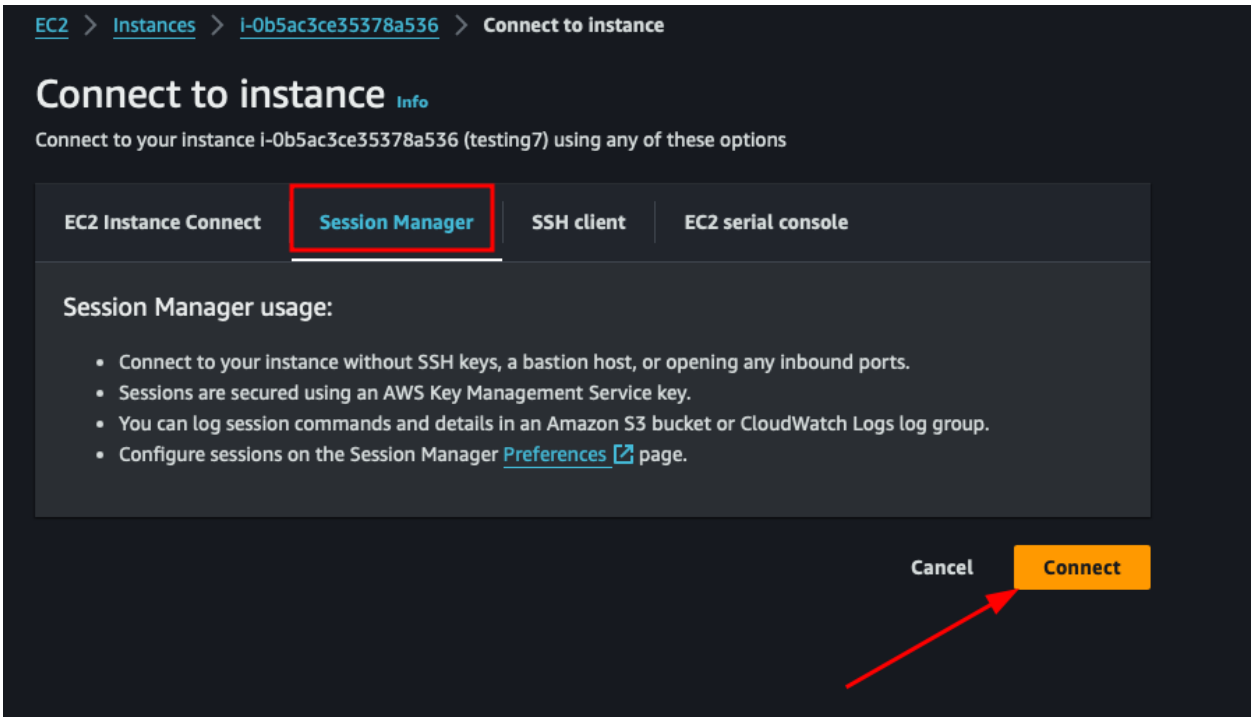

Run the following commands:

sudo su
python3 /tmp/sqstest.py

```
sh-5.2$ sudo su
[root@ip-10-10-0-143 bin]# python3 /tmp/sqstest.py
```

For this part you will need to enter:

- Backup Role ARN (the same used in the first step)
- Any name for the test queue
- Region Name (us-east-1 for example)

Expected output:

```
sh-5.2$ sudo su
[root@ip-10-10-0-143 bin]# python3 /tmp/sqstest.py
Enter Your Backup Role ARN: arn:aws:iam::202854644357:role/veeam/path/barella-cross-path
Assuming role...
Starting session...
Let's test the SQS communication, first we will create a SQS queue
Type any queue name to be created: testing_queue
Enter region name (example: us-east-1): us-east-1
This is your new queue URL: https://sqs.us-east-1.amazonaws.com/202854644357/testing_queue
Your message has been sent, Message ID: 14120e61-3a24-4f9f-a422-ca1269ffd04c
```

If you see this, it means it was able to connect to the SQS endpoint. Then the script will ask if you want to delete the resources.
The test instance will not be terminated, only the SQS queue and the credentials will be deleted.