Steps to test SQS communication.

This Python script will launch an Amazon Linux 2023 VM with necessary resources to test the SQS communication.
Install Python3 first:
https://www.python.org/downloads/
Download the python script here:
https://github.com/barellag/scripts/blob/main/launch_instances.py

For the script you will need to provide:

- Role ARN with the Backup permissions (same configured in VBAWS)

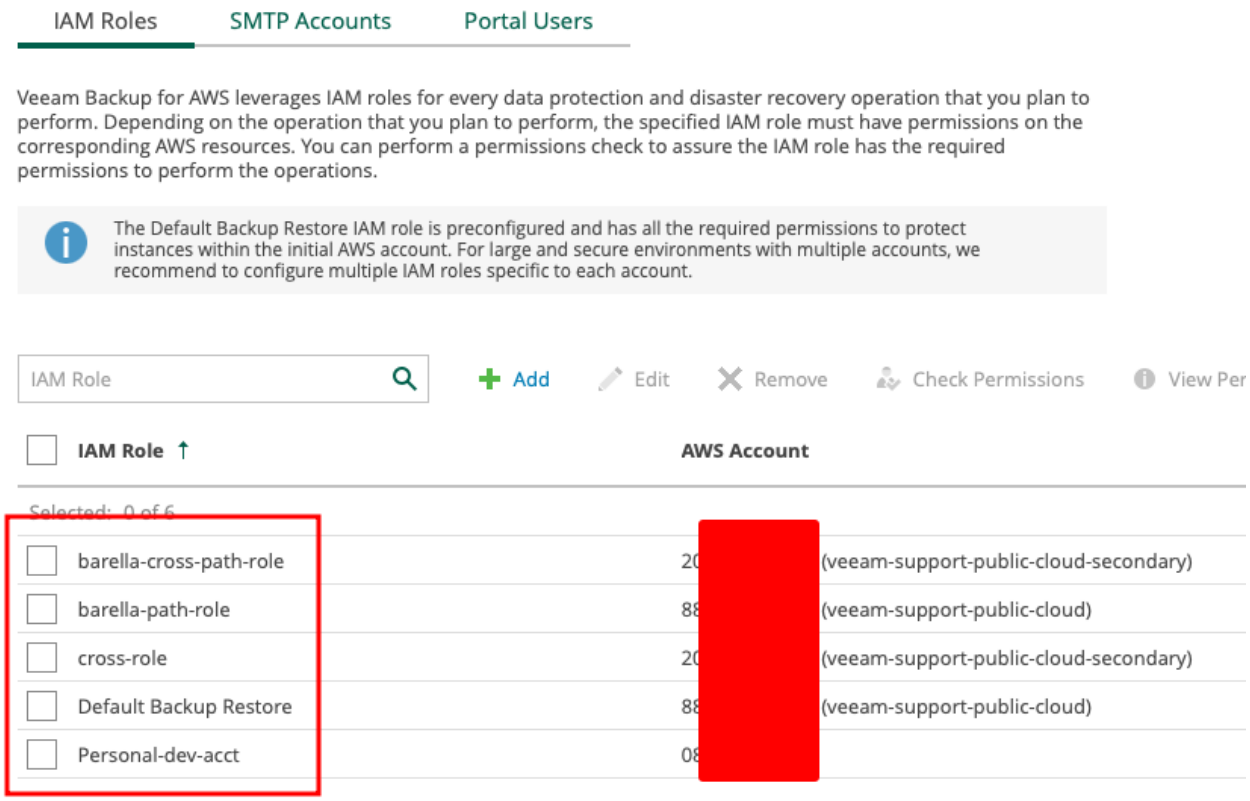

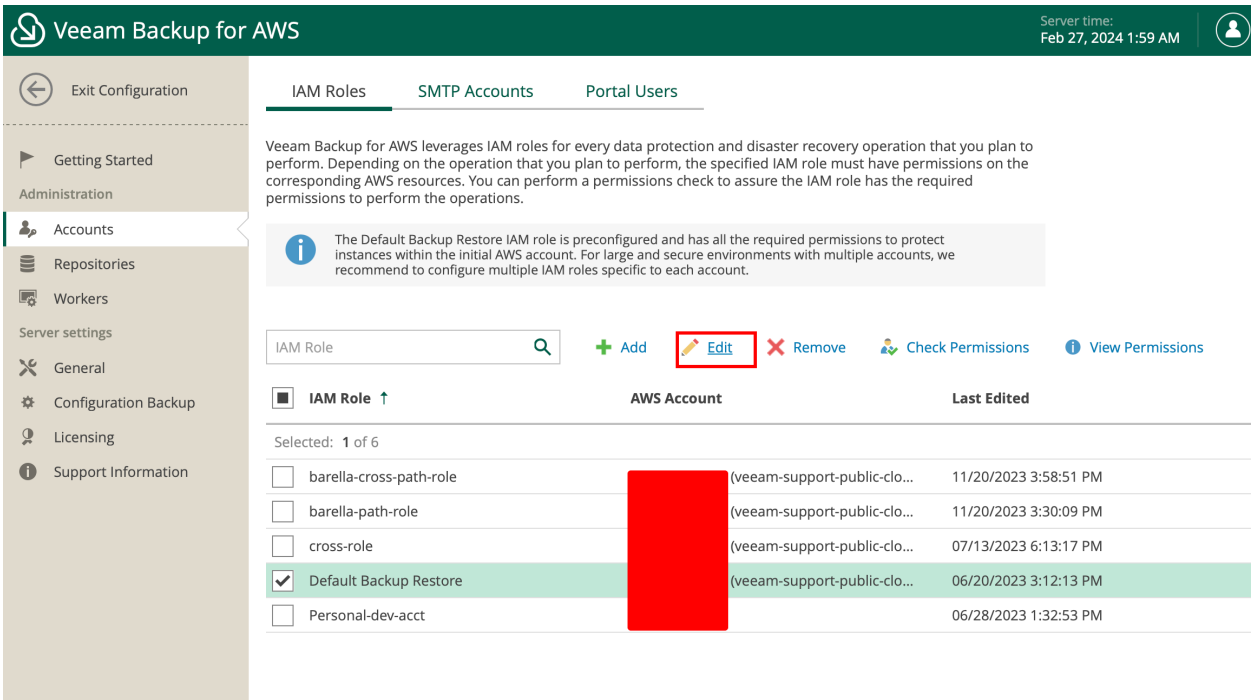

This is the Role Name:

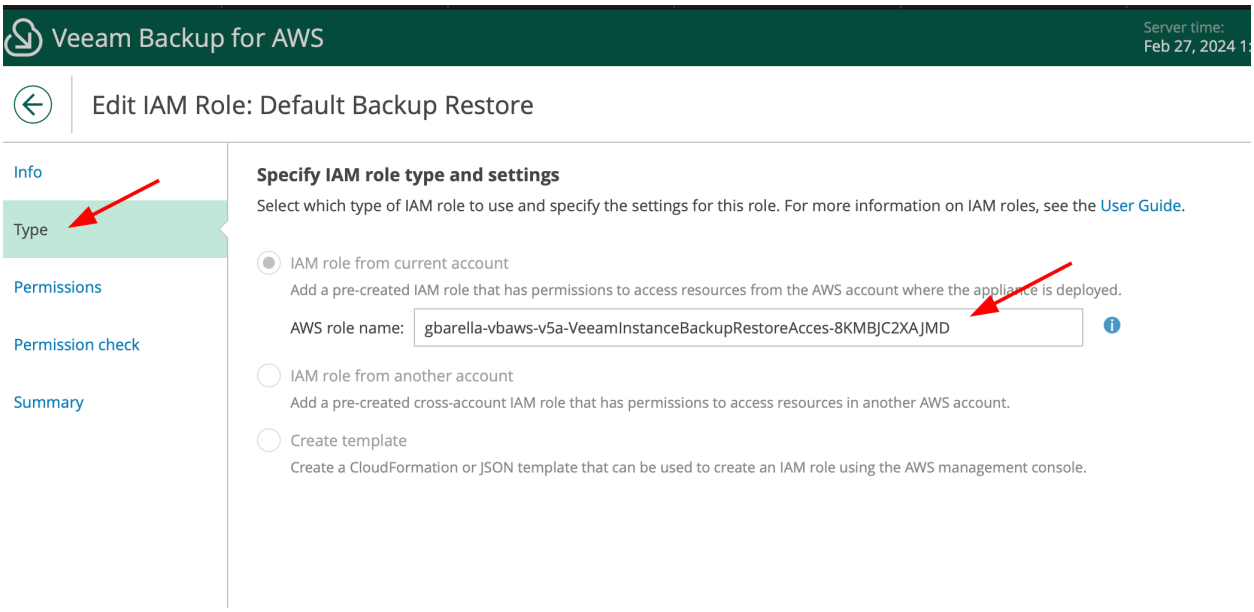

Find this role in AWS:

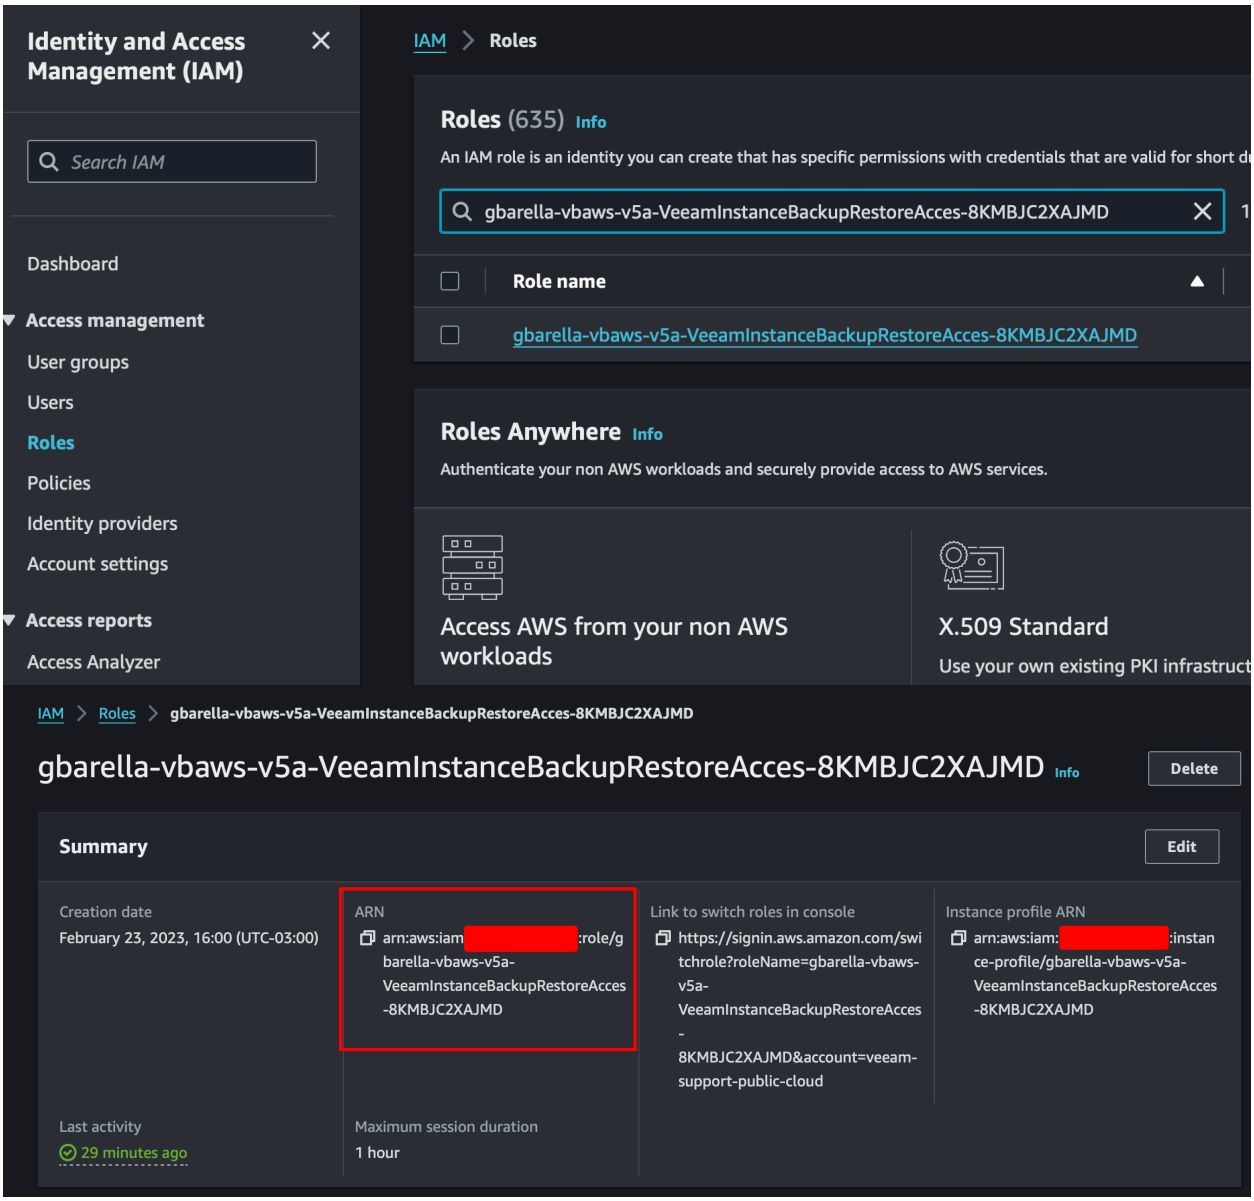

- Name for the test VM (this will play the worker role)
- Region name
- Instance Profile NAME (same as the workers are assuming for cross account, if you are testing same account, you need to identify the instance profile name that is associated to the appliance, in the Security Tab of the instance you can find the Role name).

To find the instance profile name, you click on the Role name and then you will see the instance profile name:

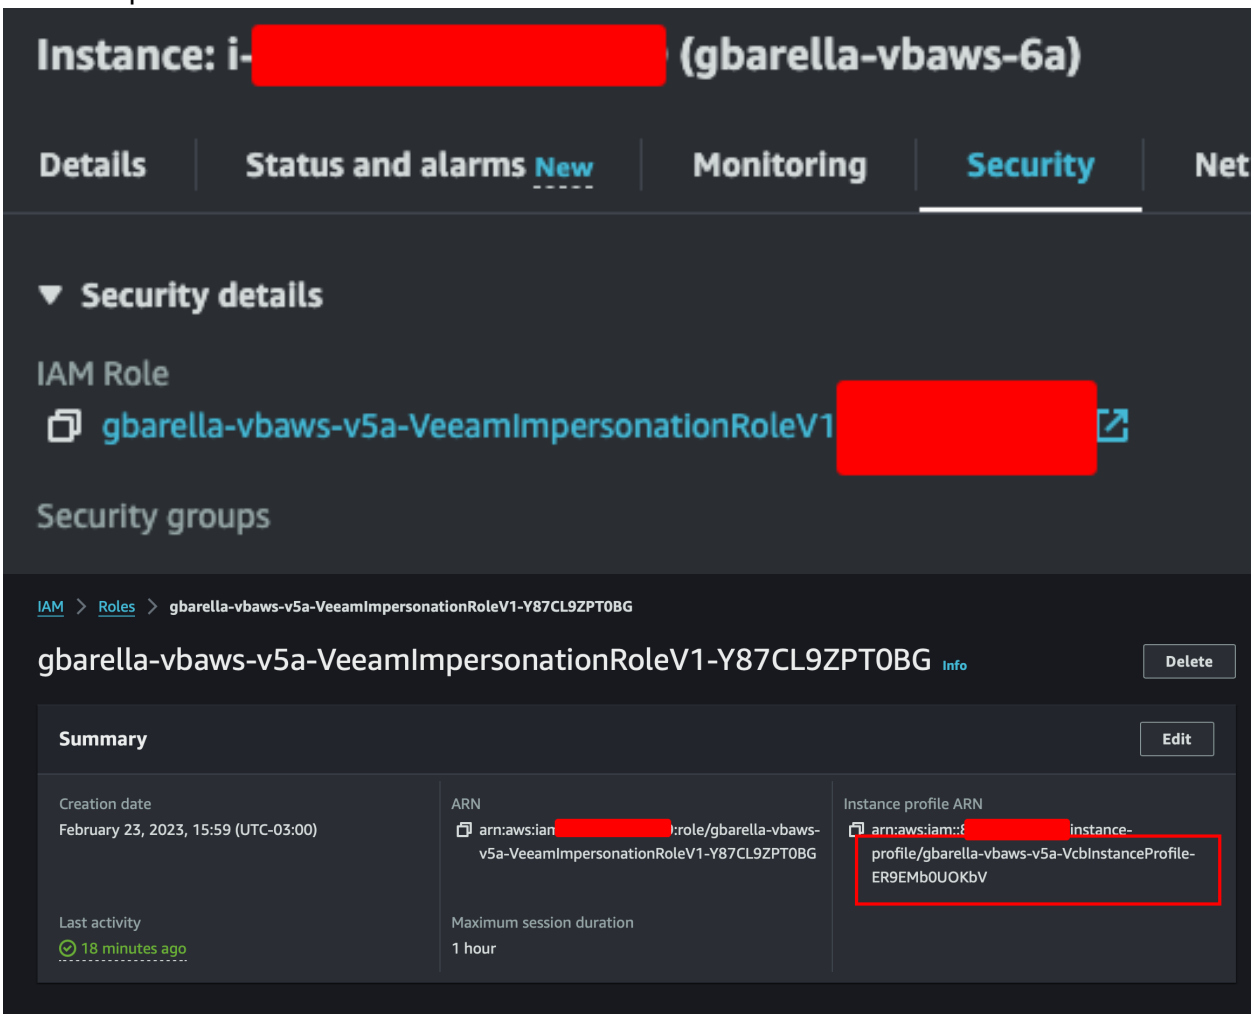

You can also use the AWS CLI:
Use the following command to find out the instance profile name:
aws iam list-instance-profiles-for-role --role-name rolenamehere

```
gabriel.barella@M0X2WP4KNW scripts % aws iam list-instance-profiles-for-role --role-name gbarella-vbaws-v5a-VeeamImpersonationRoleV1-Y87CL9ZPT0BG
{
    "InstanceProfiles": [
        {
            "Path": "/",
            "InstanceProfileName": "gbarella-vbaws-v5a-VcbInstanceProfile-ER9EMb0UOKbV",
            "InstanceProfileId": "[redacted]",
            "Arn": "arn:aws:iam::[redacted]9:instance-profile/gbarella-vbaws-v5a-VcbInstanceProfile-ER9EMb0UOKbV",
            "CreateDate": "2023-02-23T19:00:12+00:00",
            "Roles": [
                {
                    "Path": "/",
                    "RoleName": "gbarella-vbaws-v5a-VeeamImpersonationRoleV1-Y87CL9ZPT0BG",
                    "RoleId": "[redacted]AL",
                    "Arn": "arn:aws:iam::[redacted]:role/gbarella-vbaws-v5a-VeeamImpersonationRoleV1-Y87CL9ZPT0BG",
                    "CreateDate": "2023-02-23T18:59:46+00:00",
                    "AssumeRolePolicyDocument": {
                        "Version": "2012-10-17",
                        "Statement": [
                            {
                                "Effect": "Allow",
                                "Principal": {
                                    "Service": "ec2.amazonaws.com"
                                },
                                "Action": "sts:AssumeRole"
                            }
                        ]
                    }
                }
            ]
        }
    ]
}
```

In case you see the error "An error occurred (InvalidClientTokenId)", remove the credentials set to file ~/.aws/credentials. Simply delete the file credentials located at your home folder /.aws/

- Subnet ID (Same as configured for workers)
- Security Group ID (Same as used by workers)

This is the expected output:

```
Enter Your Backup Role ARN: arn:aws:iam:[redacted]role/gbarella-vbaws-v5a-VeeamInstanceBackupRestoreAcces-8KMBJC2XAJMD
Enter region name (example: us-east-1): us-east-1
Assuming role arn:aws:iam:[redacted]:role/gbarella-vbaws-v5a-VeeamInstanceBackupRestoreAcces-8KMBJC2XAJMD
Assumed role: arn:aws:sts:[redacted]:assumed-role/gbarella-vbaws-v5a-VeeamInstanceBackupRestoreAcces-8KMBJC2XAJMD/VeeamSupportSQSTest-UYxZDrmmaCP7WVoLk29gH7
Starting session...
The following AMI will be used for this region: ami-0440d3b780d96b29d
New keypair created. the PEM file has been downloaded to the folder where this script is being executed from. Key Name: VeeamSupportKey-Ww2uVjBN4iEpR8b5vKpHGJ.pem
Setting read-only permissions to PEM file
Read-only permissions set
Enter a name for the test VM: test_123
Enter the instance profile NAME used by the worker: [redacted]
Enter subnet ID: subnet-08811cff1d1a13941
Enter Security Group ID: sg-0c9158e20e1ce4711
Gathering new instance details...
Temporary instance ID: i-0051121bd5a8c5159
Getting Private IP...
Temporary instance Private IP: 10.10.80.207
Getting Public IP...
Temporary instance Public IP: 3.[redacted]
```

The SSH PEM file will be downloaded to the folder where the script was executed.

```
Enter Your Backup Role ARN: arn:aws:iam:[redacted]:role/gbarella-vbaws-v5a-VeeamInstanceBackupRestoreAcces-8KMBJC2XAJMD
Enter region name (example: us-east-1): us-east-1
Assuming role arn:aws:iam:[redacted]:role/gbarella-vbaws-v5a-VeeamInstanceBackupRestoreAcces-8KMBJC2XAJMD
Assumed role: arn:aws:sts:[redacted]:assumed-role/gbarella-vbaws-v5a-VeeamInstanceBackupRestoreAcces-8KMBJC2XAJMD/VeeamSupportSQSTest-UYxZDrmmaCP7WVoLk29gH7
Starting session...
The following AMI will be used for this region: ami-0440d3b780d96b29d
New keypair created. the PEM file has been downloaded to the folder where this script is being executed from. Key Name: VeeamSupportKey-Ww2uVjBN4iEpR8b5vKpHGJ.pem
Setting read-only permissions to PEM file
Read-only permissions set
Enter a name for the test VM: test_123
```

From the same terminal you should be able to ssh into the temp VM:

```
gabriel.barella@M0X2WP4KNW scripts % ssh -i VeeamSupportKey-Ww2uVjBN4iEpR8b5vKpHGJ.pem ec2-user@[redacted]
The authenticity of host '[redacted]' can't be established.
ED25519 key fingerprint is SHA256:Fe6wfoUIdtYg/UCP+zFaUKOzeTw5L59WuFFsRpedgqM.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '[redacted]' (ED25519) to the list of known hosts.
   ,     #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
[ec2-user@ip-10-10-80-207 ~]$
```

Run the following commands:

sudo su
python3 /tmp/sqstest.py

```
   ,     #_
   ~\_  ####_        Amazon Linux 2023
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   https://aws.amazon.com/linux/amazon-linux-2023
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'
[ec2-user@ip-10-10-80-207 ~]$
[ec2-user@ip-10-10-80-207 ~]$
[ec2-user@ip-10-10-80-207 ~]$
[ec2-user@ip-10-10-80-207 ~]$ sudo su
[root@ip-10-10-80-207 ec2-user]# python3 /tmp/sqstest.py
Enter Your Backup Role ARN:
```

For this part you will need to enter:

- Backup Role ARN (the same used in the first step)
- Any name for the test queue
- Region Name (us-east-1 for example)

Expected output:

```
sh-5.2$ sudo su
[root@ip-10-10-0-143 bin]# python3 /tmp/sqstest.py
Enter Your Backup Role ARN: arn:aws:iam::202854644357:role/veeam/path/barella-cross-path
Assuming role...
Starting session...
Let's test the SQS communication, first we will create a SQS queue
Type any queue name to be created: testing_queue
Enter region name (example: us-east-1): us-east-1
This is your new queue URL: https://sqs.us-east-1.amazonaws.com/202854644357/testing_queue
Your message has been sent, Message ID: 14120e61-3a24-4f9f-a422-ca1269ffd04c
```

If you see this, it means it was able to connect to the SQS endpoint. Then the script will ask if you want to delete the resources.
The test instance will not be terminated, only the SQS queue and the credentials will be deleted.