Practical No:7-A

Aim: Develop an Android application implementing Explicit and Implicit Intents.

Intent

An Intent is a messaging object used to communicate between Android components.

There are two types of Intents:

1. Explicit Intent

- An Explicit Intent specifies the exact Activity to be opened.
- Communicates between two activities inside the same application.
- Example: Moving from MainActivity to SecondActivity.

2. Implicit Intent

An Implicit Intent does not specify a particular Activity. Android finds an appropriate application to handle the request.

Communicates between two activities of different applications


Examples:

- Open a web page
- Make a phone call
- Send an email
- Open Google Maps


Note: Create Activity_new by using following steps.

```
Right click on app -new -Activity -Empty views activity as shown in
the below screenshot
```

By: Prof. Krutika H. Churi
SDSM College, Palghar

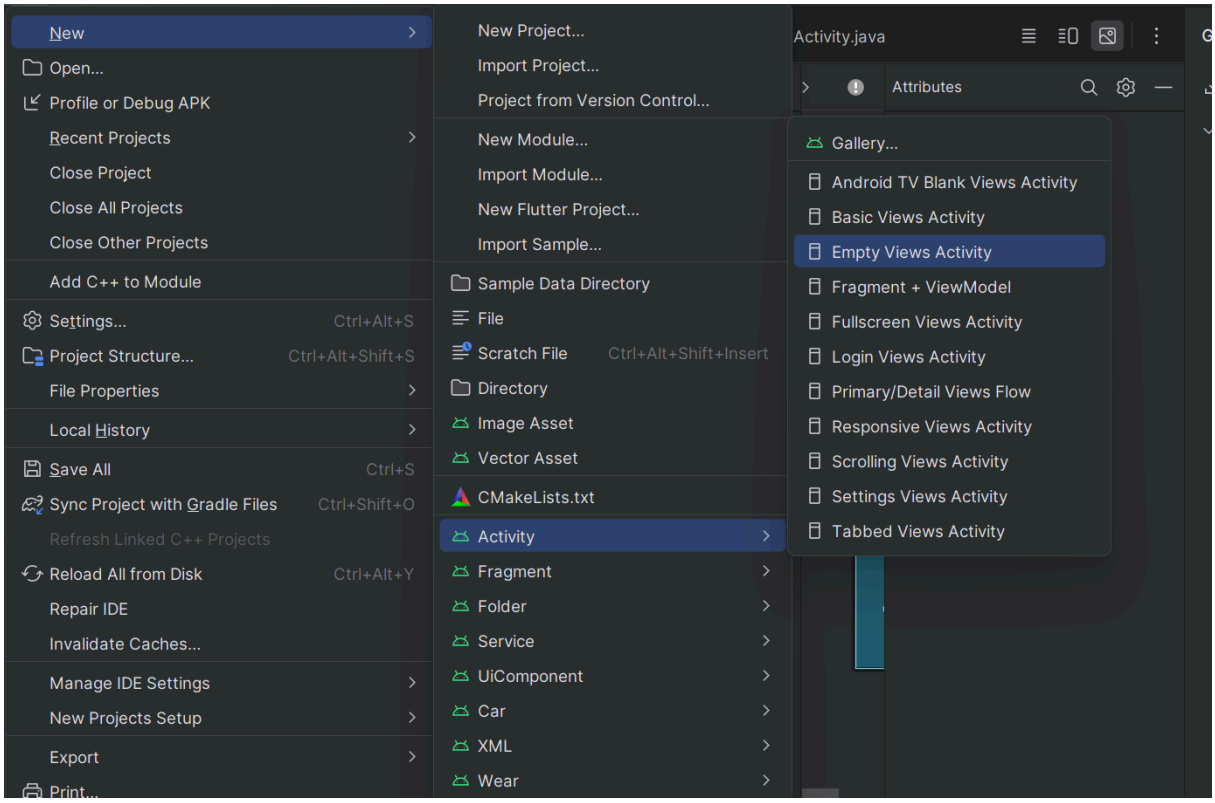

Then set the name for the new activity and click on finish as shown in the below screenshot.

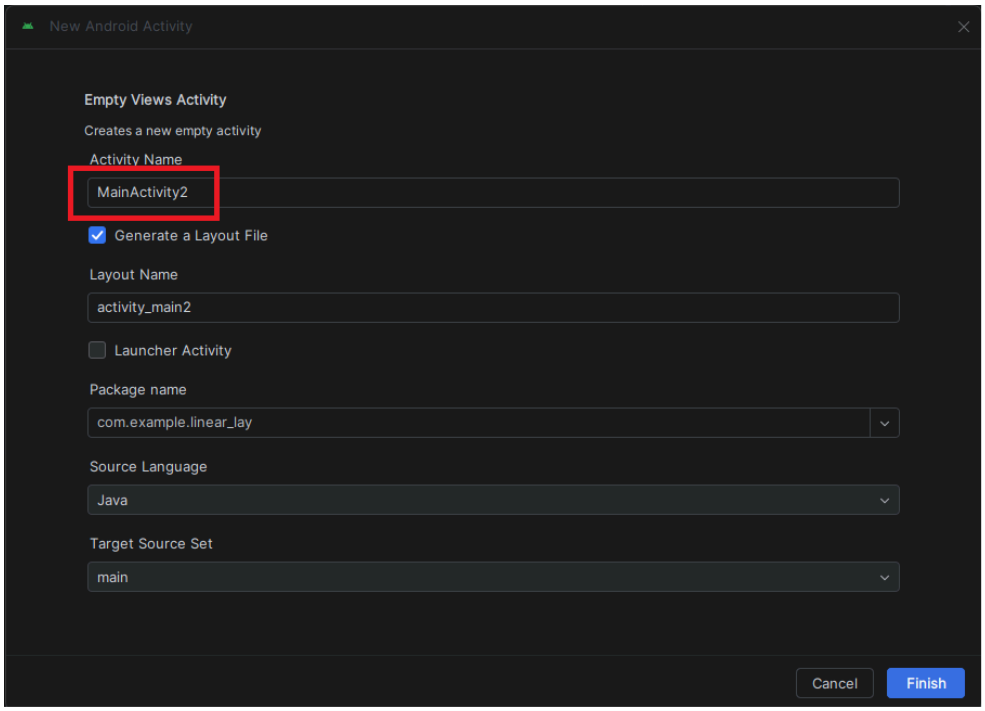

Click on finish.

By: Prof. Krutika H. Churi
SDSM College, Palghar

1) activity _main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
  xmlns:app="http://schemas.android.com/apk/res-auto"
  xmlns:tools="http://schemas.android.com/tools"
  android:id="@+id/main"
  android:layout_width="match_parent"
  android:layout_height="match_parent"
  tools:context=".MainActivity"
  android:gravity="center"
  android:orientation="vertical">

  <Button
    android:id="@+id/btnExplicit"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Explicit Intent"/>

  <Button
    android:id="@+id/btnImplicit"
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Implicit Intent"
    android:layout_marginTop="20dp"/>

</LinearLayout>
```

activity_main2.xml

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
  xmlns:app="http://schemas.android.com/apk/res-auto"
  xmlns:tools="http://schemas.android.com/tools"
  android:id="@+id/main"
  android:layout_width="match_parent"
  android:layout_height="match_parent"
  tools:context=".MainActivity2"
  android:gravity="center">

  <TextView
    android:layout_width="wrap_content"
    android:layout_height="wrap_content"
    android:text="Welcome to Second Activity"
    android:textSize="24sp"/>
```

```
</LinearLayout>
```

MainActivity.java

```
package com.example.pract1;

import android.content.Intent;
import android.net.Uri;
import android.os.Bundle;
import android.widget.Button;

import androidx.activity.EdgeToEdge;
import androidx.appcompat.app.AppCompatActivity;
import androidx.core.graphics.Insets;
import androidx.core.view.ViewCompat;
import androidx.core.view.WindowInsetsCompat;

public class MainActivity extends AppCompatActivity {
  Button btnExplicit, btnImplicit;
  @Override
  protected void onCreate(Bundle savedInstanceState) {
     super.onCreate(savedInstanceState);
     EdgeToEdge.enable(this);
     setContentView(R.layout.activity_main);
     btnExplicit = findViewById(R.id.btnExplicit);
     btnImplicit = findViewById(R.id.btnImplicit);

     // Explicit Intent
     btnExplicit.setOnClickListener(v -> {

        Intent intent =
              new Intent(
                    MainActivity.this,
                    MainActivity2.class);

        startActivity(intent);
     });


     // Implicit Intent
     btnImplicit.setOnClickListener(v -> {


        Intent intent =
              new Intent(
                    Intent.ACTION_VIEW, Uri.parse("https://www.google.com"));
        startActivity(intent);
```


```
        });
    }
}
```

Keep MainActivity2.java as it is

Output:

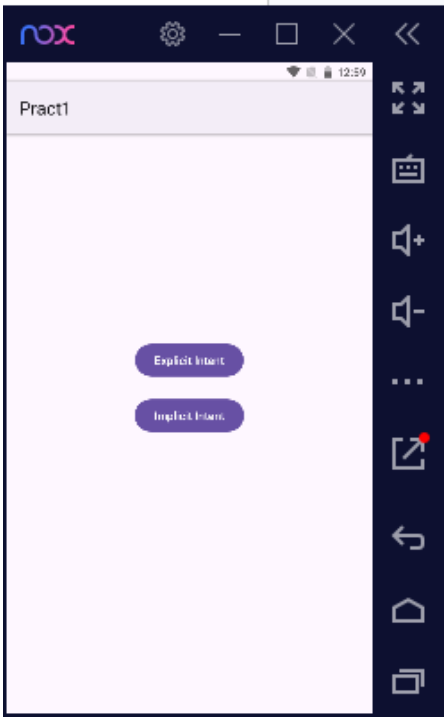

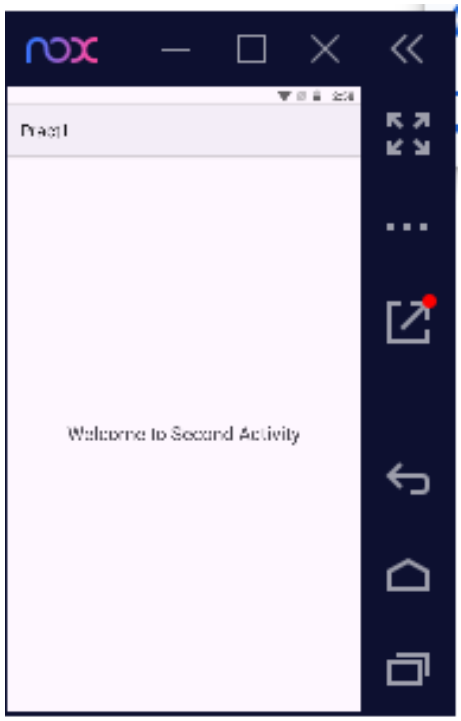

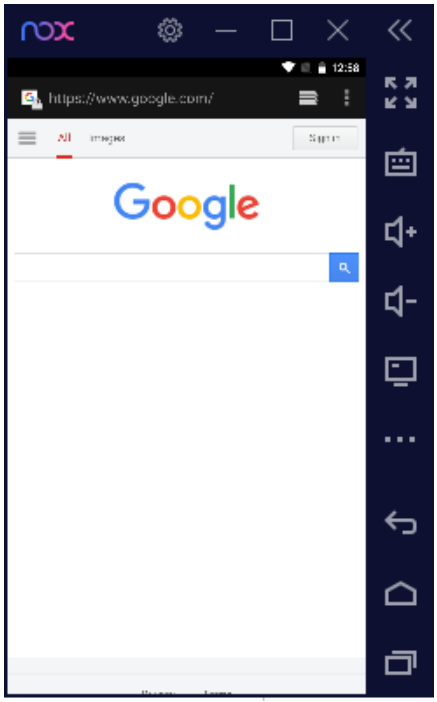

By: Prof. Krutika H. Churi
SDSM College, Palghar

By: Prof. Krutika H. Churi
SDSM College, Palghar