


TouristPlanner Protocol

Barnabas Matrai, Jarod Hila

UX:

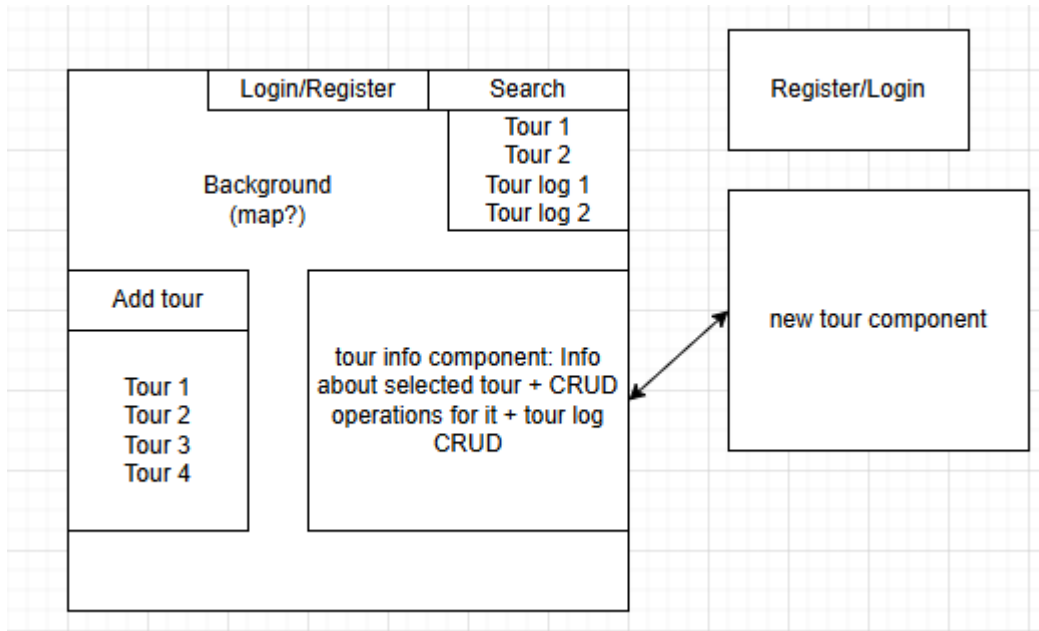

1. Domain-Centered Structure

- The application is built around a primary entity:
models/tour.ts defines the core data structure. Everything else (viewmodels and views) is derived from or interacts with this entity.

2. ViewModels as UX States

- The viewmodels/ folder contains multiple *.vm.ts files. Each represents a specific UI state or screen logic, rather than just raw data.

Examples:

tour-create.vm.ts → logic for creating a tour

tour-info.vm.ts → logic for displaying tour details

tour-list.vm.ts → logic for listing tours

tour-log-create.vm.ts → logic for creating a log entry

tour-log-list.vm.ts → logic for listing logs

tour-log-item.vm.ts → logic for individual log items

3. Views as Navigation Layers

- a. The views/ directory maps directly to user-facing pages or routes:

dashboard, home → entry points

login, register → authentication

tour-list, tour-info, tour-create → core tour management

tour-log-* → logging functionality

tour-route-map → visual/map-based representation