



ASSIGNMENT NO :- 09

TITLE :- Deploy a project from GitHub to EC2.

STEP 01 :- Create two files Index.js and package.json and store it in a folder here the folder here the name is Ankita_Barui_28 and then go to View Section of the folder and select Hiddenitems.

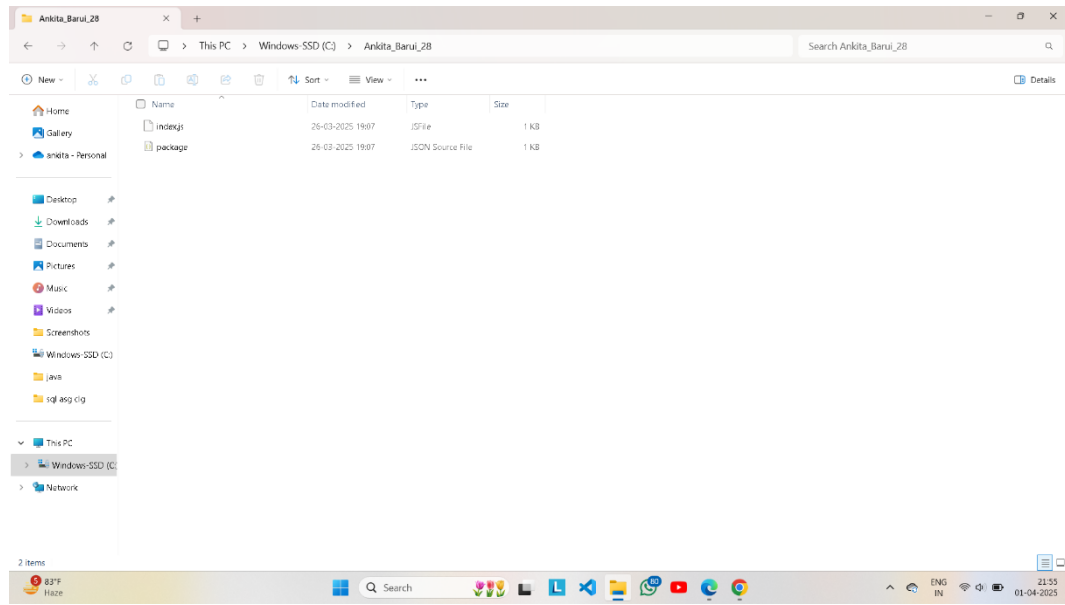

STEP 02 :- Then Log in to your GitHub Account and click on New in the left handside of the page to create New Repository.

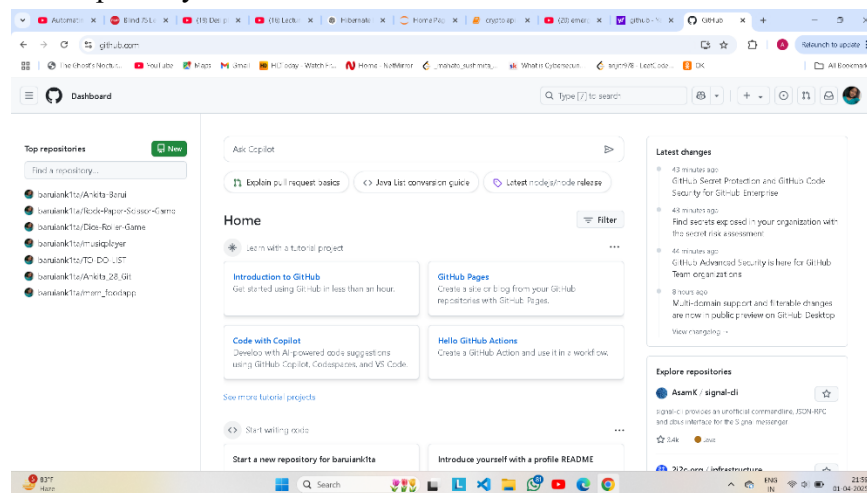

Ankita Barui
CSE_DS/22/28

STEP 03 :- Give a name to your Repository and select Public then click on Create Repository to create the Repository.

Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository](#)

Required fields are marked with an asterisk (*).

Owner * Repository name *

baruiankita / Ankita_Barui_28

Ankita_Barui_28 is available.

Create repository names are short and memorable. Need inspiration? How about: [symmetrical-invention](#)?

Description (optional)

☒ Public
Anyone on the internet can see this repository. You choose who can commit.

☐ Private
You choose who can see and commit to this repository.

Initialize this repository with:

☒ Add a README file
This is where you can write a long description for your project. [Learn more about README files](#)

Add .gitignore

.gitignore template: None

Choose which files not to track from a list of templates. [Learn more about creating files](#)

Choose a license


License: None

A license lets others know they can and can't do with your code. [Learn more about licenses](#)


☐ You are creating a public repository in your personal account.

Create repository


STEP 04 :- A New Repository is created ,Now copy the Http Link given in the blue Box.

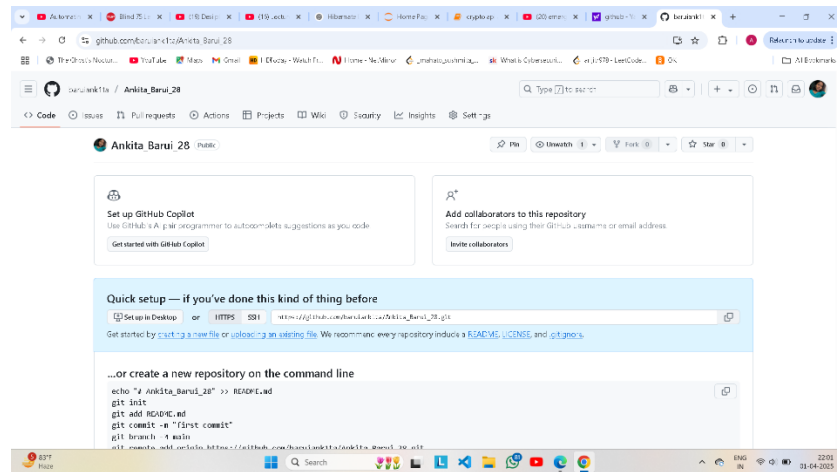


STEP 05 :- Open you folder where you have stored your files then right click on the folder and open it with Git Bash

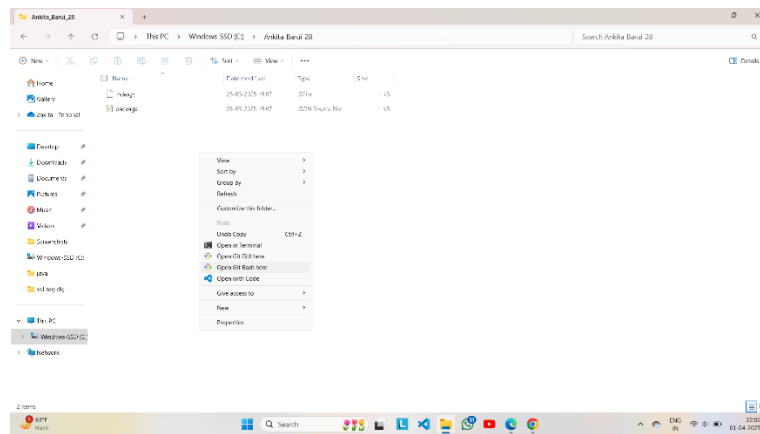


STEP 06 :- In the Git Bash write the following command to upload your files to the GitHub Repository

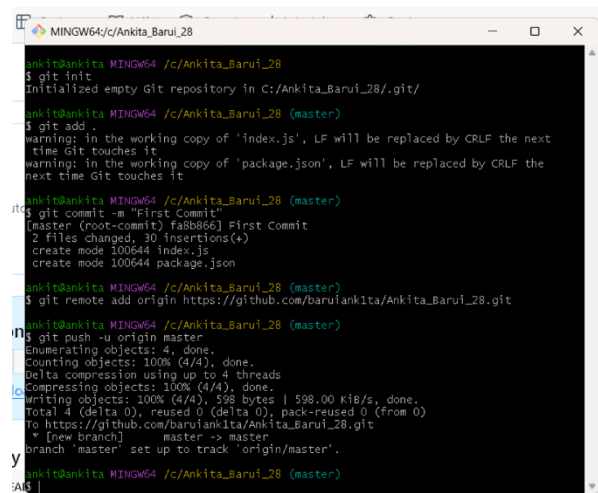


STEP 07 :- Refresh your GitHub Page and you can see your files in the Repository.

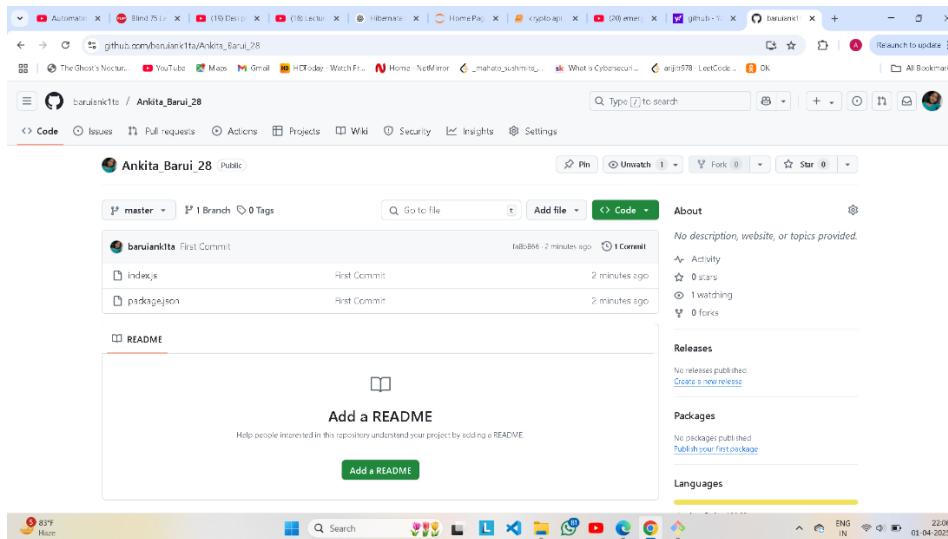

STEP 08 :- Go to your GitHub Profile and click on Settings and then goto Developer Settings

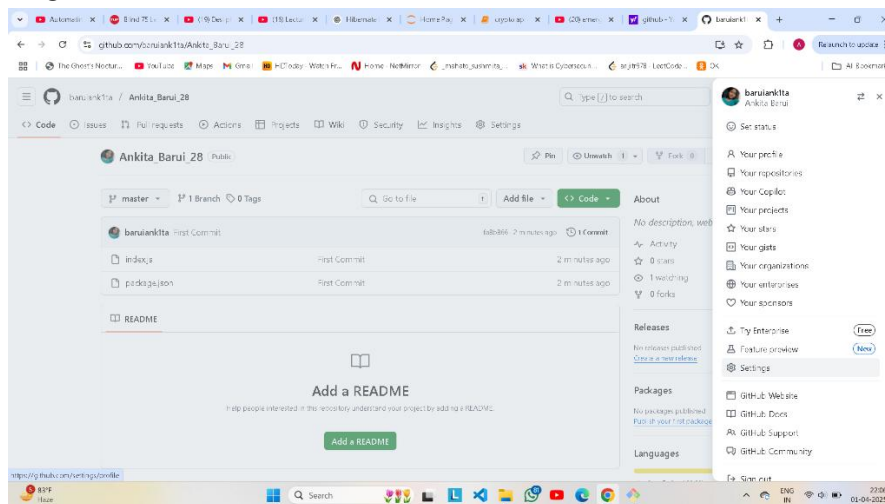


STEP 09 :- Then in Developer Setting click on Personal access tokens and then select Tokens (classic) and click on Generate Token and select all check boxes and give a Password , Copy the generated token and save it in notepad. (Here I have already created the Token previously)

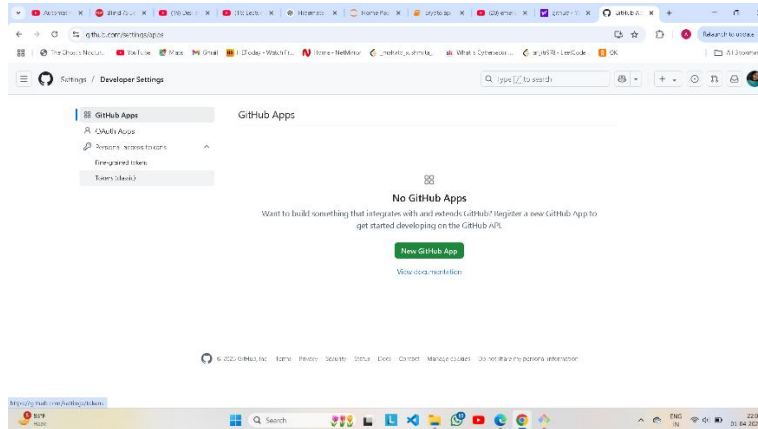


✓ ghp_9uMLsLzPspix0PLgvfRaBY4ZS9QqwE2tfrLs


STEP 10 :- Login to your AWS Account and select EC2.

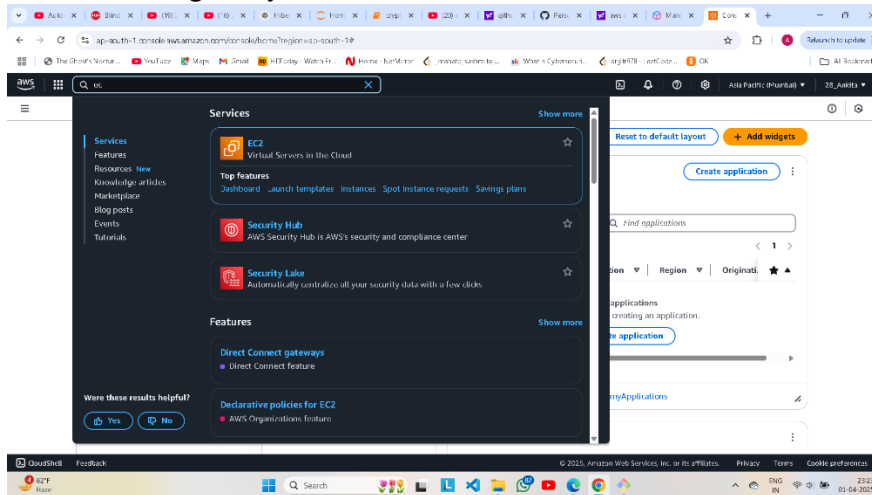


STEP 11 :- Click on Launch Instance

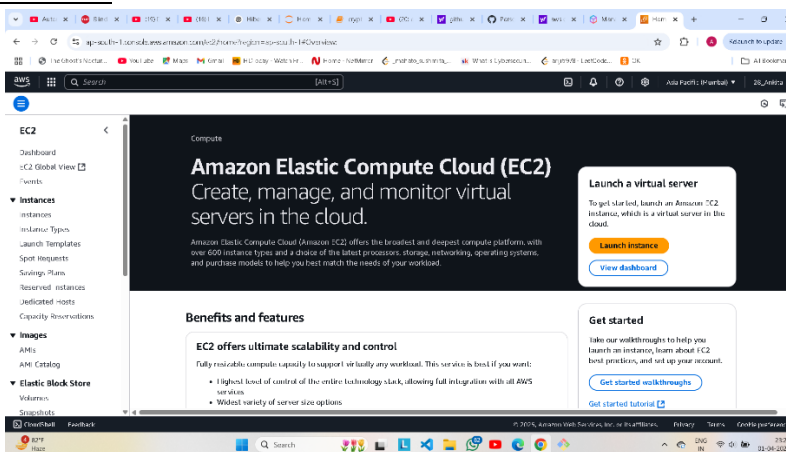


STEP 12 :- Give your instance a name and then select Ubuntu and then click on Create key pair a pop up window will appear there write the key name then select RSA and then click on .pem and click on Create Key pair at bottom of page.

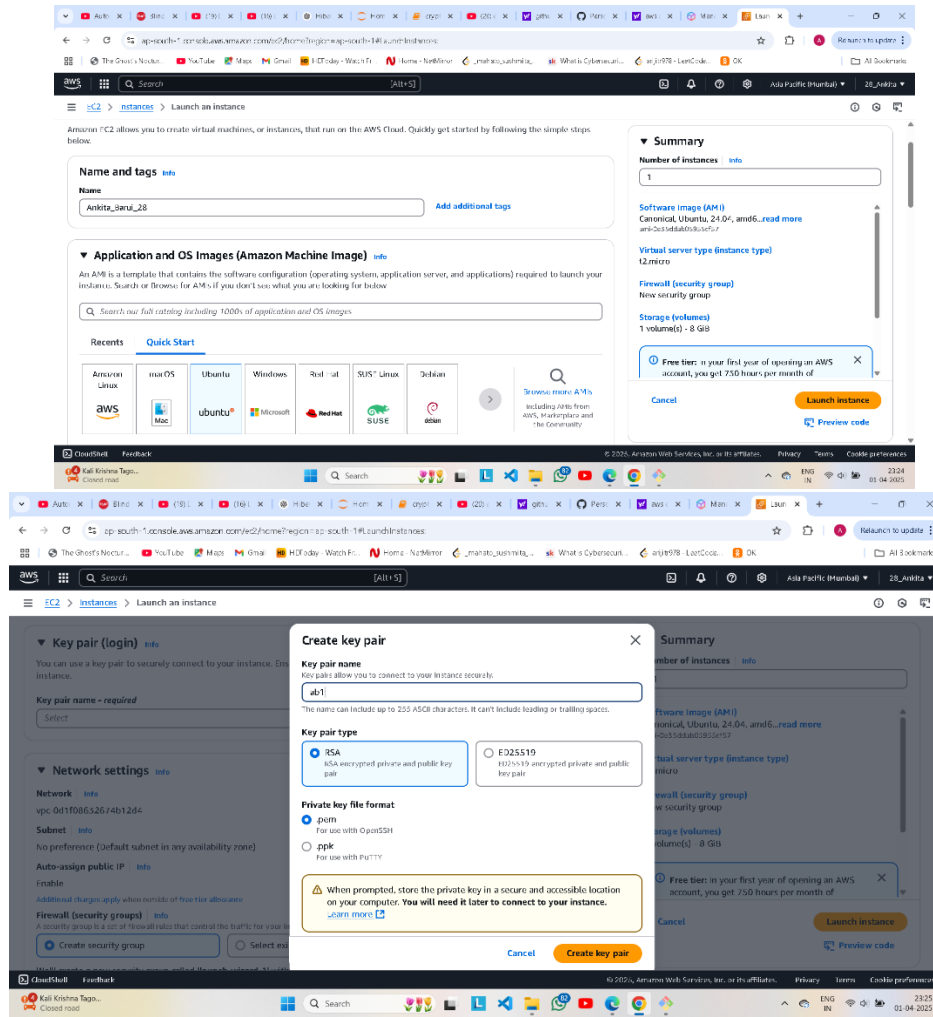


STEP 13 :- Select Create security group and select all the checkboxes of SSH , HTTPs and HTTP then click on Launch Instance at the right hand side bottom of page and you have successfully created your Instance.

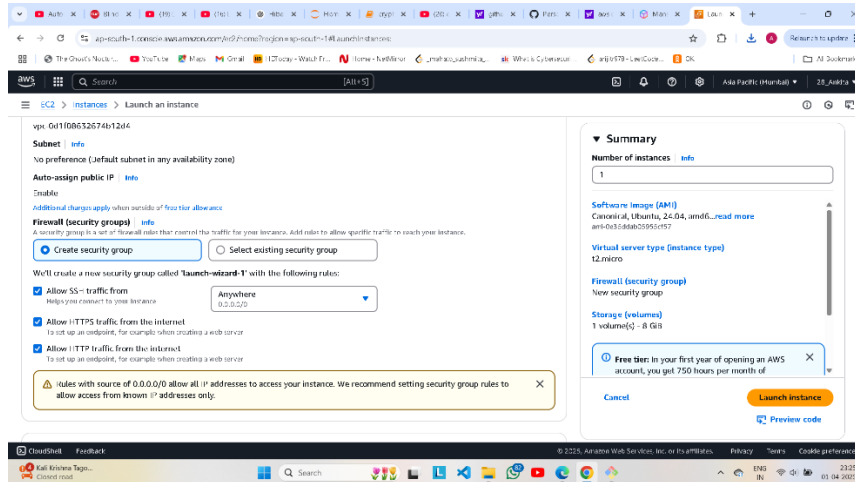


STEP 14 :- Click on the Instance ID and copy the Public IPV4 Address.

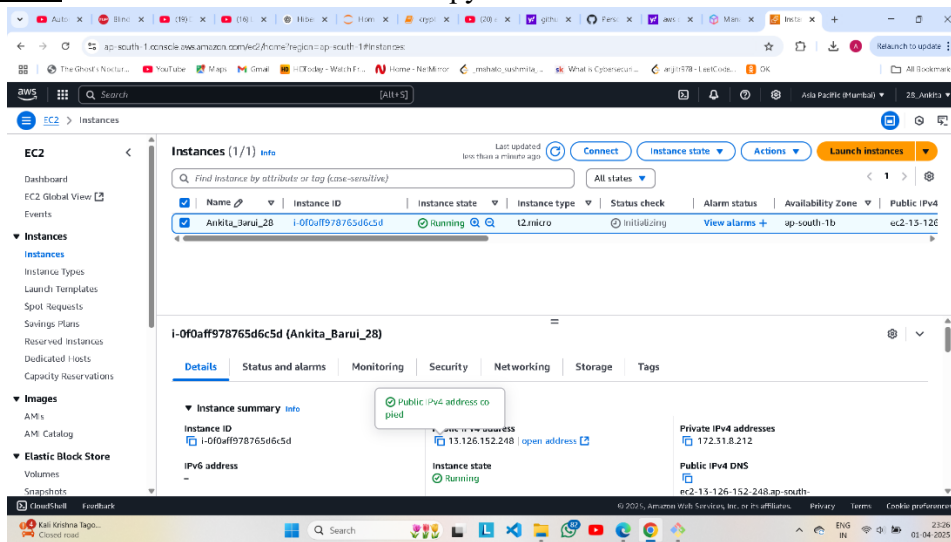



STEP 15 :- Open the Bitwise SSH Client Server and paste the Public IPV4 Address in the Host and then click on Client Key Manager

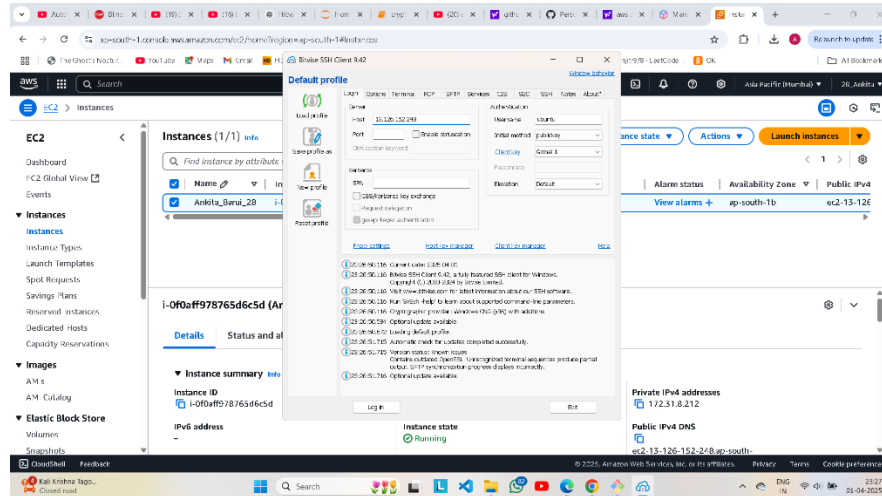

STEP 15 :- In Client Key Manager click on Import then select your Downloaded key file and click on Import your key is named as Global Key (here) then again click on import

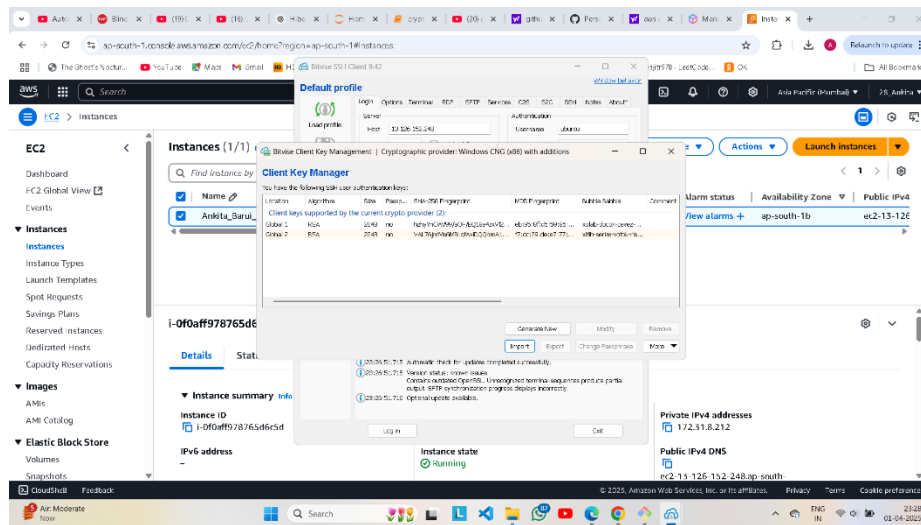


STEP 16 :- On the Right handside Give the Username as Ubuntu ,Initial method as publickey and clientkey as Global2 and then click on Log In and after that click on Accept and Save ,then click on Log In Terminal_ of Bitwise SSH Client Server .

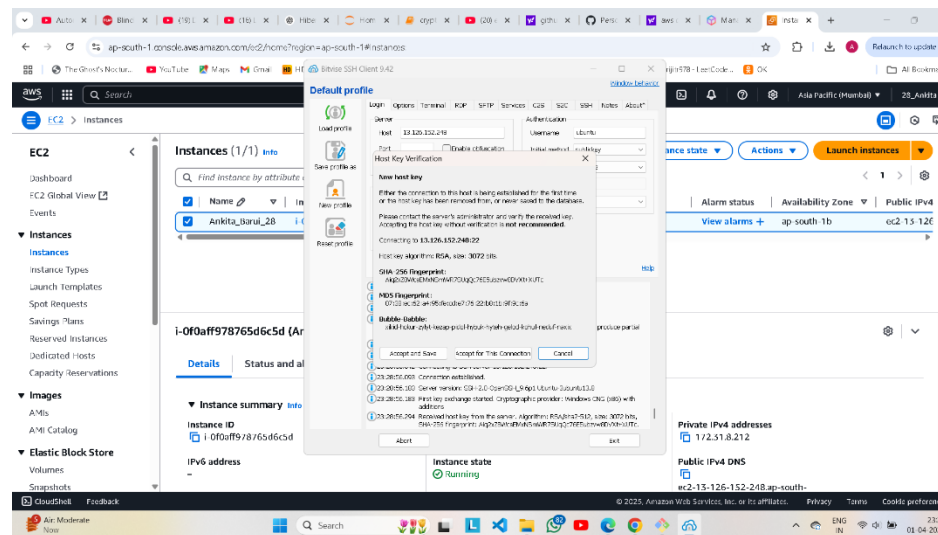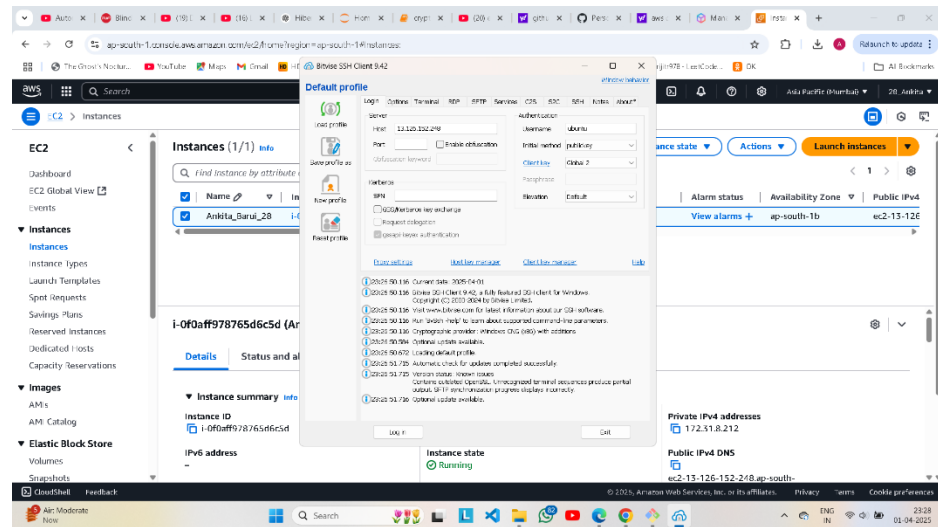

STEP 17:- Write the following Command in the terminal and run it .

- `sudo apt-get update`
- `sudo apt-get upgrade`
- `sudo apt-get install nginx`
- `curl -sL https://deb.nodesource.com/setup_18.x | sudo -E bash --` (connect with git repository)
- `sudo apt install nodejs` (to install nodejs file)

Ankita Barui
CSE_DS/22/28

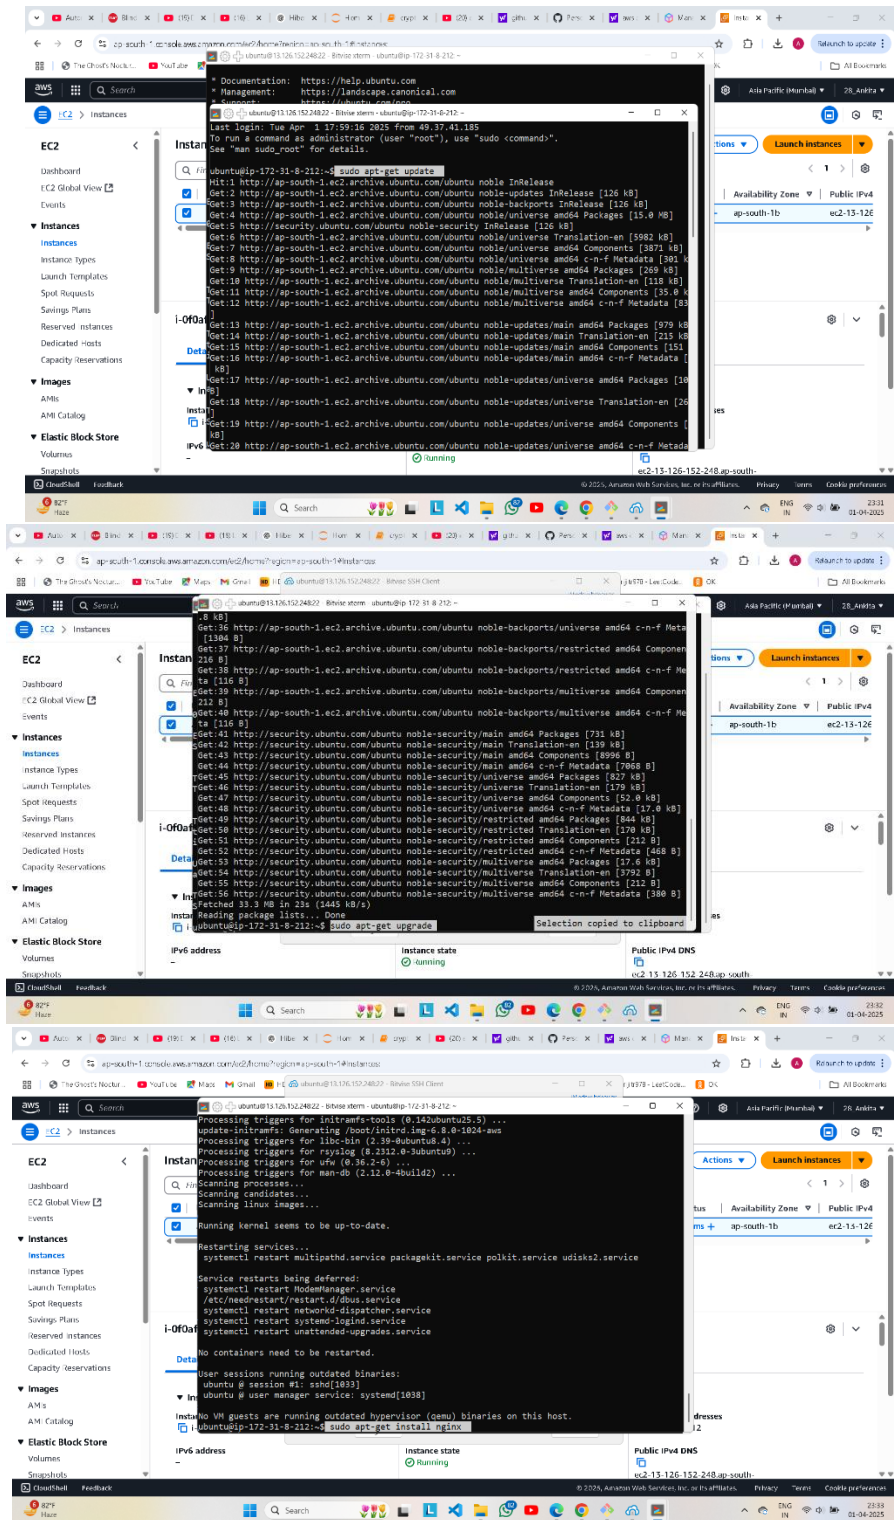


```

$ systemctl restart unattended-upgrades.service
No containers need to be restarted.
User sessions running outdated binaries:
ubuntu @ session #1: sshd[1033]
ubuntu @ user manager service: systemd[1038]
No VM guests are running outdated hypervisor (qemu) binaries on this host.
ubuntu@ip-172-31-8-212:~$ curl -sL https://deb.nodesource.com/setup_18.x | sudo -E bash -
Hit:2 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu noble-updates InRelease
Hit:3 http://ap-south-1.ec2.archive.ubuntu.com/ubuntu noble-backports InRelease
Get:4 https://deb.nodesource.com/node_18.x nodistro InRelease [12.1 kB]
Get:5 https://deb.nodesource.com/node_18.x nodistro/main amd64 Packages
Hit:6 http://security.ubuntu.com/ubuntu noble-security InRelease
Fetched 23.7 kB in 1s (37.2 kB/s)
Reading package lists... Done
2025-04-01 18:04:48 - Repository configured successfully.
2025-04-01 18:04:48 - To install Node.js, run: apt-get install nodejs -
2025-04-01 18:04:48 - You can use N|solid Runtime as a node.js alternat
2025-04-01 18:04:48 - To install N|solid Runtime, run: apt-get install
ubuntu@ip-172-31-8-212:~$ sudo apt install nodejs

```

STEP 18 :- Goto to your GitHub Account Copy you Repository URL by clicking on Code

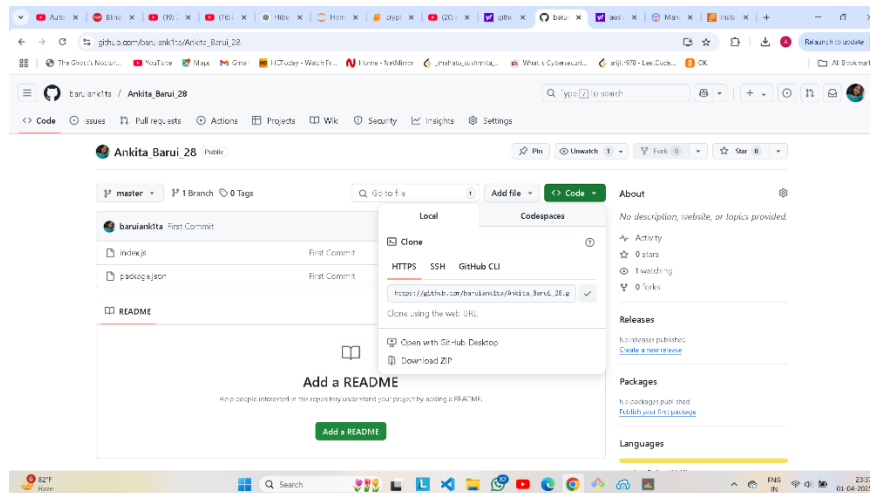


STEP 19:- Then write the command in terminal and run it


- `git clone <Repository link>`
- `cd <repository name>`
- `ls`
- `npm install`

```
No VM guests are running outdated hypervisor (qemu) binaries on this host.
ubuntu@ip-172-31-8-212:~$ node -v
v18.20.8
ubuntu@ip-172-31-8-212:~$ git clone https://github.com/baruiankita/Ankita_Barui_28.git
Cloning into 'Ankita_Barui_28'...
remote: Enumerating objects: 4, done.
remote: Counting objects: 100% (4/4), done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 4 (delta 0), reused 4 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (4/4), done.
Resolving deltas: 100% (1/1), done.
ubuntu@ip-172-31-6-4:~$ cd Ankita_Barui_28
ubuntu@ip-172-31-6-4:~/Ankita_Barui_28$ ls
index.js  package.json
ubuntu@ip-172-31-6-4:~/Ankita_Barui_28$ npm install
```


STEP 20 :- Then Go to your Instance ID and click on Security_ and then click on Security groups link

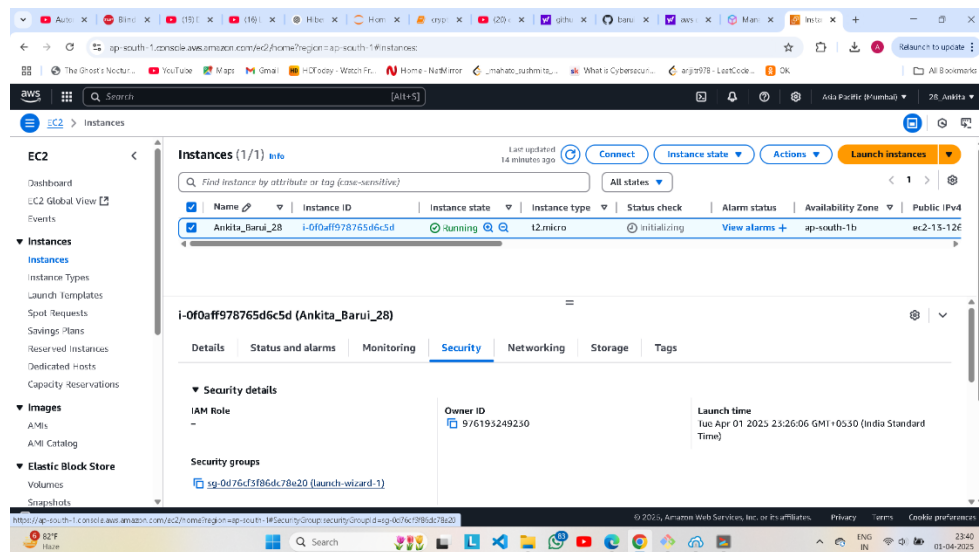


STEP 21 :- Then click on Edit Inbound Rule

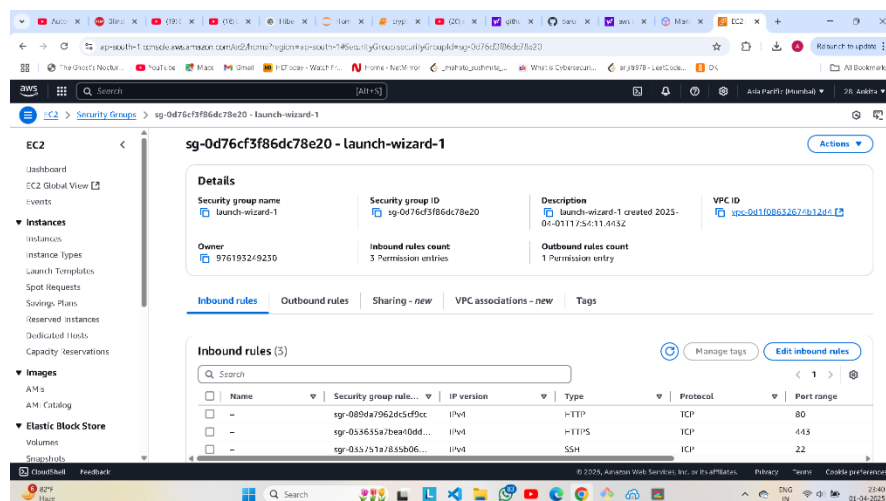

>> Give the Port Range as 4000 and 0.0.0.0/0

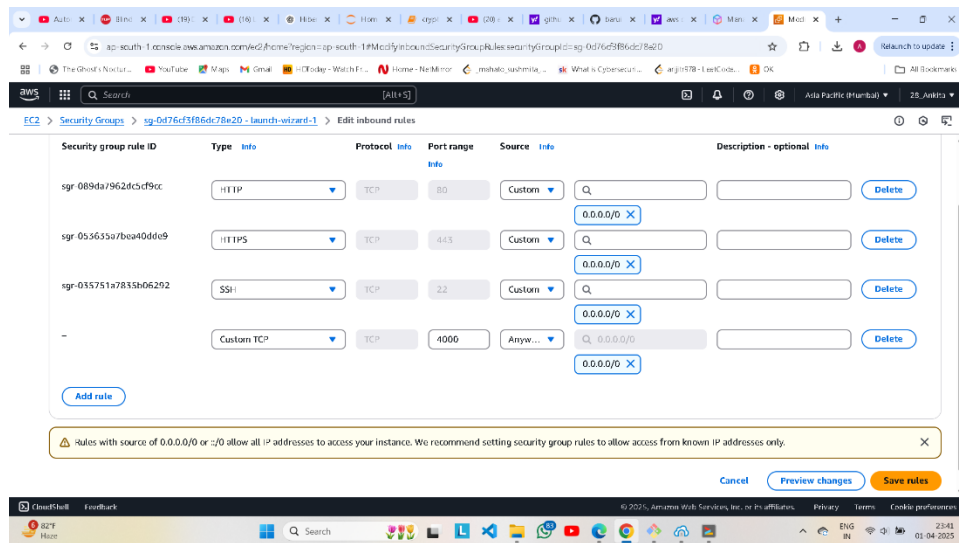


>> Your security group is changed Successfully

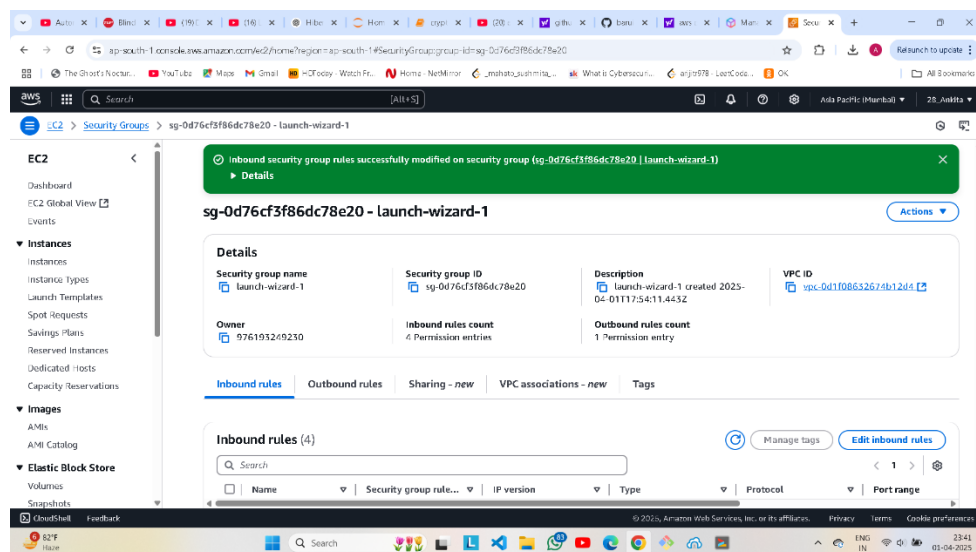

STEP 22 :- Write node index.js in terminal to Start the Server

```
npm notice New major version of npm available! 10.8.2 -> 11.2.0
npm notice Changelog: https://github.com/npm/cli/releases/tag/v11.2.0
npm notice To update run: npm install -g npm@11.2.0
npm notice
ubuntu@ip-172-31-8-212:~/Ankita_Barui_28$ node index.js
Started server
```

STEP 23 :- Then copy the Instance Public IPV4 Address and paste in Incognito Window concatenating the IPV4 Address with : 4000 (port range)

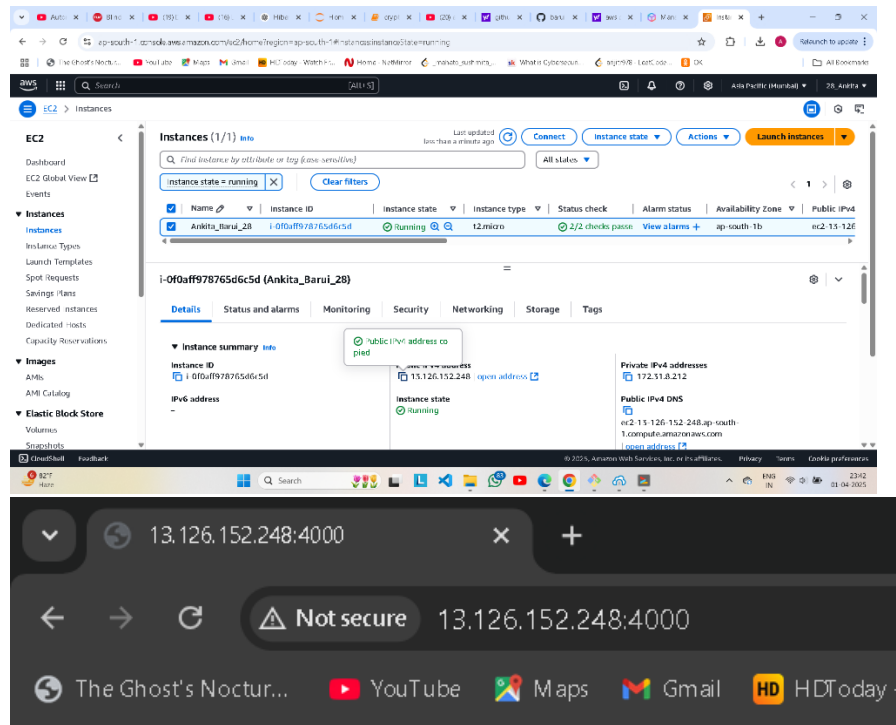

Hello MCKV

Ankita Barui
CSE_DS/22/28