


ASSIGNMENT NO :- 06


TITLE :- Upload a static website on S3.

To Upload a static website on S3 we have to follow some steps :-

STEP 1 :-> Login to the account first. Then at the top left corner of AWS Management Console click on the **services** and then click on **All services** and then go to **S3**.

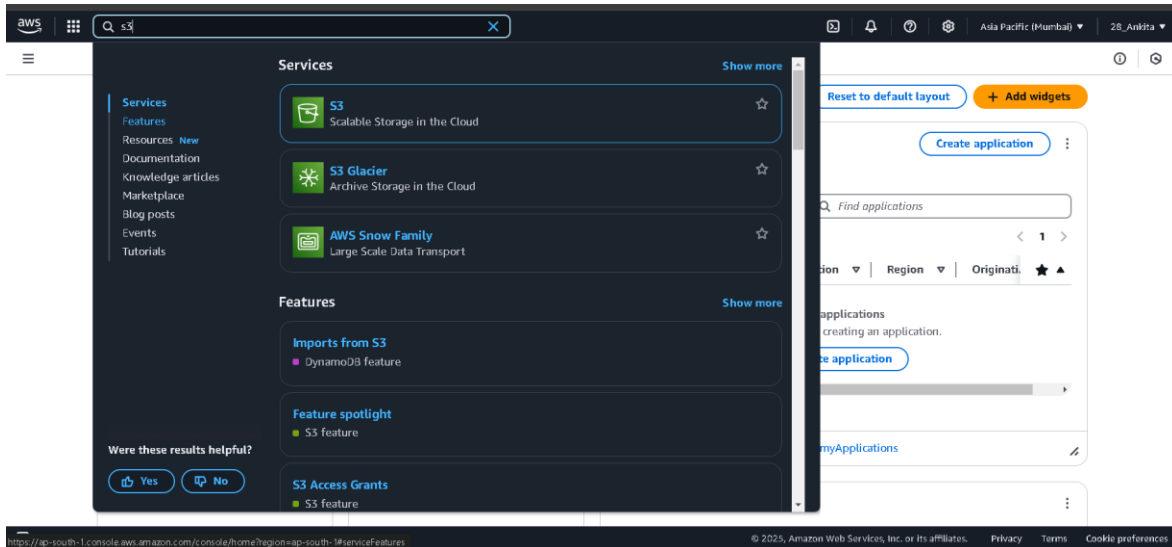

STEP 2 :-> Click on **Create bucket**.

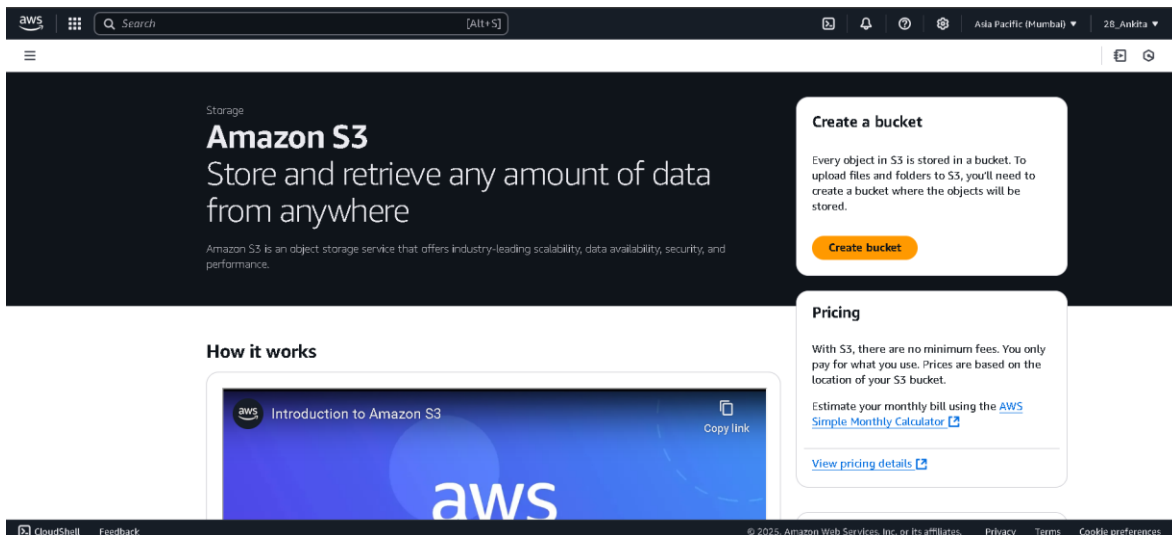

STEP 3 :-> Now to create Public Bucket Select **General purpose** and give a **bucket name** to your bucket. Select **ACL enabled** and **Uncheck Block all public access** and then select on **Enable Bucket Versioning** and then **Enable Bucket key** and then click on **Create bucket** at the bottom of the page.

The screenshot shows the 'Create bucket' page in the AWS console. The 'General configuration' section is active. Under 'AWS Region', 'Asia Pacific (Mumbai) ap-south-1' is selected. In the 'Bucket type' section, 'General purpose' is selected with a blue radio button, and 'Directory' is unselected. The 'General purpose' option has a description: 'Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.' The 'Bucket name' field contains 'ankibuck19'. Below the field, a note states: 'Bucket name must be unique within the global namespace and follow the bucket naming rules. [See rules for bucket naming](#)'. In the 'Copy settings from existing bucket - optional' section, a 'Choose bucket' button is visible. The footer shows 'CloudShell', 'Feedback', and copyright information for 2025.

The screenshot shows the 'Object Ownership' and 'Block Public Access' sections of the 'Create bucket' page. In the 'Object Ownership' section, 'ACLs enabled' is selected with a blue radio button. A warning message states: 'We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.' Under 'Object Ownership', 'Bucket owner preferred' is selected. A note explains: 'If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.' Below this, a blue box contains a tip: 'If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. [Learn more](#)'. The 'Block Public Access settings for this bucket' section is partially visible at the bottom. The footer shows 'CloudShell', 'Feedback', and copyright information for 2025.

aws [Search] [Alt+S] Ada Pacific (Mumbai) 28_Ankita

Amazon S3 > Buckets > Create bucket

☐ **Block all public access**
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

- ☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
- ☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**
S3 will ignore all ACLs that grant public access to buckets and objects.
- ☐ **Block public access to buckets and objects granted through new public bucket or access point policies**
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
- ☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Turning off block all public access might result in this bucket and the objects within becoming public.
AWS recommends that you turn on block all public access is required for specific and verified use cases such as static website hosting.

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning
Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☐ Disable

☒ Enable

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

aws [Search] [Alt+S] Ada Pacific (Mumbai) 28_Ankita

Amazon S3 > Buckets > Create bucket

Default encryption [info](#)
Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type [info](#)

☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)

☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)

☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)
Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the [Storage tab of the Amazon S3 pricing page](#).

Bucket Key
Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

☐ Disable

☒ Enable

Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel Create bucket

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

STEP 4 :-> Bucket is created.

aws [Search] [Alt+S] Ada Pacific (Mumbai) 28_Ankita

Amazon S3 > Buckets

Successfully created bucket "ankibuck19"
To upload files and folders, or to configure additional bucket settings, choose [View details](#).

Account snapshot - updated every 24 hours [All AWS Regions](#) [View Storage Lens dashboard](#)
Storage lens provides visibility into storage usage and activity trends. Metrics don't include directory buckets. [Learn more](#)

General purpose buckets **Directory buckets**


General purpose buckets (1) [info](#) [All AWS Regions](#)

Buckets are containers for data stored in S3.


Name	AWS Region	IAM Access Analyzer	Creation date
☐ ankibuck19	Asia Pacific (Mumbai) ap-south-1	View analyzer for ap-south-1	February 25, 2025, 14:24:26 (UTC+05:30)

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences


STEP 5 :-> Now choose your Bucket and select **Upload** to upload your files, Then click on **Add files** and select your desired file to add and then click on **Upload** at the bottom the page.

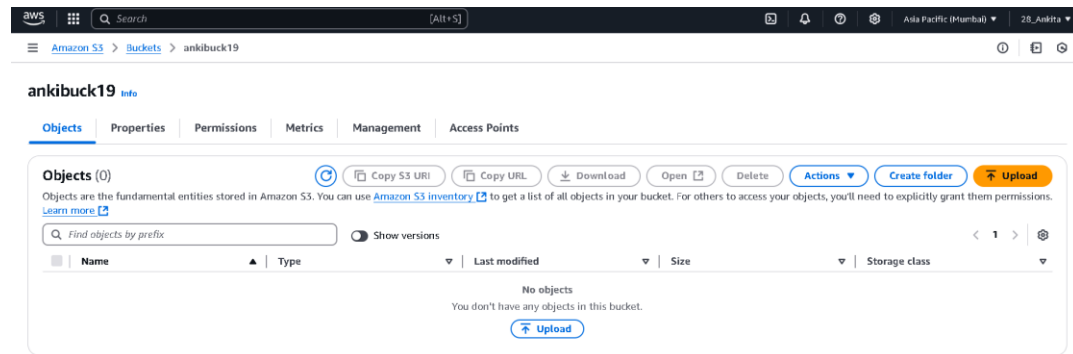

The screenshot shows the AWS S3 console interface for the bucket 'ankibuck19'. The 'Objects' tab is active, displaying a list of objects (currently 0). The 'Upload' button is highlighted in orange. The interface includes a search bar, a 'Show versions' toggle, and a table with columns for Name, Type, Last modified, Size, and Storage class. A message states 'No objects. You don't have any objects in this bucket.' with an 'Upload' button below it.

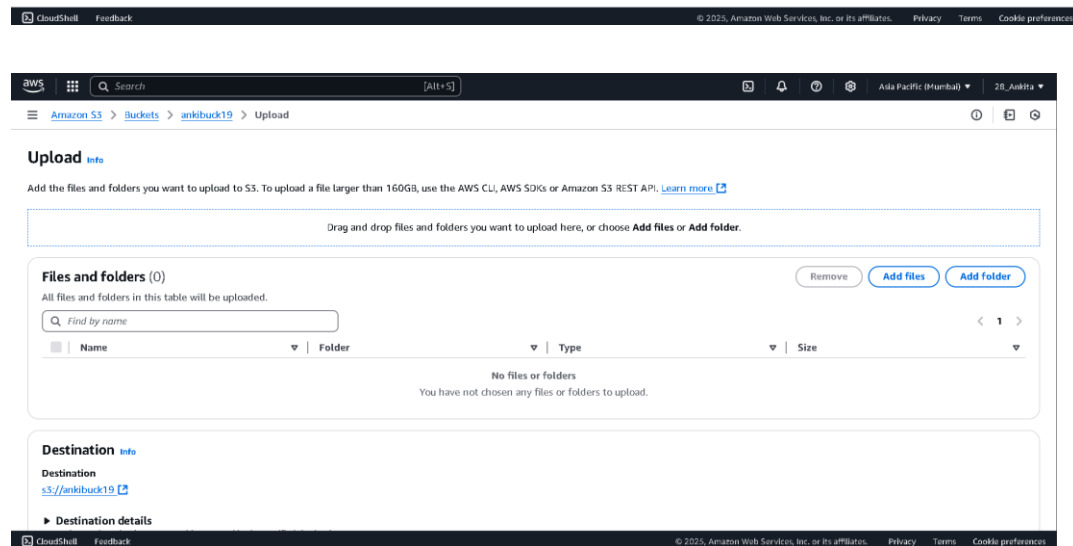

The screenshot shows the 'Upload' page in the AWS S3 console for the bucket 'ankibuck19'. The 'Files and folders' section is empty, and the 'Destination' is set to 's3://ankibuck19'. The interface includes a search bar, a 'Remove' button, and 'Add files' and 'Add folder' buttons. A message states 'No files or folders. You have not chosen any files or folders to upload.'

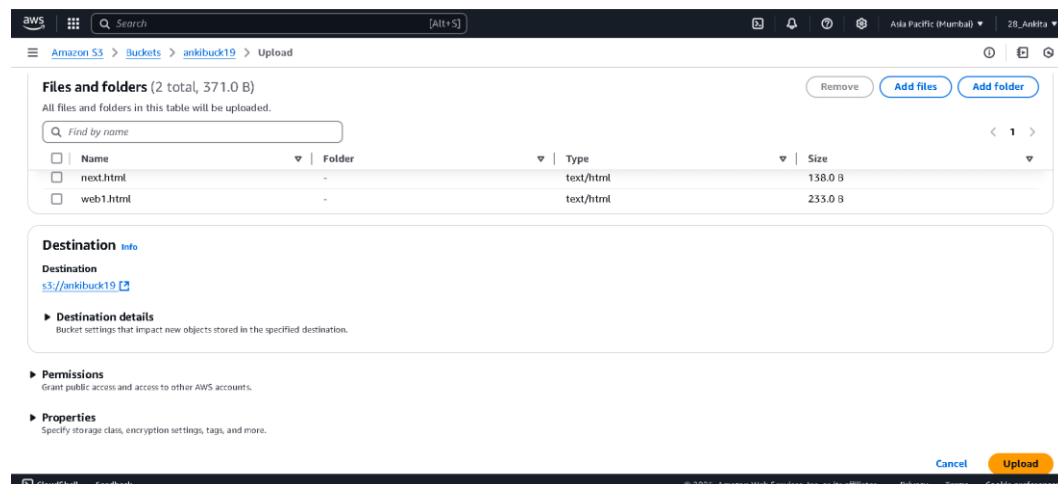

The screenshot shows the 'Upload' page in the AWS S3 console for the bucket 'ankibuck19'. The 'Files and folders' section contains two files: 'next.html' and 'web1.html'. The 'Destination' is set to 's3://ankibuck19'. The interface includes a search bar, a 'Remove' button, and 'Add files' and 'Add folder' buttons. A message states 'No files or folders. You have not chosen any files or folders to upload.'

Name	Folder	Type	Size
next.html	-	text/html	138.0 B
web1.html	-	text/html	233.0 B


STEP 6 :-> Your file is uploaded successfully.

The screenshot shows the AWS CloudShell interface. At the top, a green banner indicates "Upload succeeded" for the destination `s3://ankibuck19`. Below this, the "Upload: status" section shows a summary: 2 files, 371.0 B (100.00%) succeeded and 0 files, 0 B (0%) failed. The "Files and folders" tab is active, displaying a table of the uploaded files:



Name	Folder	Type	Size	Status	Error
next.html	-	text/html	138.0 B	Succeeded	-
web1.html	-	text/html	233.0 B	Succeeded	-

STEP 7 :-> Now click on bucket and go to **Properties** and scroll down to **Static website hosting** and click on **Edit**.

The screenshot shows the AWS S3 console for the bucket "ankibuck19". The "Properties" tab is selected. The "Bucket overview" section shows the AWS Region as "Asia Pacific (Mumbai) ap-south-1", the Amazon Resource Name (ARN) as `arn:aws:s3::ankibuck19`, and the creation date as "February 25, 2025, 14:24:26 (UTC+05:30)". The "Bucket Versioning" section shows it is "Enabled". The "Multi-factor authentication (MFA) delete" section shows it is "Disabled". There are "Edit" buttons for both the Versioning and MFA delete settings.

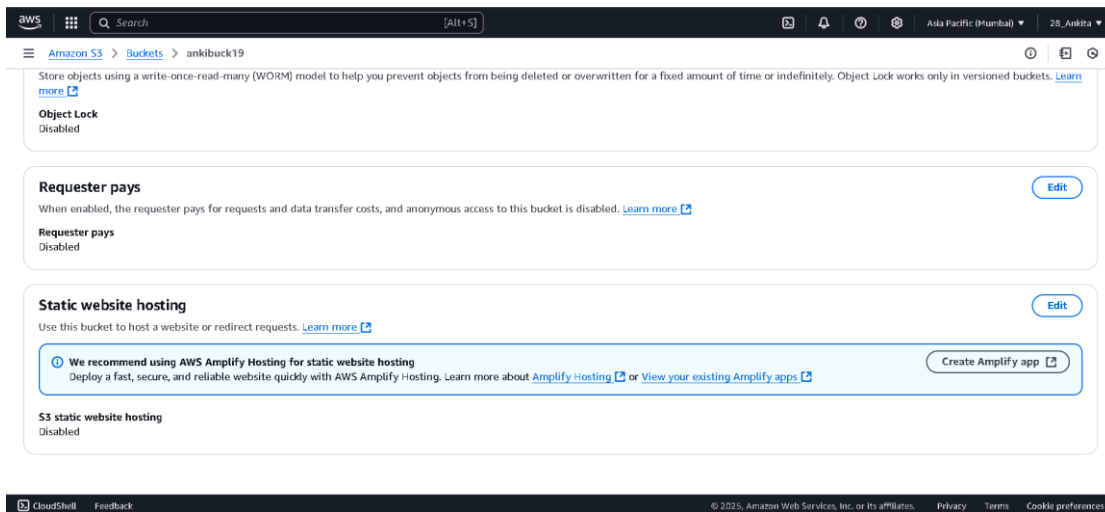


STEP 8 :-> Now Enable the Static website hosting and give Index document as your Home or Default page . After it scroll down to bottom of the page and click on Save changes.

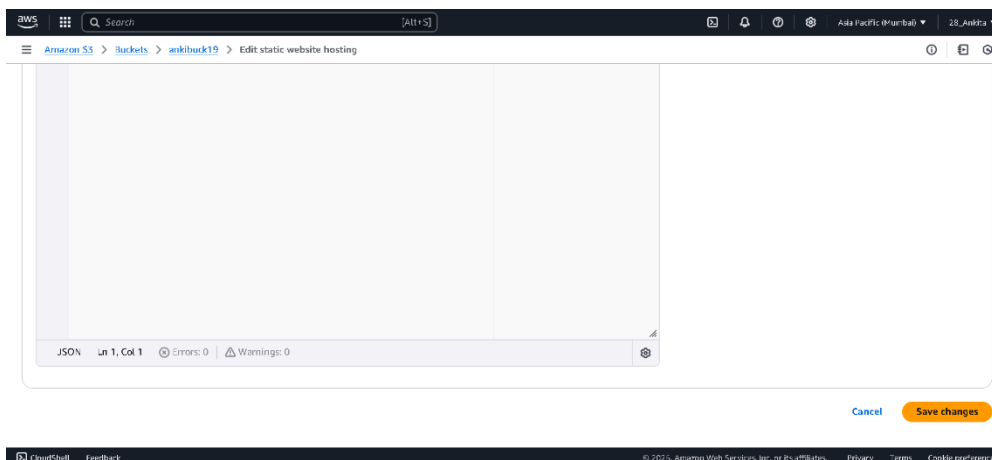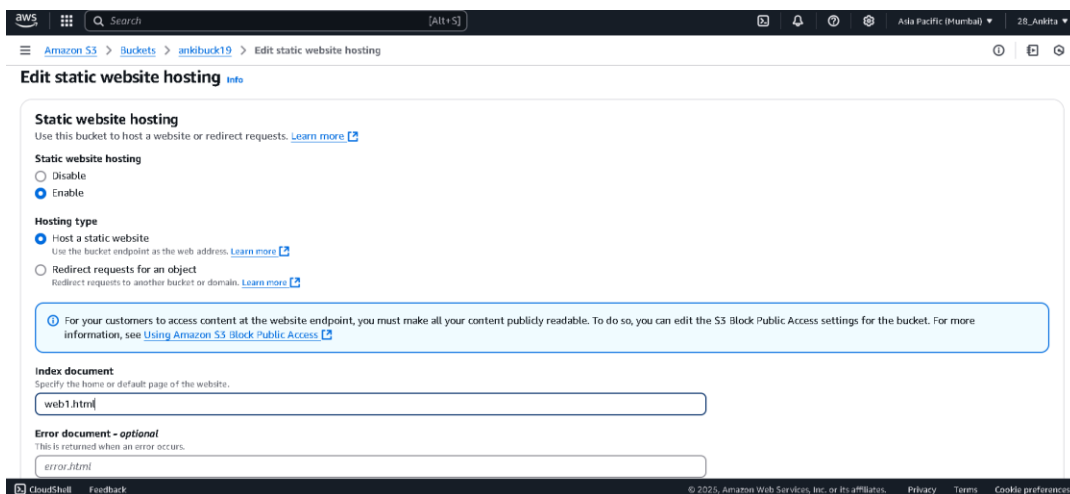


STEP 9 :-> Individually select each file and give it public access

>> For **web1.html** click on the file and go to **Permission** and then click on **Edit** of **Access control list**.

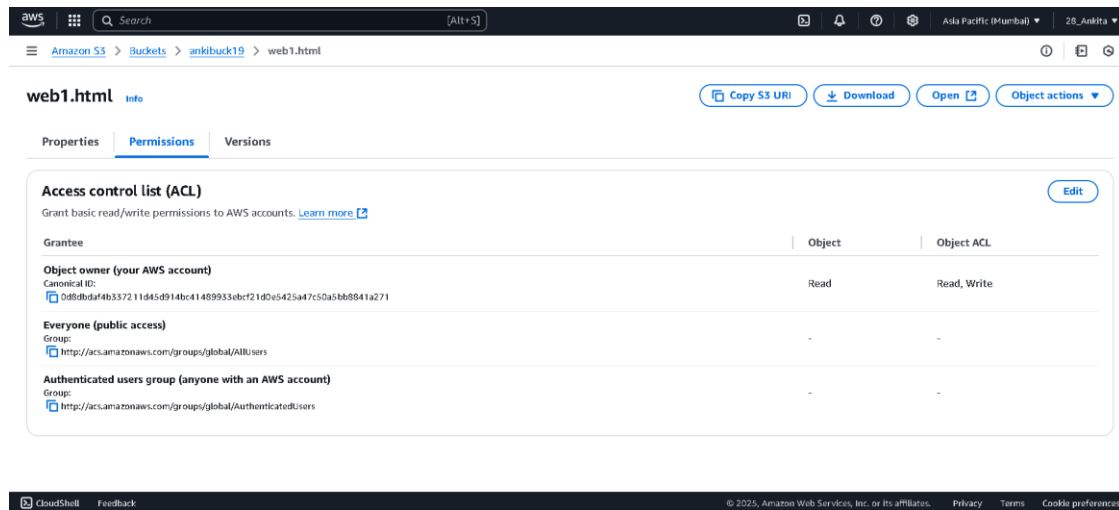


The screenshot shows the AWS console interface for the file **web1.html** in the **ankibuck19** bucket. The **Permissions** tab is selected, displaying the **Access control list (ACL)**. The ACL is currently empty, showing only the **Object owner (your AWS account)** with **Read** and **Read, Write** permissions. The **Everyone (public access)** group is listed but has no permissions. The **Authenticated users group (anyone with an AWS account)** is also listed but has no permissions. The **Edit** button is visible in the top right corner of the ACL section.


>> Give **Read** access to **Everyone(public access)** and then click on **Save changes** at the bottom of the page.

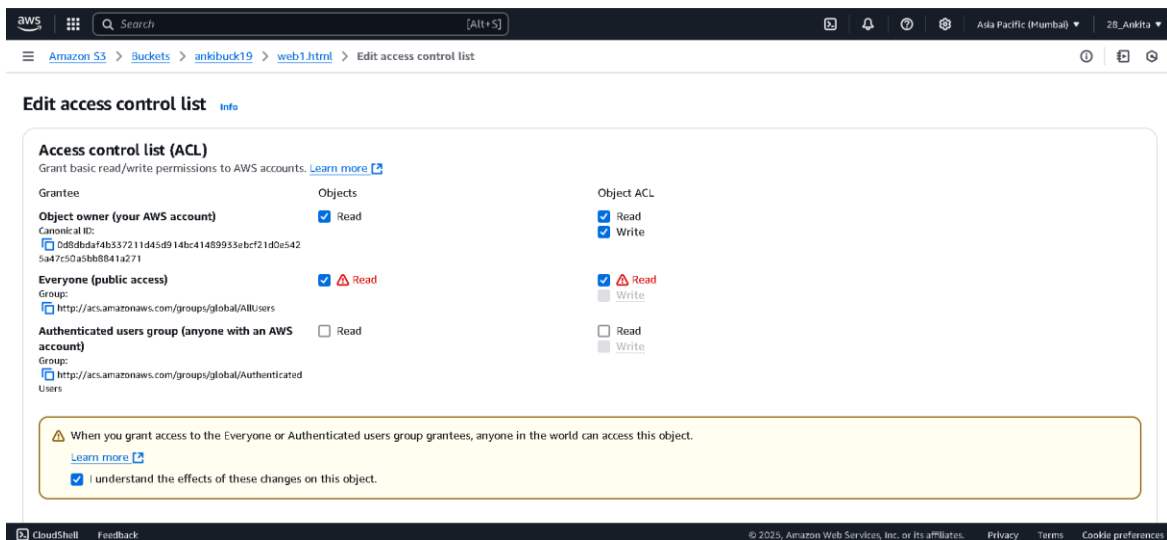

The screenshot shows the AWS console interface for the file **web1.html** in the **ankibuck19** bucket. The **Edit access control list** page is displayed. The **Access control list (ACL)** is being edited. The **Everyone (public access)** group is listed with a **Read** permission. The **Authenticated users group (anyone with an AWS account)** is also listed with a **Read** permission. The **Object owner (your AWS account)** has **Read** and **Write** permissions. The **Save changes** button is visible at the bottom of the page. A warning message is displayed at the bottom: "When you grant access to the Everyone or Authenticated users group grantees, anyone in the world can access this object. I understand the effects of these changes on this object."

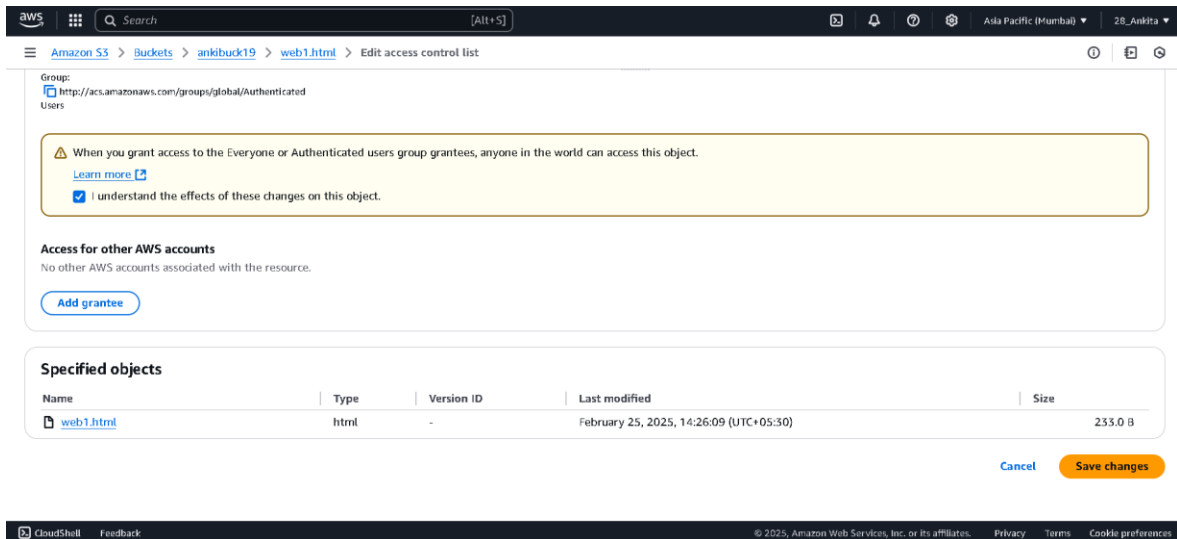

>> For **Next.html** click on the file and go to **Permission** and then click on **Edit of Access control list**.

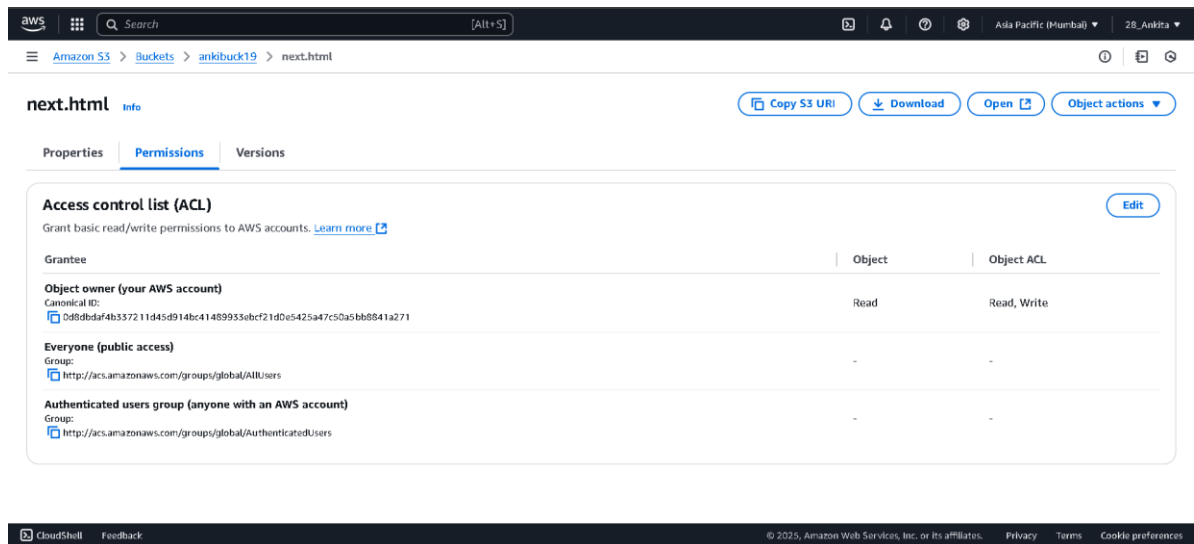

>> Give **Read** access to **Everyone(public access)** and then click on **Save changes** at the bottom of the page.

aws [Search] [Alt+S] Ada Pacific (Mumbai) 28_Aankita

Amazon S3 Buckets ankibuck19 next.html Edit access control list

Edit access control list [Info](#)

Access control list (ACL)
Grant basic read/write permissions to AWS accounts. [Learn more](#)

Grantee	Objects	Object ACL
Object owner (your AWS account) Canonical ID: 0d8dbdaf4b337211d45d914bc41489933ebcf21d0e5425a47c50a5bb8841a271	☒ Read	☒ Read ☒ Write
Everyone (public access) Group: http://acs.amazonaws.com/groups/global/AllUsers	☒ ☒ Read	☒ ☒ Read ☐ Write
Authenticated users group (anyone with an AWS account) Group: http://acs.amazonaws.com/groups/global/AuthenticatedUsers	☐ Read	☐ Read ☐ Write

⚠ When you grant access to the Everyone or Authenticated users group grantees, anyone in the world can access this object.
[Learn more](#)
☒ I understand the effects of these changes on this object.

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

aws [Search] [Alt+S] Ada Pacific (Mumbai) 28_Aankita

Amazon S3 Buckets ankibuck19 next.html Edit access control list

Group:
<http://acs.amazonaws.com/groups/global/AuthenticatedUsers>

⚠ When you grant access to the Everyone or Authenticated users group grantees, anyone in the world can access this object.
[Learn more](#)
☒ I understand the effects of these changes on this object.

Access for other AWS accounts
No other AWS accounts associated with the resource.
[Add grantee](#)

Specified objects

Name	Type	Version ID	Last modified	Size
next.html	html	-	February 25, 2025, 14:26:09 (UTC+05:30)	138.0 B

[Cancel](#) [Save changes](#)

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

STEP 10 :-> Now click on **web1.html** and go to its **Properties** and **Copy** the **Object URL**

aws [Search] [Alt+S] Ada Pacific (Mumbai) 28_Aankita

Amazon S3 Buckets ankibuck19 web1.html

web1.html [Info](#) [Copy S3 URI](#) [Download](#) [Open](#) [Object actions](#)


[Properties](#) [Permissions](#) [Versions](#)

Object overview

Owner 0d8dbdaf4b337211d45d914bc41489933ebcf21d0e5425a47c50a5bb8841a271	S3 URI s3://ankibuck19/web1.html
AWS Region Asia Pacific (Mumbai) ap-south-1	Amazon Resource Name (ARN) arn:aws:s3::ankibuck19/web1.html
Last modified February 25, 2025, 14:26:09 (UTC+05:30)	Entity tag (Etag) p507a629716b8ca0607b6b
Size 233.0 B	Object URL Copied https://ankibuck19.s3.ap-south-1.amazonaws.com/web1.html
Type html	
Key web1.html	

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 11 :-> Paste the Object URL of web1.html in Incognito window and check if you can access both the page or not.



This is a Heading

This is a Paragraph.

[Google Next](#)



This is Next

This is a Next

