



ASSIGNMENT NO :- 10

TITLE :- Deploy a project from GitHub to EC2 by creating a new Security group and user data .

STEP 01 :- Create two files Index.js and package.json and store it in a folder here the folder here the name is Ankita_Barui_28 and then go to View Section of the folder and select Hidden Items.

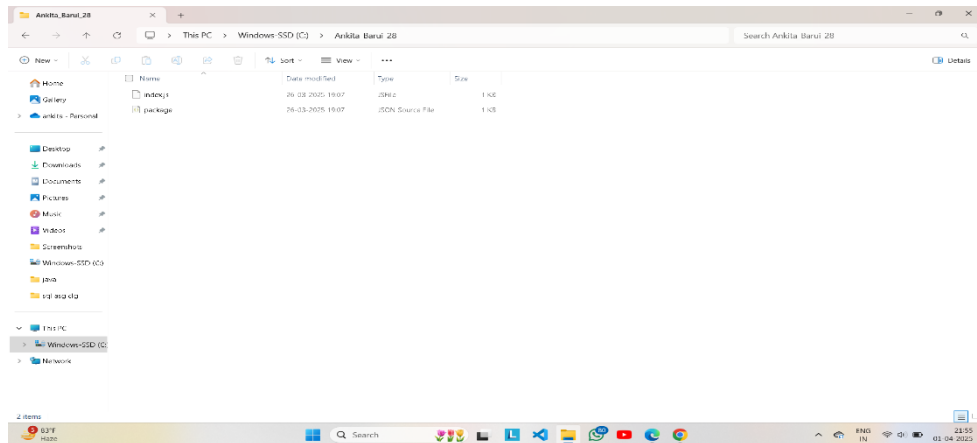

STEP 02 :- Then Log in to your GitHub Account and click on New in the left handside of the page to create New Repository.

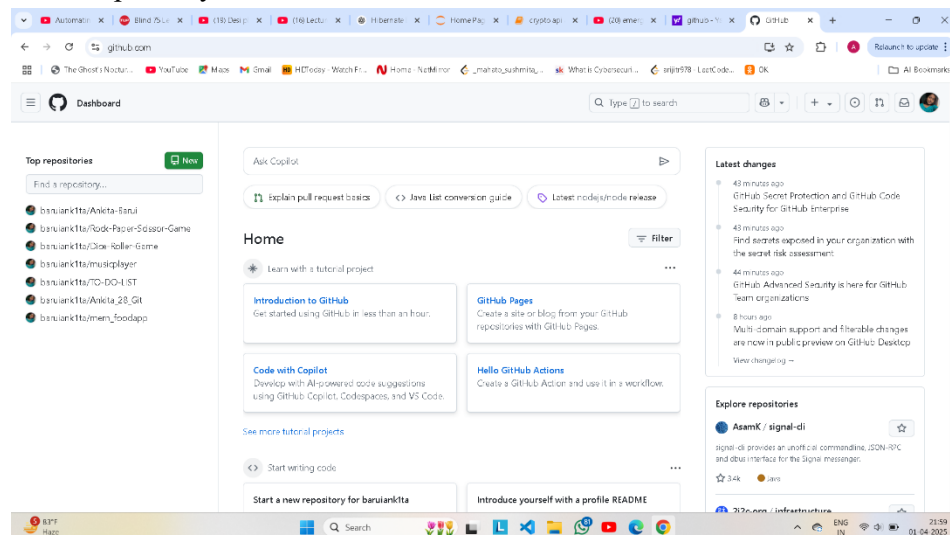

STEP 03 :- Give a name to your Repository and select Public then click on Create Repository to create the Repository.

Create a new repository

A repository contains all of your project files, including the revision history. Already have a project repository elsewhere? [Import a repository](#).

Required fields are marked with an asterisk (*)

Owner: **barulankita** Repository name: **Ankita_Barui_28**
Ankita_Barui_28 is available.

Great repository names are short, and memorable. Need inspiration? How about [symmetrical invention](#)?

Description (optional)

☒ **Public**
Anyone on the internet can see this repository. You choose who can commit.

☐ **Private**
You choose who can see and commit to this repository.

Initialize this repository with:

☐ Add a README file
This is where you can write a long description for your project. [Learn more about READMEs](#).

Add .gitignore

gitignore template: None

Choose which files to track from a list of templates. [Learn more about ignoring files](#).

Choose a license

License: None

A license lets others understand what you've agreed to with your code. [Learn more about licenses](#).

☒ You're creating a public repository in your personal account

Create repository

STEP 04 :- A New Repository is created ,Now copy the Http Link given in the blue Box.

Ankita Barui 28

Set up GitHub Copilot
Use GitHub's AI pair programmer to autocomplete suggestions as you code.
[Get started with GitHub Copilot](#)

Add collaborators to this repository
Search for people using their GitHub username or email address.
[Invite collaborators](#)

Quick setup — if you've done this kind of thing before


[Setup on Desktop](#) or [HTTPS: 5981 https://github.com/barulankita/Ankita_Barui_28.git](https://github.com/barulankita/Ankita_Barui_28.git)

Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository includes a [README](#), [LICENSE](#), and [.gitignore](#).

...or create a new repository on the command line

```
echo "# Ankita_Barui_28" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/barulankita/Ankita_Barui_28.git
```

STEP 05 :- Open you folder where you have stored your files then right click on the folder and open it with Git Bash

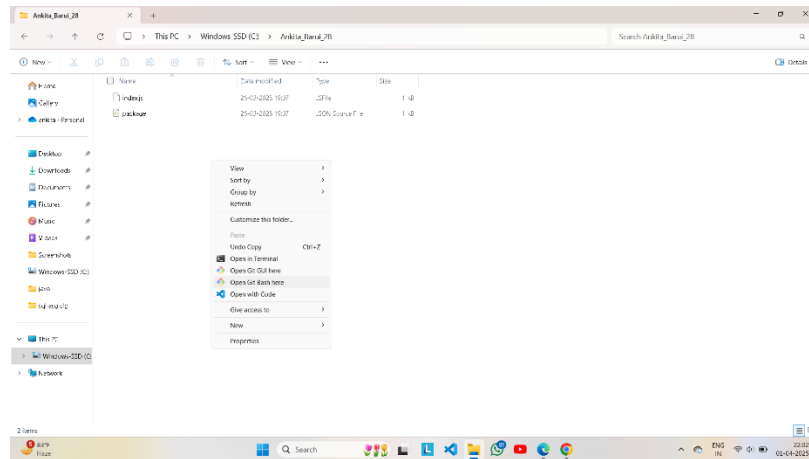

STEP 06 :- In the Git Bash write the following command to upload your files to the GitHub Repository

```
MINGW64:/c/Ankita_Barui_28
ankit@ankita MINGW64 /c/Ankita_Barui_28
$ git init
Initialized empty Git repository in C:/Ankita_Barui_28/.git/

ankit@ankita MINGW64 /c/Ankita_Barui_28 (master)
$ git add .
warning: in the working copy of 'index.js', LF will be replaced by CRLF the next
time Git touches it
warning: in the working copy of 'package.json', LF will be replaced by CRLF the
next time Git touches it



ankit@ankita MINGW64 /c/Ankita_Barui_28 (master)
$ git commit -m "First Commit"
[master (root-commit) fa8b866] First Commit
2 files changed, 30 insertions(+)
create mode 100644 index.js
create mode 100644 package.json

ankit@ankita MINGW64 /c/Ankita_Barui_28 (master)
$ git remote add origin https://github.com/baruiankita/Ankita_Barui_28.git


ankit@ankita MINGW64 /c/Ankita_Barui_28 (master)
$ git push -u origin master
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 4 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (4/4), 598 bytes | 598.00 KiB/s, done.
Total 4 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/baruiankita/Ankita_Barui_28.git
 * [new branch]      master -> master
branch 'master' set up to track 'origin/master'.

ankit@ankita MINGW64 /c/Ankita_Barui_28 (master)
$
```

STEP 07 :- Refresh your GitHub Page and you can see your files in the Repository.

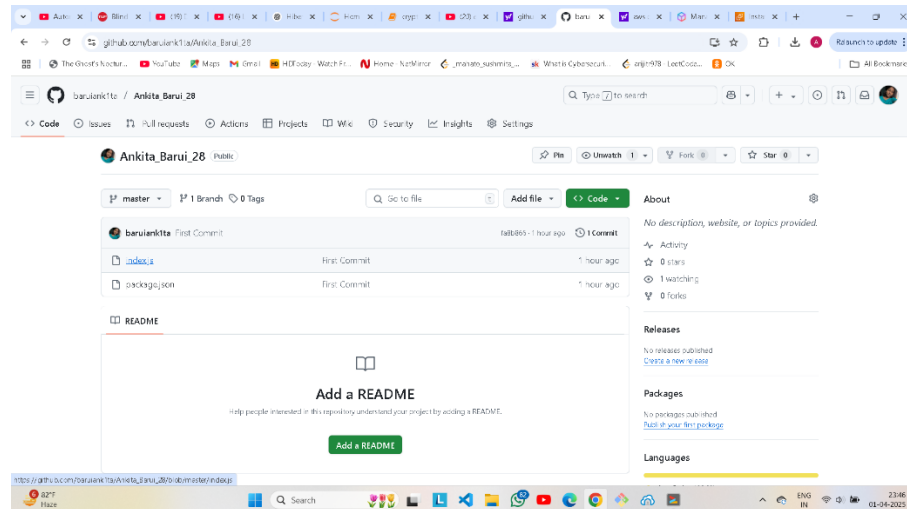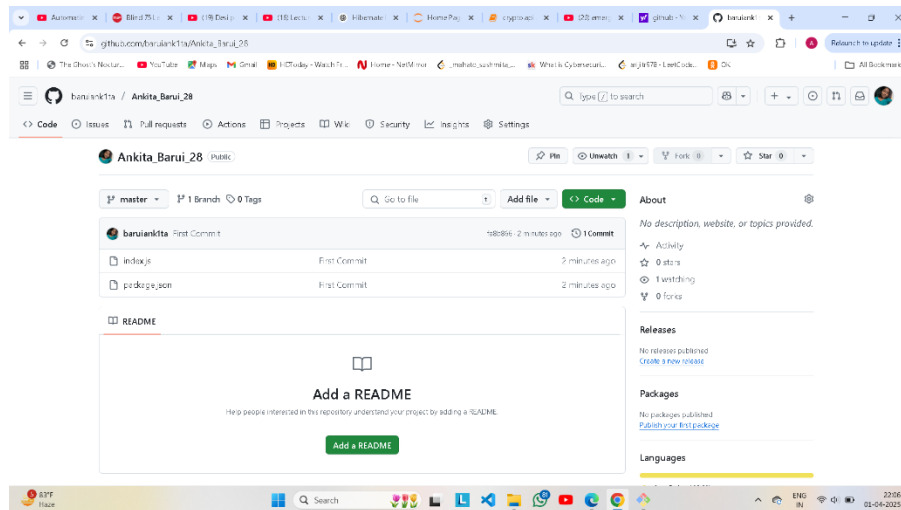


STEP 09:- Click on Edit the file and edit the file

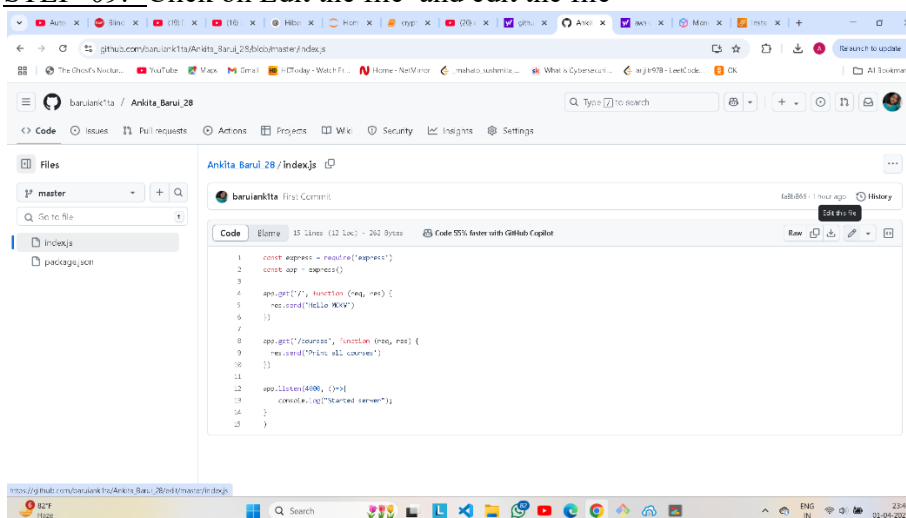


Ankita Barui
CSEDS/22/28


STEP 10 :- Click on Commit Changes and Give the Commit message and click on Commit change

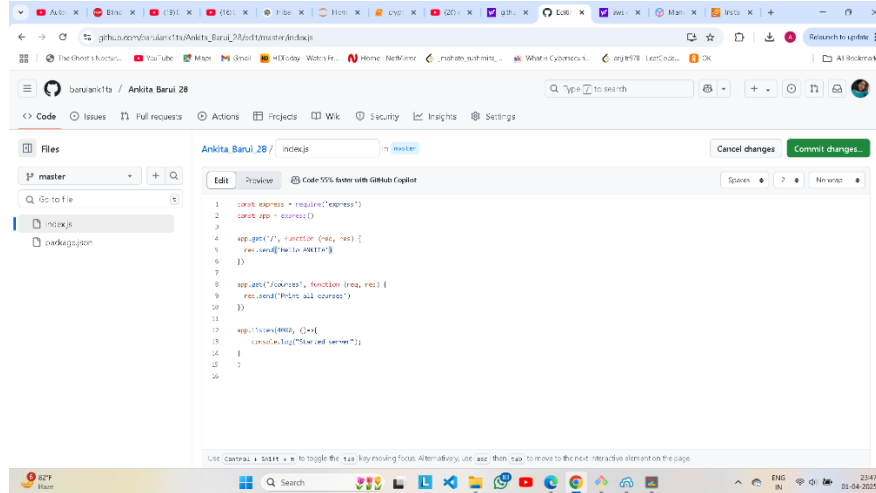

STEP 11 :- Login to your AWS Account and select EC2.

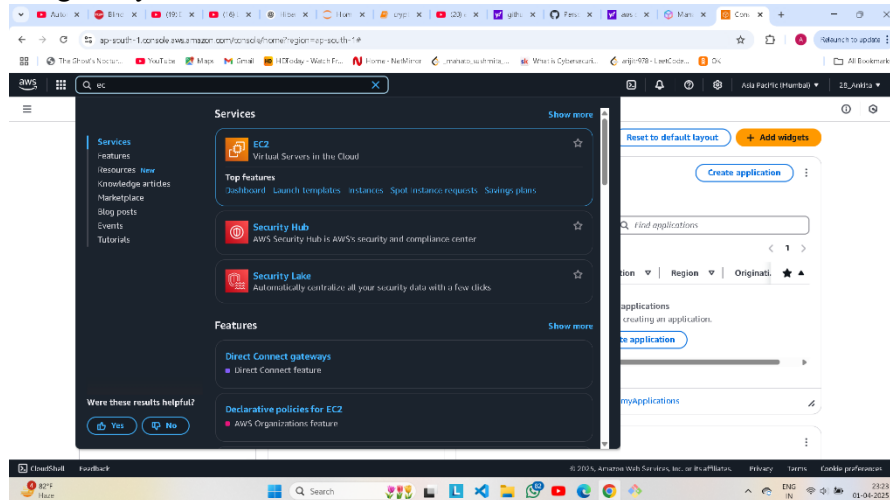


STEP 12 :- Goto the Security Groups

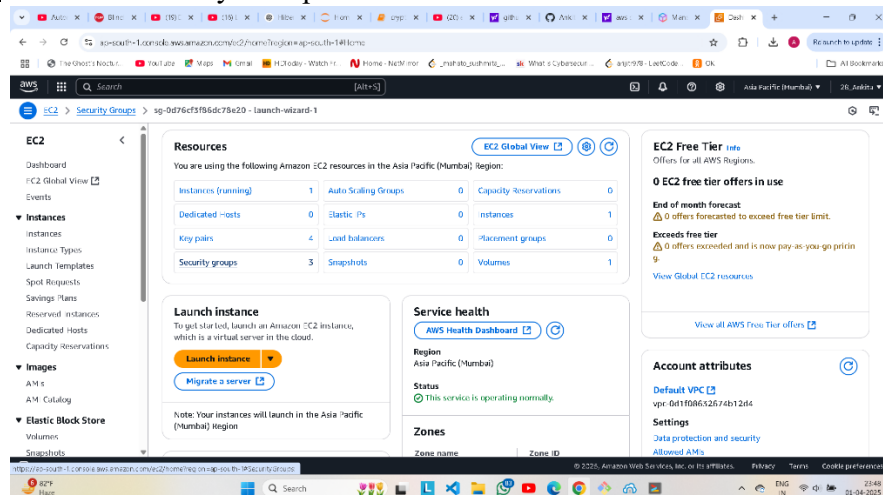


Ankita Barui
CSEDS/22/28


STEP 13 :- Delete all the Security Groups except the Default.

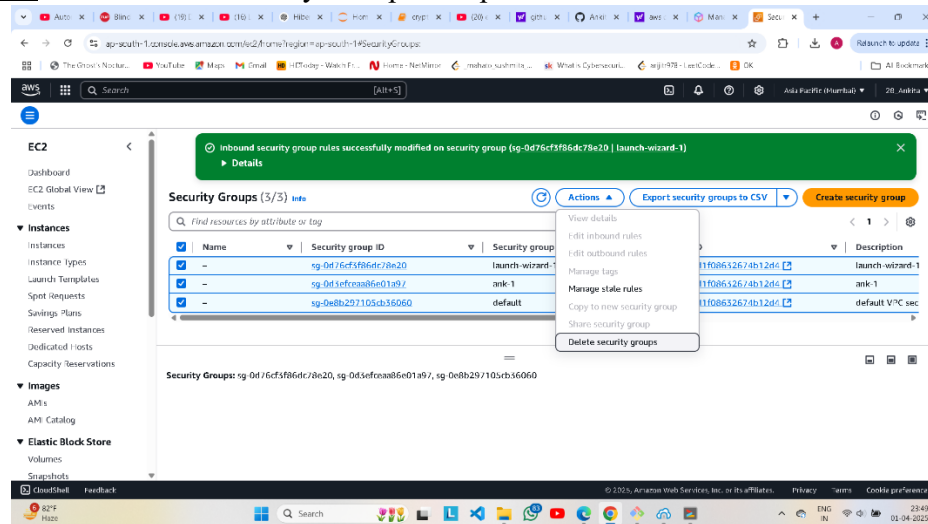


STEP 14 :- After the Successful deletion of all Security Groups click on Create Security Groups

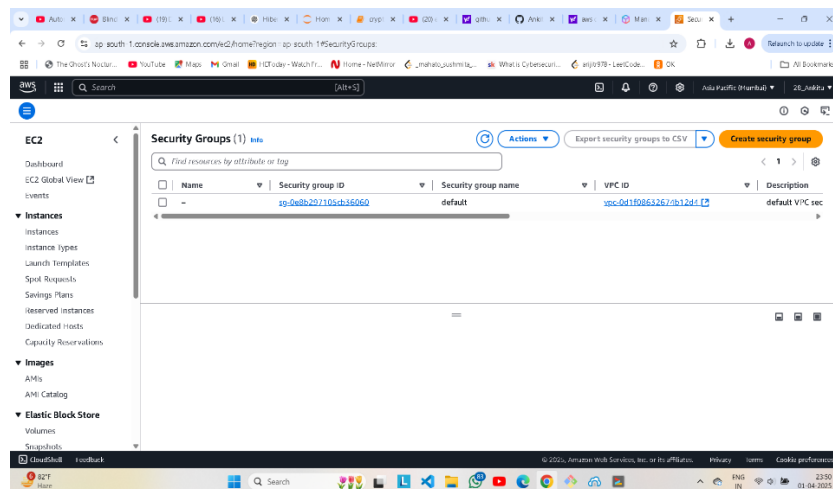

STEP 15 :- Give the Security Group Name and Description and the click on Add Rules of Inbound Rules

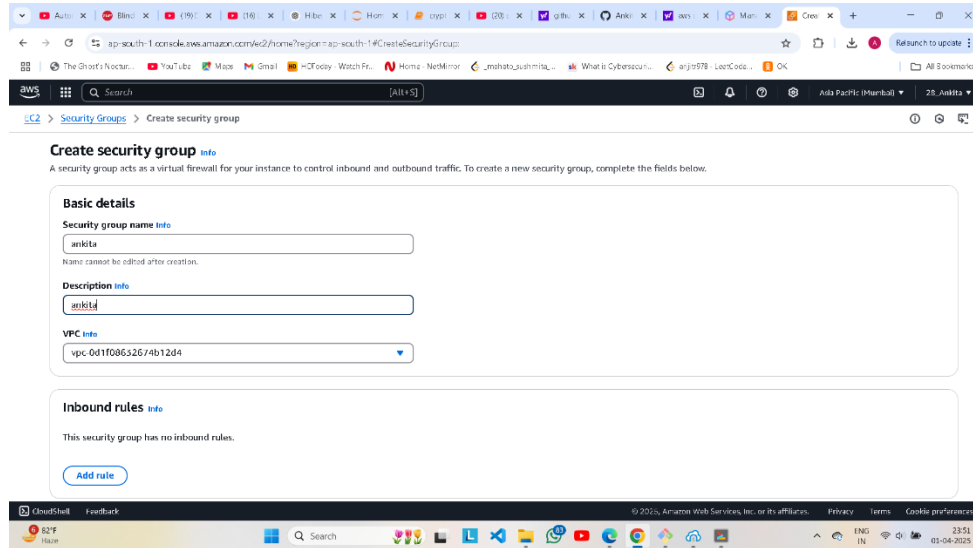


>> Add SSH , HTTP , HTTPS and CUSTOM TCP Type Rules as Given below

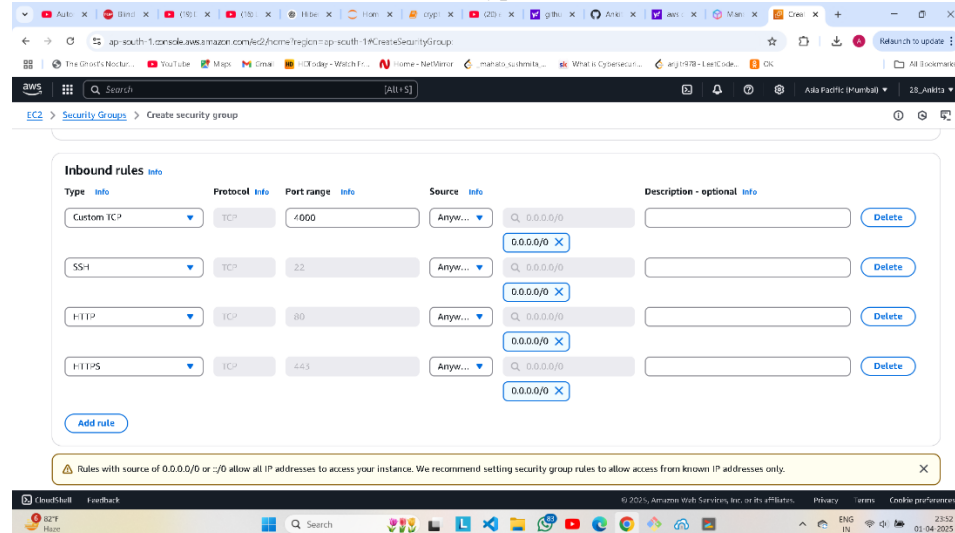


>> Click on CREATE Security Group



>> And the Security Group is Successfully created

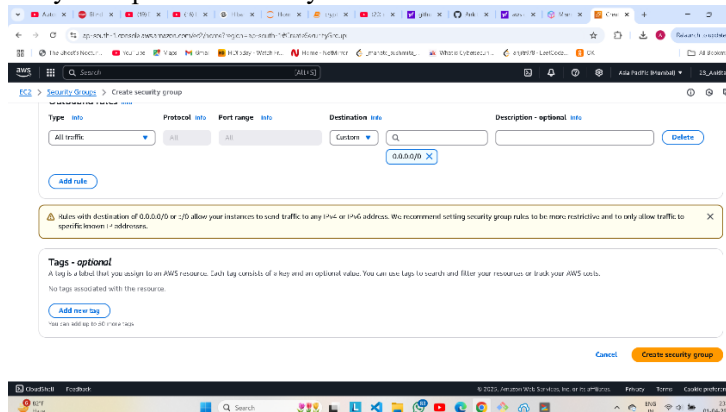

Ankita Barui
CSEDS/22/28

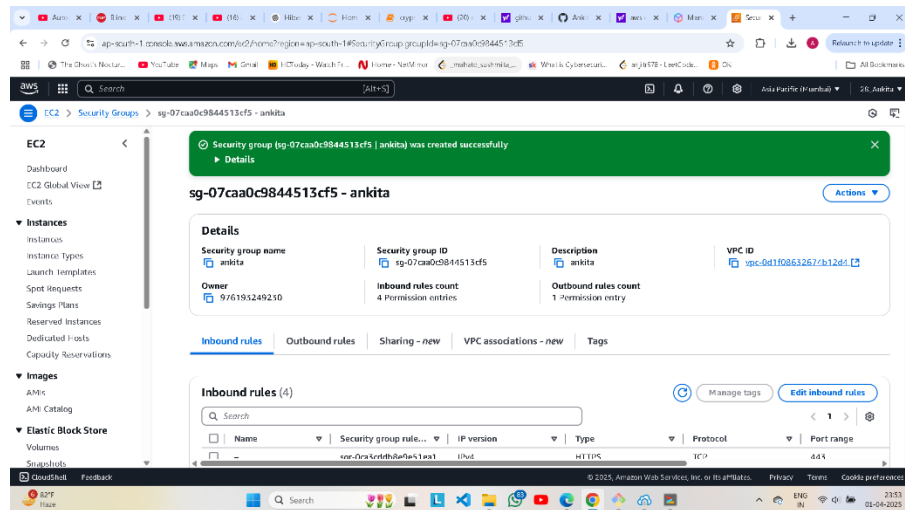


STEP 16 :- Click on Launch Instance and Give your instance a name and then select Ubuntu and Selected an existing Key ab1

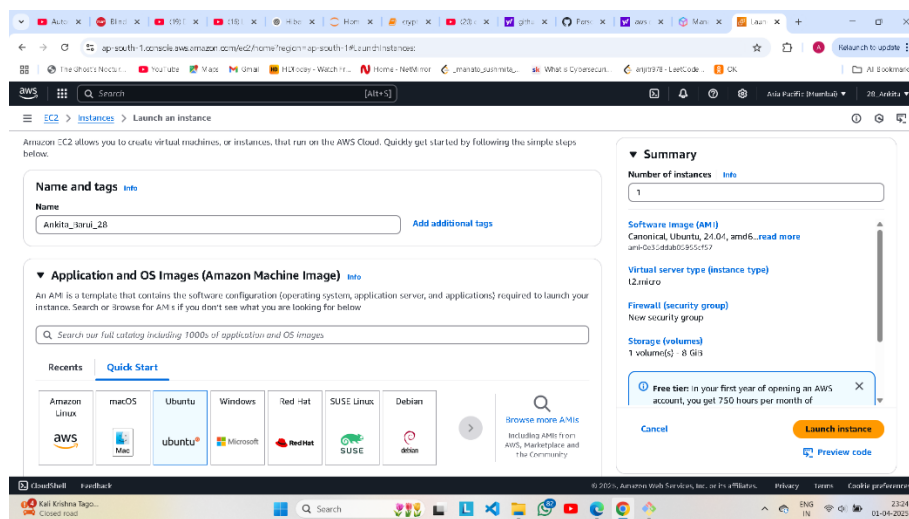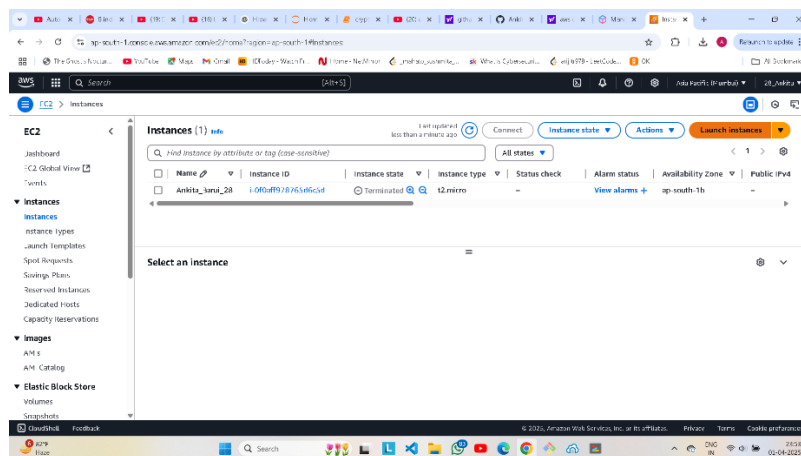


Ankita Barui
CSEDS/22/28

STEP 17 :- Then select **Select existing security group** and then choose your security group.

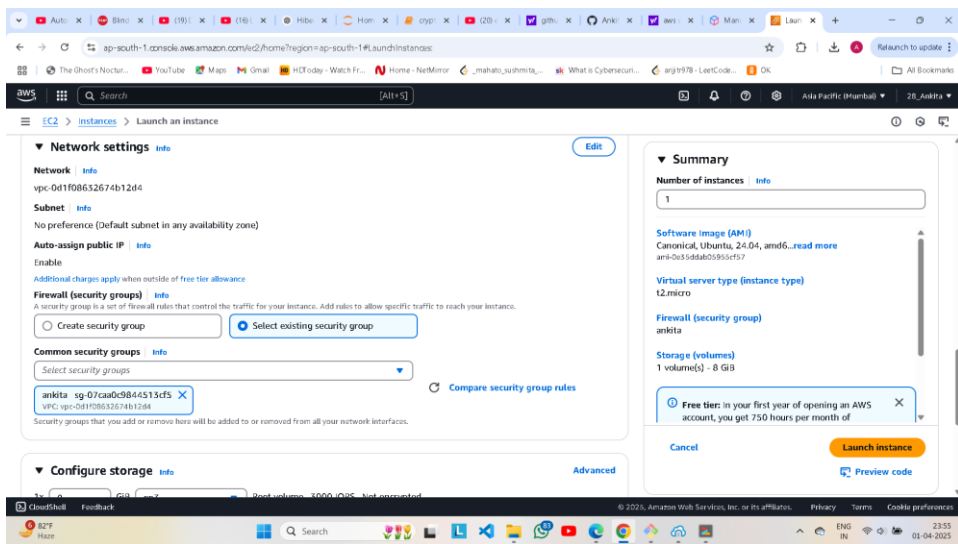


STEP 18 :- Then click on **Advanced options** and then go to **User data**

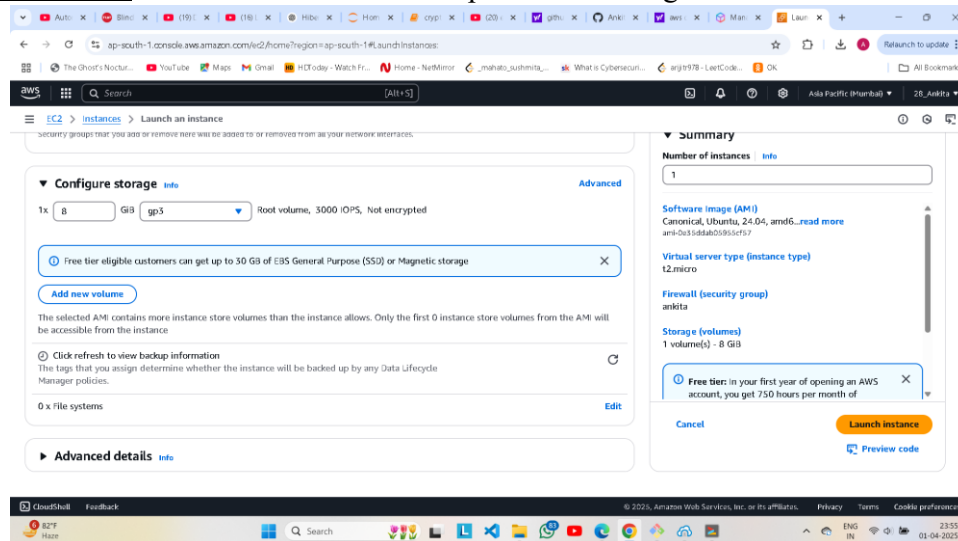


>> Write the following commands given below in **User data** and click on **Launch Instance** in Right hand bottom of page.

STEP 19 :- Click on the **Instance ID** and copy the **Public IPV4 Address**.

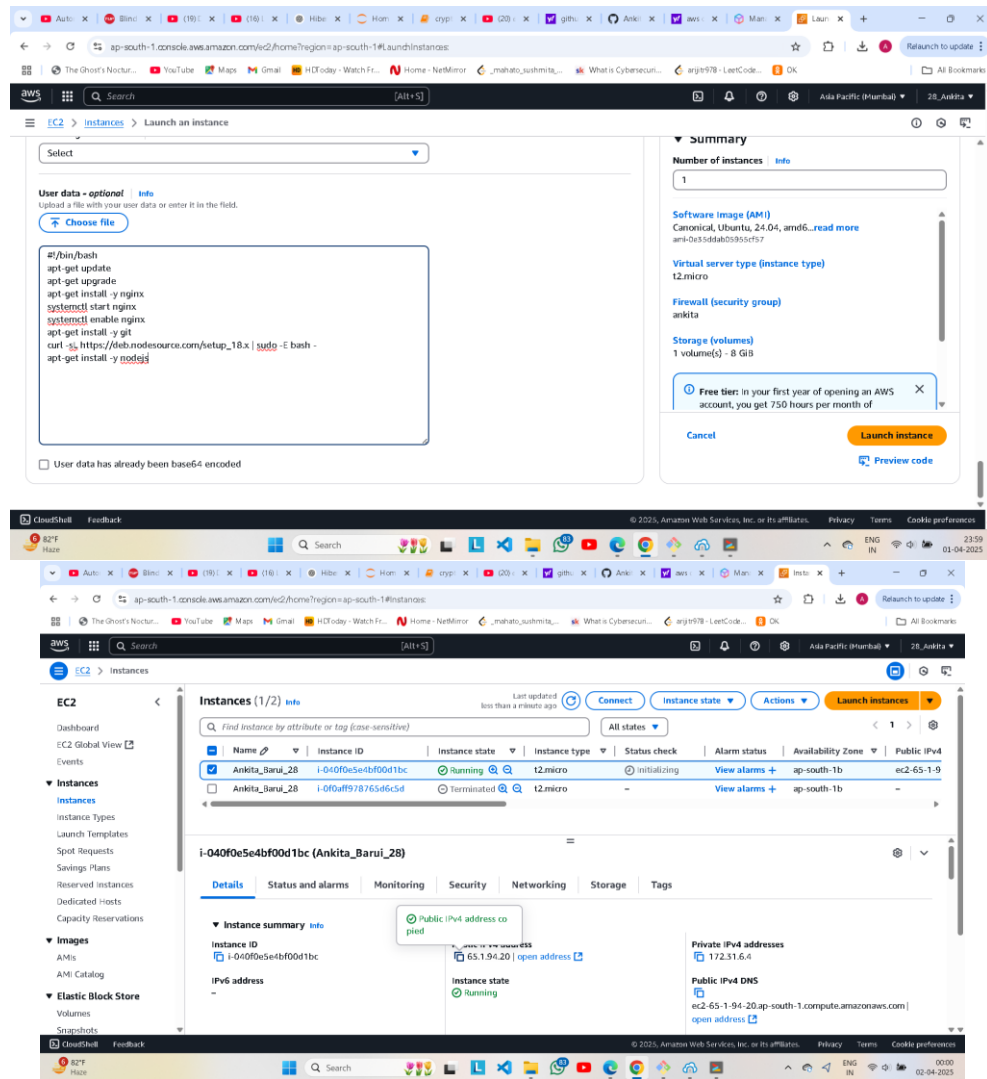


STEP 20 :- Open the Bitwise SSH Client Server and paste the Public IPV4 Address in the Host As the key is the Existing one so all other features will remain same. And then click on Log in and open the Terminal

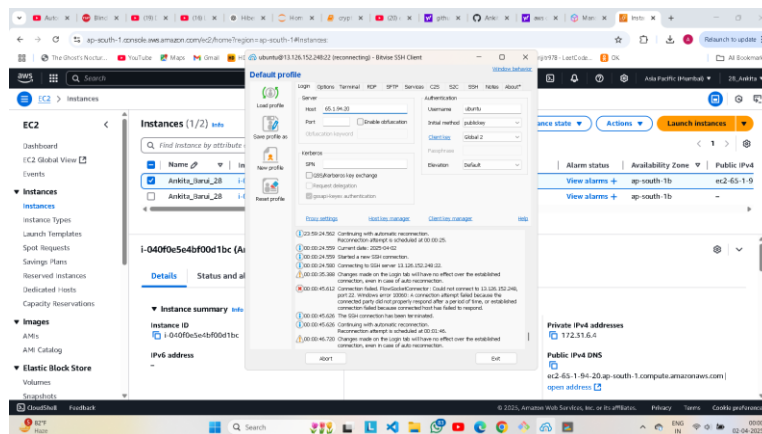

Ankita Barui
CSEDS/22/28

STEP 21 :- Goto to your GitHub Account Copy you Repository URL by clicking on Code

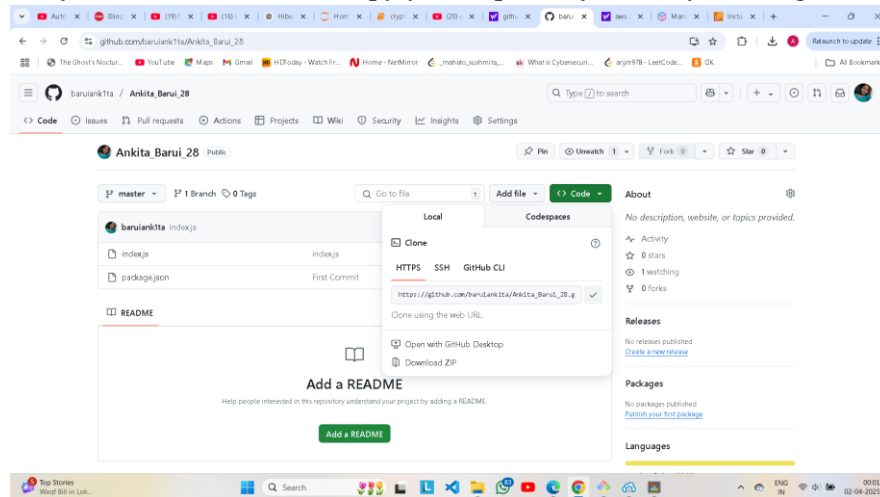

STEP 22 :- Then write the command in terminal and run it


- `git clone <Repository link>`
- `cd <repository name>`
- `ls`
- `npm install`

```
ubuntu@ip-172-31-8-212:~$ node -v
v18.20.8
ubuntu@ip-172-31-8-212:~$ git clone https://github.com/baruiankita/Ankita_Barui_28.git
Cloning into 'Ankita_Barui_28'...
remote: Enumerating objects: 4, done.
remote: Counting objects: 100% (4/4), done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 4 (delta 0), reused 4 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (4/4), done.
Resolving deltas: 100% (1/1), done.
ubuntu@ip-172-31-6-4:~$ cd Ankita_Barui_28
ubuntu@ip-172-31-6-4:~/Ankita_Barui_28$ ls
index.js  package.json
ubuntu@ip-172-31-6-4:~/Ankita_Barui_28$ npm install
```

STEP 23 :- Write node index.js in terminal to Start the Server

```
npm notice New major version of npm available! 10.8.2 -> 11.2.0
npm notice Changelog: https://github.com/npm/cli/releases/tag/v11.2.0
npm notice To update run: npm install -g npm@11.2.0
npm notice
ubuntu@ip-172-31-8-212:~/Ankita_Barui_28$ node index.js
Started server
```

STEP 24 :- Then copy the Instance Public IPV4 Address and paste in Incognito Window concating the IPV4 Address with : 4000 (port range)

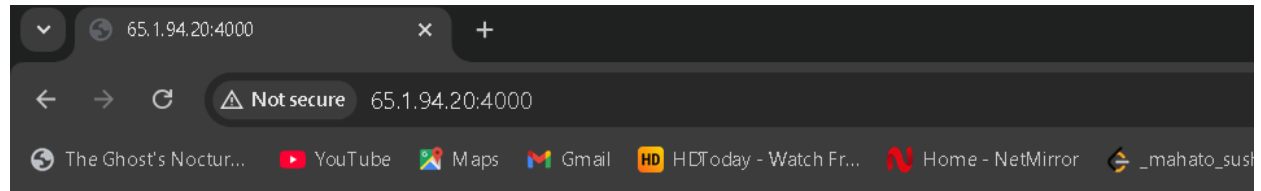

Hello ANKITA