


Assignment number : 04


Title : Create a private bucket in AWS. Upload a file and check by presigned URL whether you can access the file or not.

Step 1 : Opening and creating bucket in the AWS

Step 1.1: I'll search **S3** in the AWS management console.

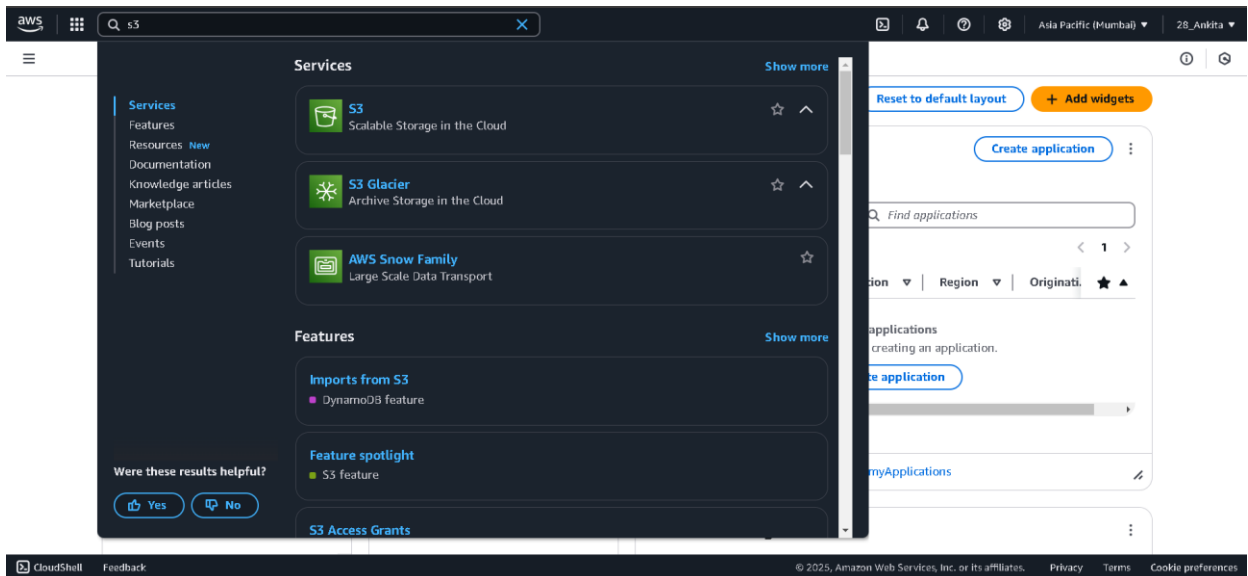

Step 1.2: I'll click on the **S3** and click on **Create bucket**.

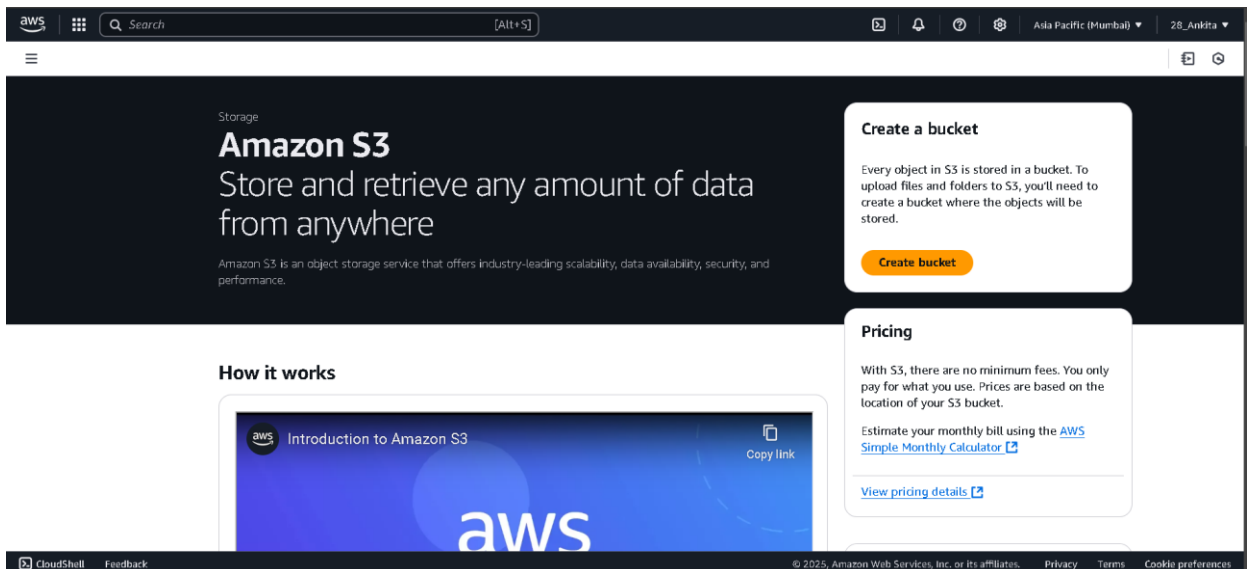

Step 2 : Updating bucket configurations

Step 2.1: Choose Bucket type “ **General purpose** ” and then name the bucket , then select on **ACLs enabled**, check **Block all public access** and click on “**Enable**” in **Bucket Versioning**.

The screenshot shows the AWS 'Create bucket' page. The 'General configuration' section is active. The 'AWS Region' is set to 'Asia Pacific (Mumbai) ap-south-1'. Under 'Bucket type', 'General purpose' is selected with a radio button. The 'Bucket name' field contains 'ankitabucket'. Below this, there is a 'Copy settings from existing bucket - optional' section with a 'Choose bucket' button. The footer of the page includes 'CloudShell', 'Feedback', and copyright information for Amazon Web Services, Inc.

This screenshot shows the 'Object Ownership' and 'Block Public Access' sections of the AWS 'Create bucket' page. In the 'Object Ownership' section, 'ACLs enabled' is selected with a radio button. A warning message states: 'We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.' Under 'Object Ownership', 'Bucket owner preferred' is selected. A note mentions that new objects will be owned by the bucket owner. A blue box contains a tip: 'If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. Learn more'. The 'Block Public Access settings for this bucket' section is partially visible at the bottom.

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

28_Ankita

Amazon S3 > Buckets > Create bucket

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☒ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☒ Block public access to buckets and objects granted through new access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☒ Block public access to buckets and objects granted through any access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

☒ Block public access to buckets and objects granted through new public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☒ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☐ Disable

☒ Enable

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 2.2: Then click on "Create Budget"

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

28_Ankita

Amazon S3 > Buckets > Create bucket

Default encryption

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type

☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)

☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)

☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Secure your objects with two separate layers of encryption. For details on pricing, see [DSSE-KMS pricing](#) on the [Storage](#) tab of the [Amazon S3 pricing page](#).

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

☐ Disable

☒ Enable

Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel

Create bucket

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Ankita Barui(CSE/DS/22/028)

Step 3 : Opening the Bucket

After **successfully** creating the budget , click on the **name** of the budget.

aws Search [Alt+S] Asia Pacific (Mumbai) 28_Ankita

Amazon S3 > Buckets

Successfully created bucket "ankitabucket28"
To upload files and folders, or to configure additional bucket settings, choose [View details](#).

Account snapshot - updated every 24 hours All AWS Regions View Storage Lens dashboard

General purpose buckets Directory buckets

General purpose buckets (1) Info All AWS Regions

Buckets are containers for data stored in S3.

Find buckets by name

Name	AWS Region	IAM Access Analyzer	Creation date
ankitabucket28	Asia Pacific (Mumbai) ap-south-1	View analyzer for ap-south-1	February 23, 2025, 13:24:38 (UTC+05:30)

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 4 : Uploading and working on files

Step 4.1: To upload any files in the bucket , click on **Upload** to upload a file

aws Search [Alt+S] Asia Pacific (Mumbai) 28_Ankita

Amazon S3 > Buckets > ankitabucket28

ankitabucket28 Info

Objects Properties Permissions Metrics Management Access Points

Objects (0) Copy S3 URI Copy URL Download Open Delete Actions Create folder Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix Show versions

Name	Type	Last modified	Size	Storage class
No objects You don't have any objects in this bucket.				

Upload

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

aws Search [Alt+S]

Amazon S3 > Buckets > ankitabucket28 > Upload

Upload [Info](#)

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Files and folders (0) Remove Add files Add folder

All files and folders in this table will be uploaded.

Find by name

☐	Name	Folder	Type	Size
No files or folders				
You have not chosen any files or folders to upload.				

Destination [Info](#)

Destination

[s3://ankitabucket28](#)

Destination details

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 4.2: Click on **Add files** , Select the file to upload and click **Open** then press **Upload**.

aws Search [Alt+S]

Amazon S3 > Buckets > ankitabucket28 > Upload

Files and folders (1 total, 3.3 MB) Remove Add files Add folder

All files and folders in this table will be uploaded.

Find by name

☐	Name	Folder	Type	Size
☐	STUDENT_SQL Notes.pdf	-	application/pdf	3.3 MB

Destination [Info](#)

Destination

[s3://ankitabucket28](#)

Destination details

Bucket settings that impact new objects stored in the specified destination.

Permissions

Grant public access and access to other AWS accounts.

Properties

Specify storage class, encryption settings, tags, and more.

Cancel Upload

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

28_Ankita

Upload succeeded

For more information, see the Files and folders table.

Close

Upload: status

After you navigate away from this page, the following information is no longer available.

Summary

Destination

s3://ankitabucket28

Succeeded

1 file, 3.3 MB (100.00%)

Failed

0 files, 0 B (0%)

Files and folders

Configuration

Files and folders (1 total, 3.3 MB)

Find by name

Name	Folder	Type	Size	Status	Error
STUDENT_SQL Notes.pdf	-	application/pdf	3.3 MB	Succeeded	-

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences

Step 5 : Checking the files uploaded Status

Step 5.1: Now I'll click on the name of the file uploaded and Copy the **Object URL**.

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

28_Ankita

Amazon S3

Buckets

ankitabucket28

STUDENT_SQL Notes.pdf

STUDENT_SQL Notes.pdf

Info

Copy S3 URI

Download

Open

Object actions

Properties

Permissions

Versions

Object overview

Owner

0d8dbdaf4b337211d45d914bc41489933ebcf21d0e5425a47c50a5bb8841a271

AWS Region

Asia Pacific (Mumbai) ap-south-1

Last modified

February 23, 2025, 13:26:48 (UTC+05:30)

Size

3.3 MB

Type

pdf

Key

STUDENT_SQL Notes.pdf

S3 URI

s3://ankitabucket28/STUDENT_SQL Notes.pdf

Amazon Resource Name (ARN)

arn:aws:s3::ankitabucket28/STUDENT_SQL Notes.pdf

Entity tag (Etag)

3868331ca114dccc259125616a25c596

Object URL

https://ankitabucket28.s3.ap-south-1.amazonaws.com/STUDENT_SQL+Notes.pdf

CloudShell

Feedback


© 2025, Amazon Web Services, Inc. or its affiliates.

Privacy


Terms

Cookie preferences

Step 5.2: Paste the object URL in incognito mode, It will show The access is denied.

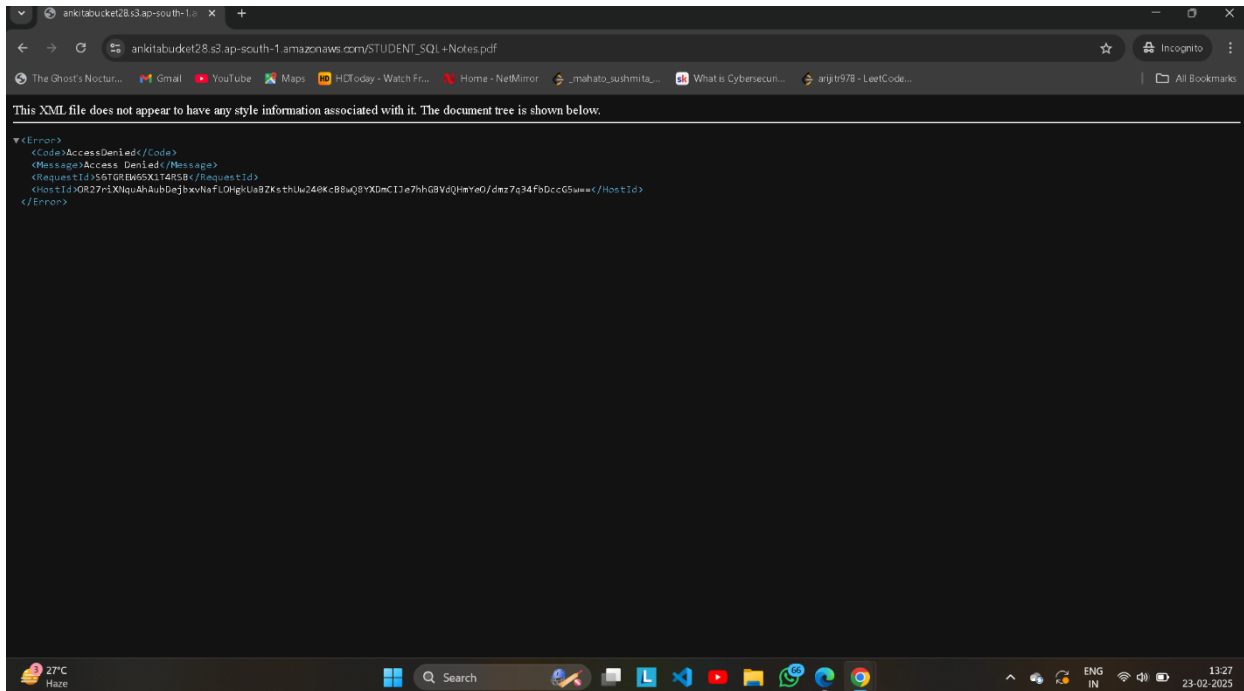

Step 5.3:- Editing the permissions by clicking on the Edit option , and the public access is disabled which means it's a private bucket .

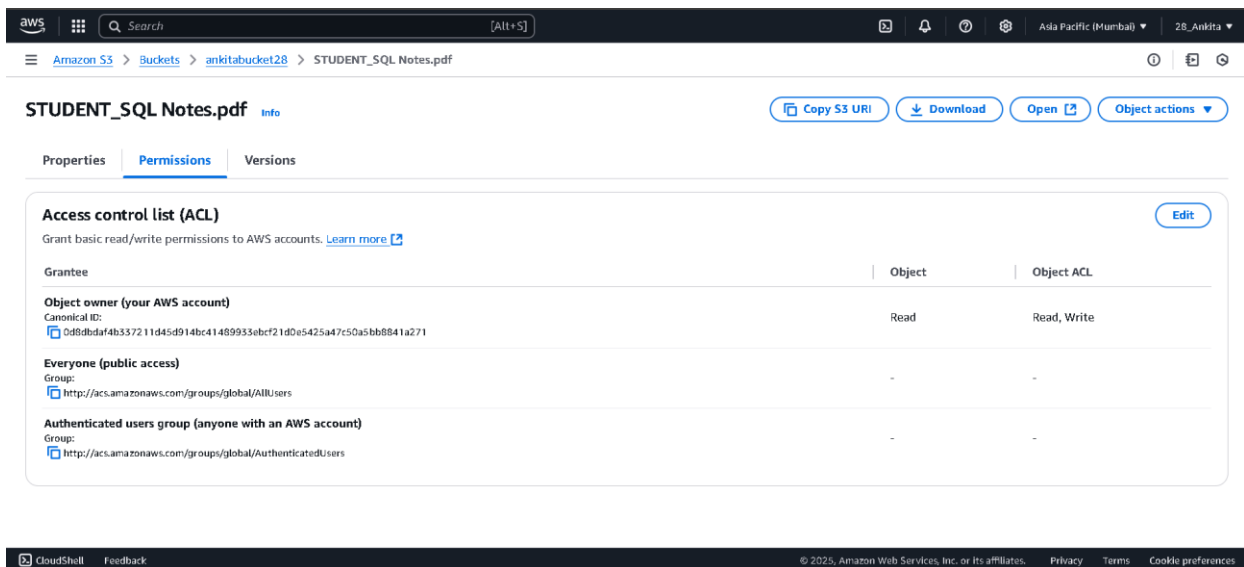

aws Search [Alt+S]

Amazon S3 > Buckets > ankitbucket28 > STUDENT_SQL_Notes.pdf > Edit access control list

Edit access control list Info

Public access is blocked because Block Public Access settings are turned on for this bucket. To determine which settings are turned on, check your [Block Public Access settings for this bucket](#). Learn more about [using Amazon S3 Block Public Access](#).

Access control list (ACL)
Grant basic read/write permissions to AWS accounts. [Learn more](#)

Grantee	Objects	Object ACL
Object owner (your AWS account) Canonical ID: 0d8dbdaf4b337211d45d914bc41489933ebcf21d0e5425a47c50a5bb8841a271	☒ Read	☒ Read ☒ Write
Everyone (public access) Group: http://acs.amazonaws.com/groups/global/AllUsers	☐ Read	☐ Read ☐ Write
Authenticated users group (anyone with an AWS account) Group: http://acs.amazonaws.com/groups/global/AuthenticatedUsers	☐ Read	☐ Read ☐ Write
Access for other AWS accounts No other AWS accounts associated with the resource.		

[Add grantee](#)

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 6 : Deleting the bucket and it's content

Step 6.1: Select the bucket name then click on **Empty** and write **Permanently delete** on the text box to delete the bucket's contents and finally click on the **Empty** option.

aws Search [Alt+S]

Amazon S3 > Buckets

Account snapshot - updated every 24 hours All AWS Regions [View Storage Lens dashboard](#)

Storage lens provides visibility into storage usage and activity trends. Metrics don't include directory buckets. [Learn more](#)

General purpose buckets Directory buckets

General purpose buckets (1/1) Info All AWS Regions

Buckets are containers for data stored in S3.

Find buckets by name

Name	AWS Region	IAM Access Analyzer	Creation date
ankitbucket28	Asia Pacific (Mumbai) ap-south-1	View analyzer for ap-south-1	February 23, 2025, 13:24:38 (UTC+05:30)

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

aws Search [Alt+S]

Amazon S3 > Buckets > ankitabucket28 > Empty bucket

Empty bucket [Info](#)

⚠ Emptying the bucket deletes all objects in the bucket and cannot be undone.

- Objects added to the bucket while the empty bucket action is in progress might be deleted.
- To prevent new objects from being added to this bucket while the empty bucket action is in progress, you might need to update your bucket policy to stop objects from being added to the bucket.

[Learn more](#)

ⓘ If your bucket contains a large number of objects, creating a lifecycle rule to delete all objects in the bucket might be a more efficient way of emptying your bucket. [Learn more](#)

[Go to lifecycle rule configuration](#)

Permanently delete all objects in bucket "ankitabucket28"?

To confirm deletion, type *permanently delete* in the text input field.

[Cancel](#) [Empty](#)

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 6.2: Now select the bucket name and click **Delete** and confirm the bucket name on the text box to delete the bucket then click delete bucket.

aws Search [Alt+S]

Amazon S3 > Buckets

✔ **Successfully emptied bucket "ankitabucket28"**

View details below. If you want to delete this bucket, use the [delete bucket configuration](#).

▶ **Account snapshot - updated every 24 hours** [All AWS Regions](#)

Storage lens provides visibility into storage usage and activity trends. Metrics don't include directory buckets. [Learn more](#)

[View Storage Lens dashboard](#)

[General purpose buckets](#) [Directory buckets](#)

General purpose buckets (1/1) [Info](#) [All AWS Regions](#)

Buckets are containers for data stored in S3.

< 1 > ⚙

Name	AWS Region	IAM Access Analyzer	Creation date
ankitabucket28	Asia Pacific (Mumbai) ap-south-1	View analyzer for ap-south-1	February 23, 2025, 13:24:38 (UTC+05:30)

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

28_Ankita

Amazon S3

Buckets

ankitabucket28

Delete bucket

Info

- Deleting a bucket cannot be undone.
- Bucket names are unique. If you delete a bucket, another AWS user can use the name.
- If this bucket is used with a Multi-Region Access Point in an external account, initiate failover before deleting the bucket.
- If this bucket is used with an access point in an external account, the requests made through those access points will fail after you delete this bucket.

[Learn more](#)

Delete bucket "ankitabucket28"?

To confirm deletion, enter the name of the bucket in the text input field.

ankitabucket28

Cancel

Delete bucket

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates.

Privacy

Terms

Cookie preferences