


Assignment number : 05


Title : Create a public bucket in AWS. Upload a file and give the necessary permission to check whether the file URL is working.

Step 1 : Opening and creating bucket in the AWS

Step 1.1: I'll search **S3** in the AWS management console.

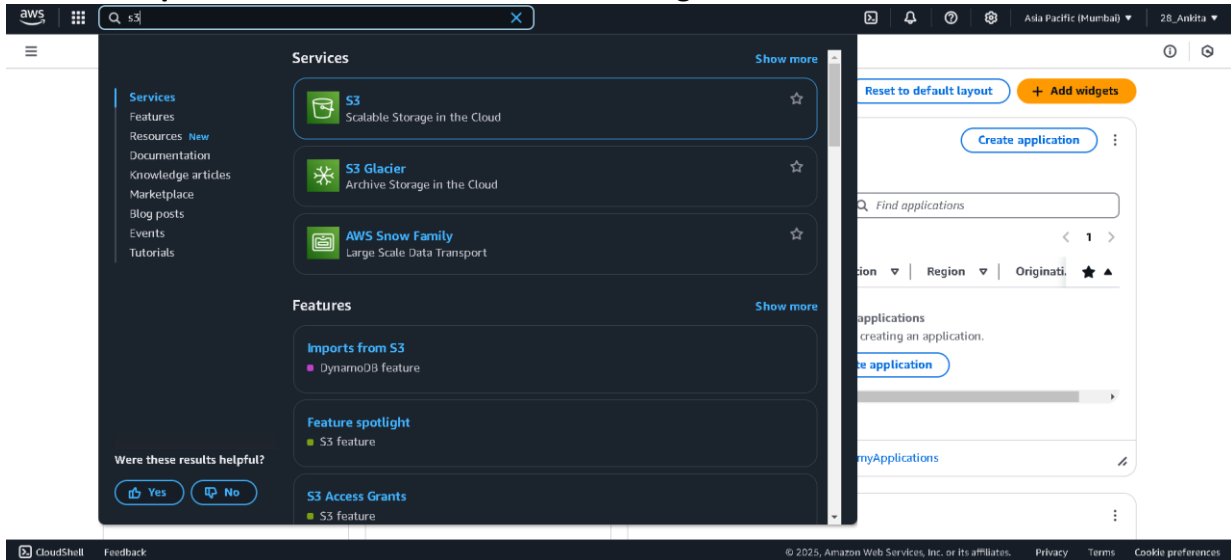

Step 1.2: I'll click on the **S3** and click on **Create bucket**.

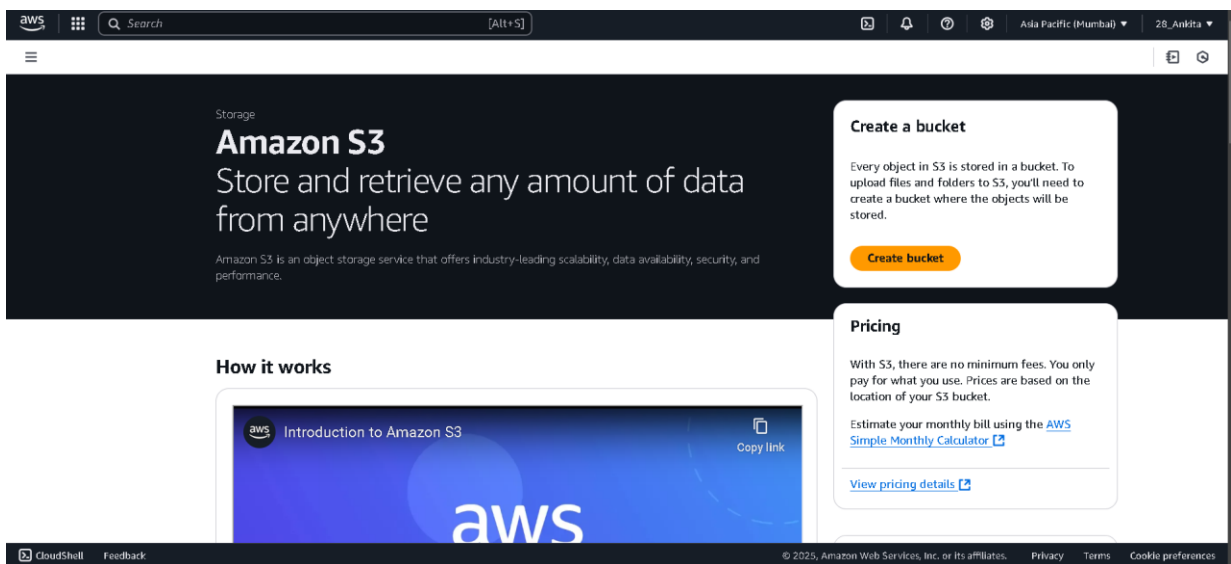

Step 2 : Updating bucket configurations

Step 2.1: Choose Bucket type “ **General purpose** ” and then name the bucket , then select on **ACLs enabled** and **UNCHECK** Block all public access and click on I acknowledge check box.

The screenshot shows the AWS 'Create bucket' console. The 'General configuration' section is active. The 'AWS Region' is set to 'Asia Pacific (Mumbai) ap-south-1'. Under 'Bucket type', 'General purpose' is selected with a radio button. The 'Bucket name' field contains 'ankbucket10'. Below this, there is a 'Copy settings from existing bucket - optional' section with a 'Choose bucket' button. The footer shows 'CloudShell', 'Feedback', and copyright information for Amazon Web Services, Inc.

Create bucket [Info](#)

Buckets are containers for data stored in S3.

General configuration

AWS Region
Asia Pacific (Mumbai) ap-south-1

Bucket type [Info](#)

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name [Info](#)
ankbucket10
Bucket name must be unique within the global namespace and follow the bucket naming rules. [See rules for bucket naming](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.
[Choose bucket](#)
Format: s3://bucket/prefix

Object Ownership [Info](#)

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

The screenshot shows the 'Object Ownership' section of the 'Create bucket' console. Two options are available: 'ACLs disabled (recommended)' and 'ACLs enabled'. The 'ACLs enabled' option is selected. Below this, there is a warning box about recommending disabling ACLs. Under 'Object Ownership', 'Bucket owner preferred' is selected. A blue information box states that if you want to enforce object ownership, your bucket policy must specify that the bucket-owner-full-control canned ACL is required. The 'Block Public Access settings for this bucket' section is partially visible at the bottom.

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

Object Ownership

☒ **Bucket owner preferred**
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.

☐ **Object writer**
The object writer remains the object owner.

If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. [Learn more](#)

Block Public Access settings for this bucket
Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will not be impacted by the loss of public access. For more information, see [Block public access to your Amazon S3 buckets and objects using policies](#).

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

28_Ankita

Amazon S3

Buckets

Create bucket

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ Block all public access

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ Block public access to buckets and objects granted through new access control lists (ACLs)

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ Block public access to buckets and objects granted through any access control lists (ACLs)

S3 will ignore all ACLs that grant public access to buckets and objects.

☐ Block public access to buckets and objects granted through new public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

⚠️ Turning off block all public access might result in this bucket and the objects within becoming public

AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

Step 2.2: Then click on "Enable" in Bucket Versioning

aws

Search

[Alt+S]

Asia Pacific (Mumbai)

28_Ankita

Amazon S3

Buckets

Create bucket

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☐ Disable

☒ Enable

Tags - optional (0)

You can use bucket tags to track storage costs and organize buckets. [Learn more](#)

No tags associated with this bucket.

Add tag

Default encryption [Info](#)

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type [Info](#)

☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)

☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)

☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the Storage tab of the [Amazon S3 pricing page](#).


CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

Ankita Barui(CSE/DS/22/028)

Step 2.3: Then click on "Create Budget"

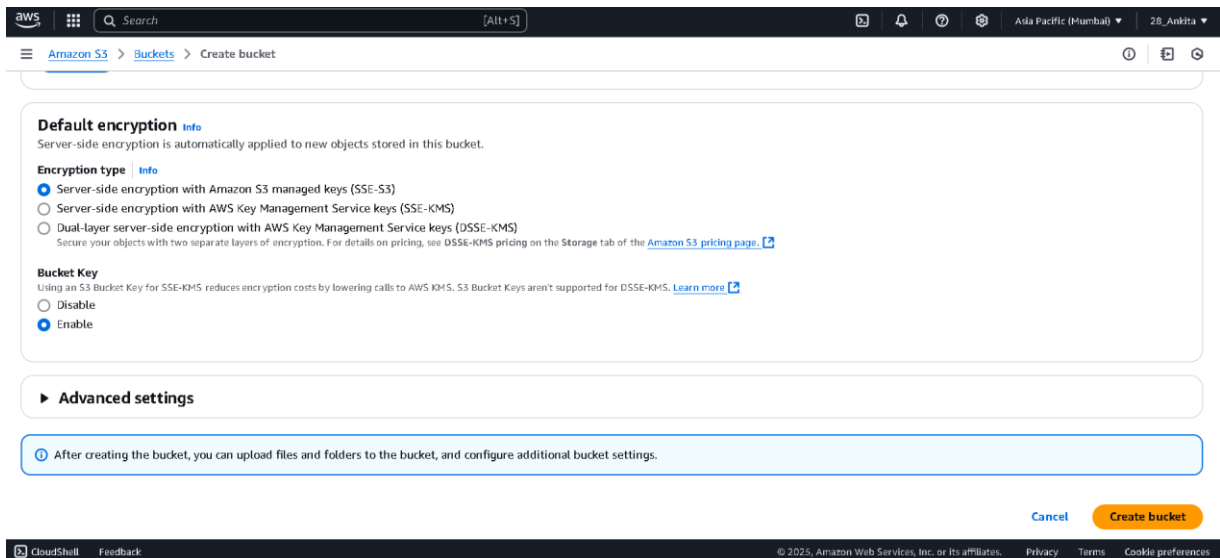

aws [Search] [Alt+S] Asia Pacific (Mumbai) 28_Ankita

Amazon S3 > Buckets > Create bucket

Default encryption [Info](#)
Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type [Info](#)

- ☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)
- ☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)
- ☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)
Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the Storage tab of the [Amazon S3 pricing page](#).

Bucket Key
Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

☐ Disable

☒ Enable

► **Advanced settings**


After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel Create bucket

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 3 : Opening the Bucket

After **successfully** creating the budget , click on the **name** of the budget.

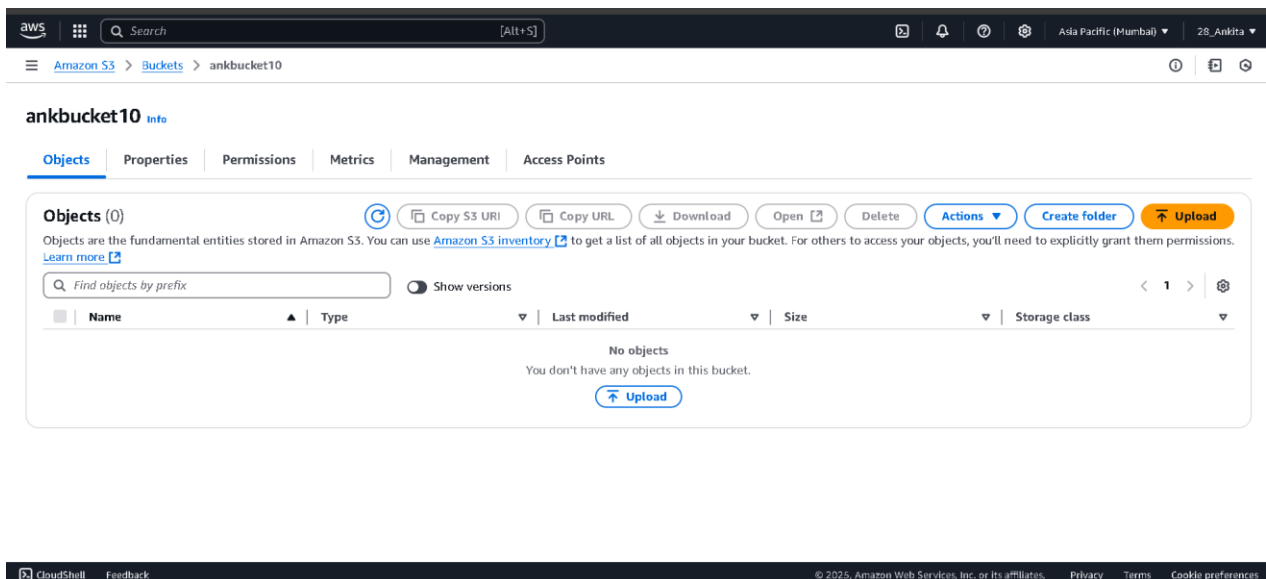

aws [Search] [Alt+S] Asia Pacific (Mumbai) 28_Ankita

Amazon S3 > Buckets > ankbucket10

ankbucket10 [Info](#)

[Objects](#) [Properties](#) [Permissions](#) [Metrics](#) [Management](#) [Access Points](#)

Objects (0) [Copy S3 URI](#) [Copy URL](#) [Download](#) [Open](#) [Delete](#) [Actions](#) [Create folder](#) [Upload](#)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

☐ Show versions


Name	Type	Last modified	Size	Storage class
No objects You don't have any objects in this bucket.				

[Upload](#)


CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 4 : Uploading and working on files

Step 4.1: To upload any files in the bucket , click on **Upload** to upload a file

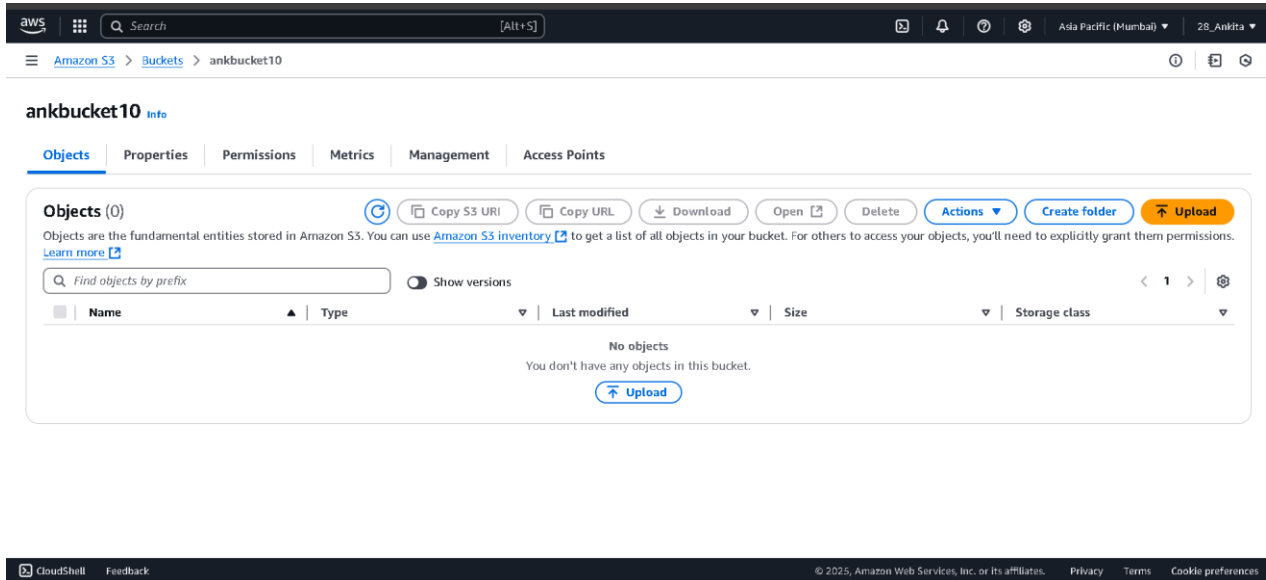

The screenshot shows the AWS Management Console interface for the bucket 'ankbucket10'. The 'Objects' tab is active, displaying a table of objects. The table has columns for Name, Type, Last modified, Size, and Storage class. A message states 'No objects' and 'You don't have any objects in this bucket.' The 'Upload' button is highlighted in orange in the top right corner of the console.

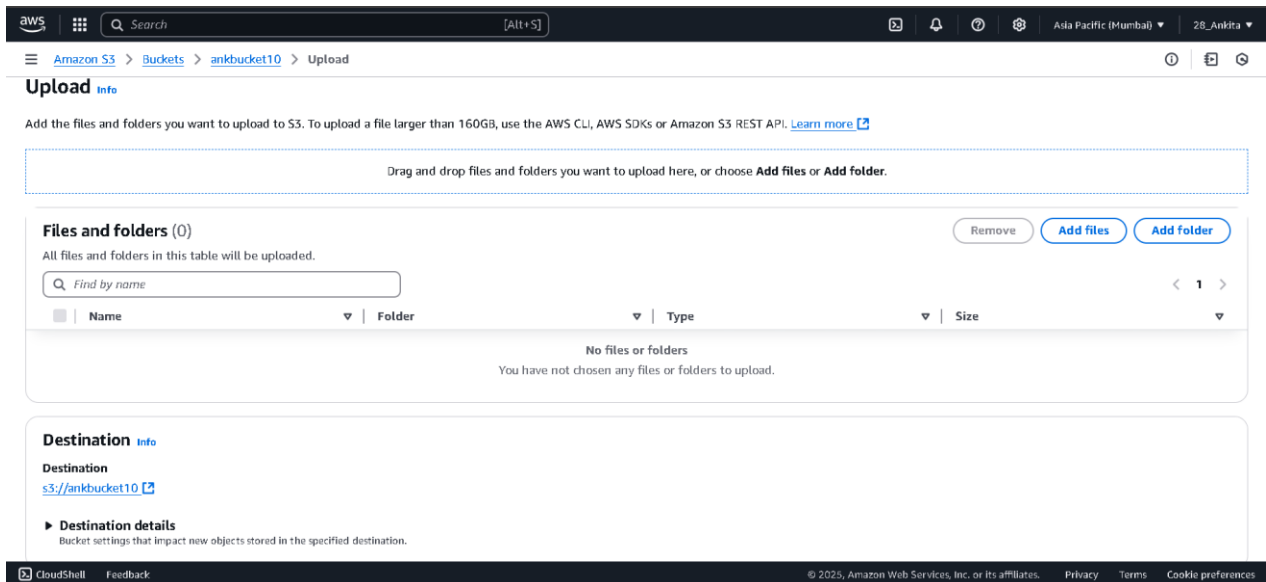

The screenshot shows the 'Upload' page for the bucket 'ankbucket10'. The page includes a drag-and-drop area with the text 'Drag and drop files and folders you want to upload here, or choose Add files or Add folder.' Below this is a table for 'Files and folders' with columns for Name, Folder, Type, and Size. A message states 'No files or folders' and 'You have not chosen any files or folders to upload.' The 'Destination' section shows the destination as 's3://ankbucket10'.

Step 4.2: Click on **Add files** , Select the file to upload and click **Open** then press **Upload**.

The screenshot shows the AWS S3 console's 'Upload' page for a bucket named 'ankbucket10'. At the top, there's a search bar and navigation links. Below, a section titled 'Files and folders (2 total, 391.1 KB)' lists two items: 'SVM_Classifier_Solutions.ankp...' and 'synopsis_project[f].pdf'. The 'Add files' button is highlighted. Below this, the 'Destination' section shows the path 's3://ankbucket10'. Further down, there are sections for 'Permissions' and 'Properties'. At the bottom right, 'Cancel' and 'Upload' buttons are visible.

Name	Folder	Type	Size
SVM_Classifier_Solutions.ankp...	-	application/pdf	280.2 KB
synopsis_project[f].pdf	-	application/pdf	110.9 KB



Step 5 : Checking the files uploaded Status

Step 5.1: Now I'll click on the name of the file uploaded.


The screenshot shows the 'Upload: status' page in the AWS S3 console. A green banner at the top indicates 'Upload succeeded'. Below this, a summary section shows 'Succeeded' status with 2 files (391.1 KB, 100.00%) and 'Failed' status with 0 files (0 B, 0%). The 'Files and folders' tab is selected, showing a table with two files: 'SVM_Classifier_Solutions.ankp...' and 'synopsis_project[f].pdf', both with a 'Succeeded' status.

Name	Folder	Type	Size	Status	Error
SVM_Classifier_Solutions.ankp...	-	application/pdf	280.2 KB	Succeeded	-
synopsis_project[f].pdf	-	application/pdf	110.9 KB	Succeeded	-

Step 5.2: Copy the Object URL and open it in incognito mode.

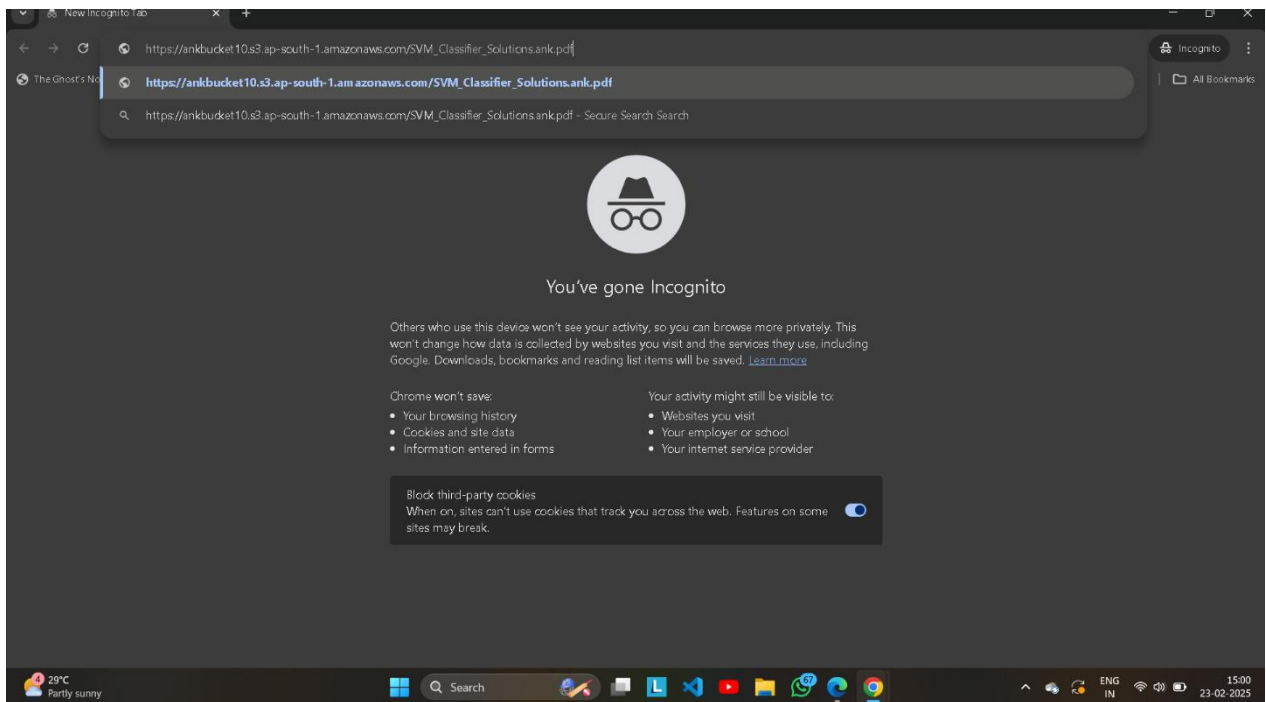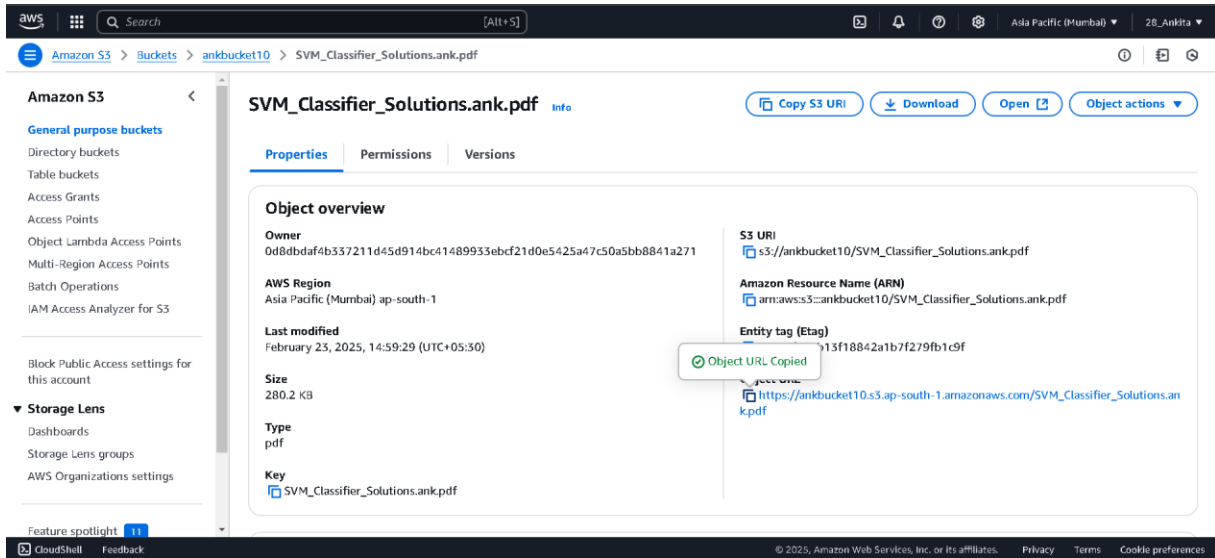


Step 5.3: It will show The access is denied.

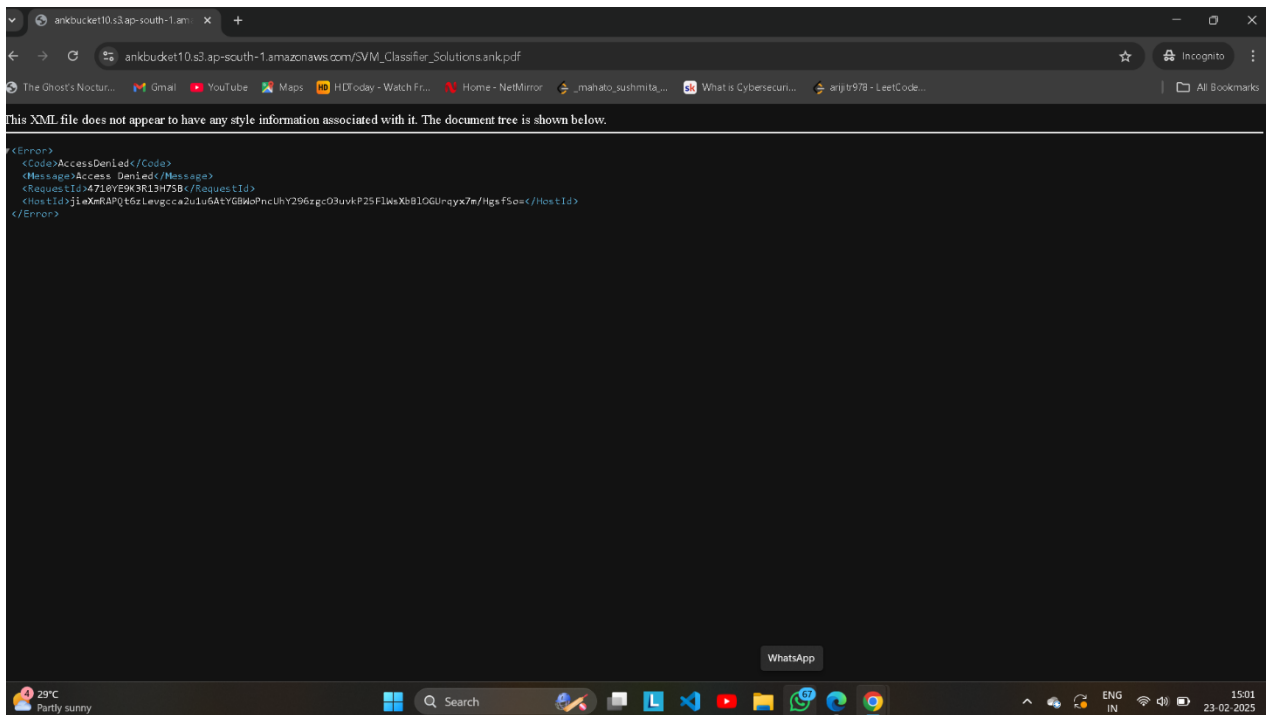


Step 6 : Giving the **necessary permissions** to check whether the file URL is working.

Step 6.1: I'll open the **Permissions** tab and click on **Edit** option.

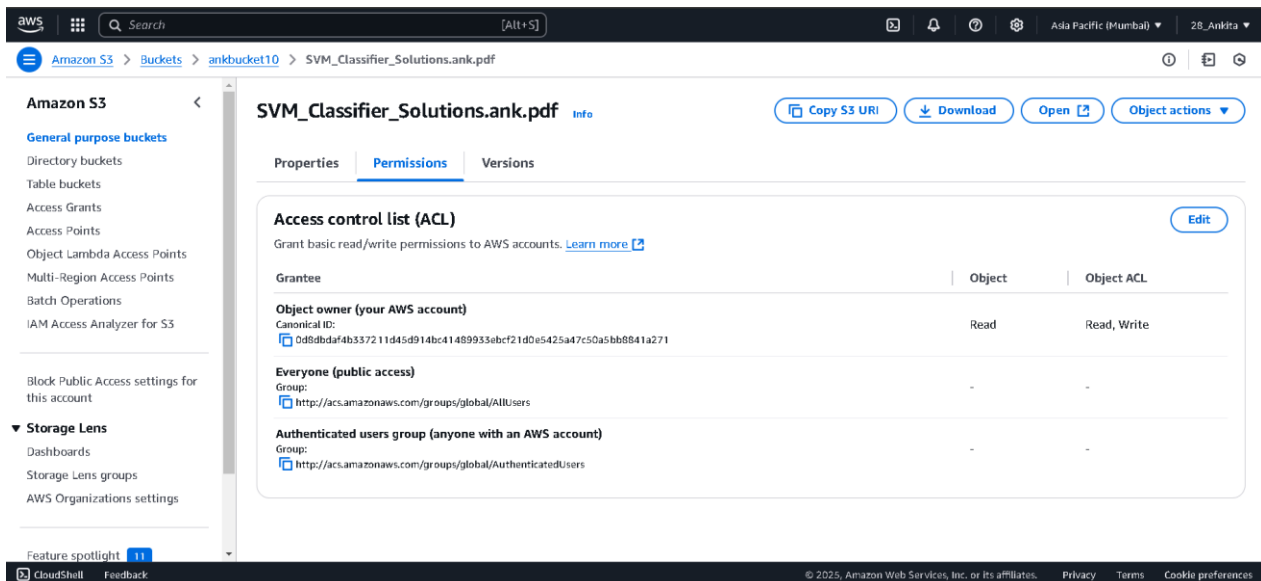

Step 6.2: Now I'll check on **Read** of objects and objects ACL everyone (i.e. give public access) and then click on **Save Changes**.

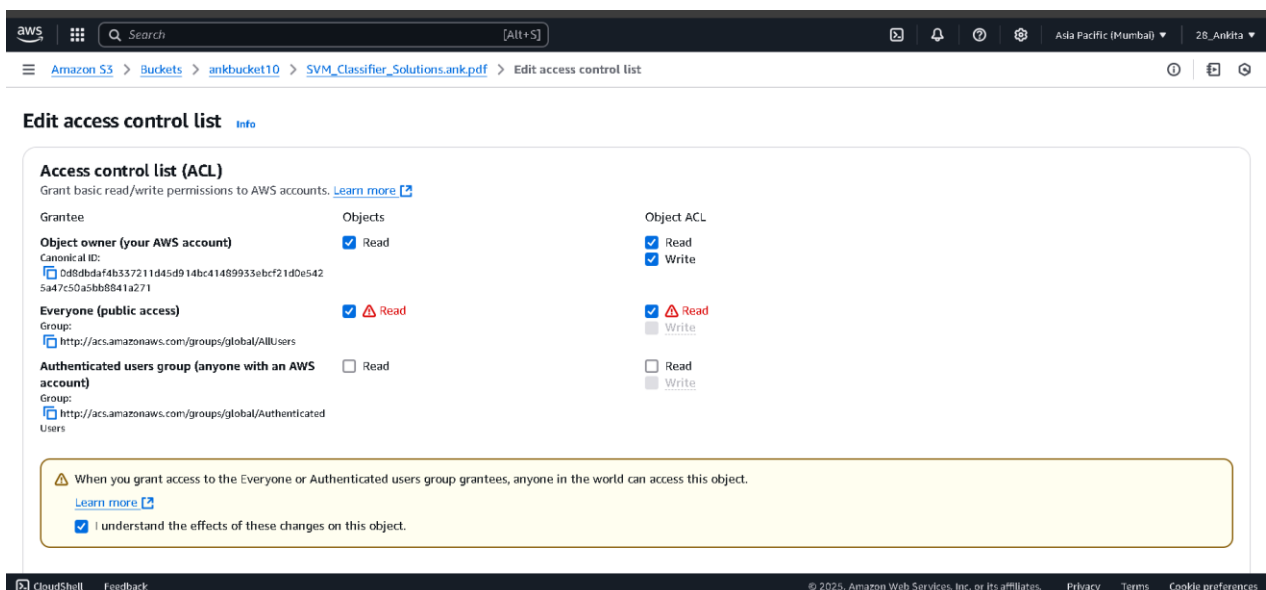

aws Search [Alt+S]

Amazon S3 > Buckets > ankbucket10 > SVM_Classifier_Solutions.ank.pdf > Edit access control list

Authenticated users group (anyone with an AWS account) ☐ Read ☐ Write

Group: <http://acs.amazonaws.com/groups/global/AuthenticatedUsers>

⚠ When you grant access to the Everyone or Authenticated users group grantees, anyone in the world can access this object. [Learn more](#)

☒ I understand the effects of these changes on this object.

Access for other AWS accounts
No other AWS accounts associated with the resource.

[Add grantee](#)

Specified objects

Name	Type	Version ID	Last modified	Size
SVM_Classifier_Solutions.ank.pdf	pdf	-	February 23, 2025, 14:59:29 (UTC+05:30)	280.2 KB

[Cancel](#) [Save changes](#)

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 7: Now Again I'll copy the object url and open it in **incognito mode** and then it will show the file.

aws Search [Alt+S]

Amazon S3 > Buckets > ankbucket10 > SVM_Classifier_Solutions.ank.pdf

☑ Successfully edited access control list for object "SVM_Classifier_Solutions.ank.pdf".

[SVM_Classifier_Solutions.ank.pdf](#)

Properties Permissions Versions

Object overview

Owner
0d8dbdaf4b337211d45d914bc41489933ebcf21d0e5425a47c50a5bb8841a271

AWS Region
Asia Pacific (Mumbai) ap-south-1

Last modified
February 23, 2025, 14:59:29 (UTC+05:30)

Size
280.2 KB

Type
pdf

Key
[SVM_Classifier_Solutions.ank.pdf](#)

S3 URI
s3://ankbucket10/SVM_Classifier_Solutions.ank.pdf

Amazon Resource Name (ARN)
arn:aws:s3::ankbucket10/SVM_Classifier_Solutions.ank.pdf

Entity tag (Etag)
113f18842a1b7f279fb1c9f

https://ankbucket10.s3.ap-south-1.amazonaws.com/SVM_Classifier_Solutions.ank.pdf

Object URL Copied

CloudShell Feedback © 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

