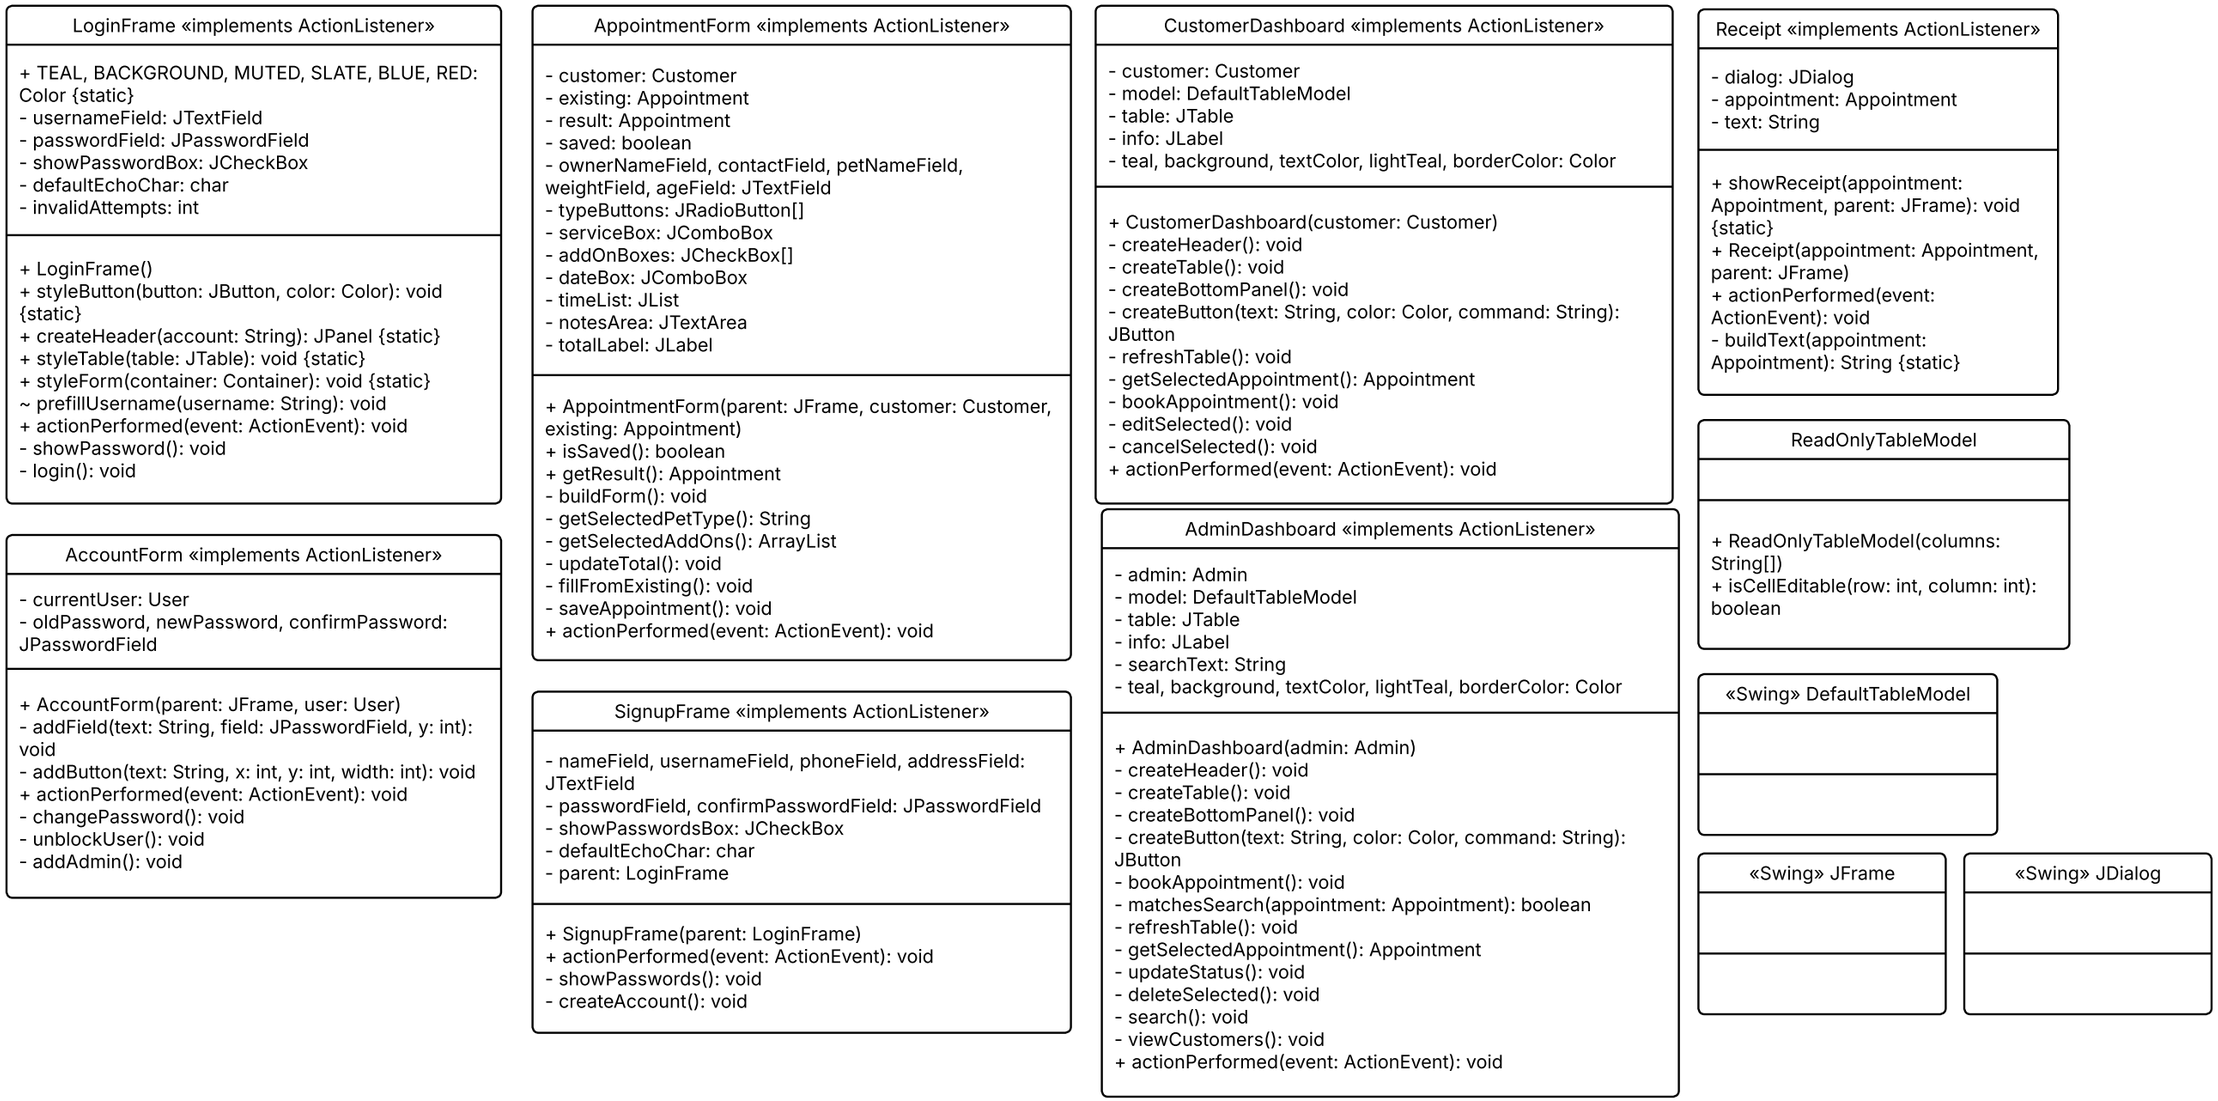

LoginFrame «implements ActionListener»
+ TEAL, BACKGROUND, MUTED, SLATE, BLUE, RED: Color {static}
- usernameField: JTextField
- passwordField: JPasswordField
- showPasswordBox: JCheckBox
- defaultEchoChar: char
- invalidAttempts: int
+ LoginFrame()
+ styleButton(button: JButton, color: Color): void {static}
+ createHeader(account: String): JPanel {static}
+ styleTable(table: JTable): void {static}
+ styleForm(container: Container): void {static}
~ prefillUsername(username: String): void
+ actionPerformed(event: ActionEvent): void
- showPassword(): void
- login(): void
AccountForm «implements ActionListener»
- currentUser: User
- oldPassword, newPassword, confirmPassword: JPasswordField
+ AccountForm(parent: JFrame, user: User)
- addField(text: String, field: JPasswordField, y: int): void
- addButton(text: String, x: int, y: int, width: int): void
+ actionPerformed(event: ActionEvent): void
- changePassword(): void
- unblockUser(): void
- addAdmin(): void
AppointmentForm «implements ActionListener»
- customer: Customer
- existing: Appointment
- result: Appointment
- saved: boolean
- ownerNameField, contactField, petNameField, weightField, ageField: JTextField
- typeButtons: JRadioButton[]
- serviceBox: JComboBox
- addOnBoxes: JCheckBox[]
- dateBox: JComboBox
- timeList: JList
- notesArea: JTextArea
- totalLabel: JLabel
+ AppointmentForm(parent: JFrame, customer: Customer, existing: Appointment)
+ isSaved(): boolean
+ getResult(): Appointment
- buildForm(): void
- getSelectedPetType(): String
- getSelectedAddOns(): ArrayList
- updateTotal(): void
- fillFromExisting(): void
- saveAppointment(): void
+ actionPerformed(event: ActionEvent): void
SignupFrame «implements ActionListener»
- nameField, usernameField, phoneField, addressField: JTextField
- passwordField, confirmPasswordField: JPasswordField
- showPasswordsBox: JCheckBox
- defaultEchoChar: char
- parent: LoginFrame
+ SignupFrame(parent: LoginFrame)
+ actionPerformed(event: ActionEvent): void
- showPasswords(): void
- createAccount(): void
CustomerDashboard «implements ActionListener»
- customer: Customer
- model: DefaultTableModel
- table: JTable
- info: JLabel
- teal, background, textColor, lightTeal, borderColor: Color
+ CustomerDashboard(customer: Customer)
- createHeader(): void
- createTable(): void
- createBottomPanel(): void
- createButton(text: String, color: Color, command: String): JButton
- refreshTable(): void
- getSelectedAppointment(): Appointment
- bookAppointment(): void
- editSelected(): void
- cancelSelected(): void
+ actionPerformed(event: ActionEvent): void
AdminDashboard «implements ActionListener»
- admin: Admin
- model: DefaultTableModel
- table: JTable
- info: JLabel
- searchText: String
- teal, background, textColor, lightTeal, borderColor: Color
+ AdminDashboard(admin: Admin)
- createHeader(): void
- createTable(): void
- createBottomPanel(): void
- createButton(text: String, color: Color, command: String): JButton
- bookAppointment(): void
- matchesSearch(appointment: Appointment): boolean
- refreshTable(): void
- getSelectedAppointment(): Appointment
- updateStatus(): void
- deleteSelected(): void
- search(): void
- viewCustomers(): void
+ actionPerformed(event: ActionEvent): void
Receipt «implements ActionListener»
- dialog: JDialog
- appointment: Appointment
- text: String
+ showReceipt(appointment: Appointment, parent: JFrame): void {static}
+ Receipt(appointment: Appointment, parent: JFrame)
+ actionPerformed(event: ActionEvent): void
- buildText(appointment: Appointment): String {static}
ReadOnlyTableModel
+ ReadOnlyTableModel(columns: String[])
+ isCellEditable(row: int, column: int): boolean
«Swing» DefaultTableModel
«Swing» JFrame
«Swing» JDialog