

Cucumber Report

02-Jan-2024, 1:10:56 pm

Start : Jan 02, 1:04:56.349 pm

End : Jan 02, 1:10:51.771 pm

Duration : 5 m 55.422 s

Features

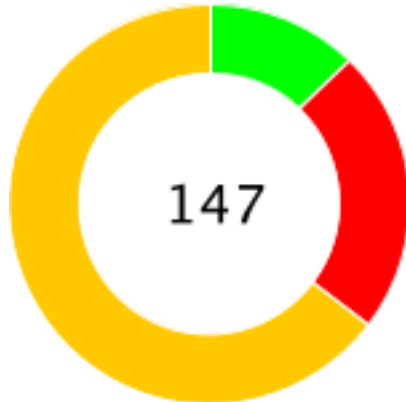
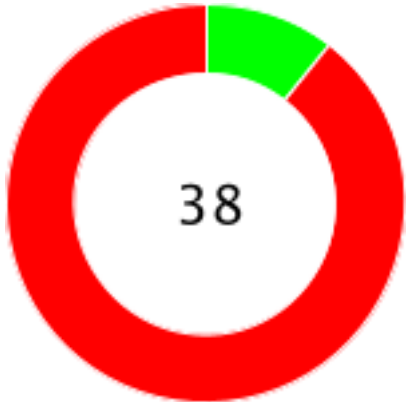
Scenarios

Steps

PASSED - 1
FAILED - 5
SKIPPED - 0

PASSED - 4
FAILED - 34
SKIPPED - 0

PASSED - 18
FAILED - 34
SKIPPED - 95



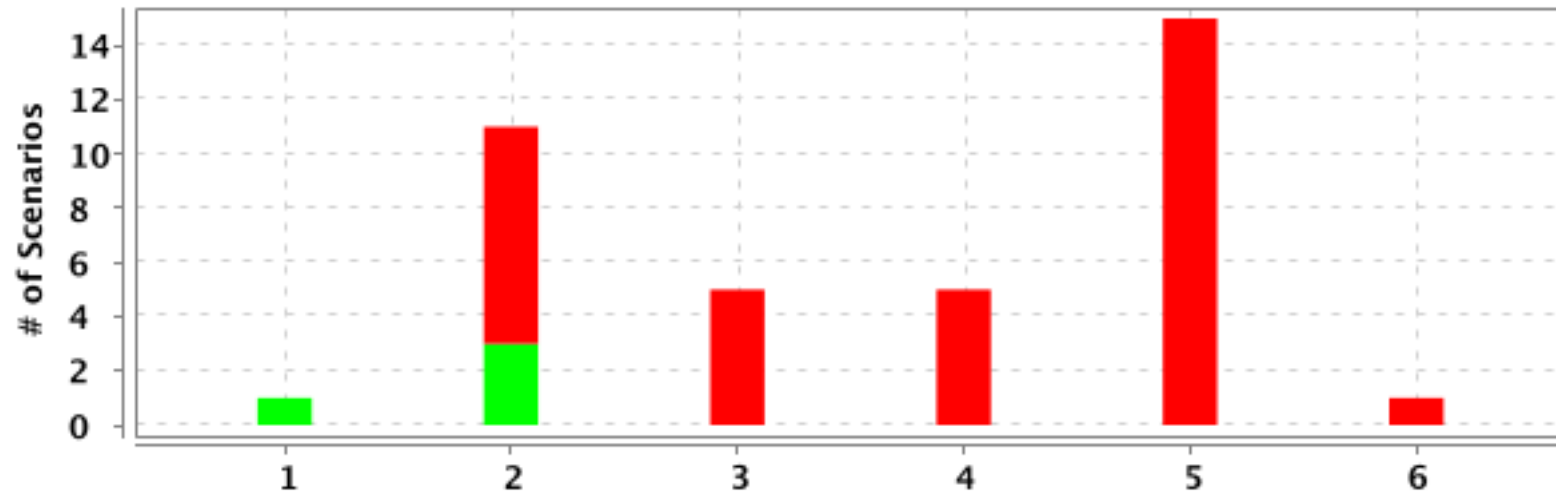
| Feature | | Scenario | | | | Step | | | |
|---|--------------|----------|---|----|---|------|----|----|----|
| Name | Duration | T | P | F | S | T | P | F | S |
| <u>Login</u> | 12.480 s | 1 | 1 | 0 | 0 | 4 | 4 | 0 | 0 |
| <u>Reports feature</u> | 5 m 28.489 s | 11 | 3 | 8 | 0 | 39 | 14 | 8 | 17 |
| <u>Tiers feature</u> | 12.294 s | 5 | 0 | 5 | 0 | 18 | 0 | 5 | 13 |
| <u>Add new program & platform configuration</u> | 0.817 s | 5 | 0 | 5 | 0 | 26 | 0 | 5 | 21 |
| <u>Member search feature</u> | 1.029 s | 15 | 0 | 15 | 0 | 54 | 0 | 15 | 39 |
| <u>Member search filter feature</u> | 0.021 s | 1 | 0 | 1 | 0 | 6 | 0 | 1 | 5 |

| # | Feature Name | Scenario Name |
|----|------------------------|---|
| 1 | <u>Reports feature</u> | <u>Delete the recently created accrual reports in the transactional section</u> |
| 2 | | <u>Create the accrual reports in the transactional section</u> |
| 3 | | <u>View the recently created communication report in the communication section</u> |
| 4 | | <u>Delete the recently created accrual reports in the transactional section</u> |
| 5 | | <u>Create the accrual reports in the transactional section</u> |
| 6 | | <u>Download the recently created accrual reports in the transactional section</u> |
| 7 | | <u>Delete the recently created accrual reports in the transactional section</u> |
| 8 | | <u>View the logs by using search file name and select the require date and check the logs details</u> |
| 9 | <u>Tiers feature</u> | <u>Create a new tier</u> |
| 10 | | <u>create second Tier</u> |
| 11 | | <u>Edit Tier</u> |
| 12 | | <u>Delete Tier</u> |

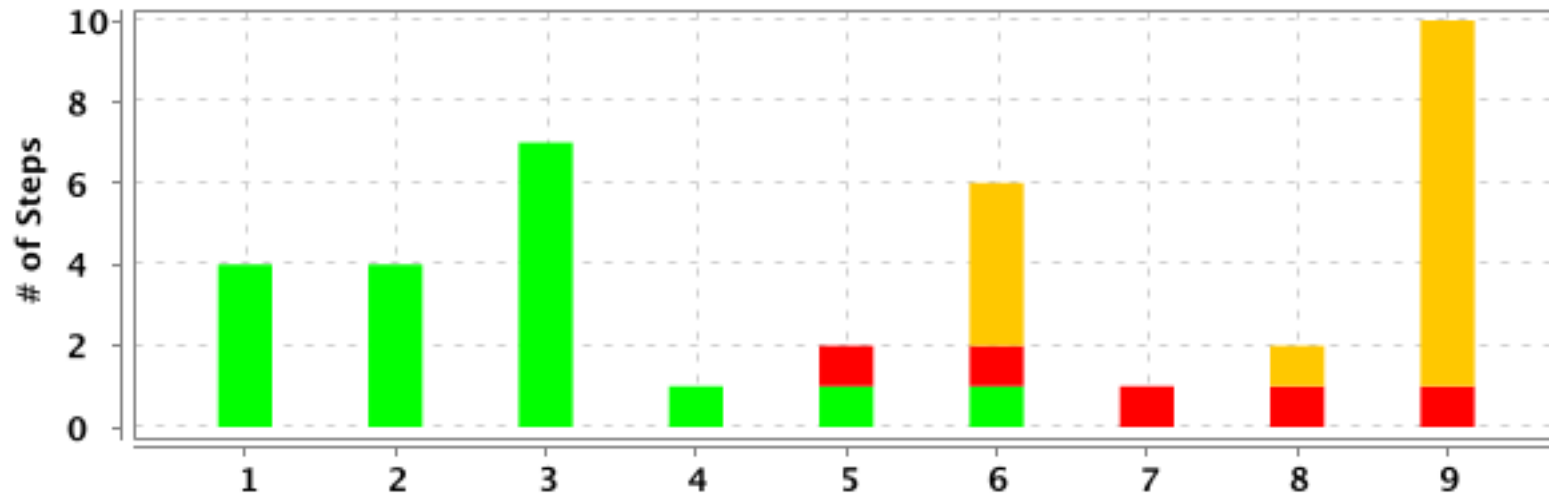
| # | Feature Name | Scenario Name |
|----|---|--|
| 13 | <u>Tiers feature</u> | <u>Tier Settings</u> |
| 14 | <u>Add new program & platform configuration</u> | <u>Test and verify Add new program</u> |
| 15 | | <u>Test and verify Add company deatils</u> |
| 16 | | <u>Test and verify Add Program details</u> |
| 17 | | <u>Test and verify Points Configuration details</u> |
| 18 | | <u>Test and Select newly created program & Verify Configurations details</u> |
| 19 | <u>Member search feature</u> | <u>Navigate to member search module, enter different search string and validate the result</u> |
| 20 | | <u>Navigate to member search module, enter different search string and validate the result</u> |
| 21 | | <u>Navigate to member search module, enter different search string and validate the result</u> |
| 22 | | <u>Navigate to member search module, enter different search string and validate the result</u> |

| # | Feature Name | Scenario Name |
|----|-------------------------------------|---|
| 23 | <u>Member search feature</u> | <u>issue manual credit/debit points</u> |
| 24 | | <u>issue manual credit/debit points</u> |
| 25 | | <u>Suspend member</u> |
| 26 | | <u>Re-Activate member</u> |
| 27 | | <u>Check Audit log for a member</u> |
| 28 | | <u>Search transactions for member using date range</u> |
| 29 | | <u>Navigate to member search and click on manage attribute link</u> |
| 30 | | <u>Create different member attributes using manage_member_attribute</u> |
| 31 | | <u>Create different member attributes using manage_member_attribute</u> |
| 32 | | <u>Create different member attributes using manage_member_attribute</u> |
| 33 | | <u>Create different member attributes using manage_member_attribute</u> |
| 34 | <u>Member search filter feature</u> | <u>Apply any single filter with its respective operator and do a search</u> |

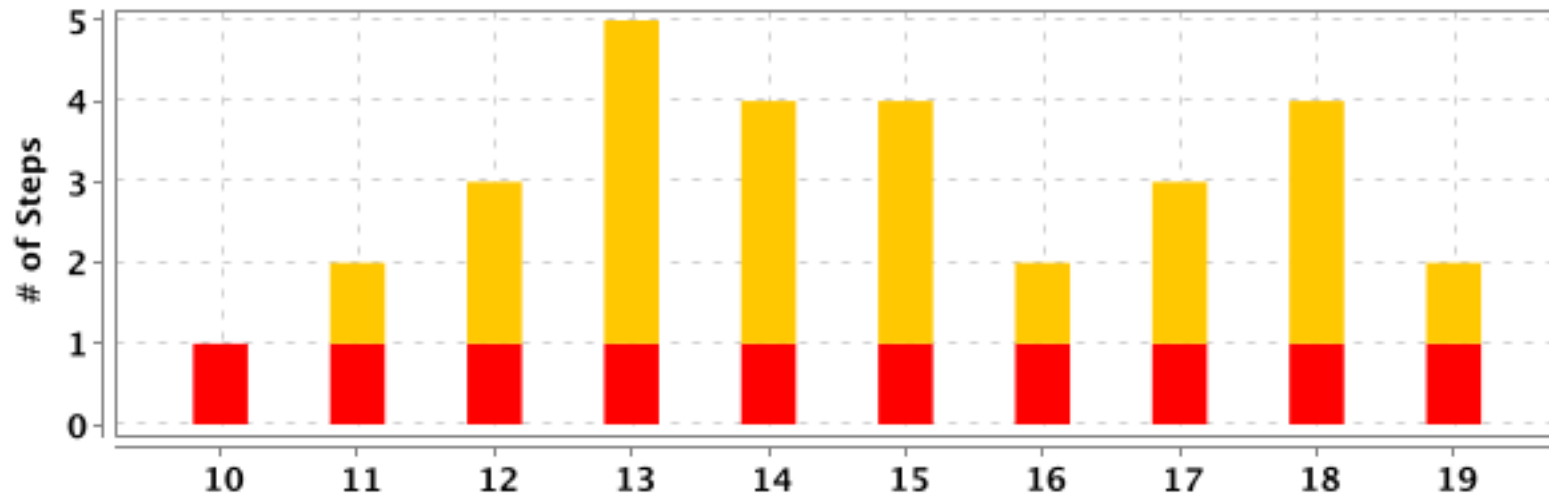
| TAG | Scenario | | | | Feature | | | |
|--------------------------------|-----------------|----------|----------|----------|----------------|----------|----------|----------|
| Name | T | P | F | S | T | P | F | S |
| @AppLoginSmoketest1 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 0 |
| @ReportSettingsSmoketest1 | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 0 |
| @TransactionalSmoketest1 | 3 | 2 | 1 | 0 | 1 | 0 | 1 | 0 |
| @CommunicationReportSmoketest1 | 3 | 0 | 3 | 0 | 1 | 0 | 1 | 0 |
| @MembersReportSmoketest1 | 3 | 0 | 3 | 0 | 1 | 0 | 1 | 0 |
| @LogsSmoketest1 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @TiersSmoketest1 | 5 | 0 | 5 | 0 | 1 | 0 | 1 | 0 |
| @Smoketest1 | 5 | 0 | 5 | 0 | 1 | 0 | 1 | 0 |
| @MembersSmoketest1 | 15 | 0 | 15 | 0 | 1 | 0 | 1 | 0 |
| @MemberSearchFilterSmoketest1 | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |



| # | Feature Name | T | P | F | S | Duration |
|---|---|----|---|----|---|--------------|
| 1 | <u>Login</u> | 1 | 1 | 0 | 0 | 12.480 s |
| 2 | <u>Reports feature</u> | 11 | 3 | 8 | 0 | 5 m 28.489 s |
| 3 | <u>Tiers feature</u> | 5 | 0 | 5 | 0 | 12.294 s |
| 4 | <u>Add new program & platform configuration</u> | 5 | 0 | 5 | 0 | 0.817 s |
| 5 | <u>Member search feature</u> | 15 | 0 | 15 | 0 | 1.029 s |
| 6 | <u>Member search filter feature</u> | 1 | 0 | 1 | 0 | 0.021 s |

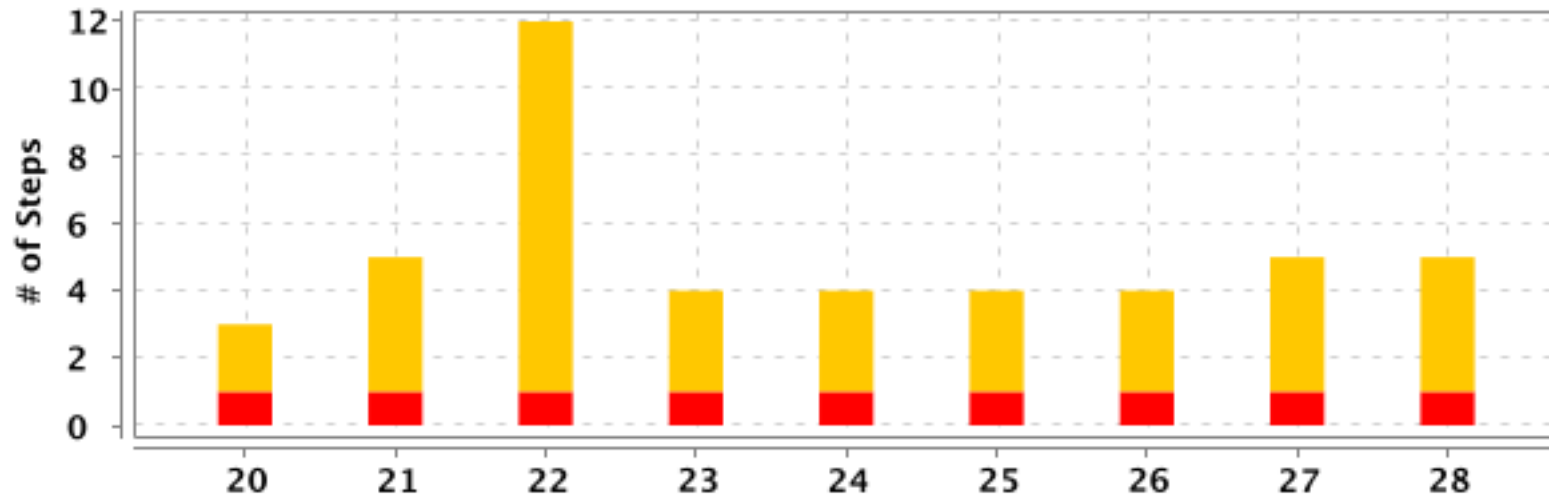


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|------------------------|--|----|---|---|---|--------------|
| 1 | <u>Login</u> | <u>Intialize browser,login to the application</u> | 4 | 4 | 0 | 0 | 12.477 s |
| 2 | <u>Reports feature</u> | <u>Change the reports settings accordingly</u> | 4 | 4 | 0 | 0 | 17.069 s |
| 3 | | <u>Create the accrual reports in the transactional section</u> | 7 | 7 | 0 | 0 | 1 m 24.192 s |
| 4 | | <u>Validate the recently created report in the transactional section</u> | 1 | 1 | 0 | 0 | 5.212 s |
| 5 | | <u>Delete the recently created accrual reports in the transactional section</u> | 2 | 1 | 1 | 0 | 16.508 s |
| 6 | | <u>Create the accrual reports in the transactional section</u> | 6 | 1 | 1 | 4 | 3 m 20.754 s |
| 7 | | <u>View the recently created communication report in the communication section</u> | 1 | 0 | 1 | 0 | 0.066 s |
| 8 | | <u>Delete the recently created accrual reports in the transactional section</u> | 2 | 0 | 1 | 1 | 0.038 s |
| 9 | | <u>Create the accrual reports in the transactional section</u> | 10 | 0 | 1 | 9 | 2.081 s |



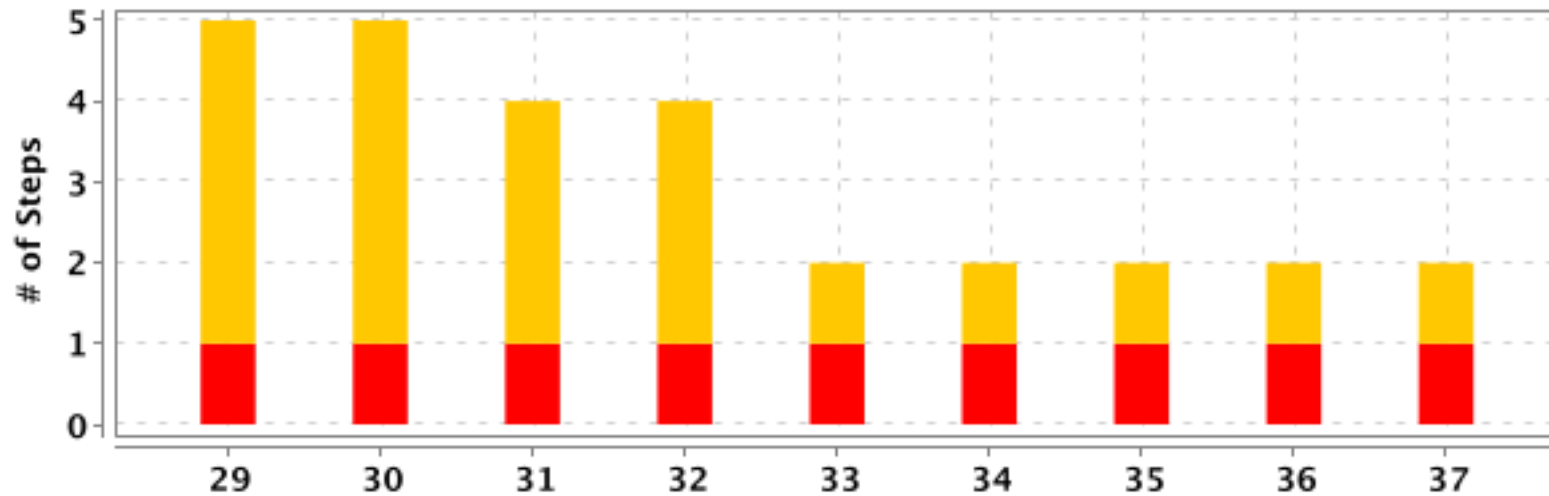
| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|---|---|---|---|---|---|----------|
| 10 | <u>Reports feature</u> | <u>Download the recently created accrual reports in the transactional section</u> | 1 | 0 | 1 | 0 | 0.023 s |
| 11 | | <u>Delete the recently created accrual reports in the transactional section</u> | 2 | 0 | 1 | 1 | 0.047 s |
| 12 | | <u>View the logs by using search file name and select the require date and check the logs details</u> | 3 | 0 | 1 | 2 | 2.057 s |
| 13 | <u>Tiers feature</u> | <u>Create a new tier</u> | 5 | 0 | 1 | 4 | 1.046 s |
| 14 | | <u>create second Tier</u> | 4 | 0 | 1 | 3 | 4.025 s |
| 15 | | <u>Edit Tier</u> | 4 | 0 | 1 | 3 | 3.027 s |
| 16 | | <u>Delete Tier</u> | 2 | 0 | 1 | 1 | 3.093 s |
| 17 | | <u>Tier Settings</u> | 3 | 0 | 1 | 2 | 1.026 s |
| 18 | <u>Add new program & platform configuration</u> | <u>Test and verify Add new program</u> | 4 | 0 | 1 | 3 | 0.548 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--------------|--|---|---|---|---|----------|
| 19 | | <u>Test and verify Add company deatils</u> | 2 | 0 | 1 | 1 | 0.032 s |



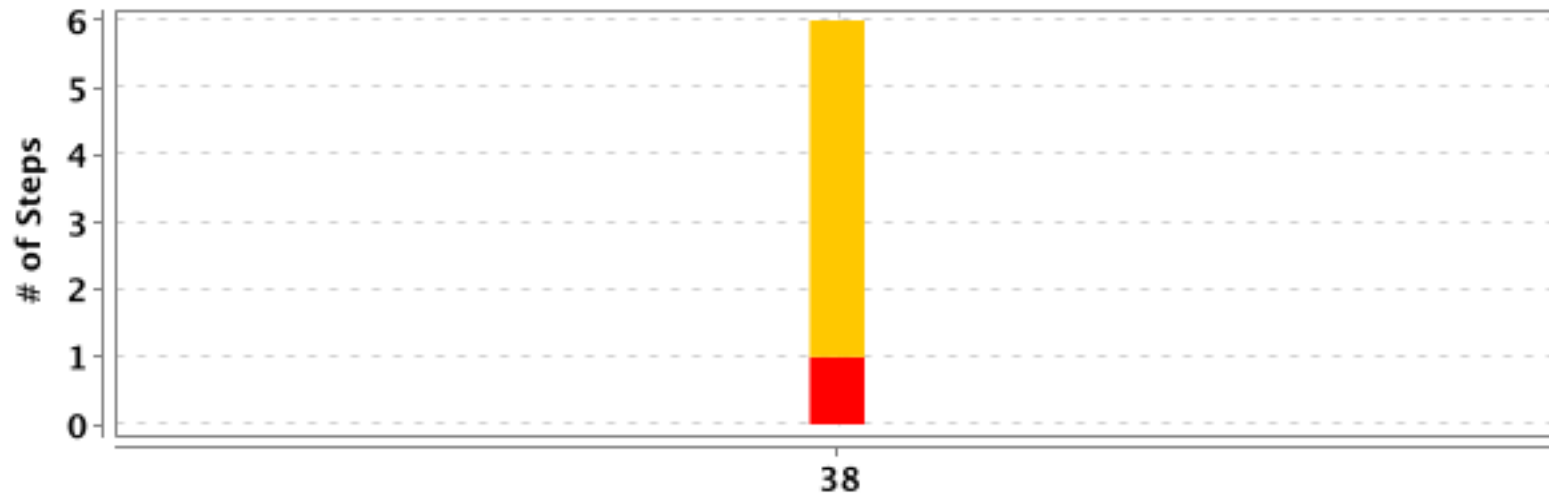
| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|---|--|----|---|---|----|----------|
| 20 | <u>Add new program & platform configuration</u> | <u>Test and verify Add Program details</u> | 3 | 0 | 1 | 2 | 0.019 s |
| 21 | | <u>Test and verify Points Configuration details</u> | 5 | 0 | 1 | 4 | 0.046 s |
| 22 | | <u>Test and Select newly created program & Verify Configurations details</u> | 12 | 0 | 1 | 11 | 0.010 s |
| 23 | <u>Member search feature</u> | <u>Navigate to member search module, enter different search string and validate the result</u> | 4 | 0 | 1 | 3 | 0.066 s |
| 24 | | <u>Navigate to member search module, enter different search string and validate the result</u> | 4 | 0 | 1 | 3 | 0.018 s |
| 25 | | <u>Navigate to member search module, enter different search string and validate the result</u> | 4 | 0 | 1 | 3 | 0.041 s |
| 26 | | <u>Navigate to member search module, enter different search string and validate the result</u> | 4 | 0 | 1 | 3 | 0.099 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--------------|---|---|---|---|---|----------|
| 27 | | <u>issue manual credit/debit points</u> | 5 | 0 | 1 | 4 | 0.041 s |
| 28 | | <u>issue manual credit/debit points</u> | 5 | 0 | 1 | 4 | 0.092 s |





| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|------------------------------|---|---|---|---|---|----------|
| 29 | <u>Member search feature</u> | <u>Suspend member</u> | 5 | 0 | 1 | 4 | 0.083 s |
| 30 | | <u>Re-Actiavte member</u> | 5 | 0 | 1 | 4 | 0.035 s |
| 31 | | <u>Check Audit log for a member</u> | 4 | 0 | 1 | 3 | 0.040 s |
| 32 | | <u>Search transactions for member using date range</u> | 4 | 0 | 1 | 3 | 0.046 s |
| 33 | | <u>Navigate to member search and click on manage attribute link</u> | 2 | 0 | 1 | 1 | 0.018 s |
| 34 | | <u>Create different member attributes using manage_member_attribute</u> | 2 | 0 | 1 | 1 | 0.033 s |
| 35 | | <u>Create different member attributes using manage_member_attribute</u> | 2 | 0 | 1 | 1 | 0.013 s |
| 36 | | <u>Create different member attributes using manage_member_attribute</u> | 2 | 0 | 1 | 1 | 0.017 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--------------|--|---|---|---|---|----------|
| 37 | | Create different member attributes using <u>manage_member_attribute</u> | 2 | 0 | 1 | 1 | 0.013 s |

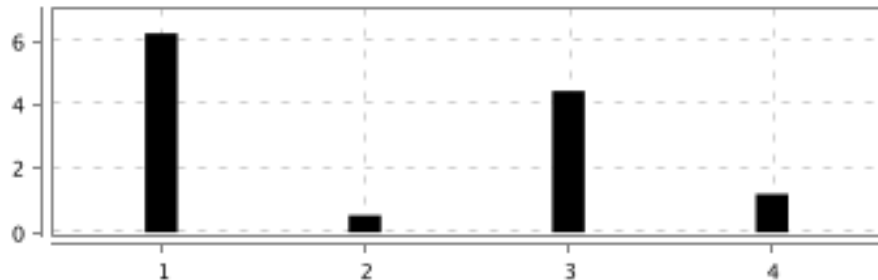



| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|-------------------------------------|---|---|---|---|---|----------|
| 38 | <u>Member search filter feature</u> | <u>Apply any single filter with its respective operator and do a search</u> | 6 | 0 | 1 | 5 | 0.021 s |

Login



| | | | | | |
|--------------------------------------|---------------------|--|---|--|---|
| PASSED | DURATION - 12.480 s | Scenarios Total - 1 Pass - 1 Fail - 0 Skip - 0 |  | Steps Total - 4 Pass - 4 Fail - 0 Skip - 0 |  |
| / 1:04:56.349 pm // 1:05:08.829 pm / | | | | | |
| | | | | | |

Intialize browser,login to the application

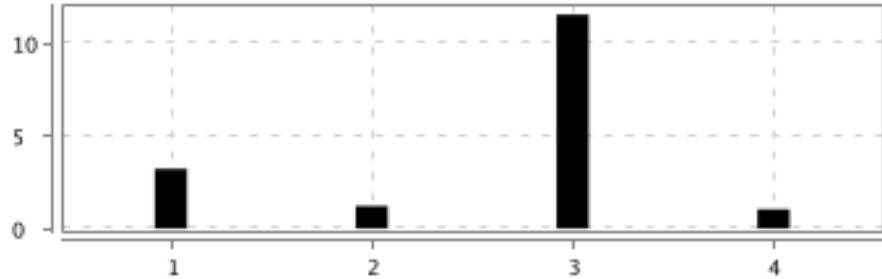

| | | | |
|--|--|---|---|
| <div>PASSED</div> <div>DURATION - 12.477 s</div> |  | <div>Steps</div> <div>Total - 4</div> <div>Pass - 4</div> <div>Fail - 0</div> <div>Skip - 0</div> |  |
| / 1:04:56.352 pm // 1:05:08.829 pm / | | | |
| Login | | | |
| @AppLoginSmoketest1 | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given Login to the application using username and password | PASSED | 6.241 s |
| 2 | When validate if the title is "Giift LBMS" | PASSED | 0.538 s |
| 3 | Then click on the profile section | PASSED | 4.437 s |
| 4 | Then select the program "A program four" | PASSED | 1.202 s |

Reports feature

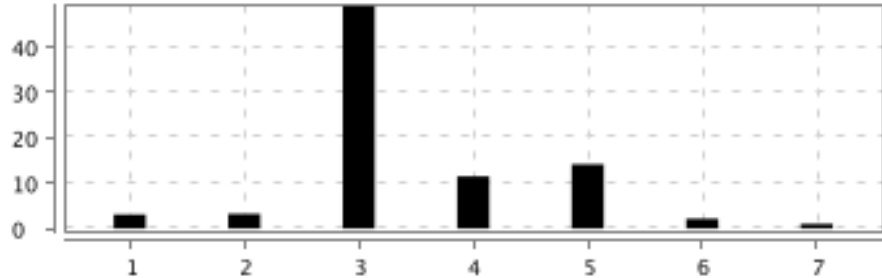

| | | | | | |
|--------------------------------------|-------------------------|---|---|---|---|
| FAILED | DURATION - 5 m 28.489 s | Scenarios Total - 11 Pass - 3 Fail - 8 Skip - 0 |  | Steps Total - 39 Pass - 14 Fail - 8 Skip - 17 |  |
| / 1:05:08.922 pm // 1:10:37.411 pm / | | | | | |
| | | | | | |

Change the reports settings accordingly

| | | | |
|--|---|---|--|
| <div>PASSED</div> <div>DURATION - 17.069 s</div> | <div></div> | <div>Steps</div> <div>Total - 4</div> <div>Pass - 4</div> <div>Fail - 0</div> <div>Skip - 0</div> | <div></div> |
| <div>/ 1:05:08.922 pm // 1:05:25.991 pm /</div> | | | |
| <div>Reports feature</div> | | | |
| <div>@ReportSettingsSmoketest1</div> | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given User navigates to reports module | PASSED | 3.226 s |
| 2 | When user clicks on the settings | PASSED | 1.222 s |
| 3 | And user change the Financial Year to "1st July - 30th June" Week Starting on to "Monday" Delay in Generation "1" Days and Historical View as "10" Days | PASSED | 11.544 s |
| 4 | Then user should get the success message as "Setting saved sucessfully" | PASSED | 1.047 s |

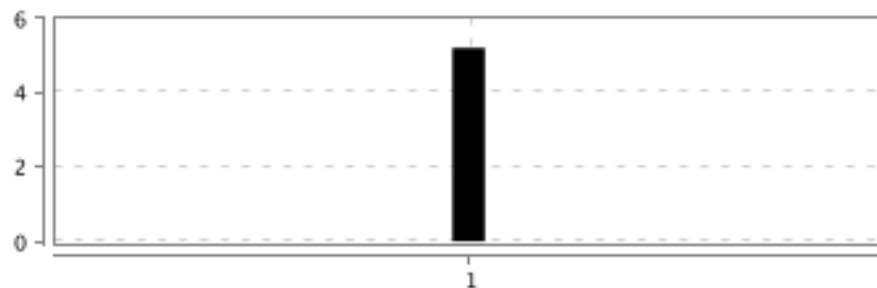

Create the accrual reports in the transactional section

| | | | |
|--|--|---|---|
| <div>PASSED</div> <div>DURATION - 1 m 24.192 s</div> | <div></div> | <div>Steps</div> <div>Total - 7</div> <div>Pass - 7</div> <div>Fail - 0</div> <div>Skip - 0</div> | <div></div> |
| <div>/ 1:05:26.062 pm // 1:06:50.254 pm /</div> | | | |
| <div>Reports feature</div> | | | |
| <div>@TransactionalSmoketest1</div> | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given User navigates to reports module | PASSED | 3.124 s |
| 2 | When user selects "transactional" and click on add new view and add the report name as "Spend points report" | PASSED | 3.216 s |
| 3 | And add the report column as "Transaction Id" "Transaction Amount" "Relation Reference" "Points Issued" "Transaction Date" "Processing Date" "Type" "Product Code" "Sub Product Code" "Narration" "Points Spoiled" "Merchant Name" "Transaction Count" "Impacted Members" "Total Points Issued" "Total Amount" "Total Points Spoiled" | PASSED | 48.964 s |
| 4 | And add the filter as "Credit by accrual" "Credit by bonus" "Debit By Bonus" "Debit By Cashback" | PASSED | 11.518 s |
| 5 | And select the period of generation as "Daily" "Weekly" "Monthly" "Quarterly" "Yearly" | PASSED | 14.157 s |
| 6 | And clicks on the "Save" button | PASSED | 2.158 s |



| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 7 | Then user should get the success message as "Report saved successfully" | PASSED | 1.031 s |

Validate the recently created report in the transactional section


| | | | | |
|--------------------------------------|--------------------|--|--|---|
| PASSED | DURATION - 5.212 s |  | Steps Total - 1 Pass - 1 Fail - 0 Skip - 0 |  |
| / 1:06:50.342 pm // 1:06:55.554 pm / | | | | |
| Reports feature | | | | |
| @TransactionalSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | When user validate the existing report "Spend points report" and click on "View" | PASSED | 5.196 s |

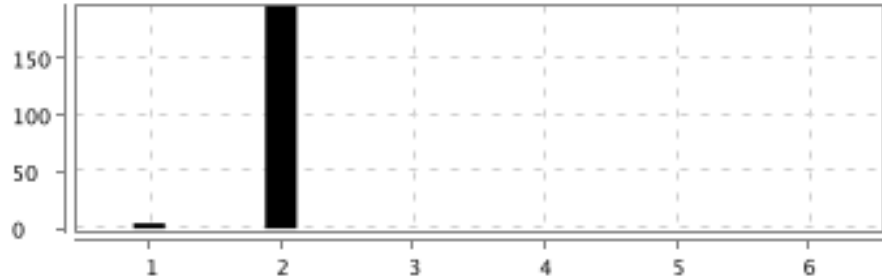

Delete the recently created accrual reports in the transactional section

| | | | | |
|--------------------------------------|---------------------|---|--|--|
| FAILED | DURATION - 16.508 s |  | Steps Total - 2 Pass - 1 Fail - 1 Skip - 0 |  |
| / 1:06:55.602 pm // 1:07:12.110 pm / | | | | |
| Reports feature | | | | |
| @TransactionalSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | When user validate the existing report "Spend points report" and click on "Delete" | PASSED | 5.196 s |
| 2 | Then user should get the success message as "Report deleted successfully" | FAILED | 11.051 s |
| | org.openqa.selenium.NoSuchElementException: For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors/no-such-element-exception Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, findElement {using=xpath, value="//div[text()='Report deleted successfully']}]] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | <pre> at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy27.getText(Unknown Source) at stepDefinition.ReportsStepDefinition.user_should_get_the_success_message_as(ReportsStepDefinition.java:85) at ?.user should get the success message as "Report deleted successfully"(file:///Users/basavaraj/Automation/Pramod/v2/LBMScloud/src/test/java/features/Reports.feature:34) * Not displayable characters are replaced by '?'. </pre> | | |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) | PASSED | 0.252 s |
| | Delete the recently created accrual reports in the transactional section | | |
| |  | | |

Create the accrual reports in the transactional section

| | | | | |
|--|--|--|---|---|
| <div>FAILED</div> <div>DURATION - 3 m 20.754 s</div> | |  | <div>Steps</div> <div>Total - 6</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 4</div> |  |
| / 1:07:12.134 pm // 1:10:32.888 pm / | | | | |
| Reports feature | | | | |
| @CommunicationReportSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|--------------|
| 1 | When user selects "Communication" and click on add new view and add the report name as "Email and SMS communication report" | PASSED | 4.720 s |
| 2 | And add the report column as "Template Name" "Email Status" "SMS Status" "Date Email/SMS Sent" "Communication Channel" "Member ID" "PhoneNumber" "Member Name" "Email" "Total Communication Sent" "Total Success Delivery" "Total Failed Delivery" org.openqa.selenium.TimeoutException: java.util.concurrent.TimeoutException Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, sendKeysToElement {id=node-7B094E86-62D3-45F8-8460-0C3730D434E0, value=[Ljava.lang.CharSequence;@361b3ca6]} Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Element: [[SafariDriver: Safari on mac (EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8)] -> xpath: //div[text()='Report Column']/parent::div/div/div/div/input] Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute0(JdkHttpClient.java:402) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute(JdkHttpClient.java:358) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:224) at org.openqa.selenium.remote.RemoteWebElement.sendKeys(RemoteWebElement.java:111) at jdk.internal.reflect.GeneratedMethodAccessor99.invoke(Unknown Source) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:51) at jdk.proxy2/jdk.proxy2.\$Proxy27.sendKeys(Unknown Source) at resources.BrowserUtils.enterText(BrowserUtils.java:81) | FAILED | 3 m 15.961 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <p>at stepDefinition.ReportsStepDefinition.add_the_report_column_as(ReportsStepDefinition.java:345)</p> <p>at ?.add the report column as "Template Name" "Email Status" "SMS Status" "Date Email/SMS Sent" "Communication Channel" "Member ID" "PhoneNumber" "Member Name" "Email" "Total Communication Sent" "Total Success Delivery" "Total Failed Delivery"(file:///Users/basavaraj/Automation/Pramod/v2/LBMScloud/src/test/java/features/Reports.feature:42)</p> <p>Caused by: java.util.concurrent.TimeoutException</p> <p>at java.base/java.util.concurrent.CompletableFuture.timedGet(CompletableFuture.java:1960)</p> <p>at java.base/java.util.concurrent.CompletableFuture.get(CompletableFuture.java:2095)</p> <p>at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute0(JdkHttpClient.java:385)</p> <p>at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)</p> <p>at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55)</p> <p>at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute(JdkHttpClient.java:358)</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:188)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)</p> <p>at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523)</p> <p>at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:224)</p> <p>at org.openqa.selenium.remote.RemoteWebElement.sendKeys(RemoteWebElement.java:111)</p> <p>atjdk.internal.reflect.GeneratedMethodAccessor99.invoke(Unknown Source)</p> <p>at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)</p> <p>at java.base/java.lang.reflect.Method.invoke(Method.java:568)</p> <p>at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:51)</p> <p>atjdk.proxy2/jdk.proxy2.\$Proxy27.sendKeys(Unknown Source)</p> <p>at resources.BrowserUtils.enterText(BrowserUtils.java:81)</p> <p>at stepDefinition.ReportsStepDefinition.add_the_report_column_as(ReportsStepDefinition.java:345)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)</p> <p>at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)</p> <p>at java.base/java.lang.reflect.Method.invoke(Method.java:568)</p> <p>at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)</p> <p>at io.cucumber.java.Invoker.invoke(Invoker.java:24)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)</p> <p>at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)</p> <p>at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:56)</p> <p>at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:84)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)</p> <p>at io.cucumber.junit.PickleRunners\$WithStepDescriptions.lambda\$run\$1(PickleRunners.java:109)</p> | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:130) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:130) at io.cucumber.junit.PickleRunners\$WithStepDescriptions.run(PickleRunners.java:106) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$3.run(ParentRunner.java:238) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:63) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:236) at org.junit.runners.ParentRunner.access\$000(ParentRunner.java:53) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:229) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner.run(ParentRunner.java:309) at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) * Not displayable characters are replaced by '?'. | | |
| 3 | And add the filter as "SMS Communication Channel" "Email Communication Channel" | SKIPPED | 0.008 s |
| 4 | And select the period of generation as "Daily" "Weekly" "Monthly" "Quarterly" "Yearly" | SKIPPED | 0.001 s |
| 5 | And clicks on the "Save" button | SKIPPED | 0.000 s |
| 6 | Then user should get the success message as "Report saved successfully" | SKIPPED | 0.001 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) | FAILED | 0.036 s |
| | org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A- | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <p>9B71-2E04E54082D8, screenshot {} Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8</p> <p>at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40)</p> | | |

View the recently created communication report in the communication section



| | | | | |
|--------------------------------------|---------------------------|---|---|--|
| FAILED | DURATION - 0.066 s |  | Steps Total - 1 Pass - 0 Fail - 1 Skip - 0 |  |
| / 1:10:32.932 pm // 1:10:32.998 pm / | | | | |
| Reports feature | | | | |
| @CommunicationReportSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | <p>When user validate the existing report "Email and SMS communication report" and click on "View"</p> <p>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, findElements [using=xpath, value=//table[@class='MuiTable-root tss-900muf-MUIDataTable-tableRoot css-1owb465']/td]] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC:</p> | FAILED | 0.049 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <pre>{DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElements(ElementLocation.java:182) at org.openqa.selenium.remote.ElementLocation.findElements(ElementLocation.java:103) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:373) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:367) at org.openqa.selenium.support.pagefactory.ByAll.findElements(ByAll.java:64) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$1.findElements(ElementLocation.java:149) at org.openqa.selenium.remote.ElementLocation.findElements(ElementLocation.java:103) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:373) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:367) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElements(DefaultElementLocator.java:83) at org.openqa.selenium.support.pagefactory.internal.LocatingElementListHandler.invoke(LocatingElementListHandler.java:36) at jdk.proxy2/jdk.proxy2.\$Proxy29.size(Unknown Source) at stepDefinition.ReportsStepDefinition.user_validate_the_existing_report_and_click_on(ReportsStepDefinition.java:263) at ?.user validate the existing report "Email and SMS communication report" and click on "View"(file:///Users/basavaraj/Automation/Pramod/ v2/LBMSCloud/src/test/java/features/Reports.feature:51) * Not displayable characters are replaced by '?'. </pre> | | |
| | <p>AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario)</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A- 9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) </pre> | FAILED | 0.007 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) </pre> | | |

Delete the recently created accrual reports in the transactional section



| | | | | |
|--------------------------------------|--------------------|--|--|---|
| FAILED | DURATION - 0.038 s |  | Steps Total - 2 Pass - 0 Fail - 1 Skip - 1 |  |
| / 1:10:33.057 pm // 1:10:33.095 pm / | | | | |
| Reports feature | | | | |
| @CommunicationReportSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | <p>When user validate the existing report "Email and SMS communication report" and click on "Delete"</p> <pre> org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, findElements {using=xpath, value=//table[@class='MuiTable-root tss-900muf-MUIDataTable-tableRoot css-1owb465']/td}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableIcCandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) </pre> | FAILED | 0.029 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | <pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElements(ElementLocation.java:182) at org.openqa.selenium.remote.ElementLocation.findElements(ElementLocation.java:103) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:373) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:367) at org.openqa.selenium.support.pagefactory.ByAll.findElements(ByAll.java:64) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$1.findElements(ElementLocation.java:149) at org.openqa.selenium.remote.ElementLocation.findElements(ElementLocation.java:103) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:373) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:367) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElements(DefaultElementLocator.java:83) at org.openqa.selenium.support.pagefactory.internal.LocatingElementListHandler.invoke(LocatingElementListHandler.java:36) at jdk.proxy2/jdk.proxy2.\$Proxy29.size(Unknown Source) at stepDefinition.ReportsStepDefinition.user_validate_the_existing_report_and_click_on(ReportsStepDefinition.java:263) at ?.user validate the existing report "Email and SMS communication report" and click on "Delete"(file:///Users/basavaraj/Automation/Pramod/ v2/LBMSCloud/src/test/java/features/Reports.feature:55) * Not displayable characters are replaced by '?'. </pre> | | |
| 2 | Then user should get the success message as "Report deleted sucessfully" | SKIPPED | 0.000 s |
| | <p>AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A- 9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableIcCandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) </pre> | FAILED | 0.007 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | | |

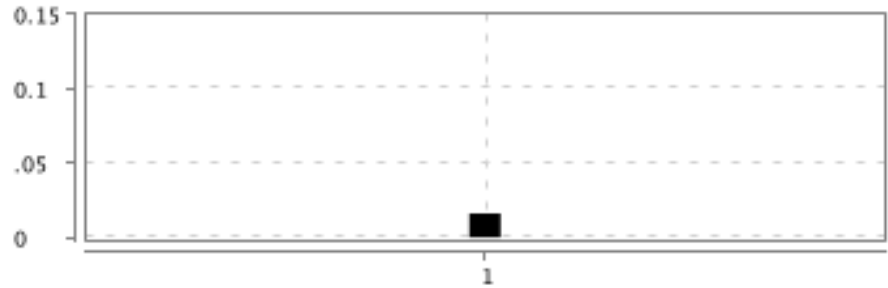

Create the accrual reports in the transactional section

| | | | | |
|---|--|---|--|--|
| <div>FAILED</div> <div>DURATION - 2.081 s</div> | | <div></div> | <div>Steps</div> <div>Total - 10</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 9</div> | <div></div> |
| <div>/ 1:10:33.129 pm // 1:10:35.210 pm /</div> | | | | |
| <div>Reports feature</div> | | | | |
| <div>@MembersReportSmoketest1</div> | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given User navigates to reports module org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) | FAILED | 2.035 s |

| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | at stepDefinition.ReportsStepDefinition.user_navigates_to_reports_module(ReportsStepDefinition.java:28) at ?.User navigates to reports module(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/Reports.feature:63) * Not displayable characters are replaced by '?'. | | |
| 2 | When user selects "Members" and click on add new view and add the report name as "Members report" | SKIPPED | 0.001 s |
| 3 | And add the report column as "Member ID" "Member Name" "Email" "Phone Number" "Segment Tag" "Enrollment Date" "Tier" "Status" "DOB" "Gender" "Address" "Points Available" "Points Expired" "Points Redeemed" "Last Transaction" "Total Transactions" "Total Members" "Total Points Issued" "Total Points Redeemed" "Total Points Expired" | SKIPPED | 0.001 s |
| 4 | And select the period of generation as "Daily" "Weekly" "Monthly" "Quarterly" "Yearly" | SKIPPED | 0.001 s |
| 5 | And user click on the Add Filters link | SKIPPED | 0.001 s |
| 6 | And select the "Age" filter | SKIPPED | 0.000 s |
| 7 | And select operator "Is less than or equal to" then enter values1 "20" and click Add Filter button | SKIPPED | 0.002 s |
| 8 | And click on apply filter button and validate the filters | SKIPPED | 0.001 s |
| 9 | And clicks on the "Save" button | SKIPPED | 0.005 s |
| 10 | Then user should get the success message as "Report saved successfully" | SKIPPED | 0.001 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | FAILED | 0.022 s |

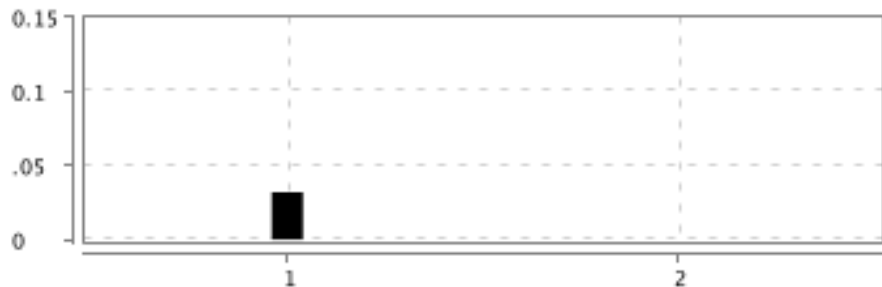

Download the recently created accrual reports in the transactional section

| | | | | |
|---|--|--|---|---|
| <div>FAILED</div> <div>DURATION - 0.023 s</div> | |  | <div>Steps</div> <div>Total - 1</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 0</div> |  |
| / 1:10:35.242 pm // 1:10:35.265 pm / | | | | |
| Reports feature | | | | |
| @MembersReportSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | <p>When user validate the existing report "Members report" and click on "View"</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, findElements {using=xpath, value=//table[@class='MuiTable-root tss-900muf-MUIDataTable-tableRoot css-1owb465']/tbody}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElements(ElementLocation.java:182) at org.openqa.selenium.remote.ElementLocation.findElements(ElementLocation.java:103) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:373) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:367) at org.openqa.selenium.support.pagefactory.ByAll.findElements(ByAll.java:64) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$1.findElements(ElementLocation.java:149) at org.openqa.selenium.remote.ElementLocation.findElements(ElementLocation.java:103) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:373) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:367)</pre> | FAILED | 0.016 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElements(DefaultElementLocator.java:83) at org.openqa.selenium.support.pagefactory.internal.LocatingElementListHandler.invoke(LocatingElementListHandler.java:36) at jdk.proxy2/jdk.proxy2.\$Proxy29.size(Unknown Source) at stepDefinition.ReportsStepDefinition.user_validate_the_existing_report_and_click_on(ReportsStepDefinition.java:263) at ?.user validate the existing report "Members report" and click on "View"(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/Reports.feature:78) * Not displayable characters are replaced by '?'. | | |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit.WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | FAILED | 0.005 s |

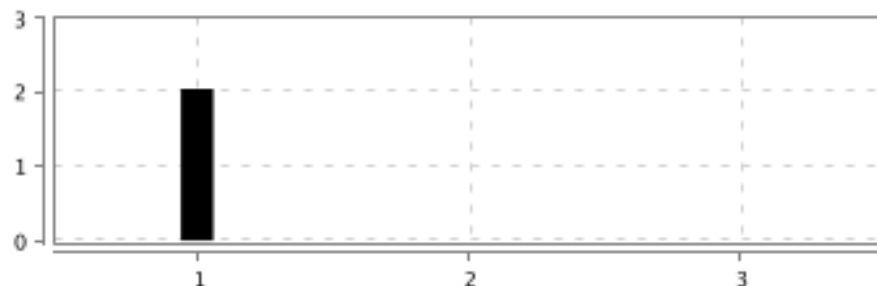

Delete the recently created accrual reports in the transactional section

| | | | | |
|---|--|---|---|--|
| <div>FAILED</div> <div>DURATION - 0.047 s</div> | | <div></div> | <div>Steps</div> <div>Total - 2</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 1</div> | <div></div> |
| <div>/ 1:10:35.288 pm // 1:10:35.335 pm /</div> | | | | |
| <div>Reports feature</div> | | | | |
| <div>@MembersReportSmoketest1</div> | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | <p>When user validate the existing report "Members report" and click on "Delete"</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, findElements {using=xpath, value=//table[@class='MuiTable-root tss-900muf-MUIDataTable-tableRoot css-1owb465']/td}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElements(ElementLocation.java:182) at org.openqa.selenium.remote.ElementLocation.findElements(ElementLocation.java:103) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:373) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:367) at org.openqa.selenium.support.pagefactory.ByAll.findElements(ByAll.java:64) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$1.findElements(ElementLocation.java:149) at org.openqa.selenium.remote.ElementLocation.findElements(ElementLocation.java:103) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:373) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:367) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElements(DefaultElementLocator.java:83) at org.openqa.selenium.support.pagefactory.internal.LocatingElementListHandler.invoke(LocatingElementListHandler.java:36)</pre> | FAILED | 0.032 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at jdk.proxy2/jdk.proxy2.\$Proxy29.size(Unknown Source) at stepDefinition.ReportsStepDefinition.user_validate_the_existing_report_and_click_on(ReportsStepDefinition.java:263) at ?.user validate the existing report "Members report" and click on "Delete"(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/Reports.feature:82) * Not displayable characters are replaced by '?'. | | |
| 2 | Then user should get the success message as "Report deleted sucessfully" | SKIPPED | 0.000 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | FAILED | 0.012 s |



View the logs by using search file name and select the require date and check the logs details

| | | | | |
|---|--|---|---|--|
| <div>FAILED</div> <div>DURATION - 2.057 s</div> | | <div></div> | <div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div> | <div></div> |
| / 1:10:35.354 pm // 1:10:37.411 pm / | | | | |
| Reports feature | | | | |
| @LogsSmoketest1 | | | | |

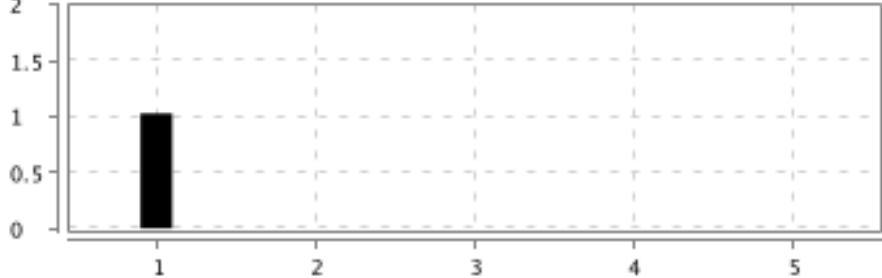

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | <p>Given User navigates to reports module</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableIcecCandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.ReportsStepDefinition.user_navigates_to_reports_module(ReportsStepDefinition.java:28) at ?.User navigates to reports module(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/Reports.feature:89) * Not displayable characters are replaced by '?'. </pre> | FAILED | 2.046 s |
| 2 | When user click on the logs section and search the file name by entering from date as "11/25/2023" and to date as "01/01/2024" | SKIPPED | 0.000 s |
| 3 | And user search the file name as "1812202325p5TXN" and validate the result | SKIPPED | 0.001 s |
| | <p>AFTER - stepDefinition.Hooks.takeScreenshotOnFailure(io.cucumber.java.Scenario)</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: </pre> | FAILED | 0.006 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <pre> mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) </pre> | | |

Tiers feature

| | | | | | |
|--------------------------------------|---------------------|-----------|--|------------|--|
| FAILED | DURATION - 12.294 s | Scenarios | | Steps | |
| / 1:10:37.449 pm // 1:10:49.743 pm / | | Total - 5 |  | Total - 18 |  |
| | | Pass - 0 | | Pass - 0 | |
| | | Fail - 5 | | Fail - 5 | |
| | | Skip - 0 | | Skip - 13 | |

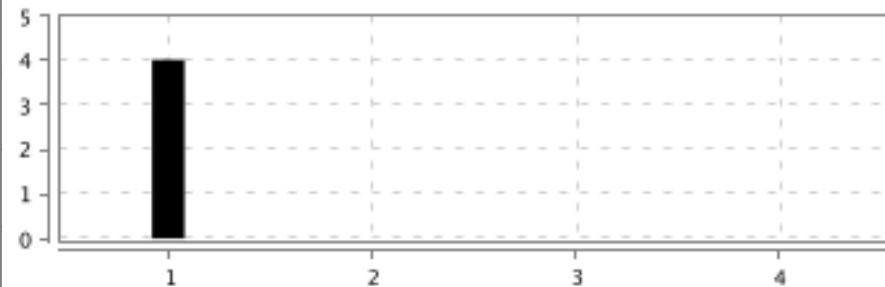

Create a new tier

| | | | | |
|--------------------------------------|--------------------|--|-----------|---|
| FAILED | DURATION - 1.046 s |  | Steps |  |
| / 1:10:37.449 pm // 1:10:38.495 pm / | | | Total - 5 | |
| Tiers feature | | | Pass - 0 | |
| @TiersSmoketest1 | | | Fail - 1 | |
| | | | Skip - 4 | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | <p>Given User navigates to tier module</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.TiersStepDefinition.user_navigates_to_tier_module(TiersStepDefinition.java:23) at ?.User navigates to tier module(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/Tiers.feature:5) * Not displayable characters are replaced by '?'.</pre> | FAILED | 1.028 s |
| 2 | When user clicks on the Enable Tiers or Add a New Tier button | SKIPPED | 0.000 s |
| 3 | And User navigates to create new tier page and select the "Silver" tier icon | SKIPPED | 0.001 s |
| 4 | And enter tier name as "Silver" multiplier as "1.25" milestone as "1000" bonus as "10" and click "Launch" | SKIPPED | 0.001 s |
| 5 | Then user gets the success message as "Tiers has been successfully enabled" | SKIPPED | 0.000 s |
| | <p>AFTER - stepDefinition.Hooks.takeScreenshotOnFailure(io.cucumber.java.Scenario)</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)</pre> | FAILED | 0.007 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | <pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) </pre> | | |

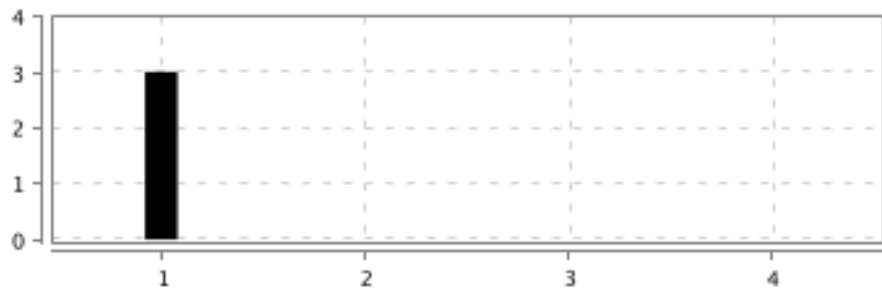

create second Tier

| | | | | | | | | |
|--------------------------------------|--|--------------------|--|--|---|---|--|--|
| FAILED | | DURATION - 4.025 s | |  | <div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div> |  | | |
| / 1:10:38.520 pm // 1:10:42.545 pm / | | | | | | | | |
| Tiers feature | | | | | | | | |
| @TiersSmoketest1 | | | | | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | <p>When user clicks on the Enable Tiers or Add a New Tier button</p> <pre> org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) </pre> | FAILED | 4.018 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.TiersStepDefinition.user_clicks_on_the_Enable_Tiers_or_Add_a_New_Tiers_button(TiersStepDefinition.java:59) at ?.user clicks on the Enable Tiers or Add a New Tier button(file:///Users/basavaraj/Automation/Pramod/v2/LBMScloud/src/test/java/features/Tiers.feature:15) * Not displayable characters are replaced by '?'. | | |
| 2 | And User navigates to create new tier page and select the "Platinum" tier icon | SKIPPED | 0.000 s |
| 3 | And enter tier name as "Platinum" multiplier as "1.5" milestone as "20000" bonus as "20" and click "Launch" | SKIPPED | 0.001 s |
| 4 | Then user gets the success message as "Tiers has been successfully enabled" | SKIPPED | 0.000 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | FAILED | 0.002 s |



Edit Tier

| | | | | |
|---|--|---|---|--|
| <div>FAILED</div> <div>DURATION - 3.027 s</div> | | <div></div> | <div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div> | <div></div> |
| / 1:10:42.559 pm // 1:10:45.586 pm / | | | | |
| Tiers feature | | | | |
| @TiersSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Then user validates "Platinum" tier and clicks "Edit" <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, findElements {using=xpath, value=//table[@class='MuiTable-root tss-900muf-MUIDataTable-tableRoot css-1owb465']/td}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElements(ElementLocation.java:182) at org.openqa.selenium.remote.ElementLocation.findElements(ElementLocation.java:103) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:373) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:367) at org.openqa.selenium.support.pagefactory.ByAll.findElements(ByAll.java:64) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$1.findElements(ElementLocation.java:149) at org.openqa.selenium.remote.ElementLocation.findElements(ElementLocation.java:103) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:373) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:367) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElements(DefaultElementLocator.java:83) at org.openqa.selenium.support.pagefactory.internal.LocatingElementListHandler.invoke(LocatingElementListHandler.java:36) at jdk.proxy2/jdk.proxy2.\$Proxy29.size(Unknown Source)</pre> | FAILED | 3.017 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at stepDefinition.TiersStepDefinition.user_validates_created_tier_clicks_edit(TiersStepDefinition.java:122) at ?.user validates "Platinum" tier and clicks "Edit"(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/Tiers.feature:24) * Not displayable characters are replaced by '?'. | | |
| 2 | When User navigates to create new tier page and select the "Bronze" tier icon | SKIPPED | 0.001 s |
| 3 | And enter tier name as "Titanium" multiplier as "2" milestone as "50000" bonus as "200" and click "Update" | SKIPPED | 0.000 s |
| 4 | Then user gets the success message as "Tier Updated Successfully" | SKIPPED | 0.000 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | FAILED | 0.003 s |

Delete Tier

| | | | | |
|---|--|---|--|--|
| <div><div>FAILED</div><div>DURATION - 3.093 s</div></div> | | <div></div> | <div><div>Steps</div><div>Total - 2</div><div>Pass - 0</div><div>Fail - 1</div><div>Skip - 1</div></div> | <div></div> |
| / 1:10:45.599 pm // 1:10:48.692 pm / | | | | |
| Tiers feature | | | | |
| @TiersSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Then user validates "Titanium" tier and clicks "Delete" <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, findElements {using=xpath, value=//table[@class='MuiTable-root tss-900muf-MUIDataTable-tableRoot css-1owb465']/td}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElements(ElementLocation.java:182) at org.openqa.selenium.remote.ElementLocation.findElements(ElementLocation.java:103) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:373) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:367) at org.openqa.selenium.support.pagefactory.ByAll.findElements(ByAll.java:64) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$1.findElements(ElementLocation.java:149) at org.openqa.selenium.remote.ElementLocation.findElements(ElementLocation.java:103) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:373) at org.openqa.selenium.remote.RemoteWebDriver.findElements(RemoteWebDriver.java:367) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElements(DefaultElementLocator.java:83) at org.openqa.selenium.support.pagefactory.internal.LocatingElementListHandler.invoke(LocatingElementListHandler.java:36) at jdk.proxy2/jdk.proxy2.\$Proxy29.size(Unknown Source)</pre> | FAILED | 3.080 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at stepDefinition.TiersStepDefinition.user_validates_created_tier_clicks_edit(TiersStepDefinition.java:122) at ?.user validates "Titanium" tier and clicks "Delete"(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/Tiers.feature:32) * Not displayable characters are replaced by '?'. | | |
| 2 | Then user should navigate to tier lists page along with success message "Titanium" "tier has been successfully deleted" | SKIPPED | 0.000 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | FAILED | 0.007 s |



Tier Settings

| | | | |
|--|--|--|--|
| FAILED DURATION - 1.026 s / 1:10:48.717 pm // 1:10:49.743 pm / <i>Tiers feature</i> @TiersSmoketest1 | | Steps Total - 3 Pass - 0 Fail - 1 Skip - 2 | |
|--|--|--|--|

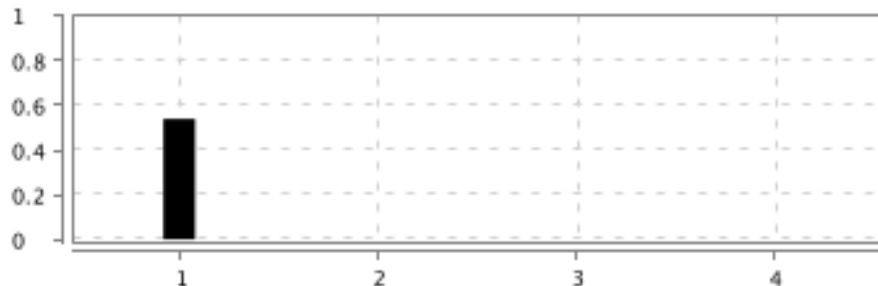

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | <p>Given User navigates to tier module</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableIcCandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.TiersStepDefinition.user_navigates_to_tier_module(TiersStepDefinition.java:23) at ?.User navigates to tier module(file:///Users/basavaraj/Automation/Pramod/v2/LBMScloud/src/test/java/features/Tiers.feature:38) * Not displayable characters are replaced by '?'.</pre> | FAILED | 1.013 s |
| 2 | When user change the tier settings timeframe | SKIPPED | 0.000 s |
| 3 | Then user gets the success message as "Tier Setting Updated Successfully" | SKIPPED | 0.000 s |
| | <p>AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario)</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableIcCandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)</pre> | FAILED | 0.003 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | <pre> at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) </pre> | | |

Add new program & platform configuration

| | | | | | |
|--------------------------------------|--------------------|-----------|---|------------|---|
| FAILED | DURATION - 0.817 s | Scenarios |  | Steps |  |
| / 1:10:49.794 pm // 1:10:50.611 pm / | | Total - 5 | 5 | Total - 26 | 26 |
| | | Pass - 0 | | Pass - 0 | |
| | | Fail - 5 | | Fail - 5 | |
| | | Skip - 0 | | Skip - 21 | |



Test and verify Add new program

| | | | | |
|--|--------------------|---|-----------|--|
| FAILED | DURATION - 0.548 s |  | Steps |  |
| / 1:10:49.795 pm // 1:10:50.343 pm / | | | Total - 4 | |
| Add new program & platform configuration | | | Pass - 0 | |
| @Smoketest1 | | | Fail - 1 | |
| | | | Skip - 3 | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | <p>Then click on the profile section</p> <pre> org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) </pre> | FAILED | 0.539 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | <pre> at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.LoginStepDefinition.click_on_the_profile_section_using_something(LoginStepDefinition.java:57) at ?.click on the profile section(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/Zconfiguration.feature:5) * Not displayable characters are replaced by '?'. </pre> | | |
| 2 | Then click on Add new program | SKIPPED | 0.000 s |
| 3 | Then Add "Automation" "Program" "automation@gmail.com" "+91" "9860979070" | SKIPPED | 0.000 s |
| 4 | Then Click on continue button | SKIPPED | 0.000 s |
| | <p>AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) </pre> | FAILED | 0.002 s |

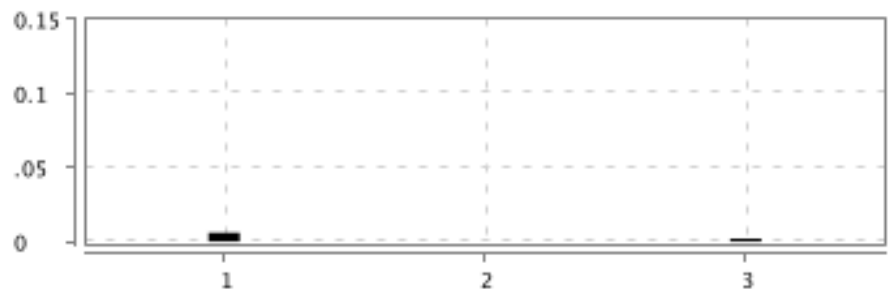

Test and verify Add company deatils

| | | | | |
|--|--------------------|--|---|---|
| FAILED | DURATION - 0.032 s |  | Steps Total - 2 Pass - 0 Fail - 1 Skip - 1 |  |
| / 1:10:50.353 pm // 1:10:50.385 pm / | | | | |
| Add new program & platform configuration | | | | |
| @Smoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | Then Add company deatils "Automation" "Automation.com" "Pune" "South" "India" java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebElement.isDisplayed()" because the return value of "resources.BrowserUtils.findAndWaitForElement(org.openqa.selenium.WebElement)" is null at resources.BrowserUtils.enterText(BrowserUtils.java:74) at stepDefinition.ConfigurationsStepDefinition.add_company_deatils(ConfigurationsStepDefinition.java:43) at ?.Add company deatils "Automation" "Automation.com" "Pune" "South" "India"(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/Zconfiguration.feature:12) * Not displayable characters are replaced by '?'. | FAILED | 0.021 s |
| 2 | Then Click on continue button | SKIPPED | 0.000 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) | FAILED | 0.007 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | | |

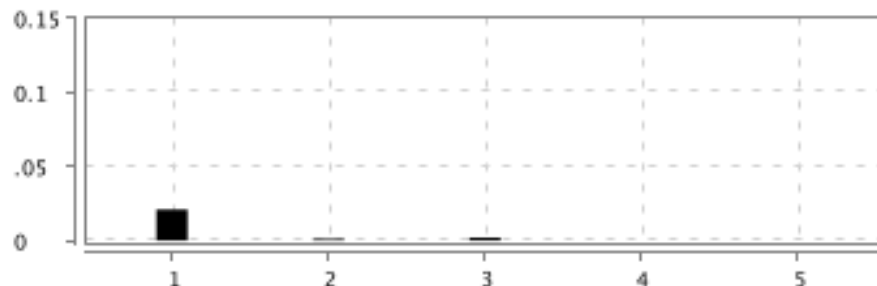

Test and verify Add Program details

| | | | | |
|--|--------------------|--|---|---|
| FAILED | DURATION - 0.019 s |  | <div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 2</div> |  |
| / 1:10:50.422 pm // 1:10:50.441 pm / | | | | |
| Add new program & platform configuration | | | | |
| @Smoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------------|----------|
| 1 | Then Add Program name org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, findElement {using=xpath, value=//input[@placeholder='Enter Program Name']}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableIACECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) | FAILED | 0.006 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy27.sendKeys(Unknown Source) at stepDefinition.ConfigurationsStepDefinition.add_program_name(ConfigurationsStepDefinition.java:149) at ?.Add Program name(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/Zconfiguration.feature:18) * Not displayable characters are replaced by '?'. | | |
| 2 | Then Add Program Logo | SKIPPED | 0.000 s |
| 3 | Then Select Base Currency "? - Indian Rupees" | SKIPPED | 0.002 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | FAILED | 0.004 s |

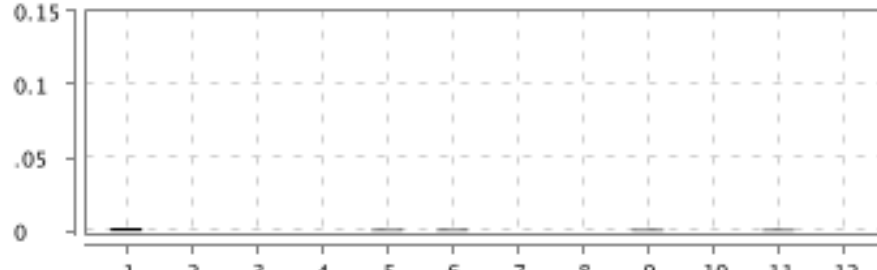

Test and verify Points Configuration details

| | | | | |
|---|--|---|---|--|
| <div>FAILED</div> <div>DURATION - 0.046 s</div> | | <div></div> | <div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div> | <div></div> |
| / 1:10:50.451 pm // 1:10:50.497 pm / | | | | |
| Add new program & platform configuration | | | | |
| @Smoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | Then Add Points Terminology as "1" "11" "1" java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebElement.isDisplayed()" because the return value of "resources.BrowserUtils.findAndWaitForElement(org.openqa.selenium.WebElement)" is null at resources.BrowserUtils.enterText(BrowserUtils.java:74) at stepDefinition.ConfigurationsStepDefinition.add_points_terminology_ad(ConfigurationsStepDefinition.java:80) at ?.Add Points Terminology as "1" "11" "1"(file:///Users/basavaraj/Automation/Pramod/v2/LBMScloud/src/test/java/features/Zconfiguration.feature:25) * Not displayable characters are replaced by '?'. | FAILED | 0.021 s |
| 2 | Then Select Point Expiration Period as "Quarterly" | SKIPPED | 0.001 s |
| 3 | Then Add Cashback Rate "10.7" Customer Purchase Rate "5.5" Redemption Rate "10" | SKIPPED | 0.002 s |
| 4 | Then Click on Create program | SKIPPED | 0.000 s |
| 5 | Then Click on Done | SKIPPED | 0.000 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) | FAILED | 0.020 s |



| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | | |

Test and Select newly created program & Verify Configurations details

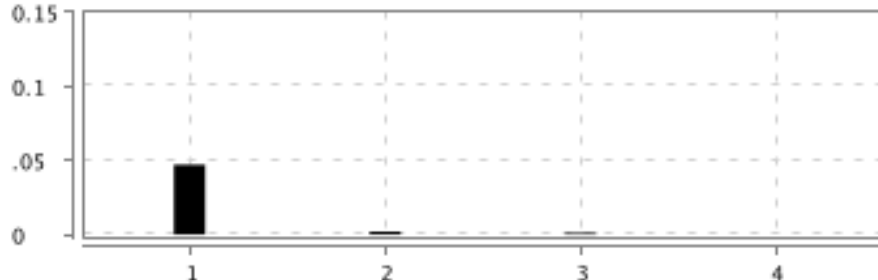

| | | | | |
|--|--------------------|--|--|---|
| FAILED | DURATION - 0.010 s |  | Steps Total - 12 Pass - 0 Fail - 1 Skip - 11 |  |
| / 1:10:50.601 pm // 1:10:50.611 pm / | | | | |
| Add new program & platform configuration | | | | |
| @Smoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|----|--|---------|----------|
| 1 | Then click on the profile section using Step undefined | FAILED | 0.002 s |
| 2 | Then Click on recently created program | SKIPPED | 0.000 s |
| 3 | Then Click on Configurations | SKIPPED | 0.000 s |
| 4 | Then Click on Organisation | SKIPPED | 0.000 s |
| 5 | Then Edit basic details As "NewProgram" "Program" "www@xoxoday.com" "9545002222" | SKIPPED | 0.001 s |
| 6 | Then Edit company details As "NewProgram" "Program" "www@xoxoday.com" "9545002222" | SKIPPED | 0.001 s |
| 7 | When Click on Program | SKIPPED | 0.000 s |
| 8 | Then Verify Program Name | SKIPPED | 0.000 s |
| 9 | Then Click on Program Details try to edit then cancel "XYZ" | SKIPPED | 0.001 s |
| 10 | Then Click on Point Definition try to edit then cancel "Point" "Points" "1.5" "0.5" "0.10" | SKIPPED | 0.000 s |
| 11 | Then Click on Marketplace | SKIPPED | 0.001 s |
| 12 | Then Click on Communication try to edit then cancel "Xoxoday" "xoxoday@xoxoday.com" | SKIPPED | 0.000 s |

Member search feature

| | | | | | |
|--------------------------------------|---------------------------|--|---|---|---|
| FAILED | DURATION - 1.029 s | Scenarios Total - 15 Pass - 0 Fail - 15 Skip - 0 |  | Steps Total - 54 Pass - 0 Fail - 15 Skip - 39 |  |
| / 1:10:50.694 pm // 1:10:51.723 pm / | | | | | |

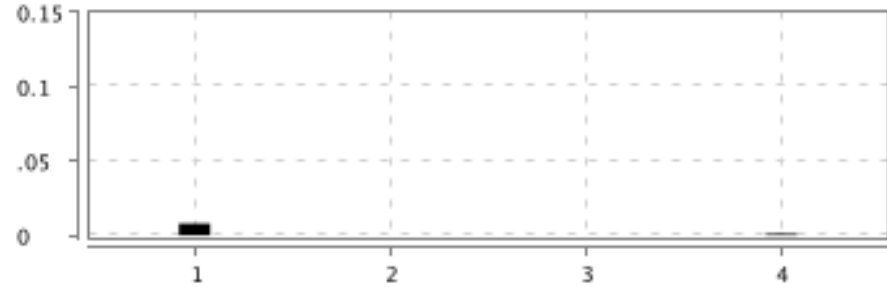

Navigate to member search module, enter different search string and validate the result

| | | | | |
|--------------------------------------|---------------------------|--|--|---|
| FAILED | DURATION - 0.066 s |  | Steps Total - 4 Pass - 0 Fail - 1 Skip - 3 |  |
| / 1:10:50.698 pm // 1:10:50.764 pm / | | | | |
| Member search feature | | | | |
| @MembersSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | <p>Given Naviagte to member search module</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.MemberSearchStepDefinition.NavigateToMemberSearch(MemberSearchStepDefinition.java:20)</pre> | FAILED | 0.047 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at ?.Naviagte to member search module(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/membersearch.feature:11) * Not displayable characters are replaced by '?'. | | |
| 2 | When enter different search "name" and "MRF 01" | SKIPPED | 0.002 s |
| 3 | Then click on the first search result | SKIPPED | 0.001 s |
| 4 | Then Validate the following details "name" and "MRF 01" | SKIPPED | 0.000 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at java.lang.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.lang.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | FAILED | 0.012 s |

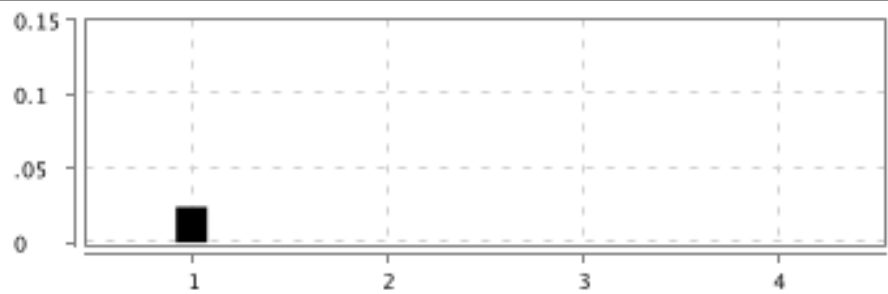

Navigate to member search module, enter different search string and validate the result

| | | | |
|---|--|--|---|
| FAILED DURATION - 0.018 s / 1:10:50.777 pm // 1:10:50.795 pm / Member search feature @MembersSmoketest1 |  | Steps Total - 4 Pass - 0 Fail - 1 Skip - 3 |  |
|---|--|--|---|

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | <p>Given Naviagte to member search module</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) atjava.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) atjava.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) atjava.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) atorg.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) atorg.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) atorg.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) atorg.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) atorg.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) atresources.BrowserUtils.clickElement(BrowserUtils.java:67) atstepDefinition.MemberSearchStepDefinition.NavigateToMemberSearch(MemberSearchStepDefinition.java:20) at?.Naviagte to member search module(file:///Users/basavaraj/Automation/Pramod/v2/LBMScloud/src/test/java/features/membersearch.feature:11) * Not displayable characters are replaced by '?'. </pre> | FAILED | 0.008 s |
| 2 | When enter different search "member_ref_no" and "MRF01" | SKIPPED | 0.000 s |
| 3 | Then click on the first search result | SKIPPED | 0.000 s |
| 4 | Then Validate the following details "member_ref_no" and "MRF01" | SKIPPED | 0.001 s |
| | <p>AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario)</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) atjava.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) atjava.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) atjava.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) </pre> | FAILED | 0.005 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | <pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) </pre> | | |

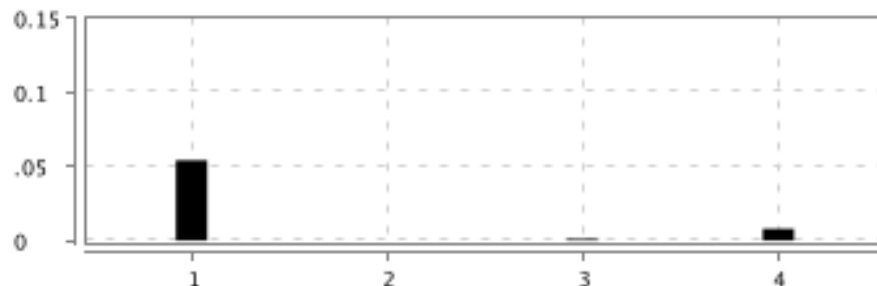

Navigate to member search module, enter different search string and validate the result

| | | | | |
|---|--|--|---|---|
| <div>FAILED</div> <div>DURATION - 0.041 s</div> | |  | <div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div> |  |
| / 1:10:50.821 pm // 1:10:50.862 pm / | | | | |
| Member search feature | | | | |
| @MembersSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | <p>Given Naviagte to member search module</p> <pre> org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) </pre> | FAILED | 0.024 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.MemberSearchStepDefinition.NavigateToMemberSearch(MemberSearchStepDefinition.java:20) at ?.Naviagte to member search module(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/membersearch.feature:11) * Not displayable characters are replaced by '?'. | | |
| 2 | When enter different search "mobile" and "9036820287" | SKIPPED | 0.000 s |
| 3 | Then click on the first search result | SKIPPED | 0.000 s |
| 4 | Then Validate the following details "mobile" and "9036820287" | SKIPPED | 0.000 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | FAILED | 0.011 s |

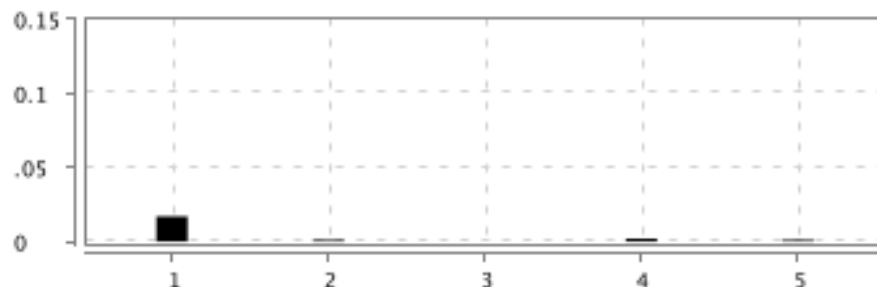

Navigate to member search module, enter different search string and validate the result

| | | | | |
|---|--|---|---|--|
| <div>FAILED</div> <div>DURATION - 0.099 s</div> | | <div></div> | <div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div> | <div></div> |
| / 1:10:50.882 pm // 1:10:50.981 pm / | | | | |
| Member search feature | | | | |
| @MembersSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | <p>Given Naviagte to member search module</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.MemberSearchStepDefinition.NavigateToMemberSearch(MemberSearchStepDefinition.java:20) at ?.Naviagte to member search module(file:///Users/basavaraj/Automation/Pramod/v2/LBMScloud/src/test/java/features/membersearch.feature:11) * Not displayable characters are replaced by '?'. </pre> | FAILED | 0.054 s |
| 2 | When enter different search "email" and "pramod.brs@xoxoday.com" | SKIPPED | 0.000 s |
| 3 | Then click on the first search result | SKIPPED | 0.001 s |
| 4 | Then Validate the following details "email" and "pramod.brs@xoxoday.com" | SKIPPED | 0.008 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) | FAILED | 0.021 s |
| | org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <pre>'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40)</pre> | | |

issue manual credit/debit points

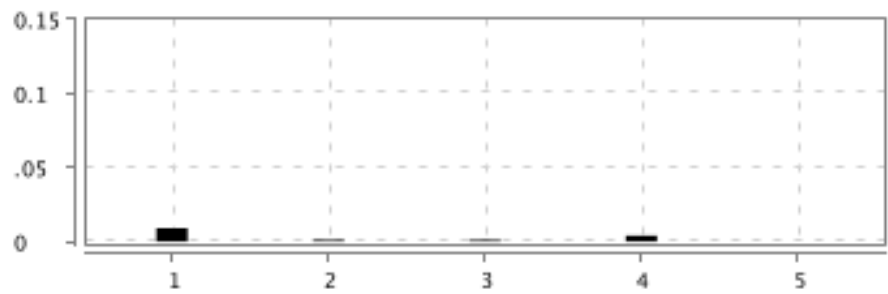

| | | | | |
|--------------------------------------|--------------------|---|---|--|
| FAILED | DURATION - 0.041 s |  | <div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div> |  |
| / 1:10:51.025 pm // 1:10:51.066 pm / | | | | |
| Member search feature | | | | |
| @MembersSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Naviagte to member search module <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8</pre> | FAILED | 0.017 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | <pre> atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) atjava.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) atjava.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) atjava.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) atorg.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) atorg.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) atorg.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) atorg.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) atorg.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) atresources.BrowserUtils.clickElement(BrowserUtils.java:67) atstepDefinition.MemberSearchStepDefinition.NavigateToMemberSearch(MemberSearchStepDefinition.java:20) at?.Naviagte to member search module(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/membersearch.feature:25) * Not displayable characters are replaced by '?'. </pre> | | |
| 2 | When search member "MRF01" | SKIPPED | 0.001 s |
| 3 | Then click on the first search result | SKIPPED | 0.000 s |
| 4 | Then click on Actions | SKIPPED | 0.002 s |
| 5 | Then issue manual "Debit" point of "25" with "TestDebit" | SKIPPED | 0.001 s |
| | <p>AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) atjava.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) atjava.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) atjava.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) atorg.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) atorg.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) atorg.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) atorg.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) atorg.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) </pre> | FAILED | 0.013 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | | |

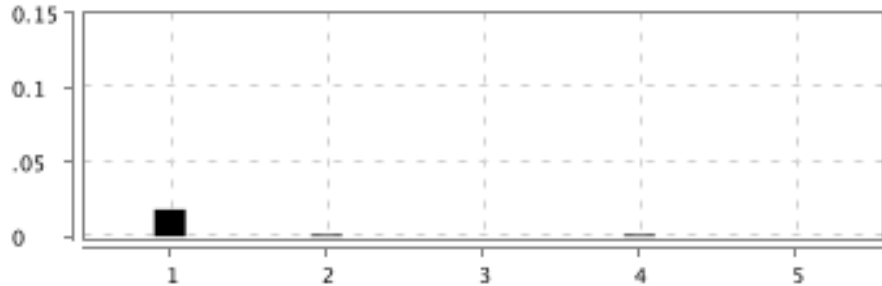

issue manual credit/debit points

| | | | | |
|---|--|--|---|---|
| <div>FAILED</div> <div>DURATION - 0.092 s</div> | |  | <div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div> |  |
| / 1:10:51.086 pm // 1:10:51.178 pm / | | | | |
| Member search feature | | | | |
| @MembersSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------------|----------|
| 1 | Given Naviagte to member search module org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.MemberSearchStepDefinition.NavigateToMemberSearch(MemberSearchStepDefinition.java:20) at ?.Naviagte to member search module(file:///Users/basavaraj/Automation/Pramod/v2/LBMScloud/src/test/java/features/membersearch.feature:25) | FAILED | 0.009 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | * Not displayable characters are replaced by '?'. When search member "MRF01" | SKIPPED | 0.001 s |
| 2 | Then click on the first search result | SKIPPED | 0.001 s |
| 3 | Then click on Actions | SKIPPED | 0.004 s |
| 4 | Then issue manual "Credit" point of "60" with "TestCredit" | SKIPPED | 0.000 s |
| 5 | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | FAILED | 0.054 s |

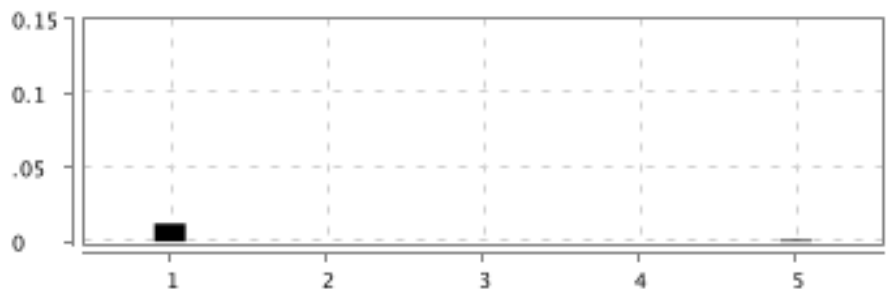

Suspend member

| | | | | |
|--------------------------------------|--------------------|--|--|---|
| FAILED | DURATION - 0.083 s |  | Steps Total - 5 Pass - 0 Fail - 1 Skip - 4 |  |
| / 1:10:51.278 pm // 1:10:51.361 pm / | | | | |
| Member search feature | | | | |
| @MembersSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | <p>Given Naviagte to member search module</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.MemberSearchStepDefinition.NavigateToMemberSearch(MemberSearchStepDefinition.java:20) at ?.Naviagte to member search module(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/membersearch.feature:38) * Not displayable characters are replaced by '?'. </pre> | FAILED | 0.018 s |
| 2 | When search member "MRF01" | SKIPPED | 0.001 s |
| 3 | Then click on the first search result | SKIPPED | 0.000 s |
| 4 | Then click on Actions | SKIPPED | 0.001 s |
| 5 | Then click on suspend and confirm | SKIPPED | 0.000 s |
| | <p>AFTER - stepDefinition.Hooks.takeScreenshotOnFailure(io.cucumber.java.Scenario)</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) </pre> | FAILED | 0.027 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <pre> at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) </pre> | | |

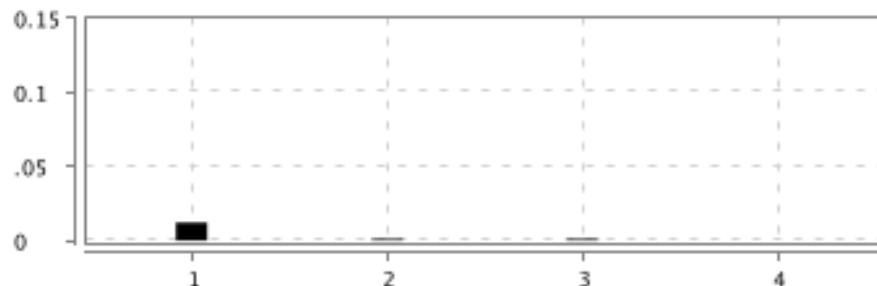

Re-Activat member

| | | | | |
|--------------------------------------|---------------------------|--|---|---|
| FAILED | DURATION - 0.035 s |  | Steps Total - 5 Pass - 0 Fail - 1 Skip - 4 |  |
| / 1:10:51.378 pm // 1:10:51.413 pm / | | | | |
| Member search feature | | | | |
| @MembersSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------------|----------|
| 1 | <p>Given Naviagte to member search module</p> <pre> org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableIcCandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) </pre> | FAILED | 0.012 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.MemberSearchStepDefinition.NavigateToMemberSearch(MemberSearchStepDefinition.java:20) at ?.Naviagte to member search module(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/membersearch.feature:46) * Not displayable characters are replaced by '?'. | | |
| 2 | When search member "MRF01" | SKIPPED | 0.000 s |
| 3 | Then click on the first search result | SKIPPED | 0.000 s |
| 4 | Then click on Actions | SKIPPED | 0.000 s |
| 5 | Then click on Re-Activate | SKIPPED | 0.001 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit.WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | FAILED | 0.018 s |

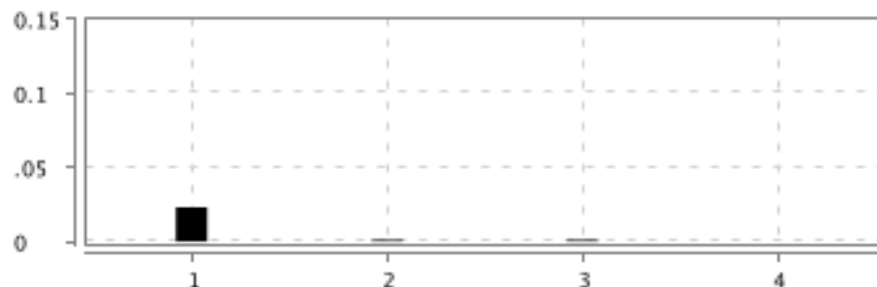

Check Audit log for a member

| | | | | |
|---|--|---|---|--|
| <div>FAILED</div> <div>DURATION - 0.040 s</div> | | <div></div> | <div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div> | <div></div> |
| <div>/ 1:10:51.424 pm // 1:10:51.464 pm /</div> | | | | |
| <div>Member search feature</div> | | | | |
| <div>@MembersSmoketest1</div> | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 1 | Given Naviagte to member search module <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.MemberSearchStepDefinition.NavigateToMemberSearch(MemberSearchStepDefinition.java:20) at ?.Naviagte to member search module(file:///Users/basavaraj/Automation/Pramod/v2/LBMScloud/src/test/java/features/membersearch.feature:54) * Not displayable characters are replaced by '?'. </pre> | FAILED | 0.012 s |
| 2 | When search member "MRF01" | SKIPPED | 0.001 s |
| 3 | Then click on the first search result | SKIPPED | 0.001 s |
| 4 | And click on Audit_log | SKIPPED | 0.000 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) | FAILED | 0.007 s |
| | org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: | | |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <pre>'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40)</pre> | | |

Search transactions for member using date range

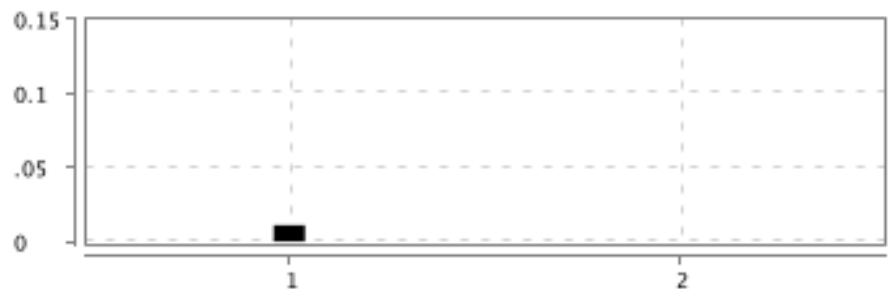

| | | | | |
|---|--|--|---|---|
| <div>FAILED</div> <div>DURATION - 0.046 s</div> | | <div></div> | <div>Steps</div> <div>Total - 4</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 3</div> | <div></div> |
| <div>/ 1:10:51.518 pm // 1:10:51.564 pm /</div> | | | | |
| <div>Member search feature</div> | | | | |
| <div>@MembersSmoketest1</div> | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given Naviagte to member search module <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8</pre> | FAILED | 0.023 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | <pre> atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) atjava.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) atjava.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) atjava.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) atorg.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) atorg.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) atorg.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) atorg.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) atorg.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) atresources.BrowserUtils.clickElement(BrowserUtils.java:67) atstepDefinition.MemberSearchStepDefinition.NavigateToMemberSearch(MemberSearchStepDefinition.java:20) at?.Naviagte to member search module(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/membersearch.feature:61) * Not displayable characters are replaced by '?'. </pre> | | |
| 2 | When search member "MRF01" | SKIPPED | 0.001 s |
| 3 | Then click on the first search result | SKIPPED | 0.001 s |
| 4 | And Enter "11/30/2023" "12/29/2023" and click on Search | SKIPPED | 0.000 s |
| | <p>AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) atjava.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) atjava.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) atjava.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) atorg.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) atorg.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) atorg.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) atorg.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) atorg.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) atorg.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) atorg.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) </pre> | FAILED | 0.008 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | | |

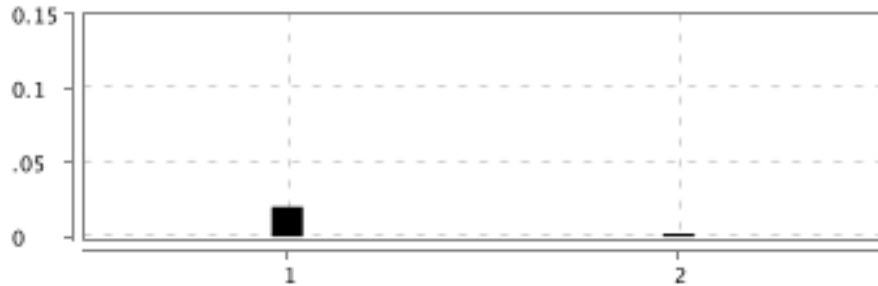

Navigate to member search and click on manage attribute link

| | | | | |
|--------------------------------------|-------------------------------|--|---|---|
| <div>FAILED</div> | <div>DURATION - 0.018 s</div> |  | <div>Steps</div> <div>Total - 2</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 1</div> |  |
| / 1:10:51.577 pm // 1:10:51.595 pm / | | | | |
| Member search feature | | | | |
| @MembersSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------------|----------|
| 1 | <p>Given Naviagte to member search module</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.MemberSearchStepDefinition.NavigateToMemberSearch(MemberSearchStepDefinition.java:20) at ?.Naviagte to member search module(file:///Users/basavaraj/Automation/Pramod/v2/LBMScloud/src/test/java/features/membersearch.feature:70) * Not displayable characters are replaced by '?'. </pre> | FAILED | 0.011 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| 2 | When click on manage member attributes link | SKIPPED | 0.000 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40)</pre> | FAILED | 0.005 s |

Create different member attributes using manage_member_attribute

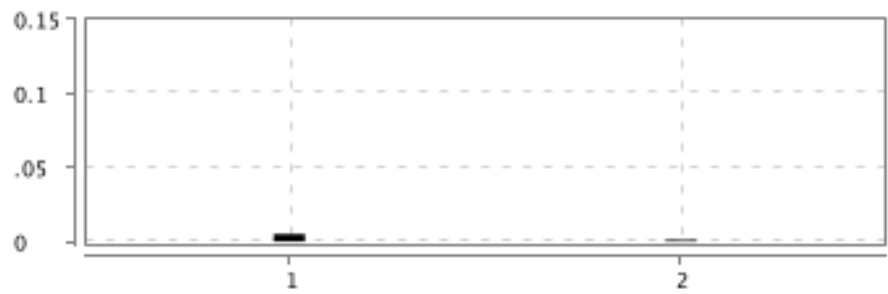

| | | | | |
|--------------------------------------|--------------------|---|--|---|
| FAILED | DURATION - 0.033 s |  | Steps Total - 2 Pass - 0 Fail - 1 Skip - 1 |  |
| / 1:10:51.600 pm // 1:10:51.633 pm / | | | | |
| Member search feature | | | | |
| @MembersSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | When click on Add new custom attribute link | FAILED | 0.020 s |
| | <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-</pre> | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | <p>9B71-2E04E54082D8, setTimeout {implicit=10000}} Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8</p> <p>at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.MemberSearchStepDefinition.click_on_Add_new_custom_attribute_link(MemberSearchStepDefinition.java:143) at ?.click on Add new custom attribute link(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/membersearch.feature:75)</p> <p>* Not displayable characters are replaced by '?'. </p> | | |
| 2 | Then Enter value "String_FF" "String_FF" "String" "false" "false" | SKIPPED | 0.002 s |
| | <p>AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario)</p> <p>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8</p> <p>at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596)</p> | FAILED | 0.006 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | | |

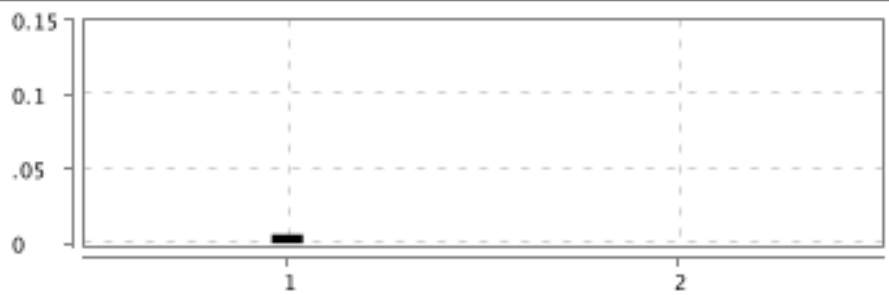

Create different member attributes using manage_member_attribute

| | | | | | | | |
|--------------------------------------|--|--------------------|--|--|--|---|--|
| FAILED | | DURATION - 0.013 s | |  | Steps Total - 2 Pass - 0 Fail - 1 Skip - 1 |  | |
| / 1:10:51.645 pm // 1:10:51.658 pm / | | | | | | | |
| Member search feature | | | | | | | |
| @MembersSmoketest1 | | | | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------------|----------|
| 1 | When click on Add new custom attribute link org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.MemberSearchStepDefinition.click_on_Add_new_custom_attribute_link(MemberSearchStepDefinition.java:143) at ?.click on Add new custom attribute link(file:///Users/basavaraj/Automation/Pramod/v2/LBMScloud/src/test/java/features/membersearch.feature:75) | FAILED | 0.005 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | * Not displayable characters are replaced by '?'. 2 Then Enter value "Number_TF" "Number_TF" "Numbers" "false" "true" | SKIPPED | 0.001 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | FAILED | 0.005 s |

Create different member attributes using manage_member_attribute

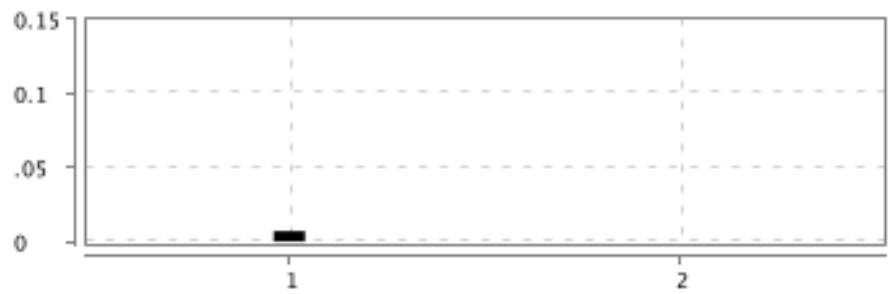

| | | | | |
|--------------------------------------|--------------------|--|--|---|
| FAILED | DURATION - 0.017 s |  | Steps Total - 2 Pass - 0 Fail - 1 Skip - 1 |  |
| / 1:10:51.668 pm // 1:10:51.685 pm / | | | | |
| Member search feature | | | | |
| @MembersSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | When click on Add new custom attribute link | FAILED | 0.006 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | <p>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit.WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8</p> <p>at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.MemberSearchStepDefinition.click_on_Add_new_custom_attribute_link(MemberSearchStepDefinition.java:143) at ?.click on Add new custom attribute link(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/membersearch.feature:75) * Not displayable characters are replaced by '?'. </p> | | |
| 2 | Then Enter value "DATE_FT" "DATE_FT" "Decimals" "true" "false" | SKIPPED | 0.000 s |
| | <p>AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario)</p> <p>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit.WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8</p> <p>at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) </p> | FAILED | 0.010 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | | |



Create different member attributes using manage_member_attribute

| | | | | |
|---|--|--|---|---|
| <div>FAILED</div> <div>DURATION - 0.013 s</div> | |  | <div>Steps</div> <div>Total - 2</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 1</div> |  |
| / 1:10:51.710 pm // 1:10:51.723 pm / | | | | |
| Member search feature | | | | |
| @MembersSmoketest1 | | | | |

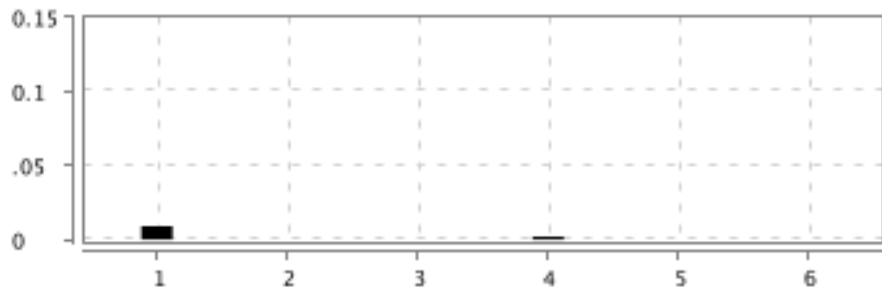

| # | Step / Hook Details | Status | Duration |
|---|---|---------------|----------|
| 1 | When click on Add new custom attribute link org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.MemberSearchStepDefinition.click_on_Add_new_custom_attribute_link(MemberSearchStepDefinition.java:143) | FAILED | 0.007 s |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at ?.click on Add new custom attribute link(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/membersearch.feature:75) * Not displayable characters are replaced by '?'. | | |
| 2 | Then Enter value "decimal_TT" "decimal_TT" "Date" "true" "true" | SKIPPED | 0.000 s |
| | AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit.WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenShotOnFailure(Hooks.java:40) | FAILED | 0.004 s |

Member search filter feature

| | | | | | |
|--------------------------------------|--------------------|-----------|---|-----------|---|
| FAILED | DURATION - 0.021 s | Scenarios |  | Steps |  |
| / 1:10:51.750 pm // 1:10:51.771 pm / | | Total - 1 | 1 | Total - 6 | 6 |
| | | Pass - 0 | | Pass - 0 | |
| | | Fail - 1 | | Fail - 1 | |
| | | Skip - 0 | | Skip - 5 | |

Apply any single filter with its respective operator and do a search

| | | | | |
|---|--|---|---|--|
| <div>FAILED</div> <div>DURATION - 0.021 s</div> | | <div></div> | <div>Steps</div> <div>Total - 6</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 5</div> | <div></div> |
| / 1:10:51.750 pm // 1:10:51.771 pm / | | | | |
| Member search filter feature | | | | |
| @MemberSearchFilterSmoketest1 | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | <p>Given Naviagte to member search module</p> <pre>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8 at jdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at resources.BrowserUtils.clickElement(BrowserUtils.java:67) at stepDefinition.MemberSearchStepDefinition.NavigateToMemberSearch(MemberSearchStepDefinition.java:20) at ?.Naviagte to member search module(file:///Users/basavaraj/Automation/Pramod/v2/LBMScloud/src/test/java/features/membersearchfilter.feature:5) * Not displayable characters are replaced by '?'. </pre> | FAILED | 0.009 s |
| 2 | When click on filter option | SKIPPED | 0.000 s |
| 3 | Then select "Age" filter | SKIPPED | 0.000 s |
| 4 | Then Select operator "Is less than or equal to" | SKIPPED | 0.002 s |
| 5 | Then Enter value1 "40" and value2 "2023-09-09" for operator "Is less than or equal to" | SKIPPED | 0.000 s |
| 6 | Then click on apply filter button and validate the result | SKIPPED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | <p>AFTER - stepDefinition.Hooks.takeScreenshotOnFailure(io.cucumber.java.Scenario)</p> <p>org.openqa.selenium.NoSuchSessionException: Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.safari.SafariDriver Command: [EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: Safari, browserVersion: 17.2.1, platformName: mac, safari:automaticInspection: false, safari:automaticProfiling: false, safari:diagnose: false, safari:platformBuildVersion: 23C71, safari:platformVersion: 14.2.1, safari:useSimulator: false, setWindowRect: true, strictFileInteractability: false, webkit:WebRTC: {DisableICECandidateFiltering: false, DisableInsecureMediaCapture: false}} Session ID: EE6AA5D3-B7E6-4D8A-9B71-2E04E54082D8</p> <p>atjdk.internal.reflect.GeneratedConstructorAccessor20.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:326) at stepDefinition.Hooks.takeScreenshotOnFailure(Hooks.java:40)</p> | FAILED | 0.005 s |