


Feature			Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S	
<u>Login</u>	1 m 3.452 s	1	1	0	0	4	4	0	0	
<u>Tiers feature</u>	1 m 44.371 s	5	1	4	0	18	5	4	9	


#	Feature Name	Scenario Name
1	<u>Tiers feature</u>	<u>create second Tier</u>
2		Edit Tier
3		Delete Tier
4		<u>Tier Settings</u>

TAG	Scenario			Feature				
Name	T	P	F	S	T	P	F	S
@AppLoginSmoketest1	1	1	0	0	1	1	0	0
@TiersSmoketest1	5	1	4	0	1	0	1	0

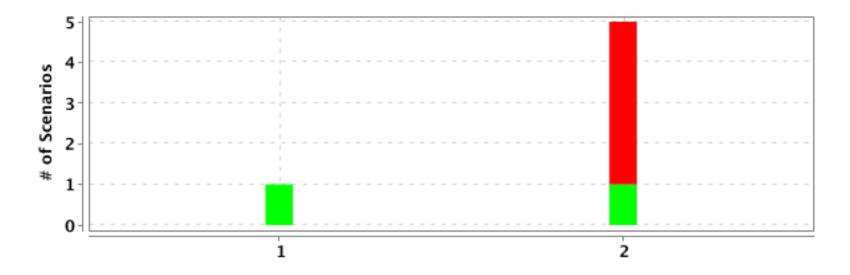

#	Feature Name	T	P	F	S	Duration
1	<u>Login</u>	1	1	0	0	1 m 3.452 s
2	<u>Tiers feature</u>	5	1	4	0	1 m 44.371 s

SCENARIOS SUMMARY -- 6 --

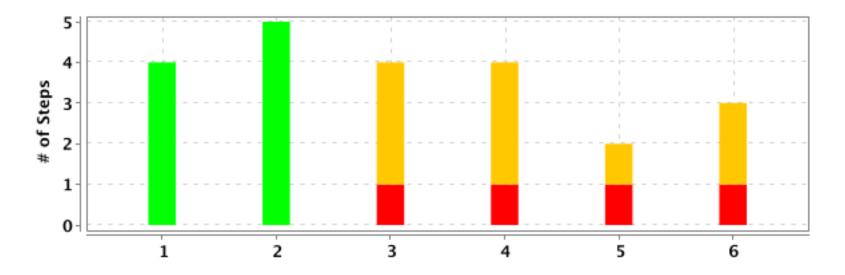


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Login</u>	Intialize browser,login to the application	4	4	0	0	1 m 3.436 s
2	<u>Tiers feature</u>	Create a new tier	5	5	0	0	1 m 12.271 s
3		create second Tier	4	0	1	3	17.456 s
4		Edit Tier	4	0	1	3	5.678 s
5		Delete Tier	2	0	1	1	4.921 s
6		Tier Settings	3	0	1	2	3.890 s

DETAILED SECTION -- 7 --

Login

PASSED	DURATION - 1 m 3.452 s	Scenarios		Steps	
		Total - 1		Total - 4	
/ 1:29:27.417 pm //	′ 1:30:30.869 pm /	Pass - 1	1	Pass - 4	4
		Fail - 0		Fail - 0	
		Skip - 0		Skip - 0	

Intialize browser,login to the application

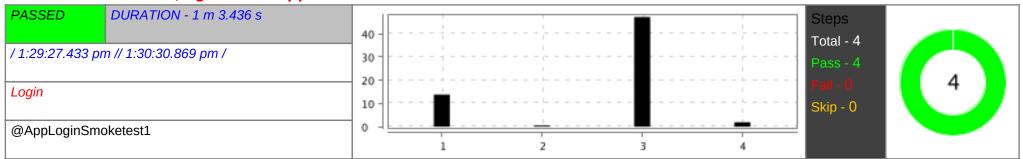


#	Step / Hook Details	Status	Duration
1	Given Login to the application using username and password	PASSED	13.795 s
2	When validate if the title is "Giift LBMS"	PASSED	0.511 s
3	Then click on the profile section	PASSED	47.184 s
4	Then select the program "A program four"	PASSED	1.876 s

Tiers feature

FAILED	DURATION - 1 m 44.371 s	Scenarios		Steps	
/ 1:30:30.980 p	om // 1:32:15.351 pm /	Total - 5 Pass - 1	5	Total - 18 Pass - 5	18
		Fail - 4 Skip - 0	V	Fail - 4 Skip - 9	


Create a new tier

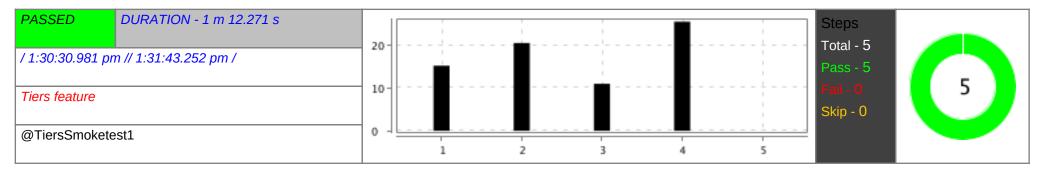

-- 8 --

#	Step / Hook Details	Status	Duration
1	Given User navigates to tier module	PASSED	15.224 s
2	When user clicks on the Enable Tiers or Add a New Tier button	PASSED	20.512 s
3	And User navigates to create new tier page and select the "Silver" tier icon	PASSED	10.988 s
4	And enter tier name as "Silver" multiplier as "1.25" milestone as "1000" bonus as "10" and click "Launch"	PASSED	25.494 s
5	Then user gets the success message as "Tiers has been successfully enabled"	PASSED	0.003 s

create second Tier

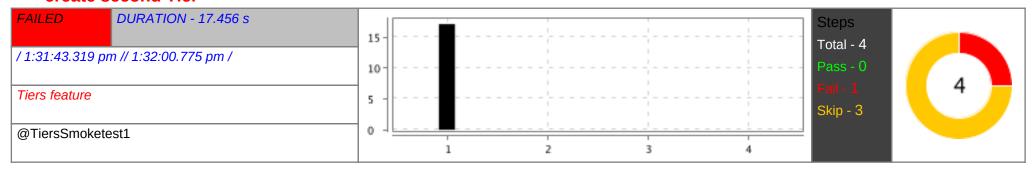


#	# Step / Hook Details	Status	Duration
1	When user clicks on the Enable Tiers or Add a New Tier button	FAILED	17.105 s
	org.openqa.selenium.ElementClickInterceptedException: element click intercepted: Element is not clickable at point (1329, 248). Other element would receive the click: <div class="no-data"></div> (Sessic chrome=120.0.6099.129) Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os. '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [ef4c4da0d5f2417f26e67537135fe clickElement {id=6454C21B507E4E56857E9229BDDE39F1_element_2339}] Capabilities {acceptInsecureCerts: false, browserNam browserVersion: 120.0.6099.129, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/nj/n_9g}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:52258}, networkConnectionEnabled: false, pageLoadS normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:52258/devtoo, se:cdpVersion: 120.0.6099.129, setWindowRect strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension	on info: s.version: 1995, 19: chrome, 19:	

#	Step / Hook Details	Status	Duration
	webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on mac (ef4c4da0d5f2417f26e67537135fe995)] -> xpath:		
	//span[text()='Add a New Tier']] Session ID: ef4c4da0d5f2417f26e67537135fe995		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523)		
	at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:224)		
	at org.openqa.selenium.remote.RemoteWebElement.click(RemoteWebElement.java:77)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:568)		
	at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:51)		
	at jdk.proxy2/jdk.proxy27.click(Unknown Source)		
	at resources.BrowserUtils.clickElement(BrowserUtils.java:69)		
	at stepDefinition.TiersStepDefinition.user_clicks_on_the_Enable_Tiers_or_Add_a_New_Tiers_button(TiersStepDefinition.java:59)		
	at ?.user clicks on the Enable Tiers or Add a New Tier button(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/		
	features/Tiers.feature:15)		
	* Not displayable characters are replaced by '?'.		
2	And User navigates to create new tier page and select the "Platinum" tier icon	SKIPPED	0.002 s
3	And enter tier name as "Platinum" multiplier as "1.5" milestone as "20000" bonus as "20" and click "Launch"	SKIPPED	0.000 s
4	Then user gets the success message as "Tier Setting Updated Successfully"	SKIPPED	0.001 s
	AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario)	PASSED	0.320 s
	create second Tier		

#	Step / Hook Details	Status	Duration
	NOT FOUND		


Edit Tier

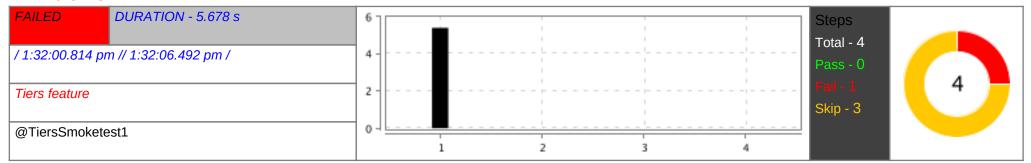

#	Step / Hook Details	Status	Duration
1	Then user validates "Platinum" tier and clicks "Edit"	FAILED	5.395 s
	java.lang.AssertionError: Record not found: at org.junit.Assert.fail(Assert.java:88) at org.junit.Assert.assertTrue(Assert.java:41) at stepDefinition.TiersStepDefinition.user_validates_created_tier_clicks_edit(TiersStepDefinition.java:166) at ?.user validates "Platinum" tier and clicks "Edit"(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/Tiers. feature:24) * Not displayable characters are replaced by '?'.		
2	When User navigates to create new tier page and select the "Bronze" tier icon	SKIPPED	0.000 s
3	And enter tier name as "Titanium" multiplier as "2" milestone as "50000" bonus as "200" and click "Update"	SKIPPED	0.000 s
4	Then user gets the success message as "Tier Updated Successfully"	SKIPPED	0.000 s
	AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario)	PASSED	0.277 s
	Edit Tier	1	

#	Step / Hook Details	Status	Duration
	NOT FOUND		


Delete Tier

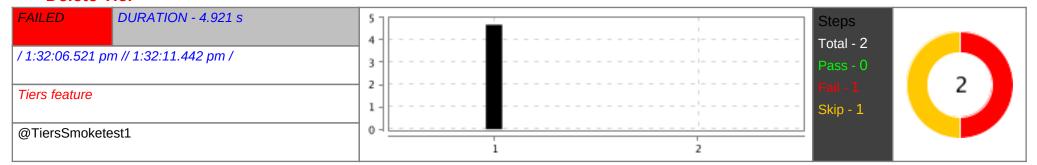

#	Step / Hook Details	Status	Duration
1	Then user validates "Titanium" tier and clicks "Delete"	FAILED	4.676 s
	java.lang.AssertionError: Record not found: at org.junit.Assert.fail(Assert.java:88) at org.junit.Assert.assertTrue(Assert.java:41) at stepDefinition.TiersStepDefinition.user_validates_created_tier_clicks_edit(TiersStepDefinition.java:166) at ?.user validates "Titanium" tier and clicks "Delete"(file:///Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/Tiers. feature:32) * Not displayable characters are replaced by '?'.		
2	Then user should navigate to tier lists page along with success message "Titanium" "tier has been successfully deleted"	SKIPPED	0.000 s
	AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario)	PASSED	0.239 s
	Delete Tier		

#	Step / Hook Details	Status	Duration
	NOT FOUND		

Tier Settings

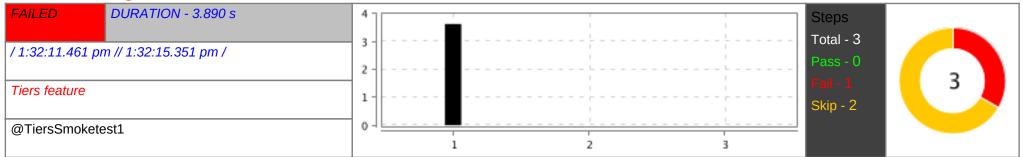

#	Step / Hook Details	Status	Duration
1	Given User navigates to tier module	FAILED	3.622 s
	org.openqa.selenium.ElementClickInterceptedException: element click intercepted: Element is not clickable at point (64, 252). Other element would receive the click: <div class="sc-fXSgeo iceehS"></div> (Session info: chrome=120.0.6099.129) Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os. version: '14.2.1', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [ef4c4da0d5f2417f26e67537135fe995, clickElement {id=6454C21B507E4E56857E9229BDDE39F1_element_756}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.129, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: /var/folders/nj/n_9gw81j7mq}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:52258}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), se:cdp: ws://localhost:52258/devtoo, se:cdpVersion: 120.0.6099.129, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Element: [[ChromeDriver: chrome on mac (ef4c4da0d5f2417f26e67537135fe995)] -> xpath: //span[text()='Tiers']] Session ID: ef4c4da0d5f2417f26e67537135fe995 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		

DETAILED SECTION -- 13 --

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:489) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.Codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:224) at org.openqa.selenium.remote.RemoteWebElement.execute(RemoteWebElement.java:77) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethod) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/jdk.internal.reflect.Method.invoke(Method.java:568) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:51) at jdk.proxy2/jdk.proxy2.\$Proxy27.click(Unknown Source) at resources.BrowserUtils.clickElement(BrowserUtils.java:69) at stepDefinition.TiersStepDefinition.user_navigates_to_tier_module(TiersStepDefinition.java:23) at ?.User navigates to tier module(file://Users/basavaraj/Automation/Pramod/v2/LBMSCloud/src/test/java/features/Tiers.feature:38) * Not displayable characters are replaced by '?'.		
2	When user change the tier settings timeframe	SKIPPED	0.002 s
3	Then user gets the success message as "Tier Setting Updated Successfully"	SKIPPED	0.001 s
	AFTER - stepDefinition.Hooks.takeScreenShotOnFailure(io.cucumber.java.Scenario) Tier Settings NOT FOUND	PASSED	0.259 s