
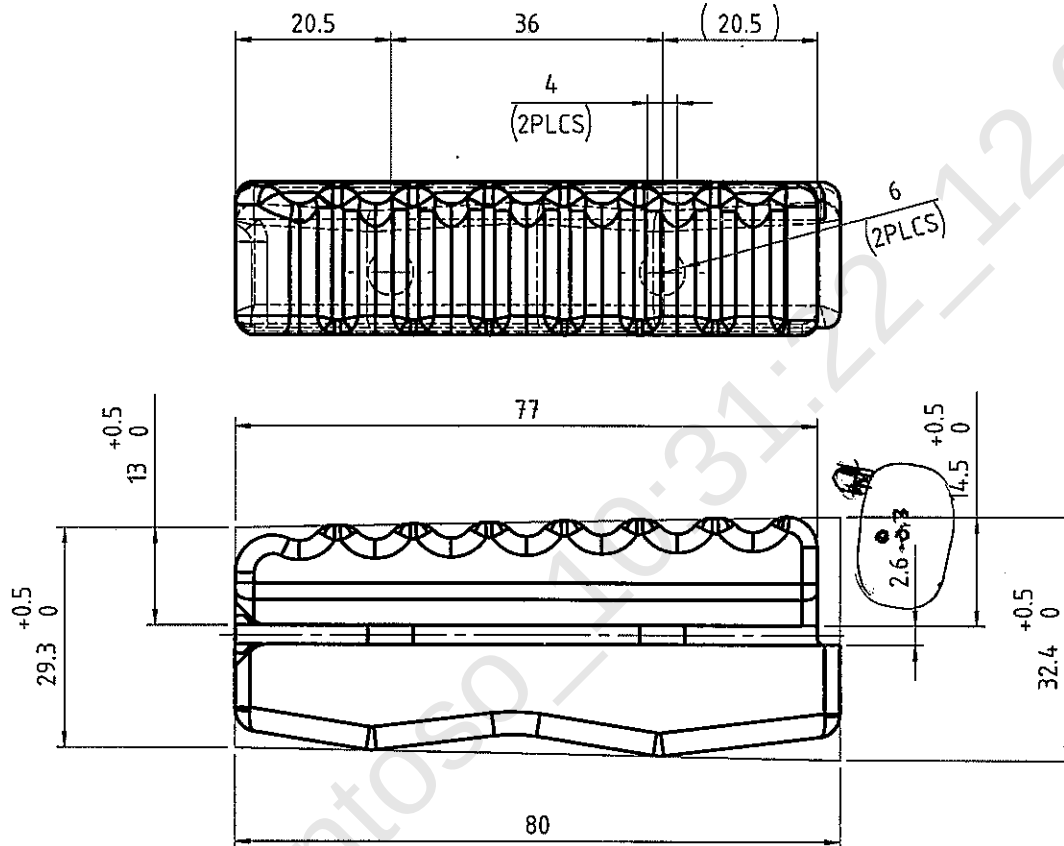

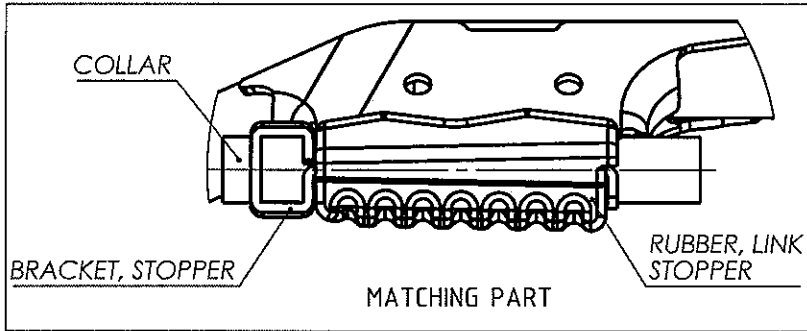


REVISION RECORD

REV. LETTER	CHANGE NO.	DESCRIPTION	DATE	APPR.
A	LJJA-F-60	Drawing based on 3D LJJA-F-60	23.04.18	IMA
B	LJJA-F-100	Dimensions Change	04.01.19	IMA

THIS DRAWING CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION AND DATA EXCLUSIVELY OWNED BY PT. DHARMA POLIMETAL AND IS NOT TO BE COPIED REPRODUCED, OR OTHERWISE DISCLOSED TO OTHERS



NOTE

- DIMENSIONS AND SHAPE NOT SPECIFIED SHALL FOLLOW 3D DATA
- RAW MATERIAL COLOR : BLACK
- R MAY BE APPLIED TO EDGES IN 3D DATA R MAX SHALL BE 0.5 (NOTE THAT THIS RULE IS NOT APPLIED TO EDGES OF RIB ROOTS, INSERT DIE, AND DIE PARTING AREA.)
- VOLUME ELECTRIC RESISTIVITY : 107 $\Omega \cdot \text{cm}$ MIN. (MEASURED IN ACCORDANCE WITH JIS K6271 OR ASTM D257)
- ABSOLUTE VALUE DEFERENCE OF VOLUME CHANGE IN TOLUENE IMMERSION TEST IS WITHIN 10% COMPARED TO TEST PIECE MEETING SPEC. (TEST METHOD : JIS K6258 TEST CONDITION: R.T. X 72h)
- MATERIAL : HES C201 AI5010b (1.3 $\pm$ 0.2 MPa AT 100% MODULUS, 3.7 $\pm$ 0.6 MPa AT 300% MODULUS.)

1	50352-K0JA-N000	RUBBER, LINK STOPPER	1	HES C201 AI5010b	HES C201 AI5010b	Approx. Mass. 0.034 Kg
ITEM No	PART No.	PART NAME	QTY.	MATERIAL	MATERIAL SIMPLIFICATION	
HA	DATE 04.01.19	DIMENSION IN INCHES FRACTIONS $\pm$ 1/32 .000 $\pm$.005 .00 $\pm$.015 .0 $\pm$.030 ANGLES $\pm$ 1/2° HOLE DIA $\pm$.004 - .002			PT. DHARMA POLIMETAL JL. ANGSA NA RAYA BLOK A 9 No. 8, DELTA SILICON 1, CIKARANG	
AFM	DRAWN BY: IMA			TITLE : RUBBER, LINK STOPPER (LINK ASSY, ENG HANGER)		
Q	CHKD. BY: RUBI	DIMENSION IN METRIC GENERAL $\pm$ JIS B 0405-M ANGLES $\pm$ 1/2° HOLE DIA $\pm$ 0.10 - 0.05		ORIGINAL DWG: 50350-K0JA-N000	CUSTOMER: PT. AHM	
Q	APPD BY: SANDYA	DO NOT SCALE THIS DRAWING TOLERANCES BREAK ALL SHARP EDGES FILLET .030 MAX MACHINED SURFACES 125/ UNLESS OTHERWISE SPECIFIED		SIZE A4 DWG. No. 50352-K0JA-N000	REV. LETTER B	
Q	DEP. ENG. DANIEL			SCALE 1:1	SOLIDWORKS	Sheet 2 of 2
NF	FINISH					