






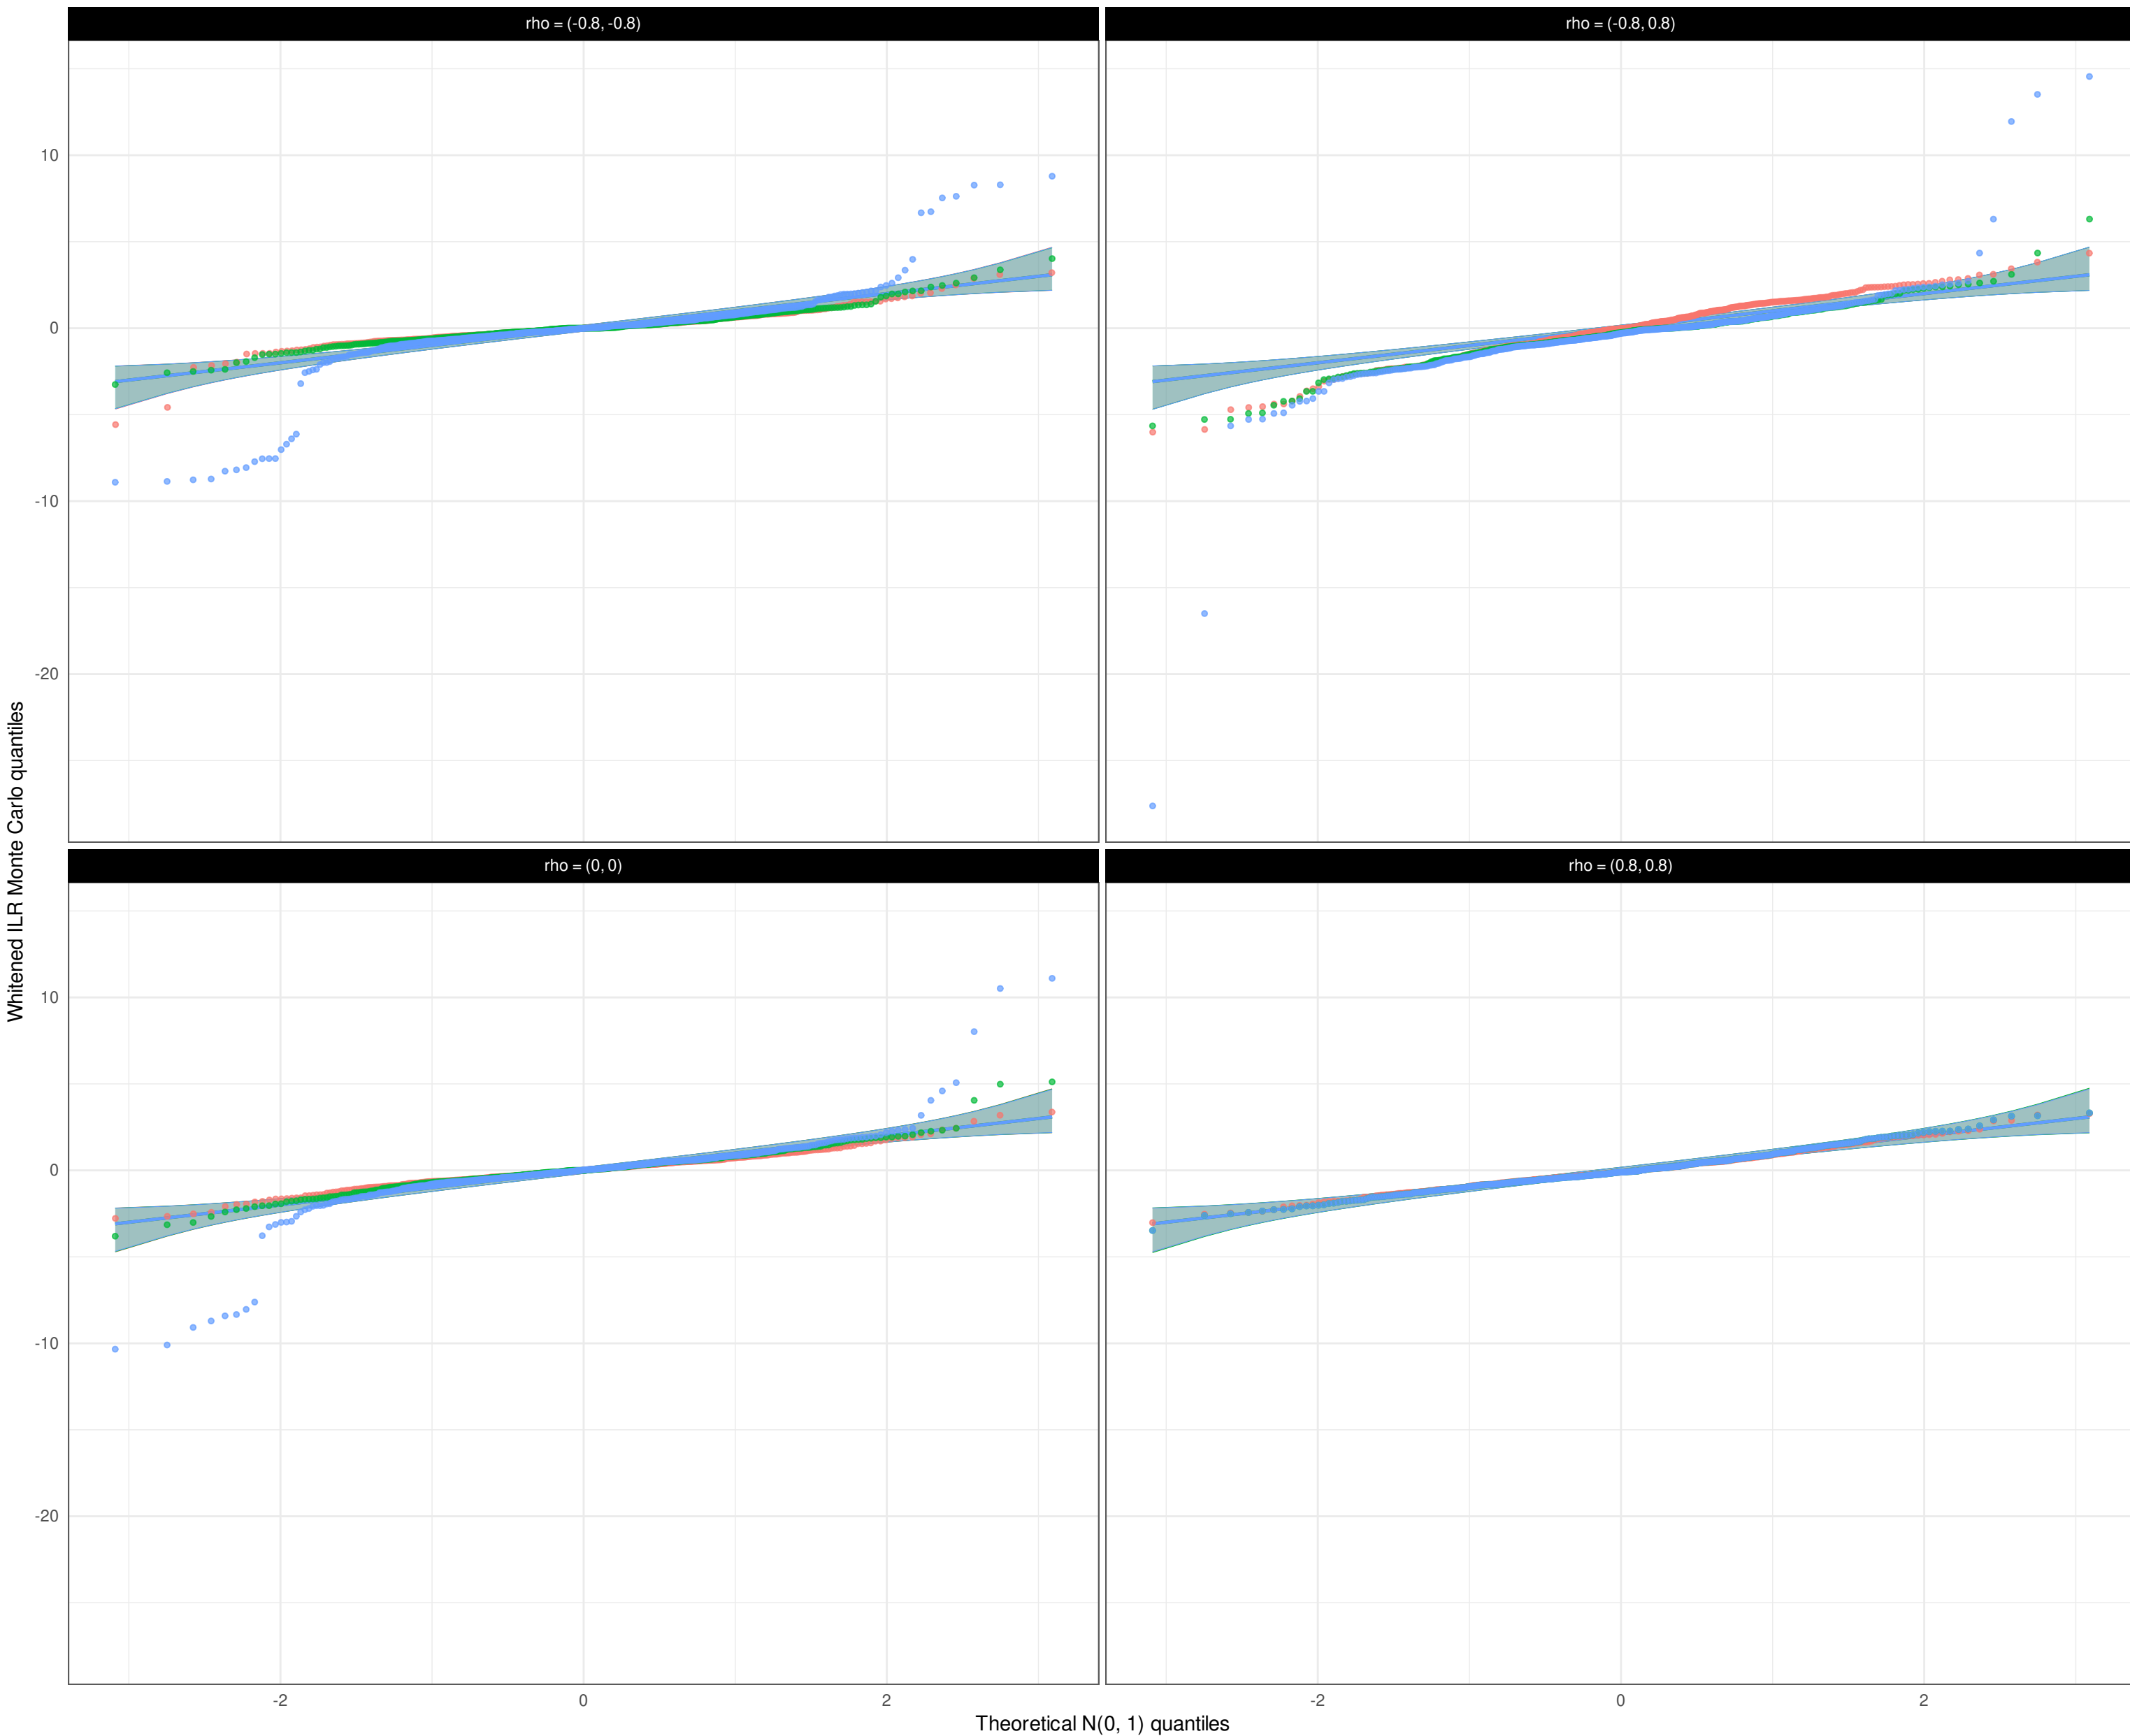


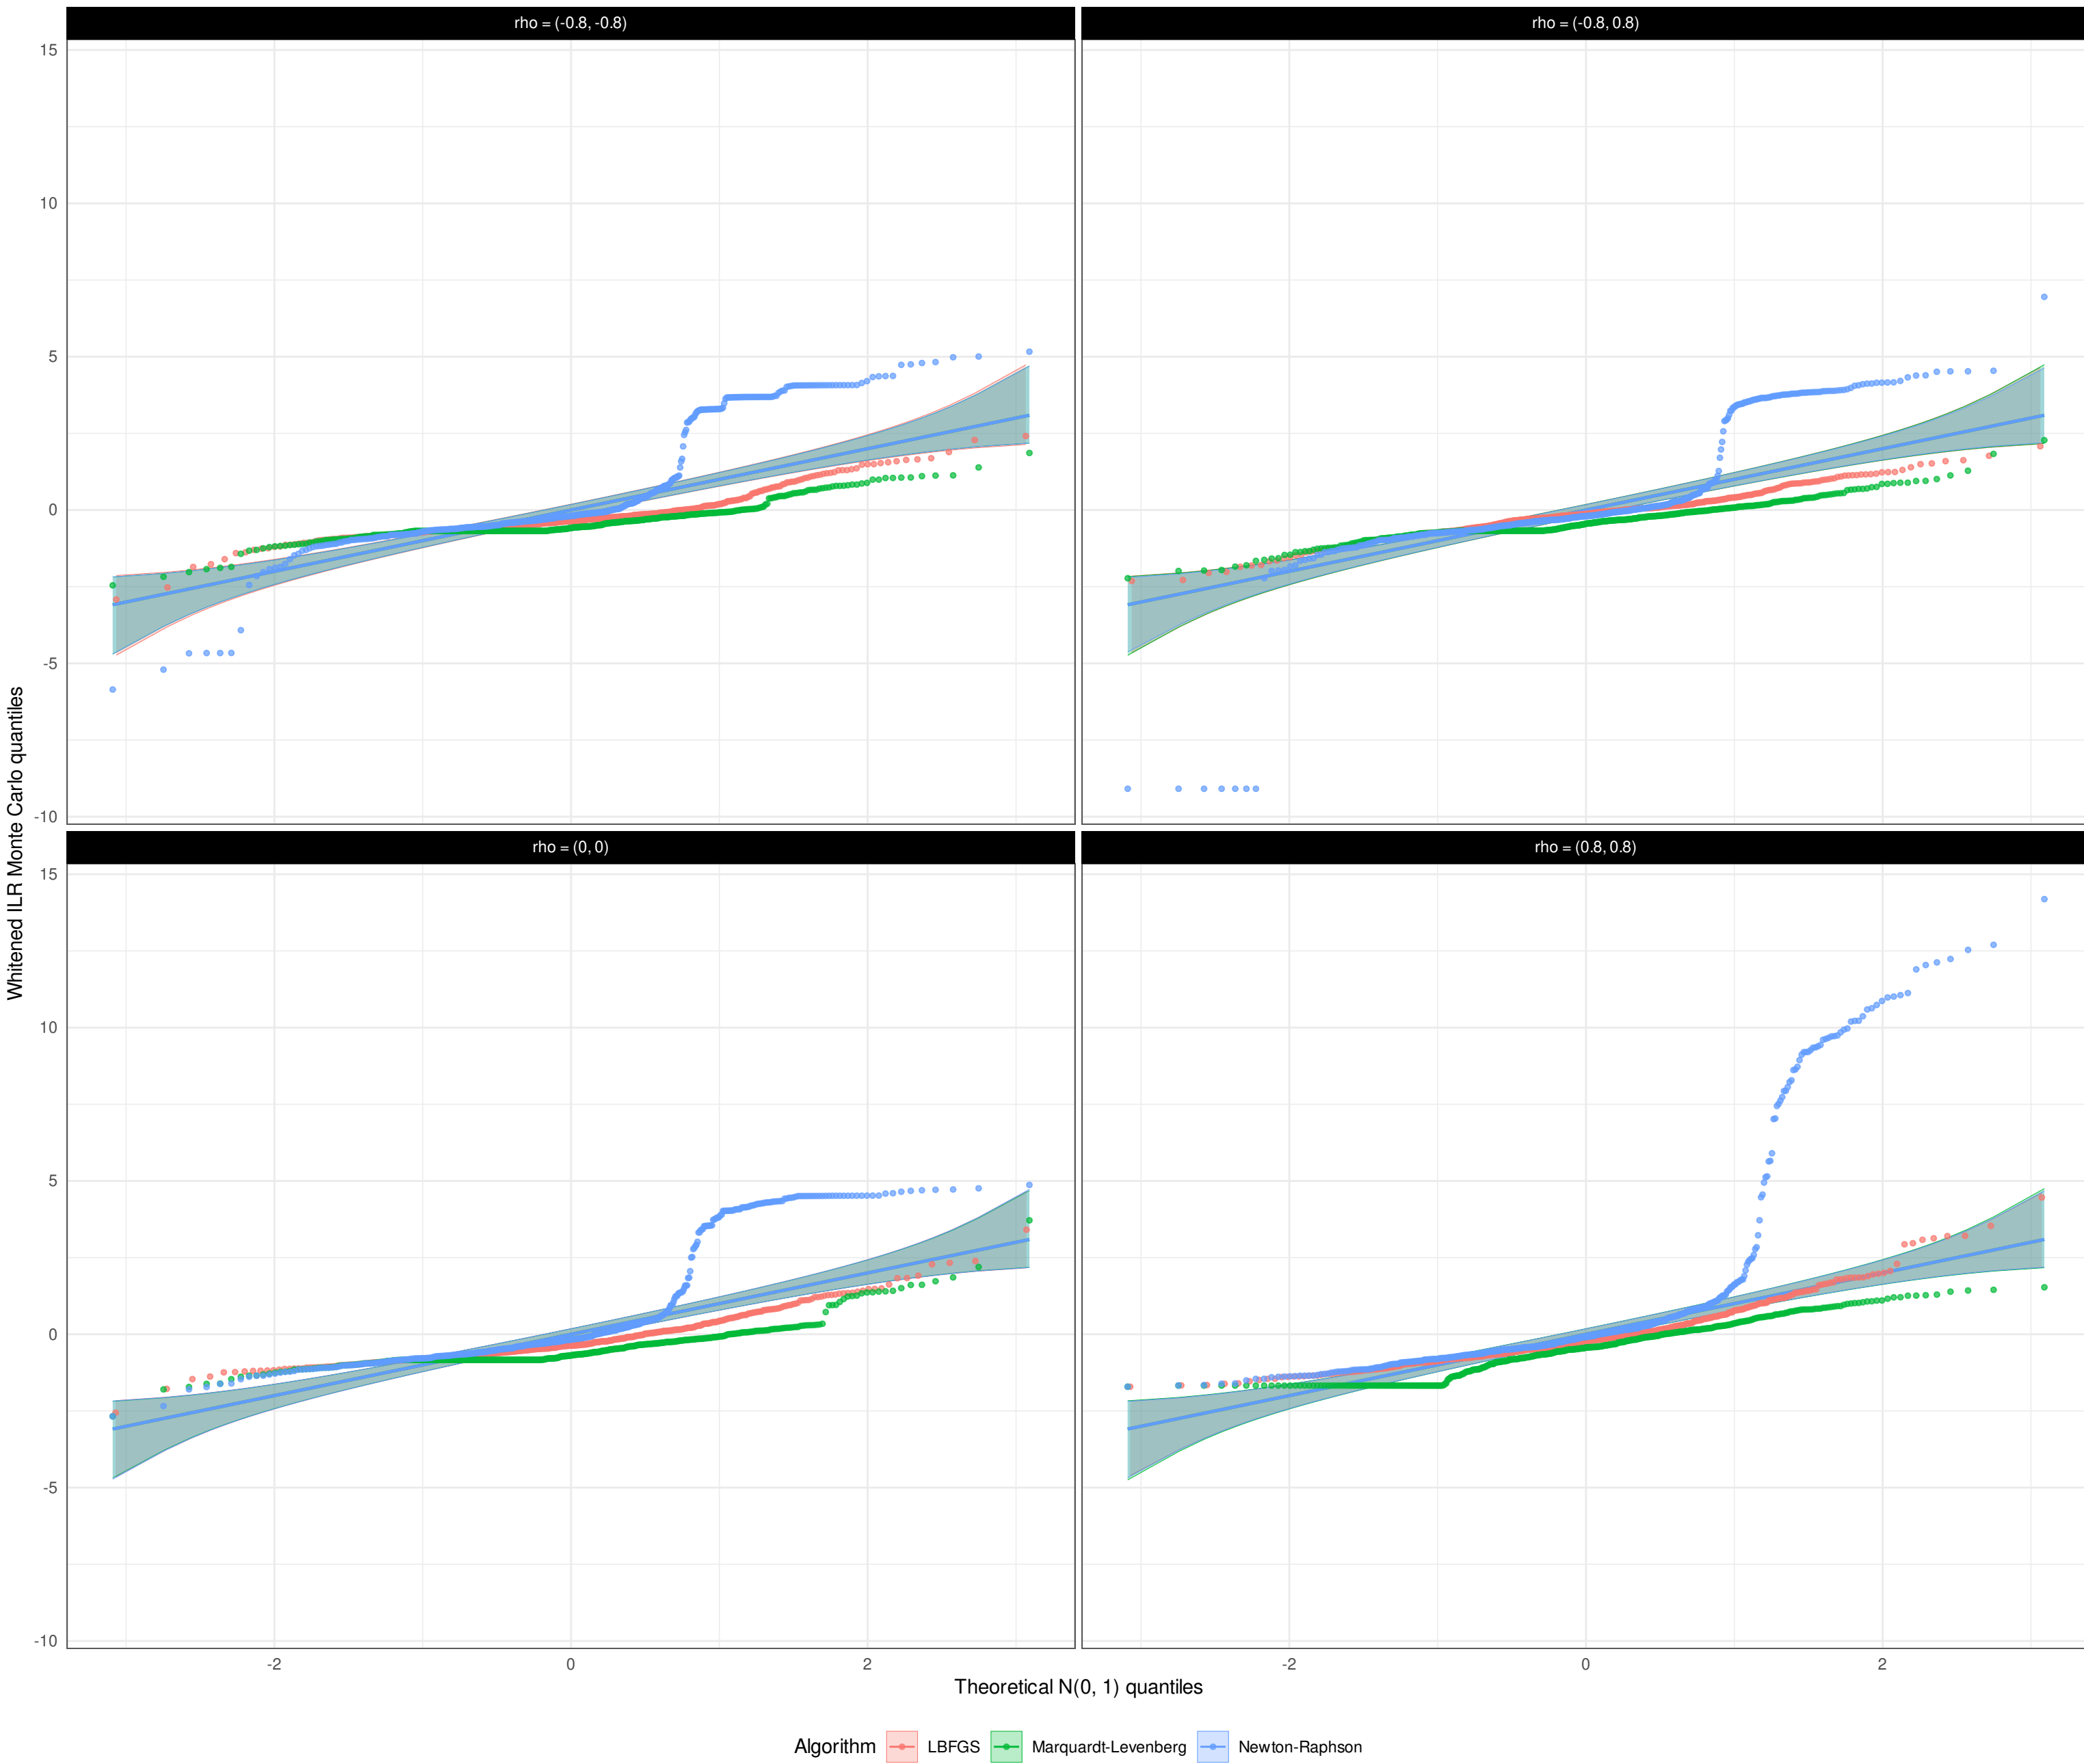


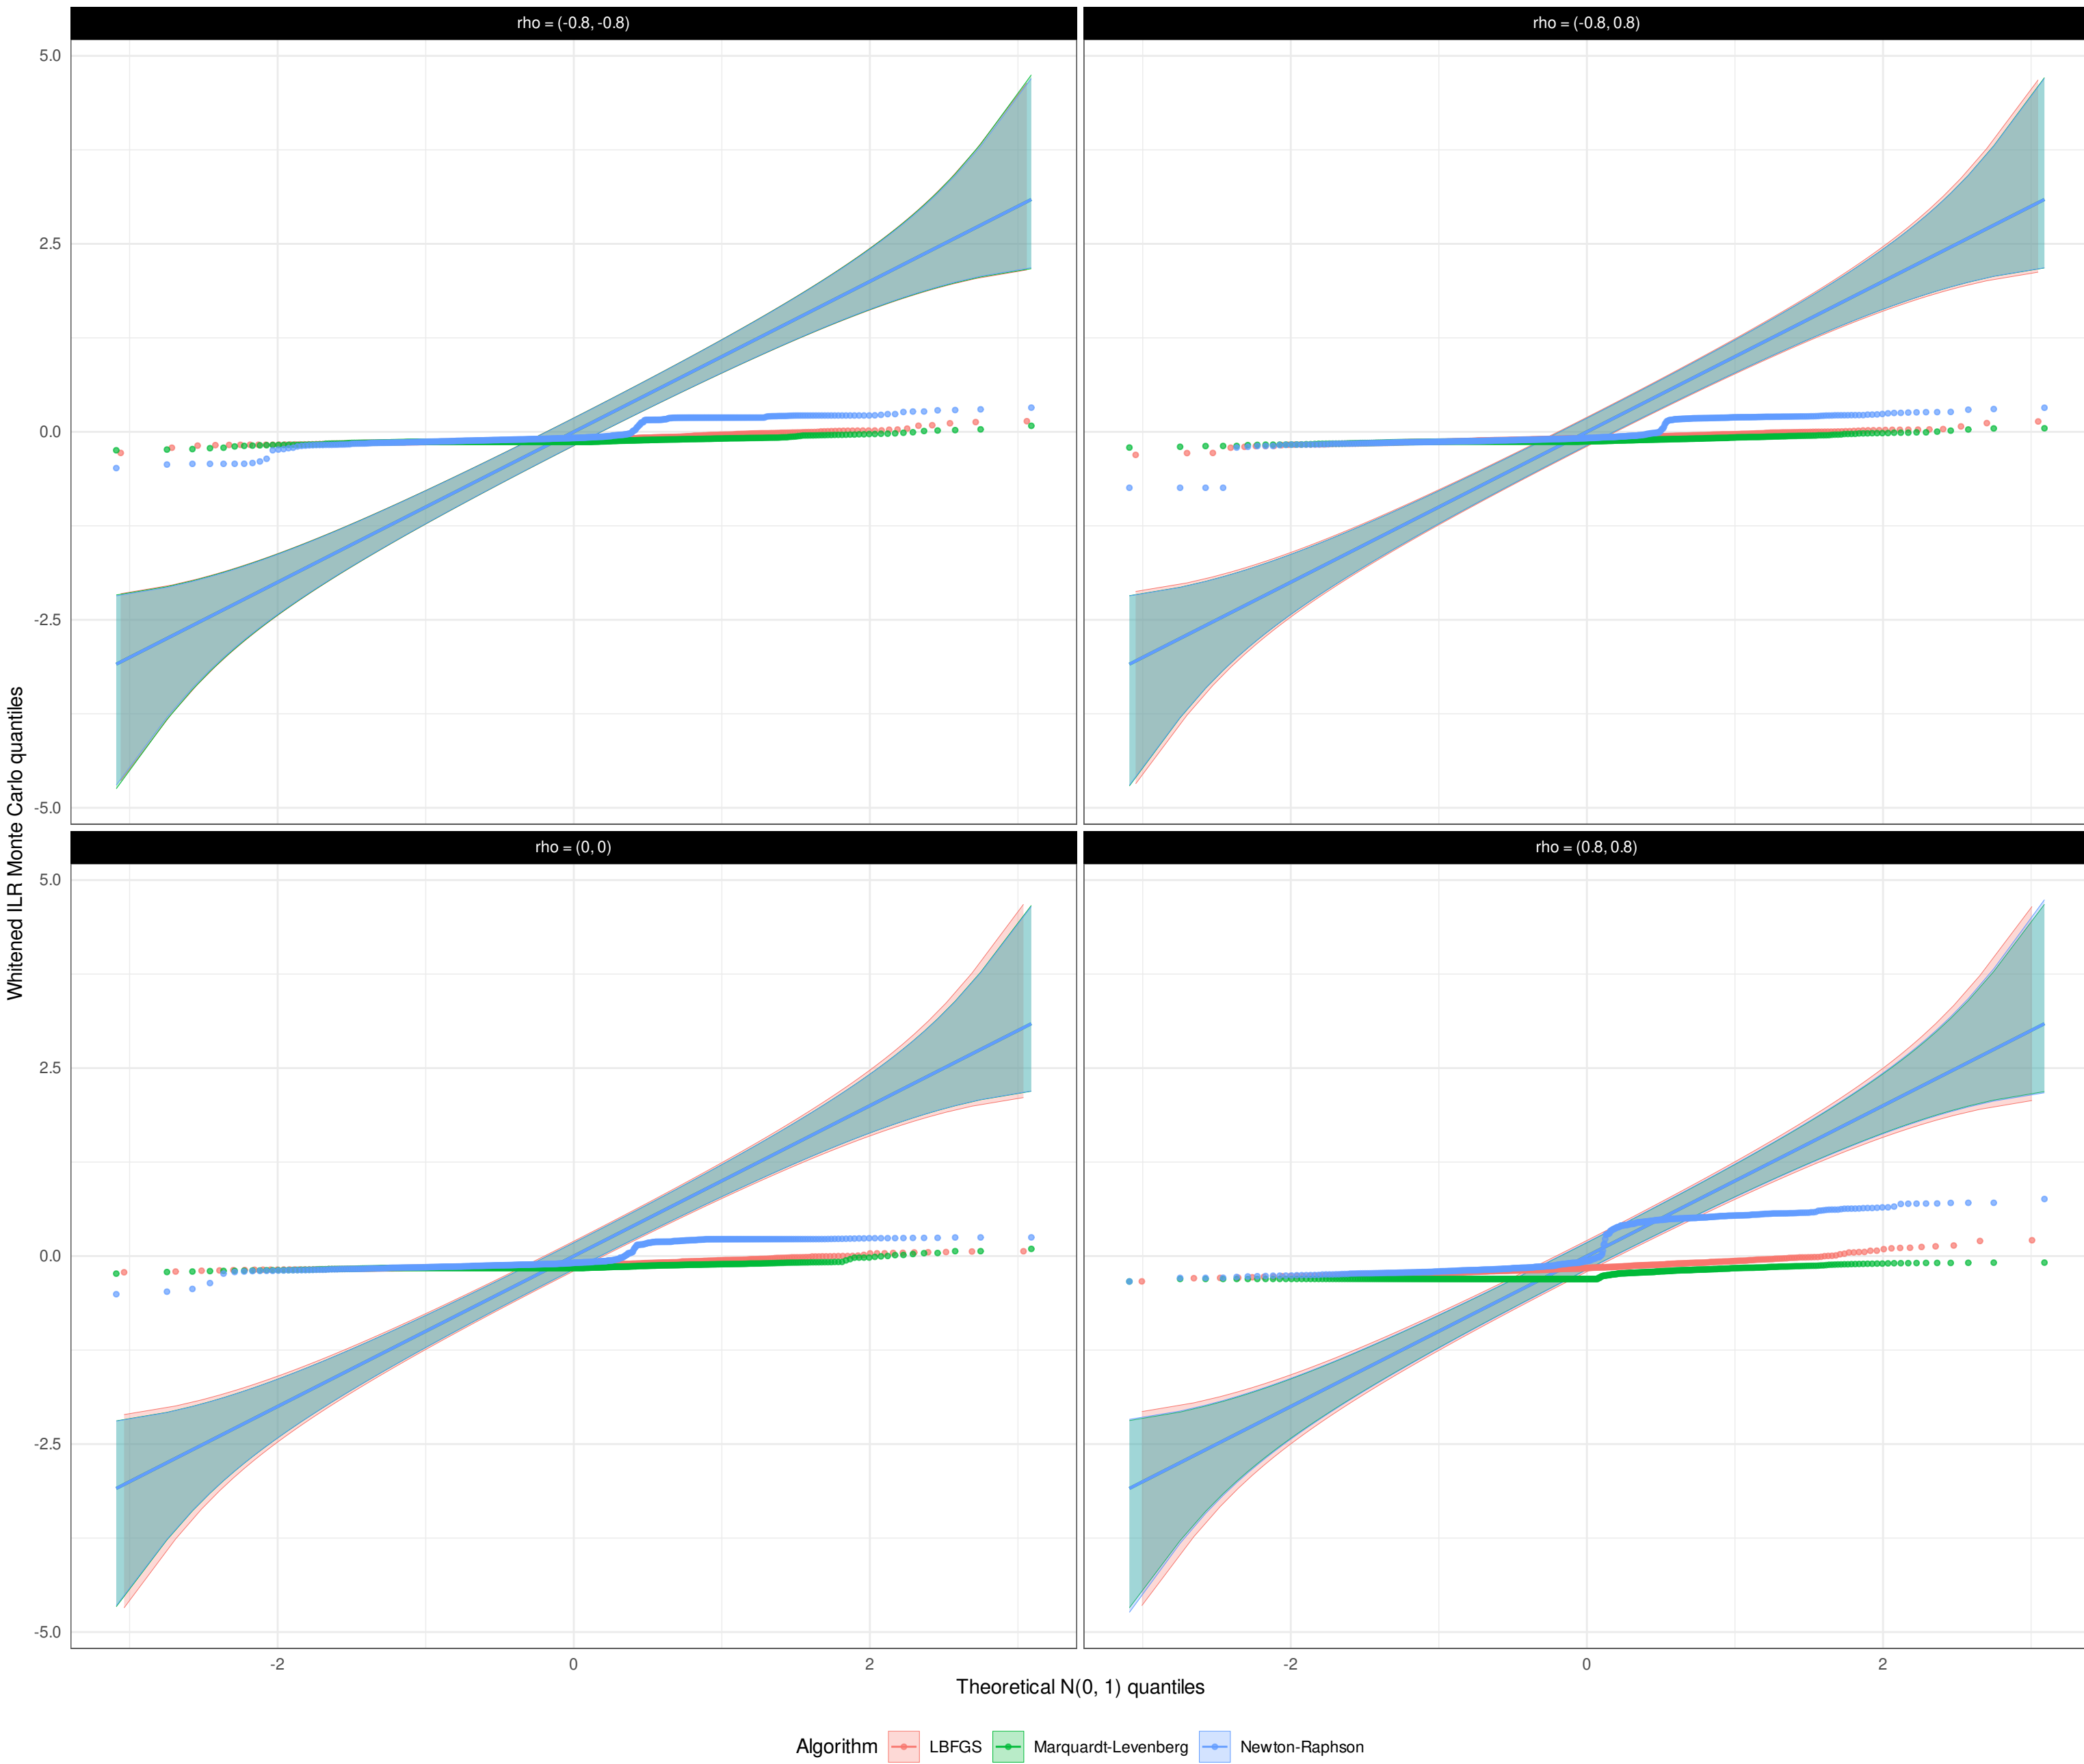

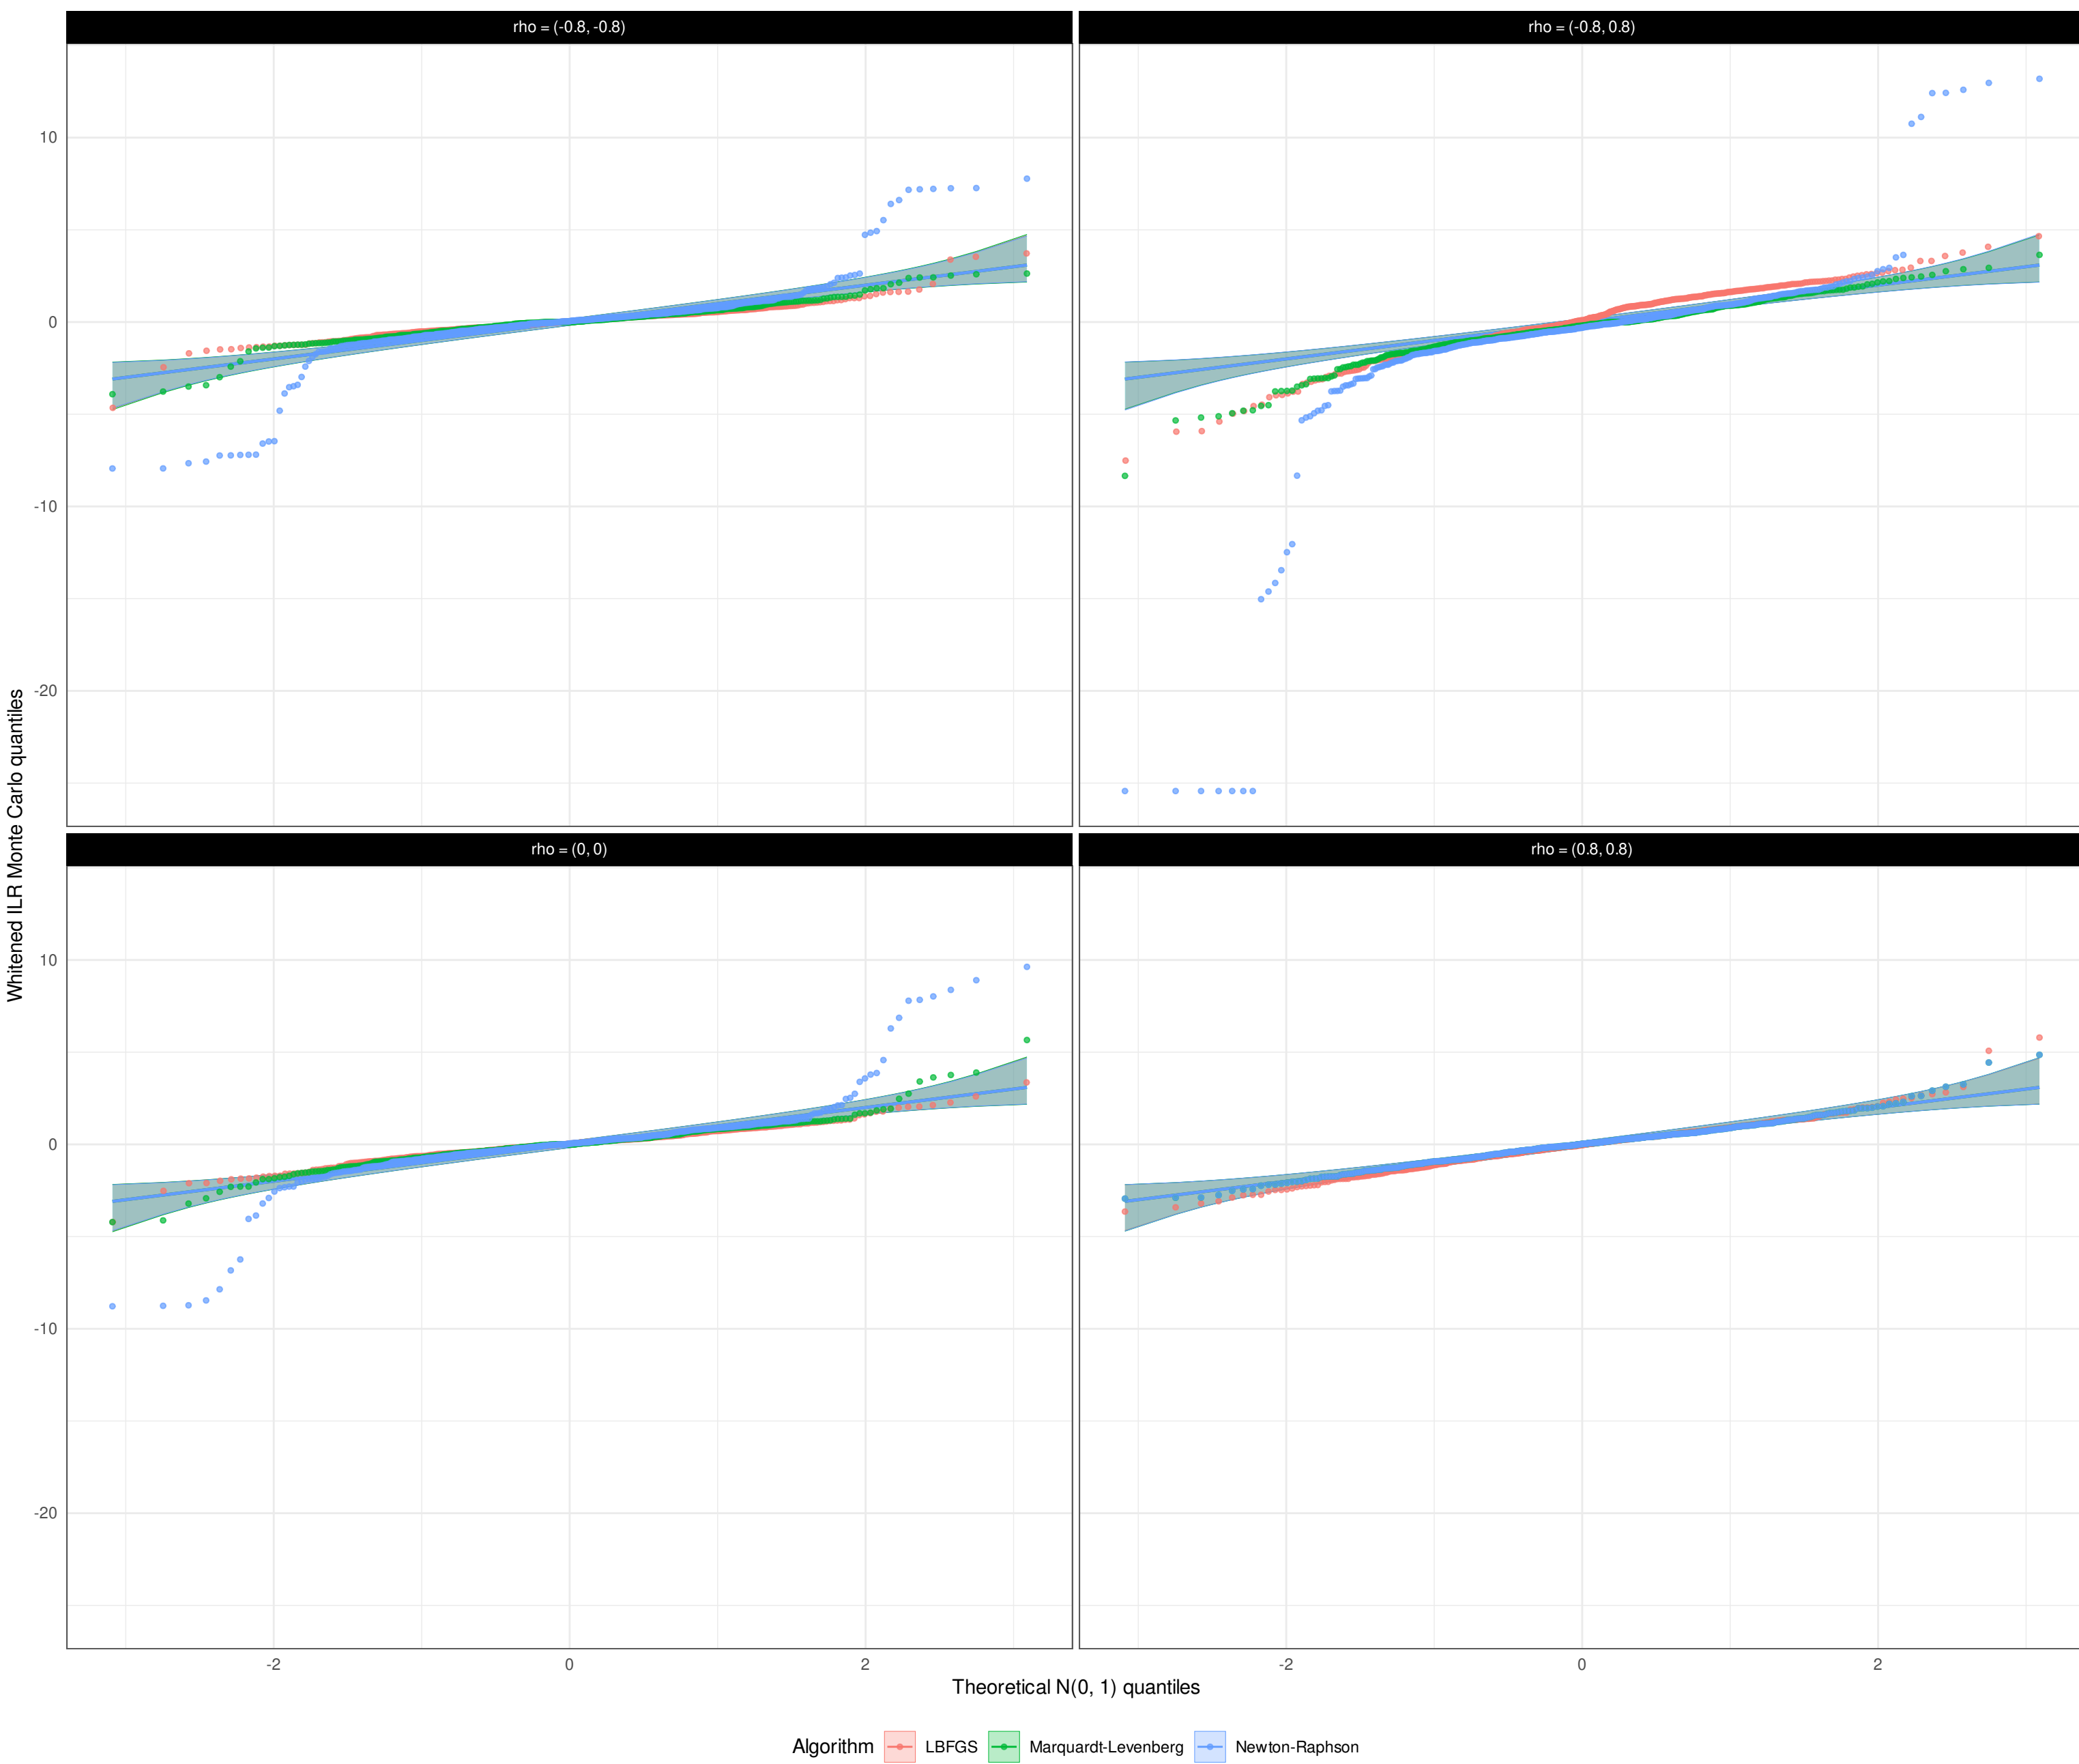

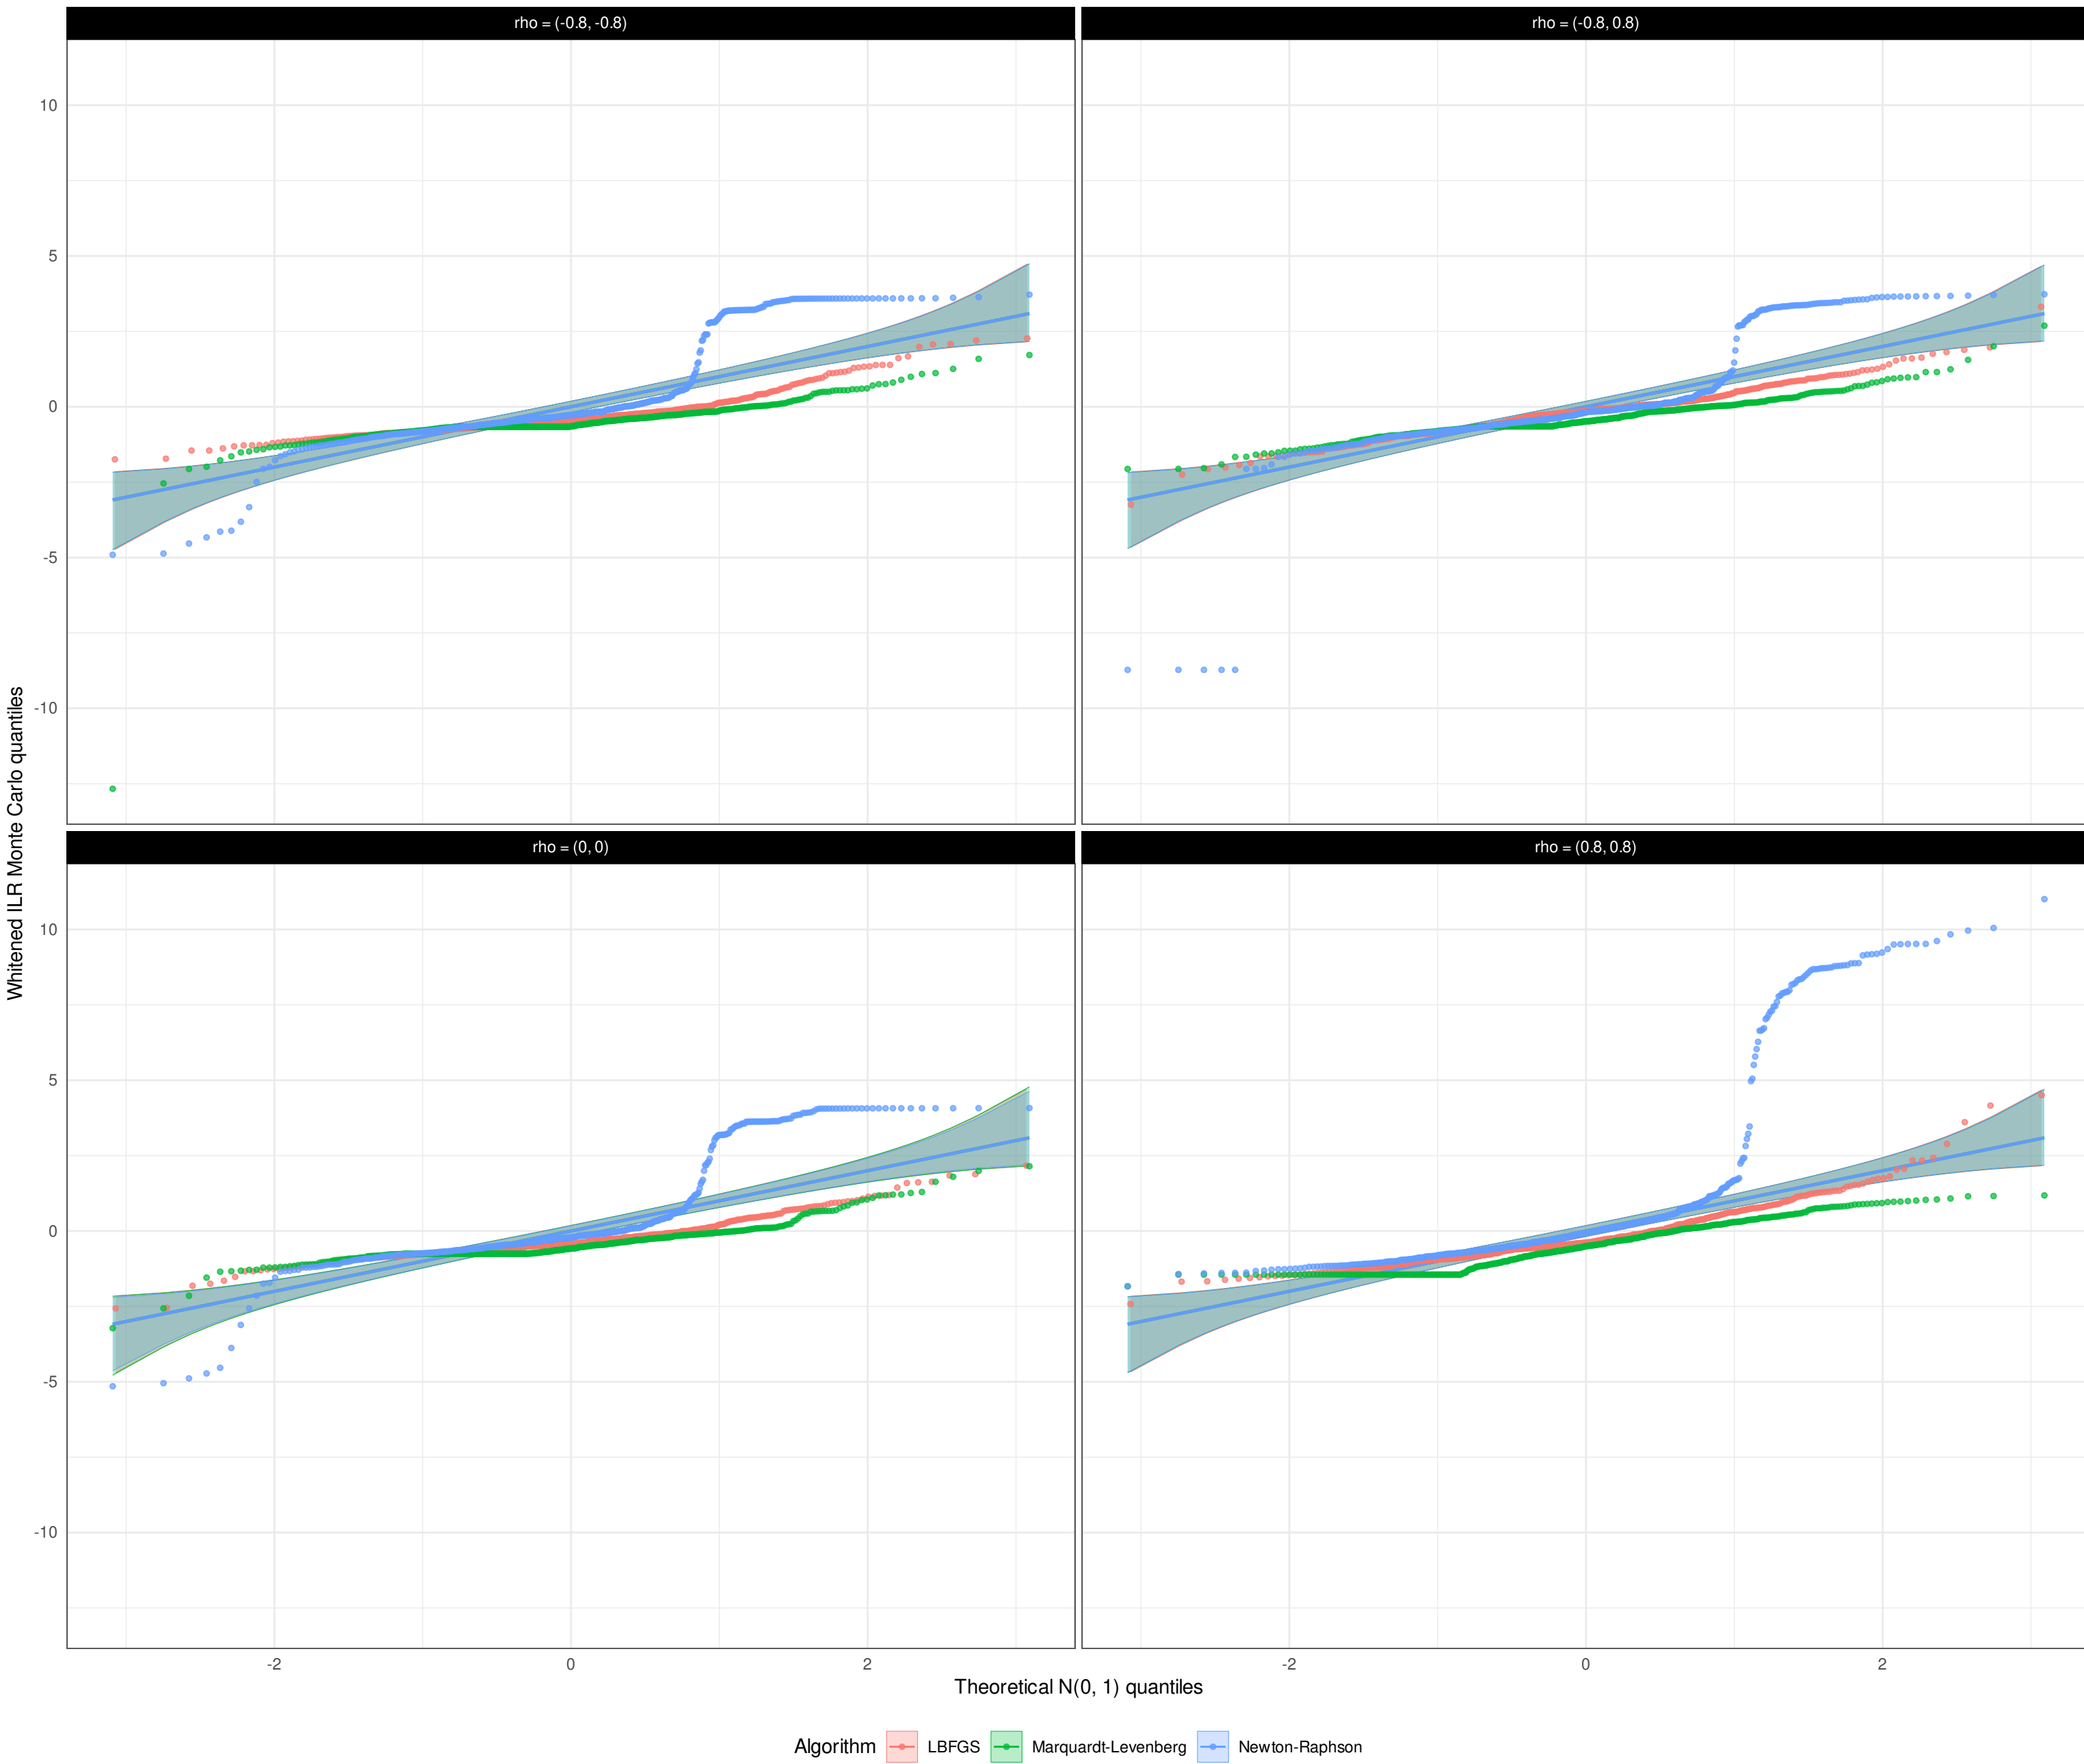


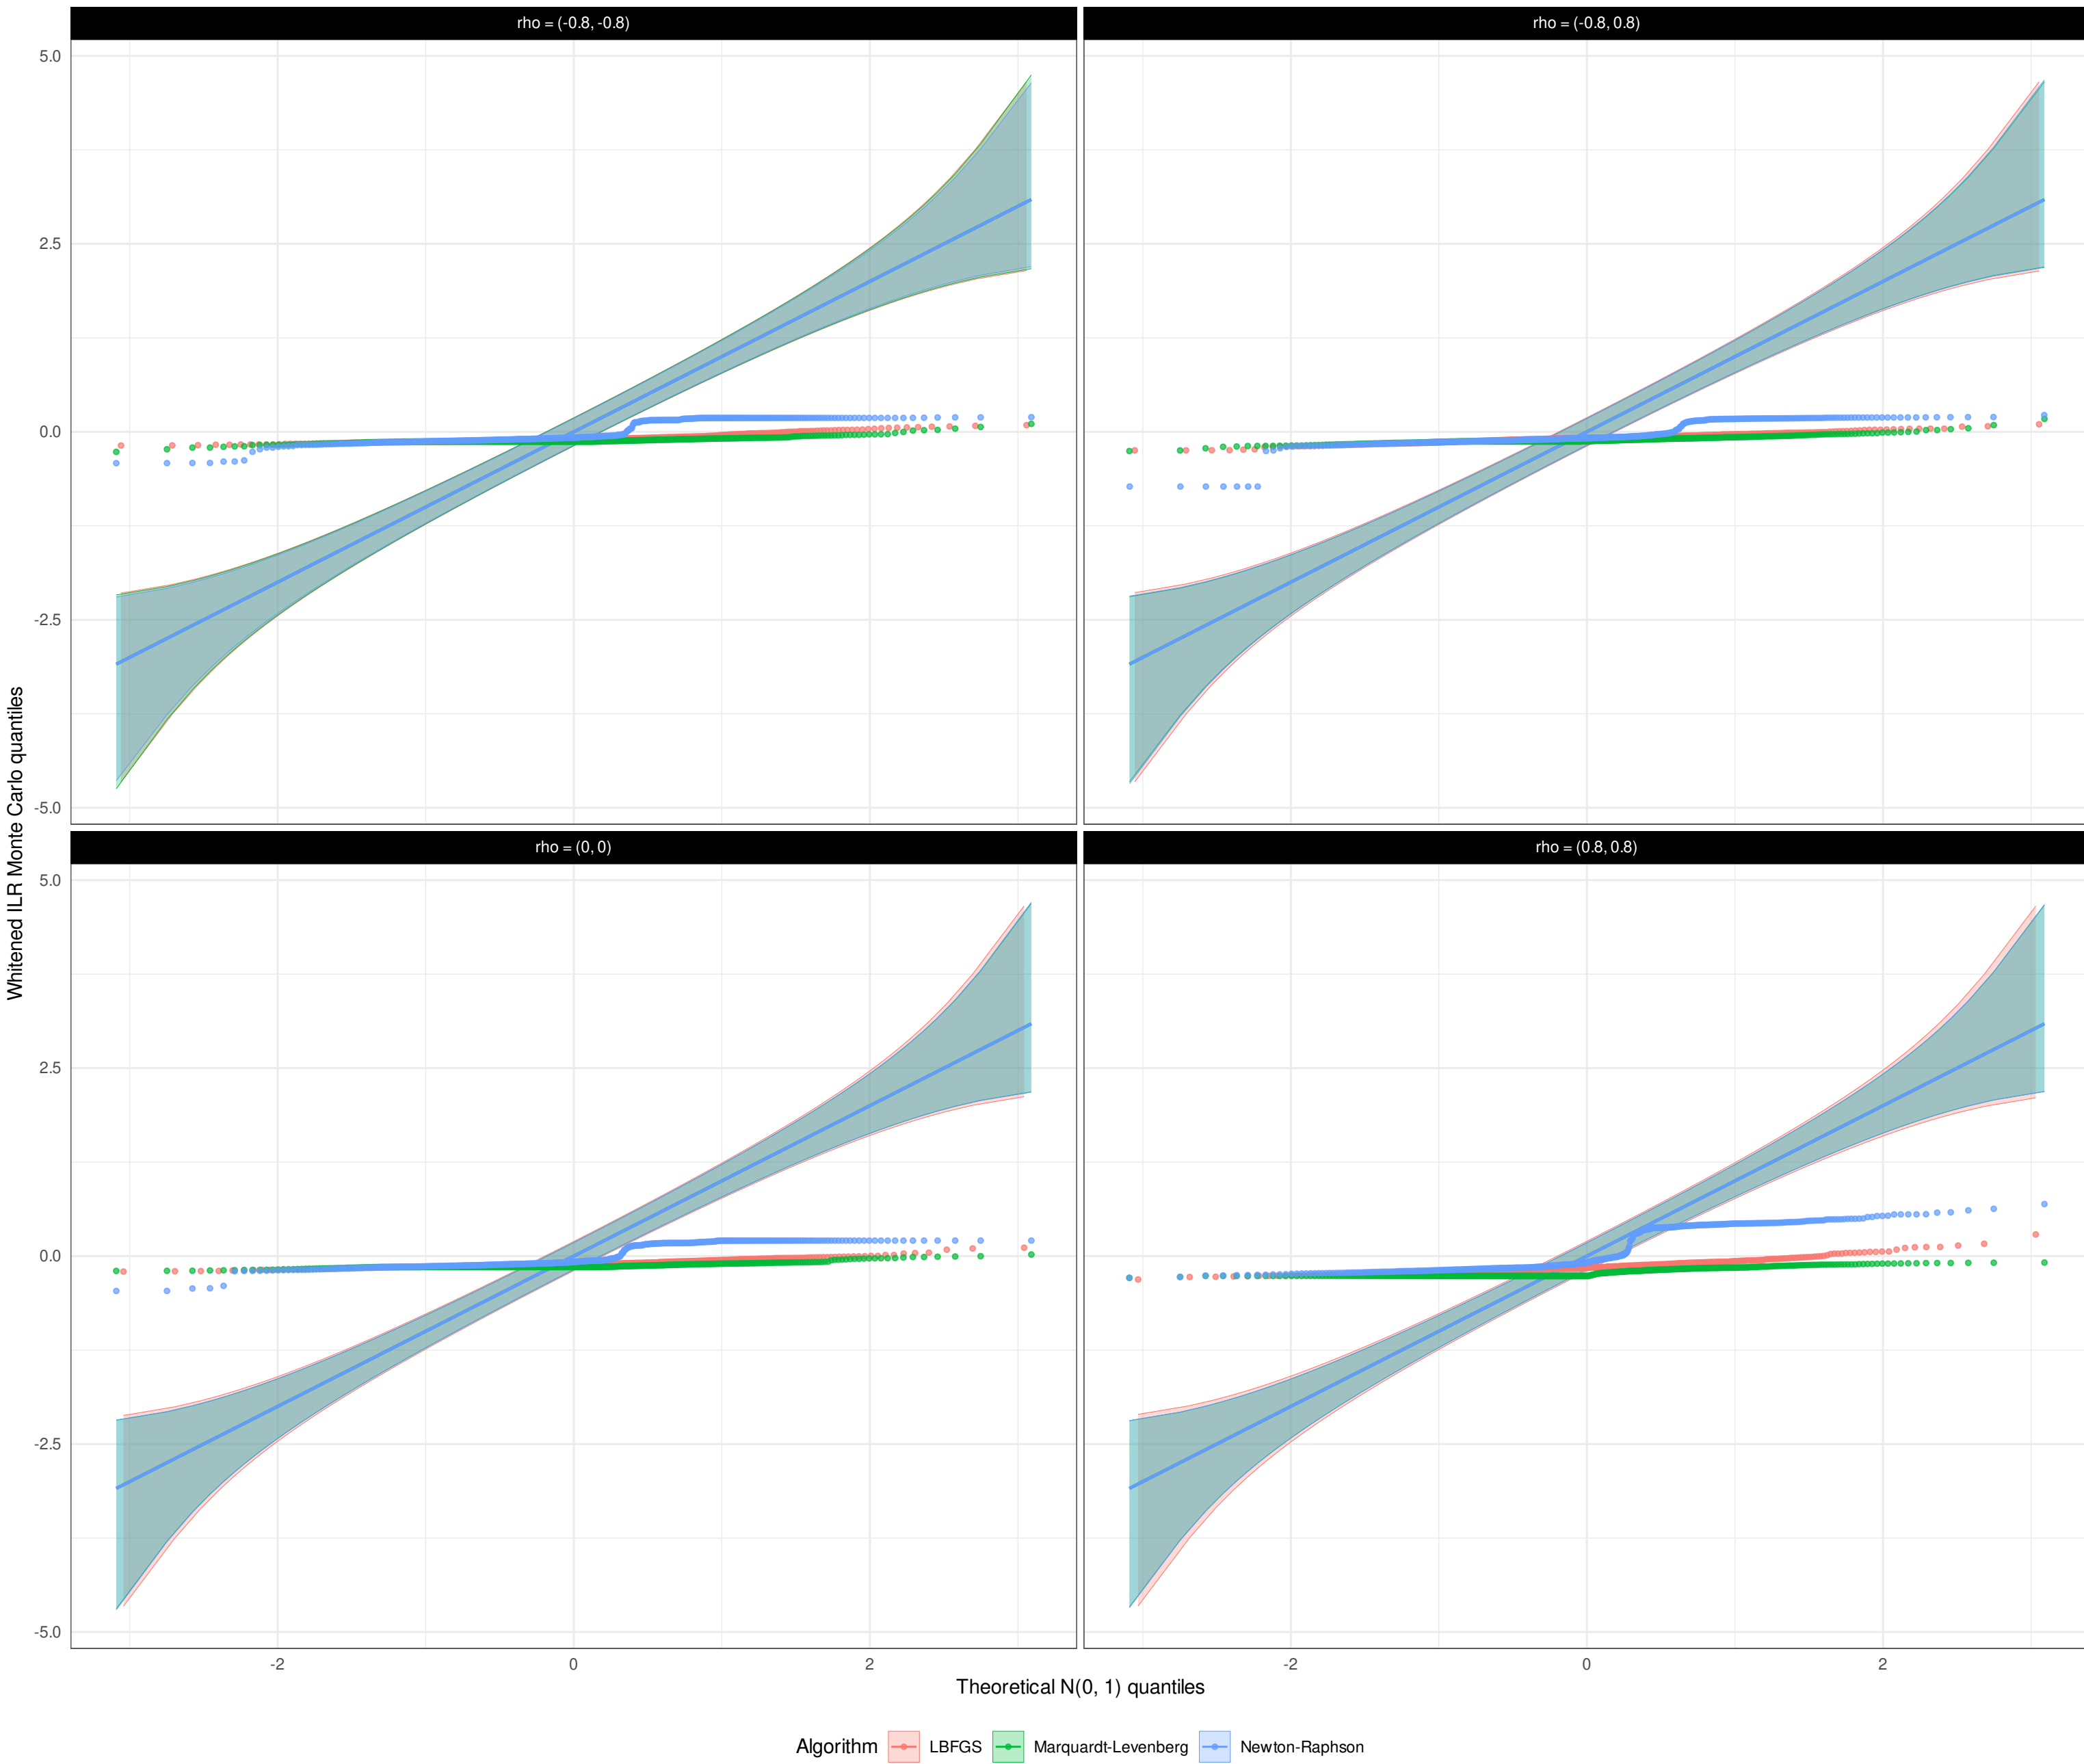

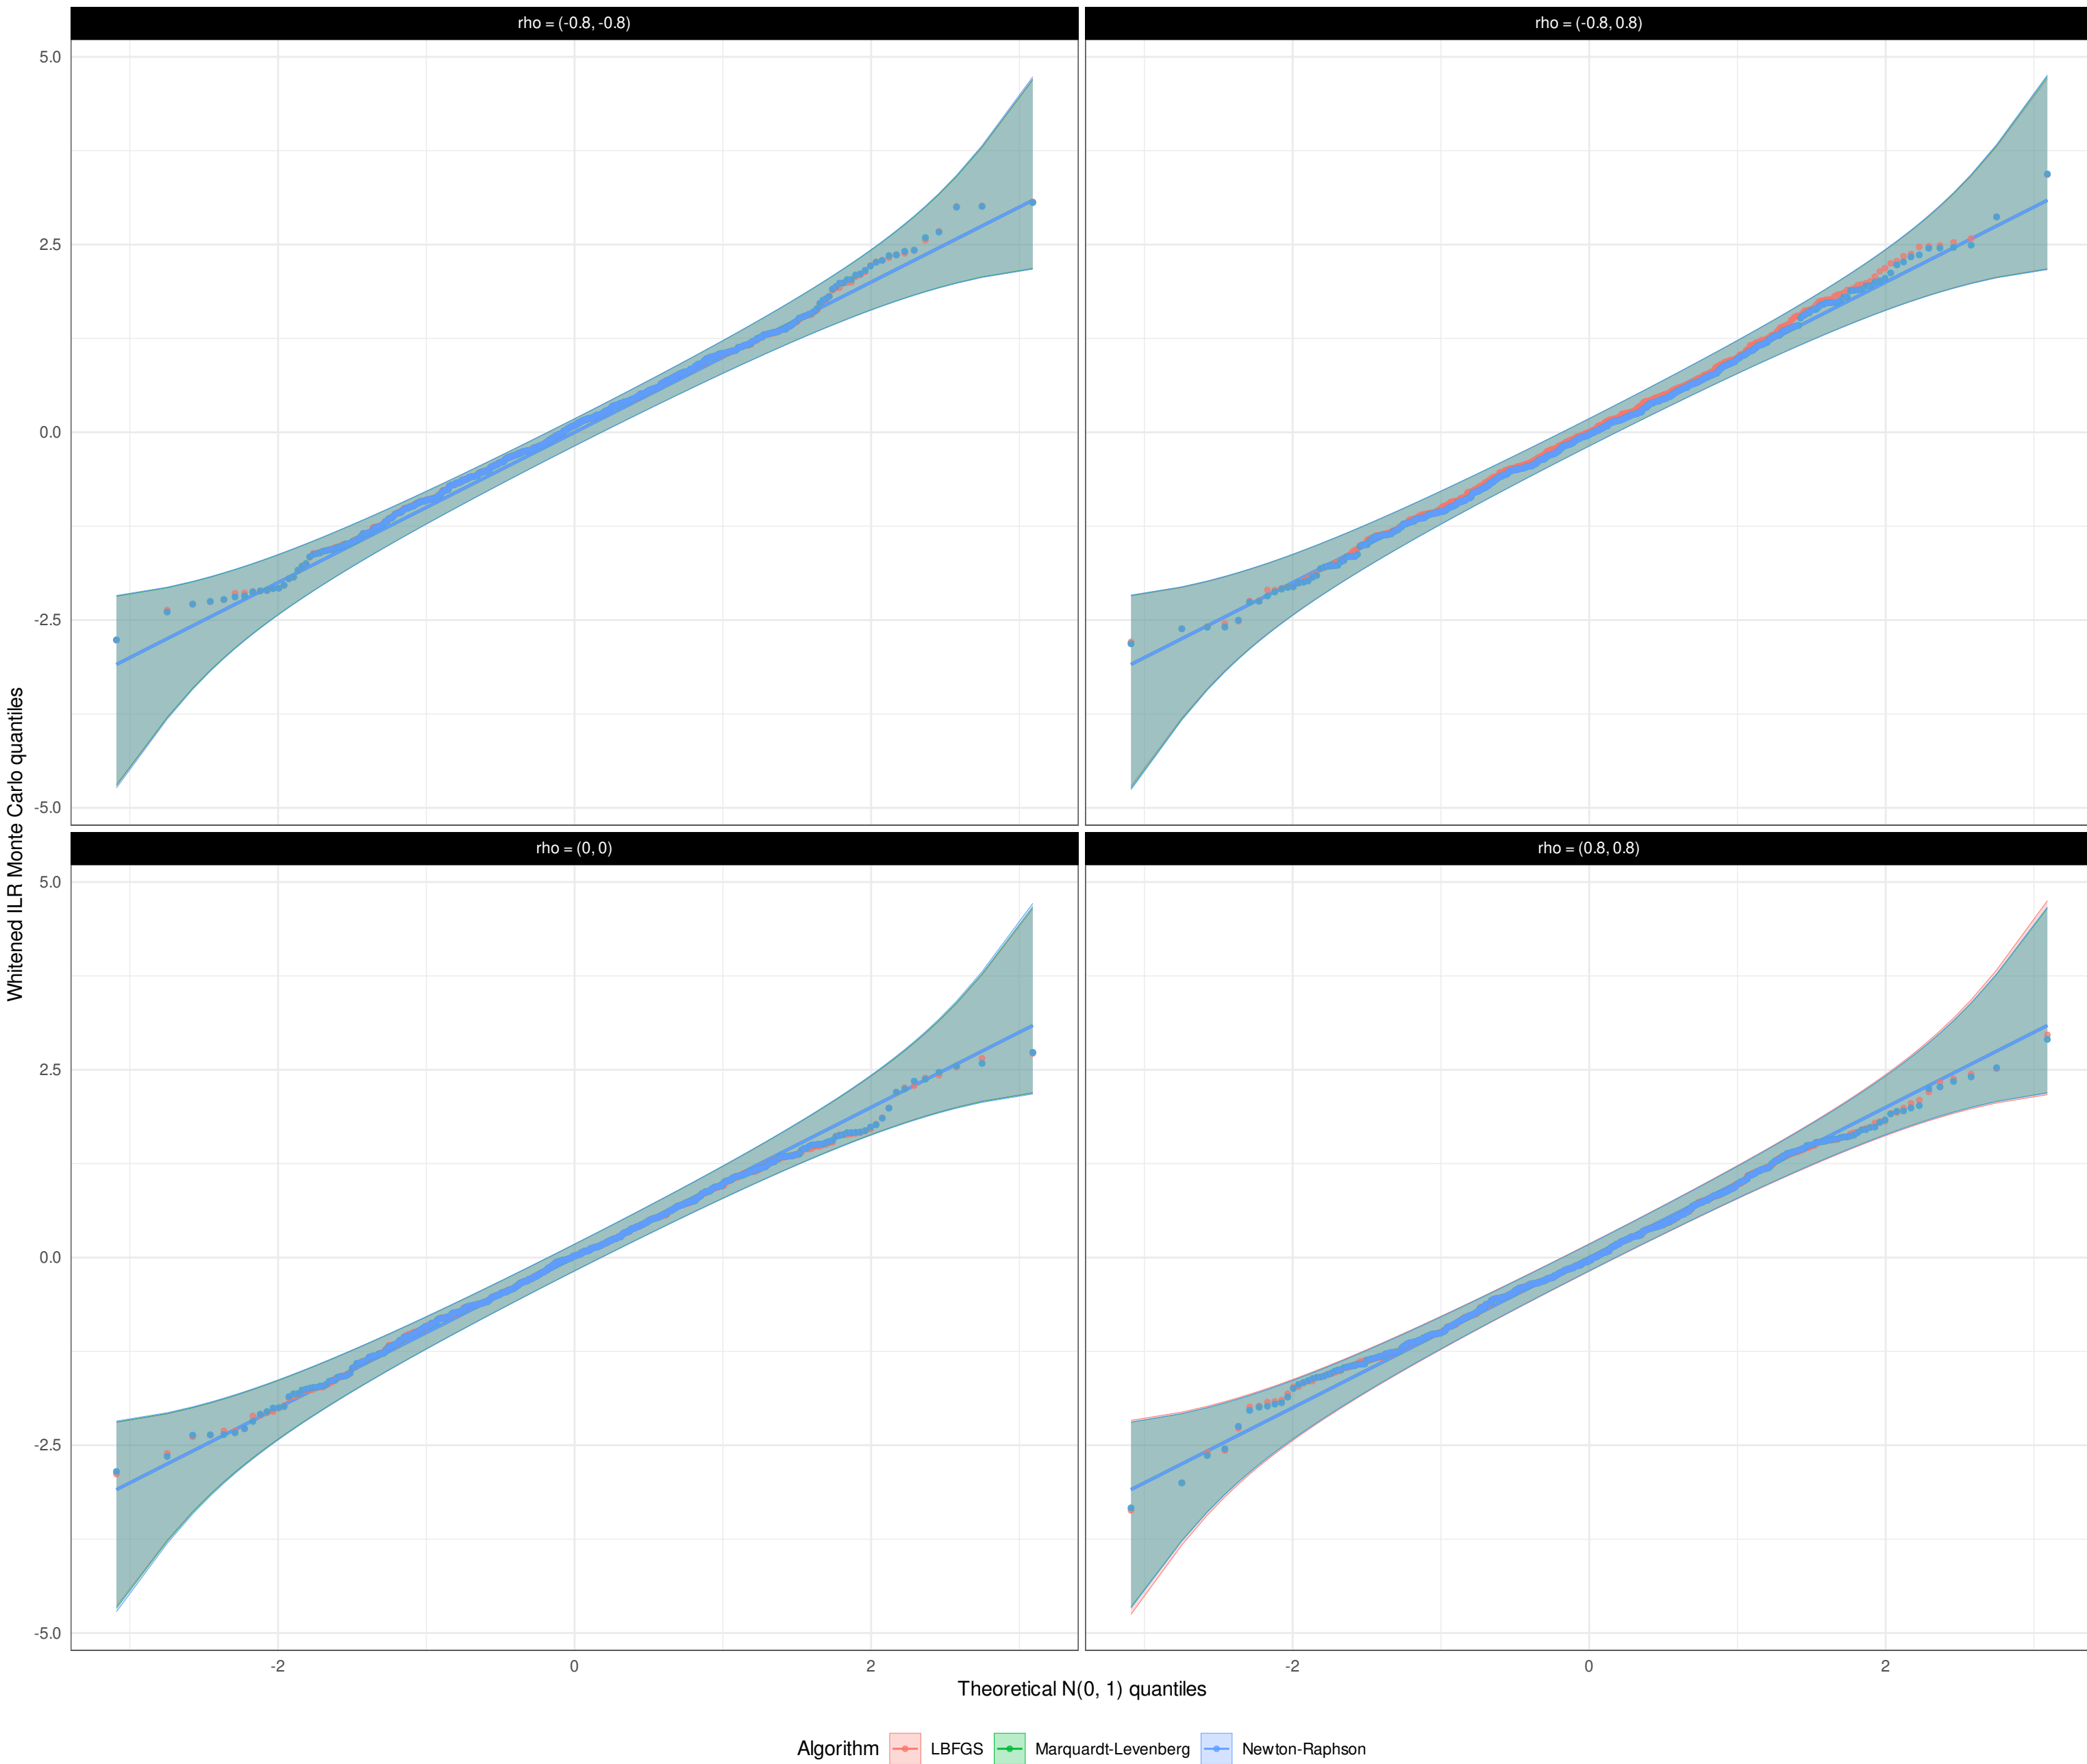

large_CLD / homoscedastic / moderately unbalanced


Whitened ILR Monte Carlo quantiles

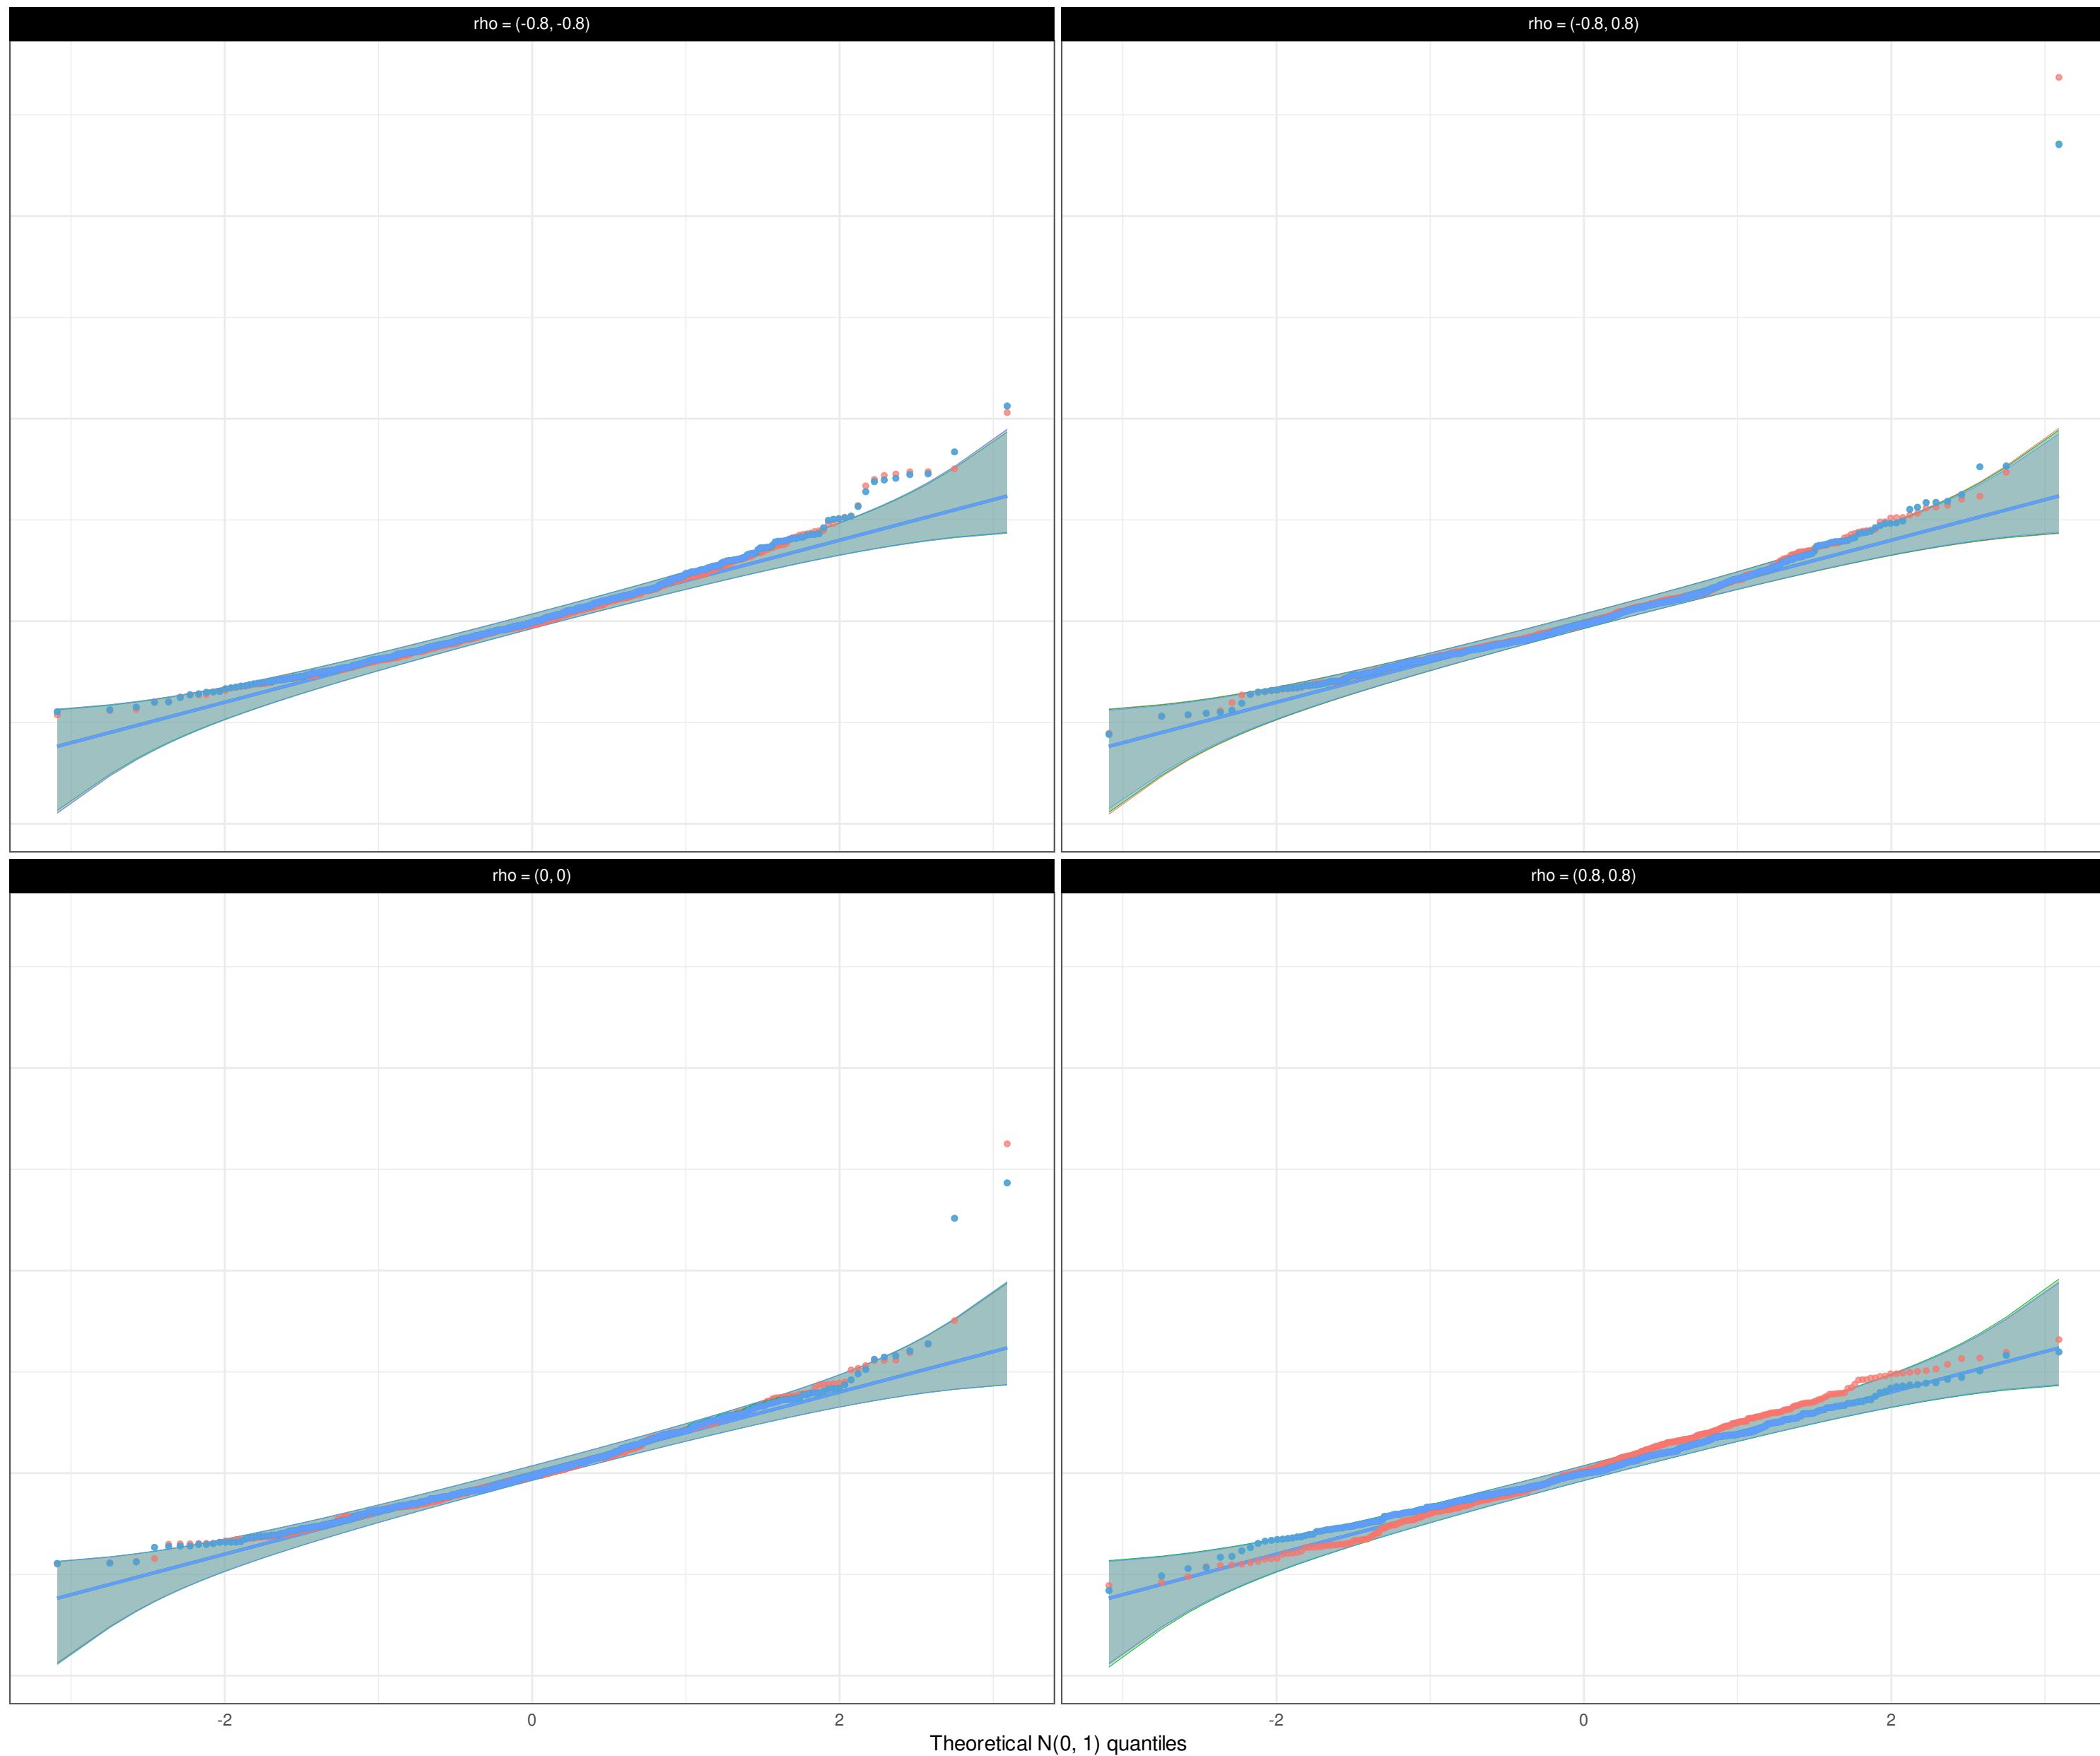


Algorithm LBFGS Marquardt-Levenberg Newton-Raphson


$W = I_z(p)^{1/2} (\hat{z} - z^*)$ versus $N(0, 1)$; identity line. Tail-sensitive band (Aldor-Noiman et al.) with $\mu = 0$, $\sigma = 1$. LBFGS, Marquardt-Levenberg and Newton-Raphson only; not detrended.

large_CLD / homoscedastic / highly unbalanced

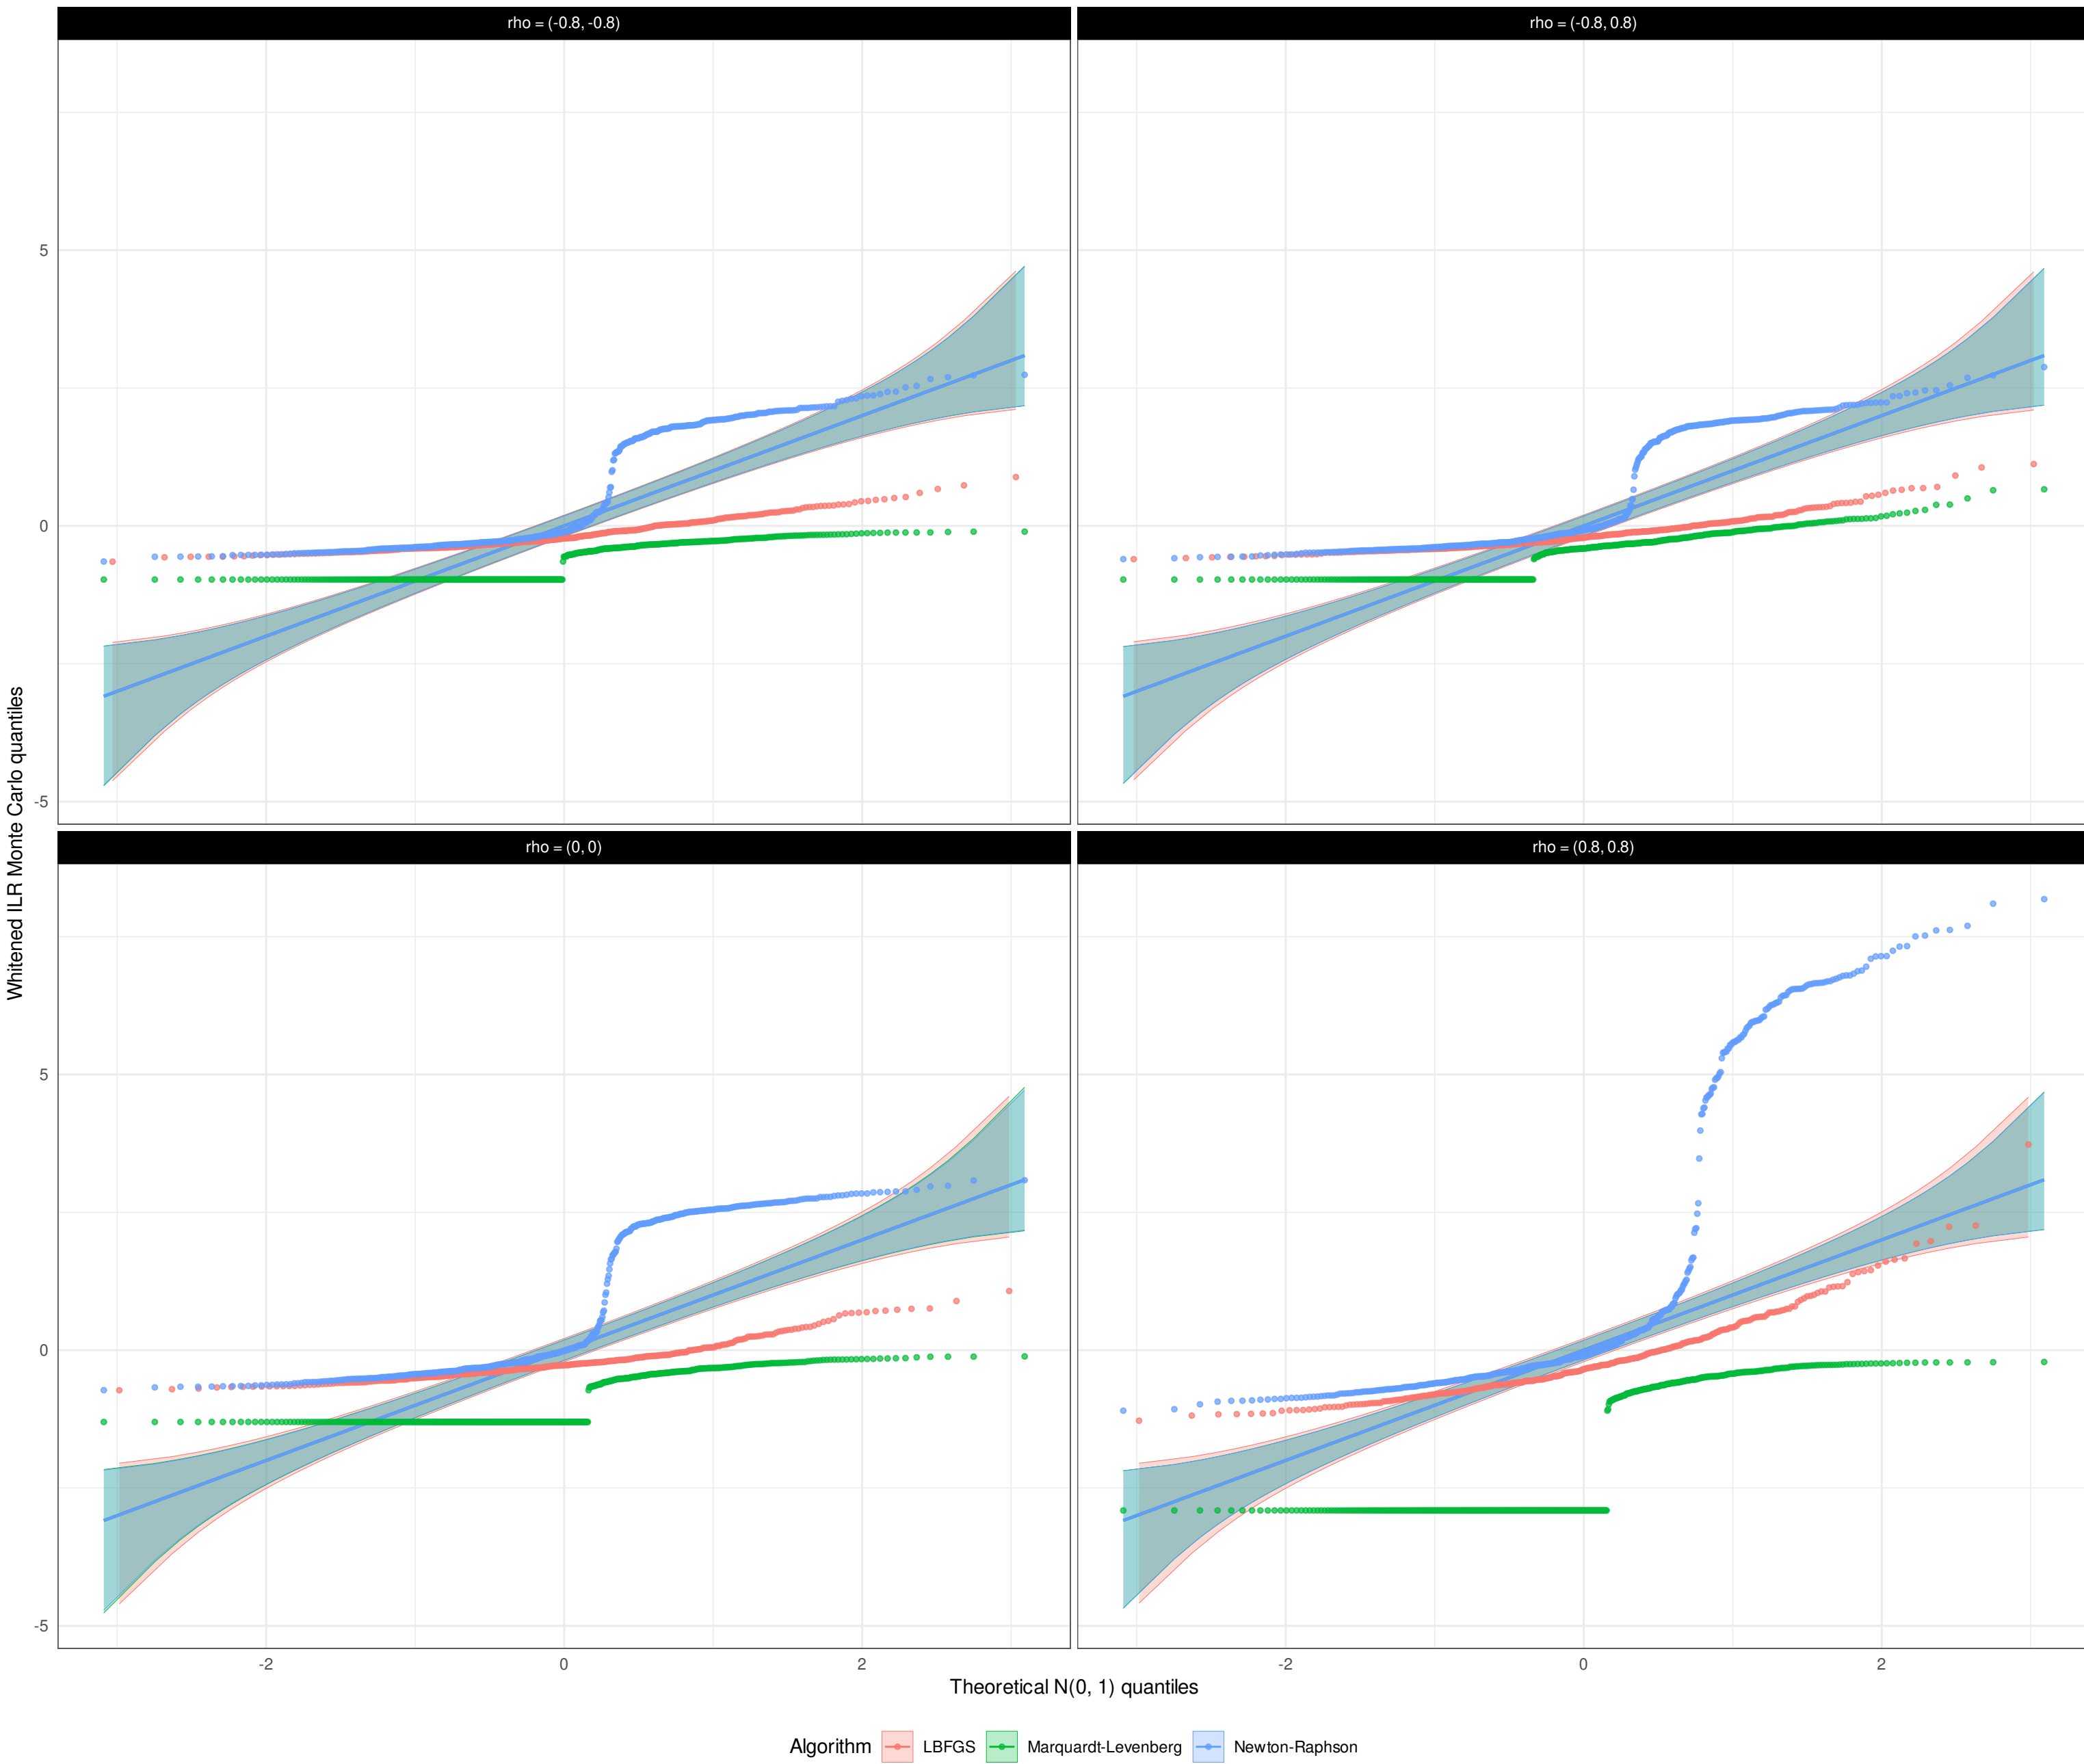


$W = l_z(p)^{1/2} (\hat{z} - z^*)$ versus $N(0, 1)$; identity line. Tail-sensitive band (Aldor-Noiman et al.) with $\mu = 0$, $\sigma = 1$. LBFGS, Marquardt-Levenberg and Newton-Raphson only; not detrended.

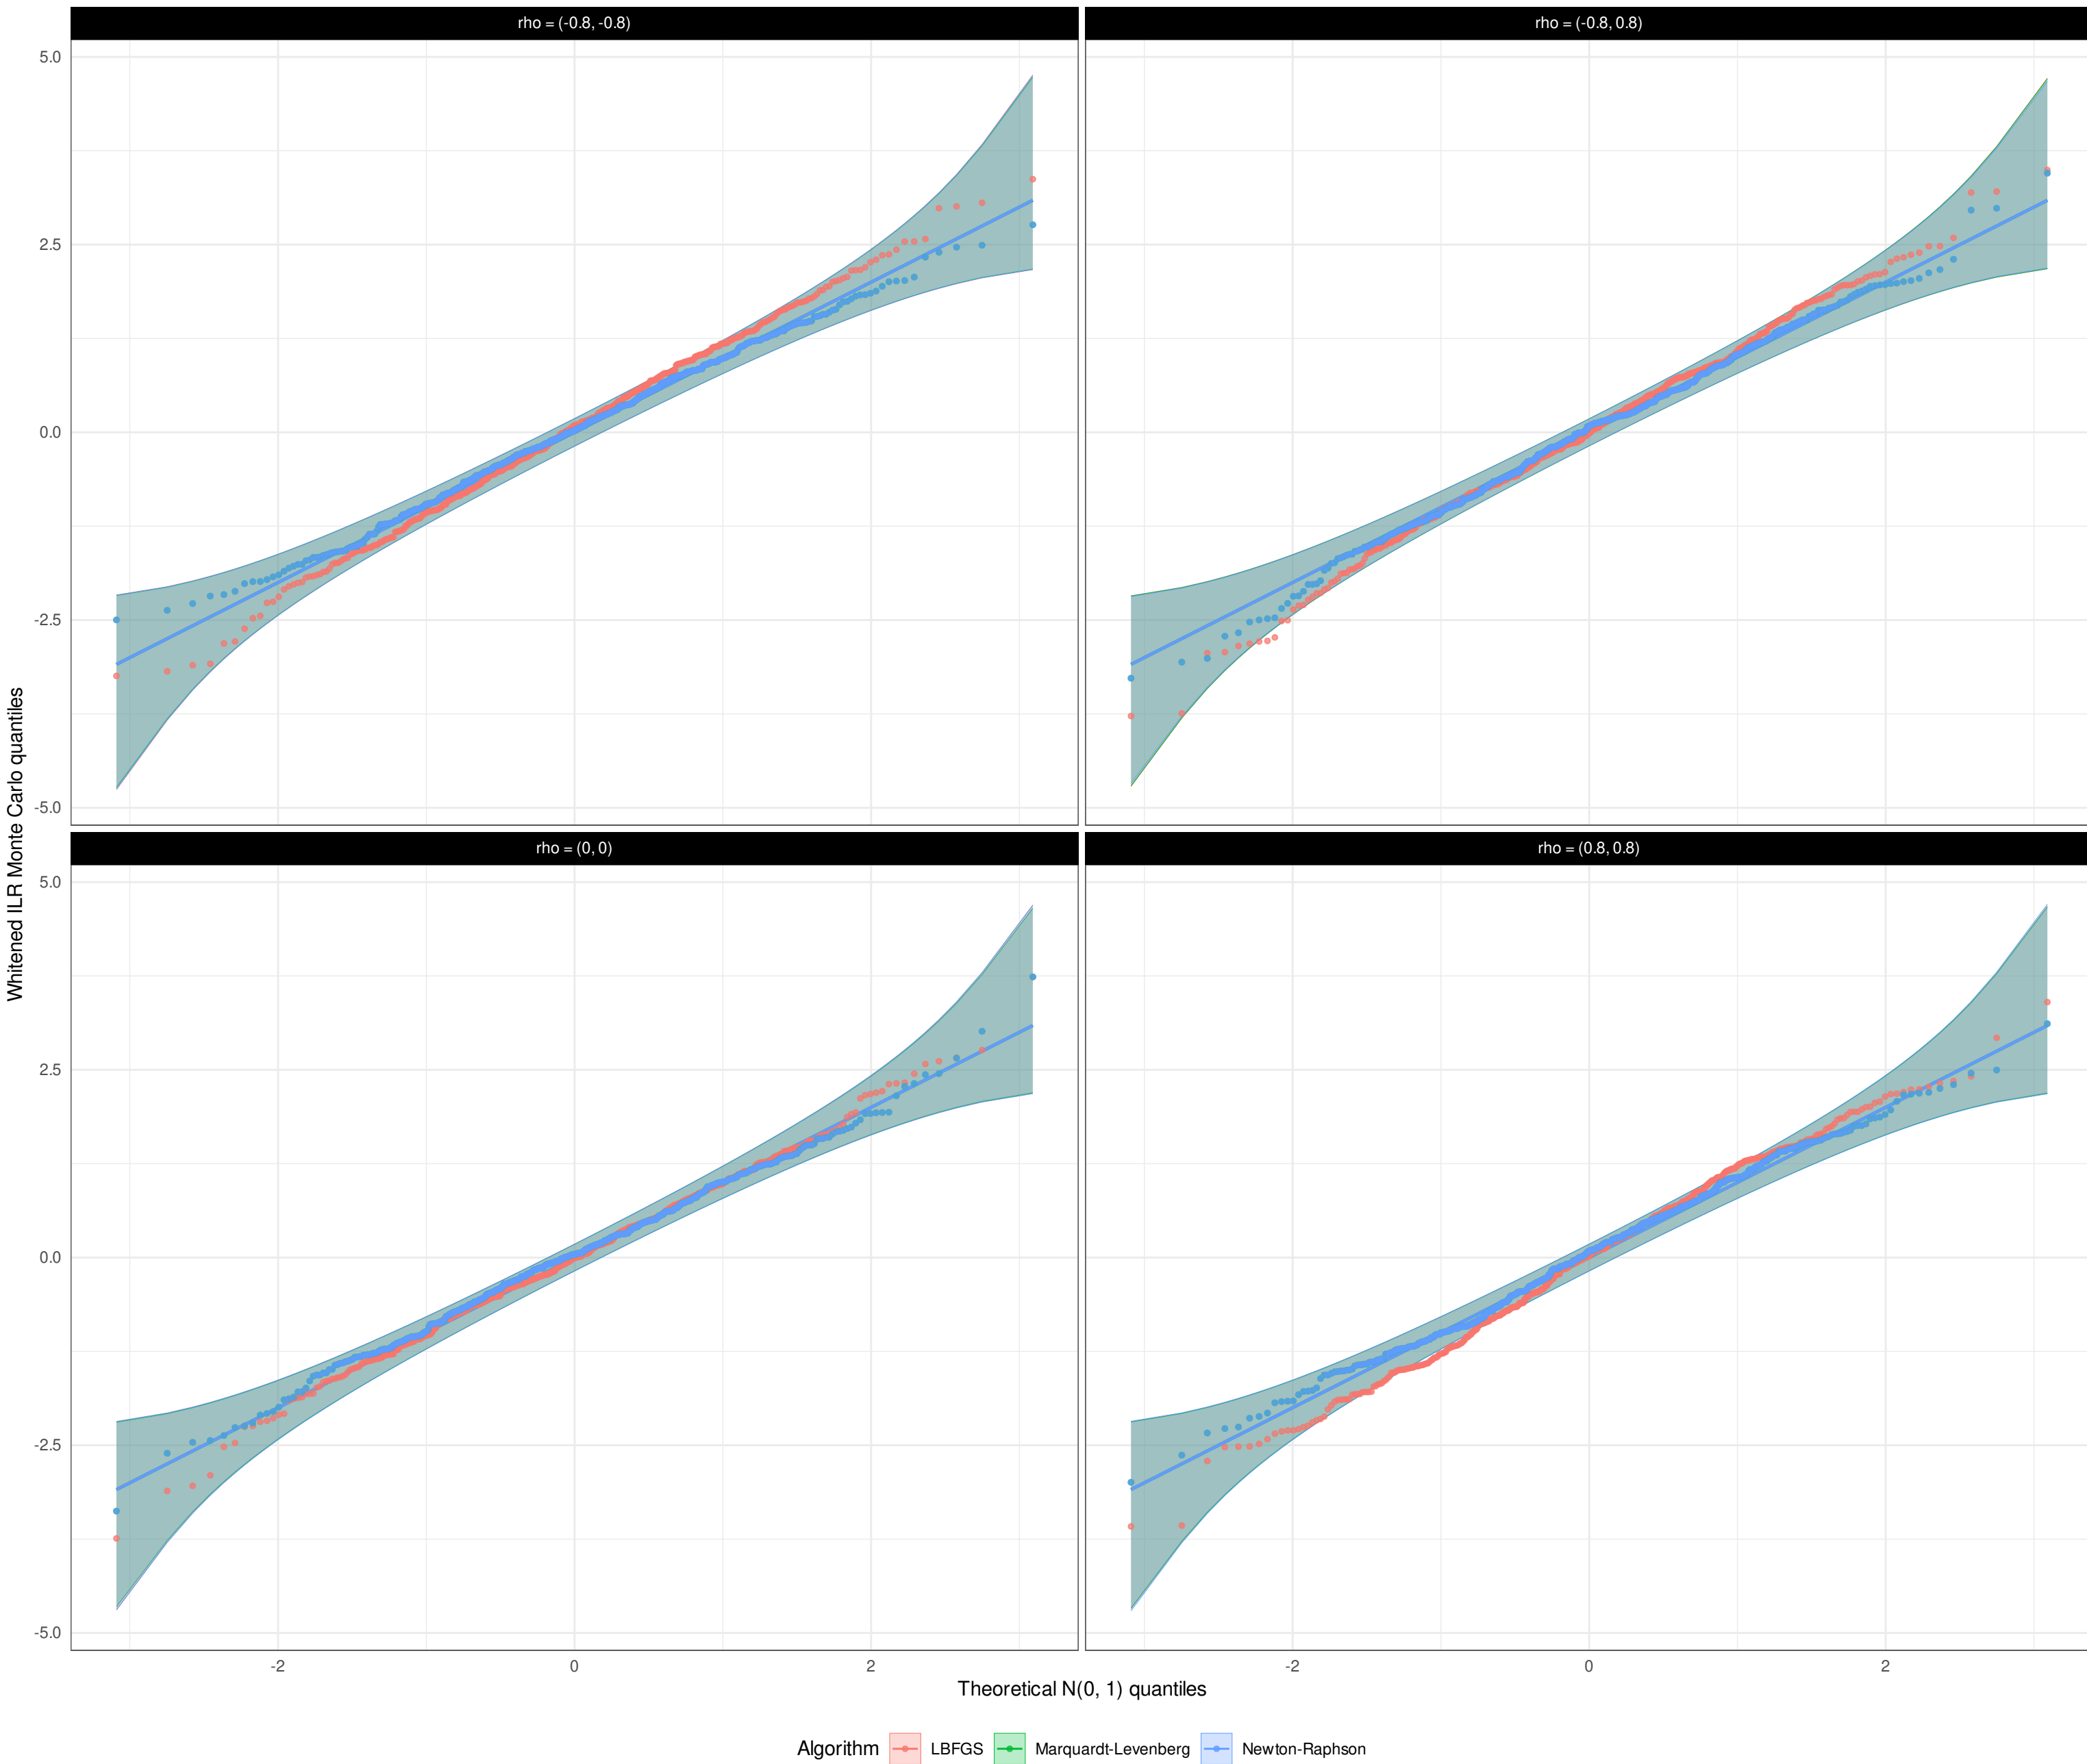

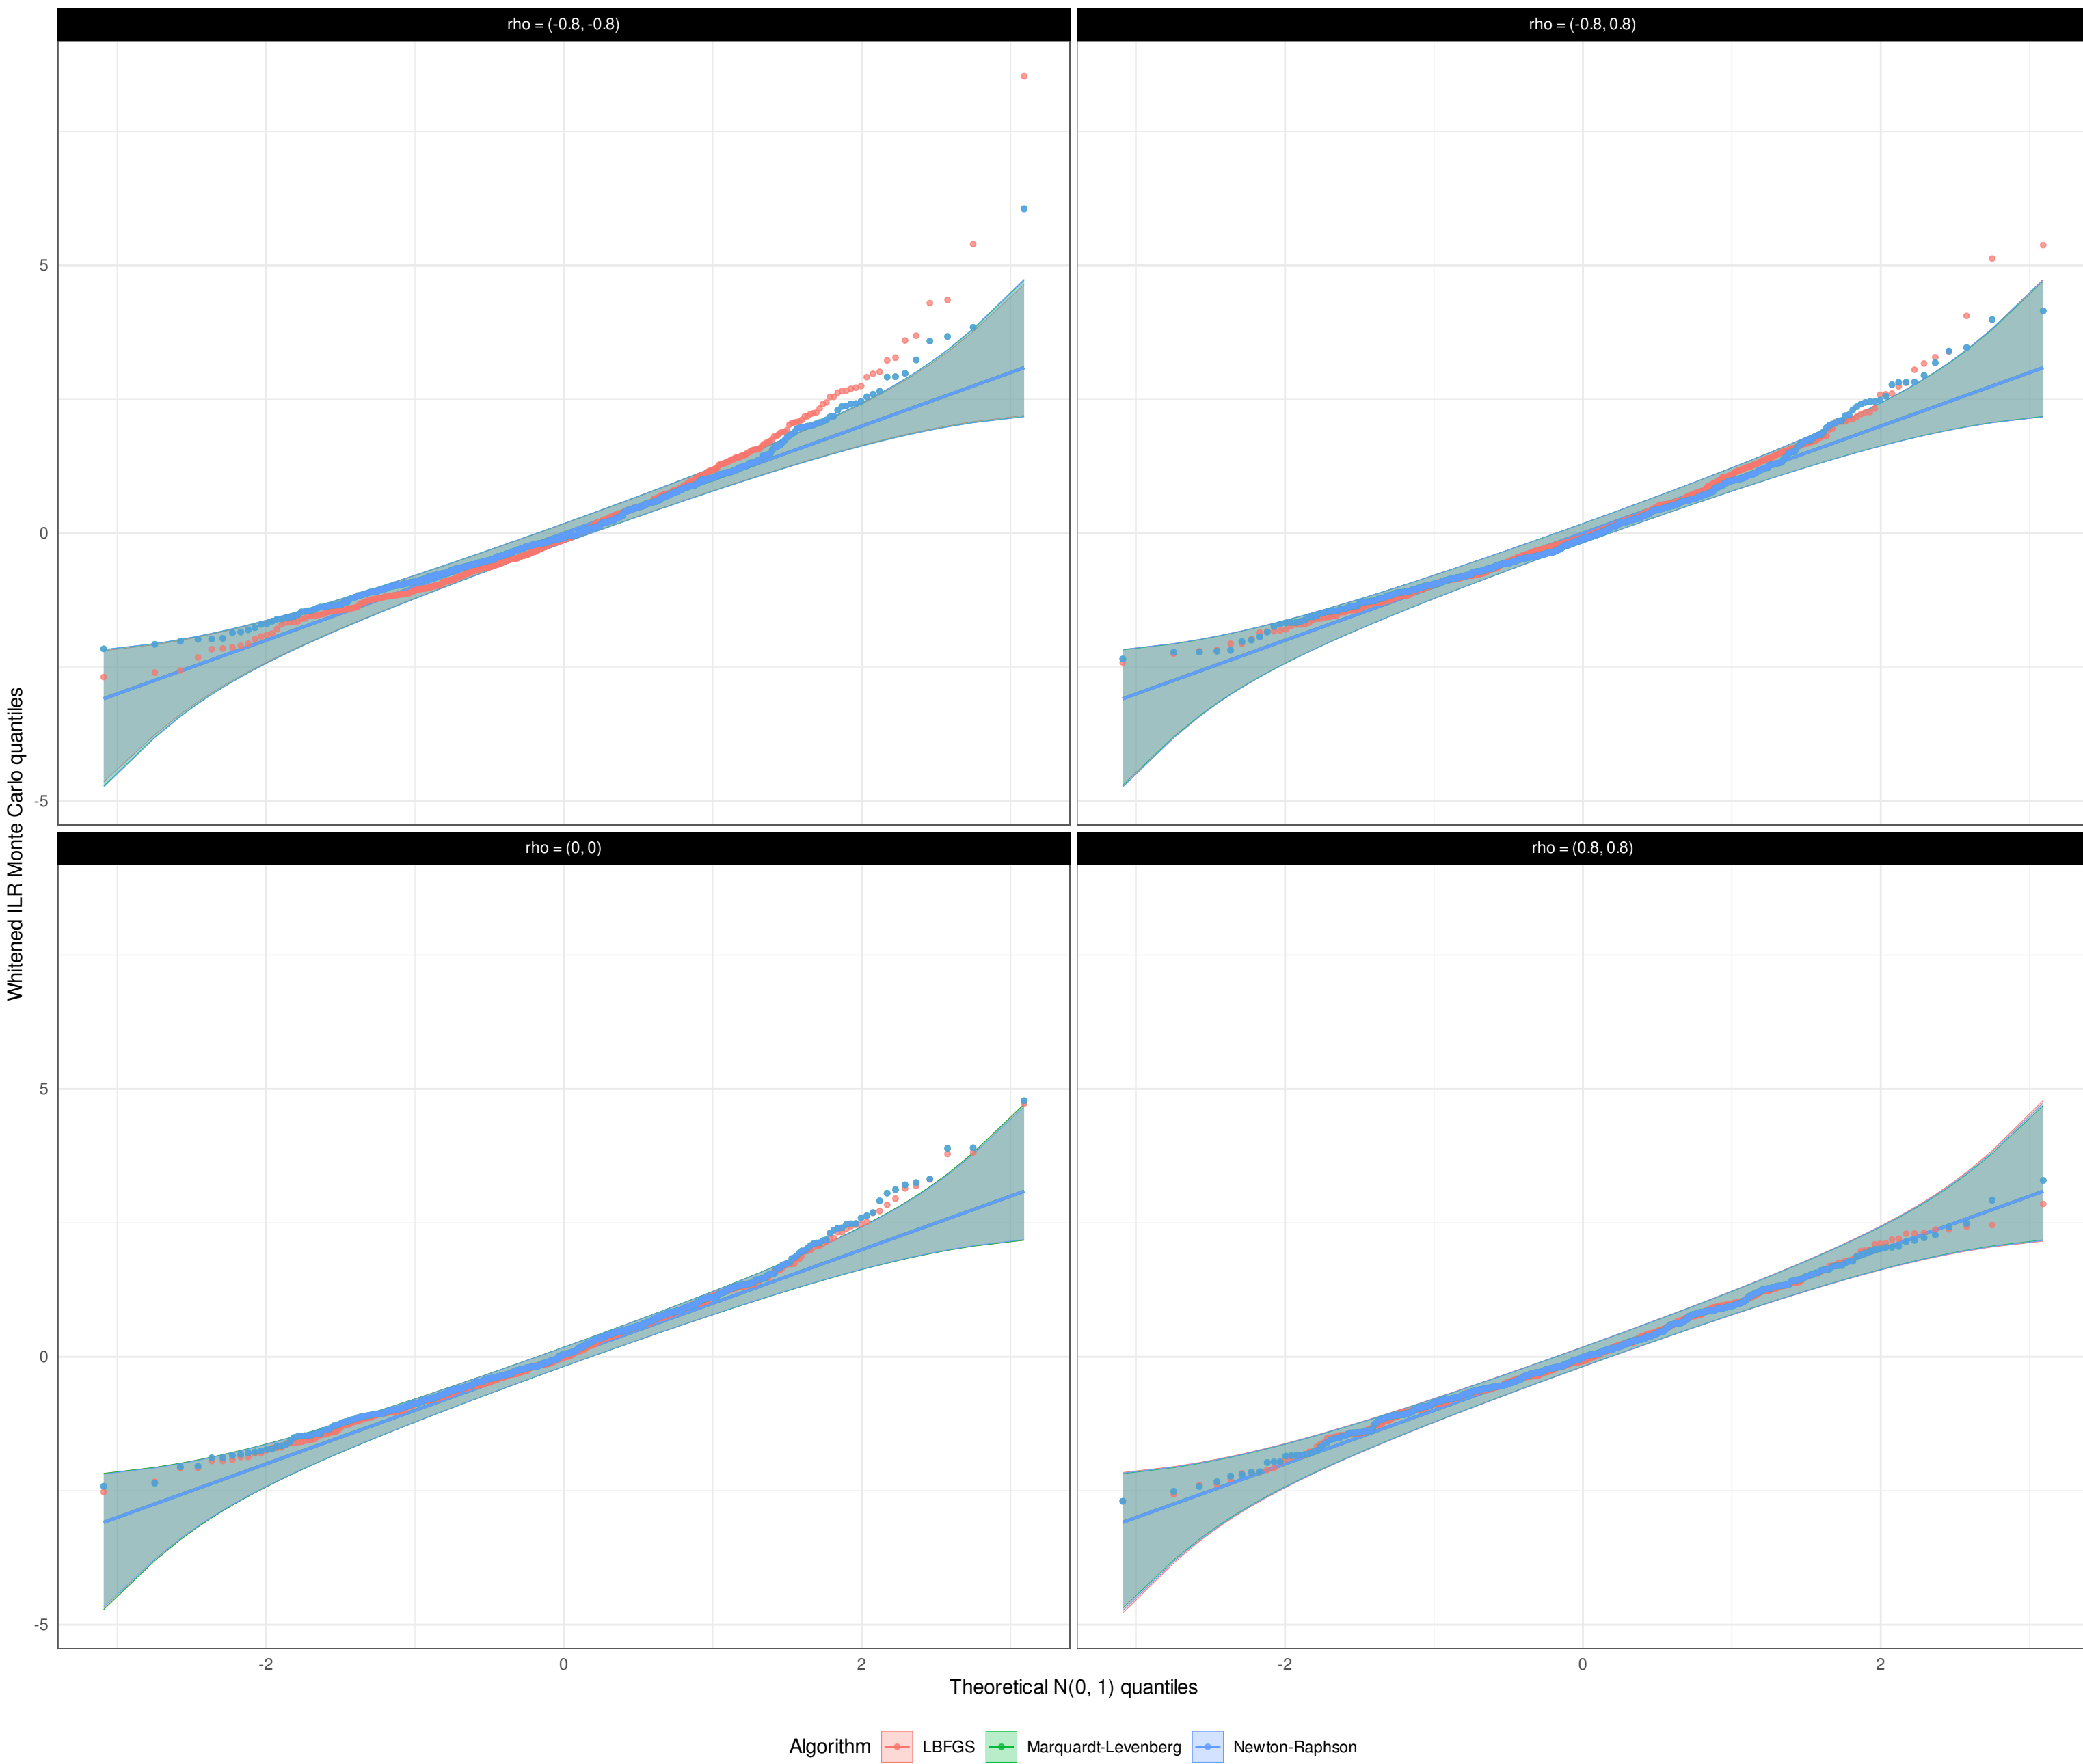

large_CLD / heteroscedastic / highly unbalanced

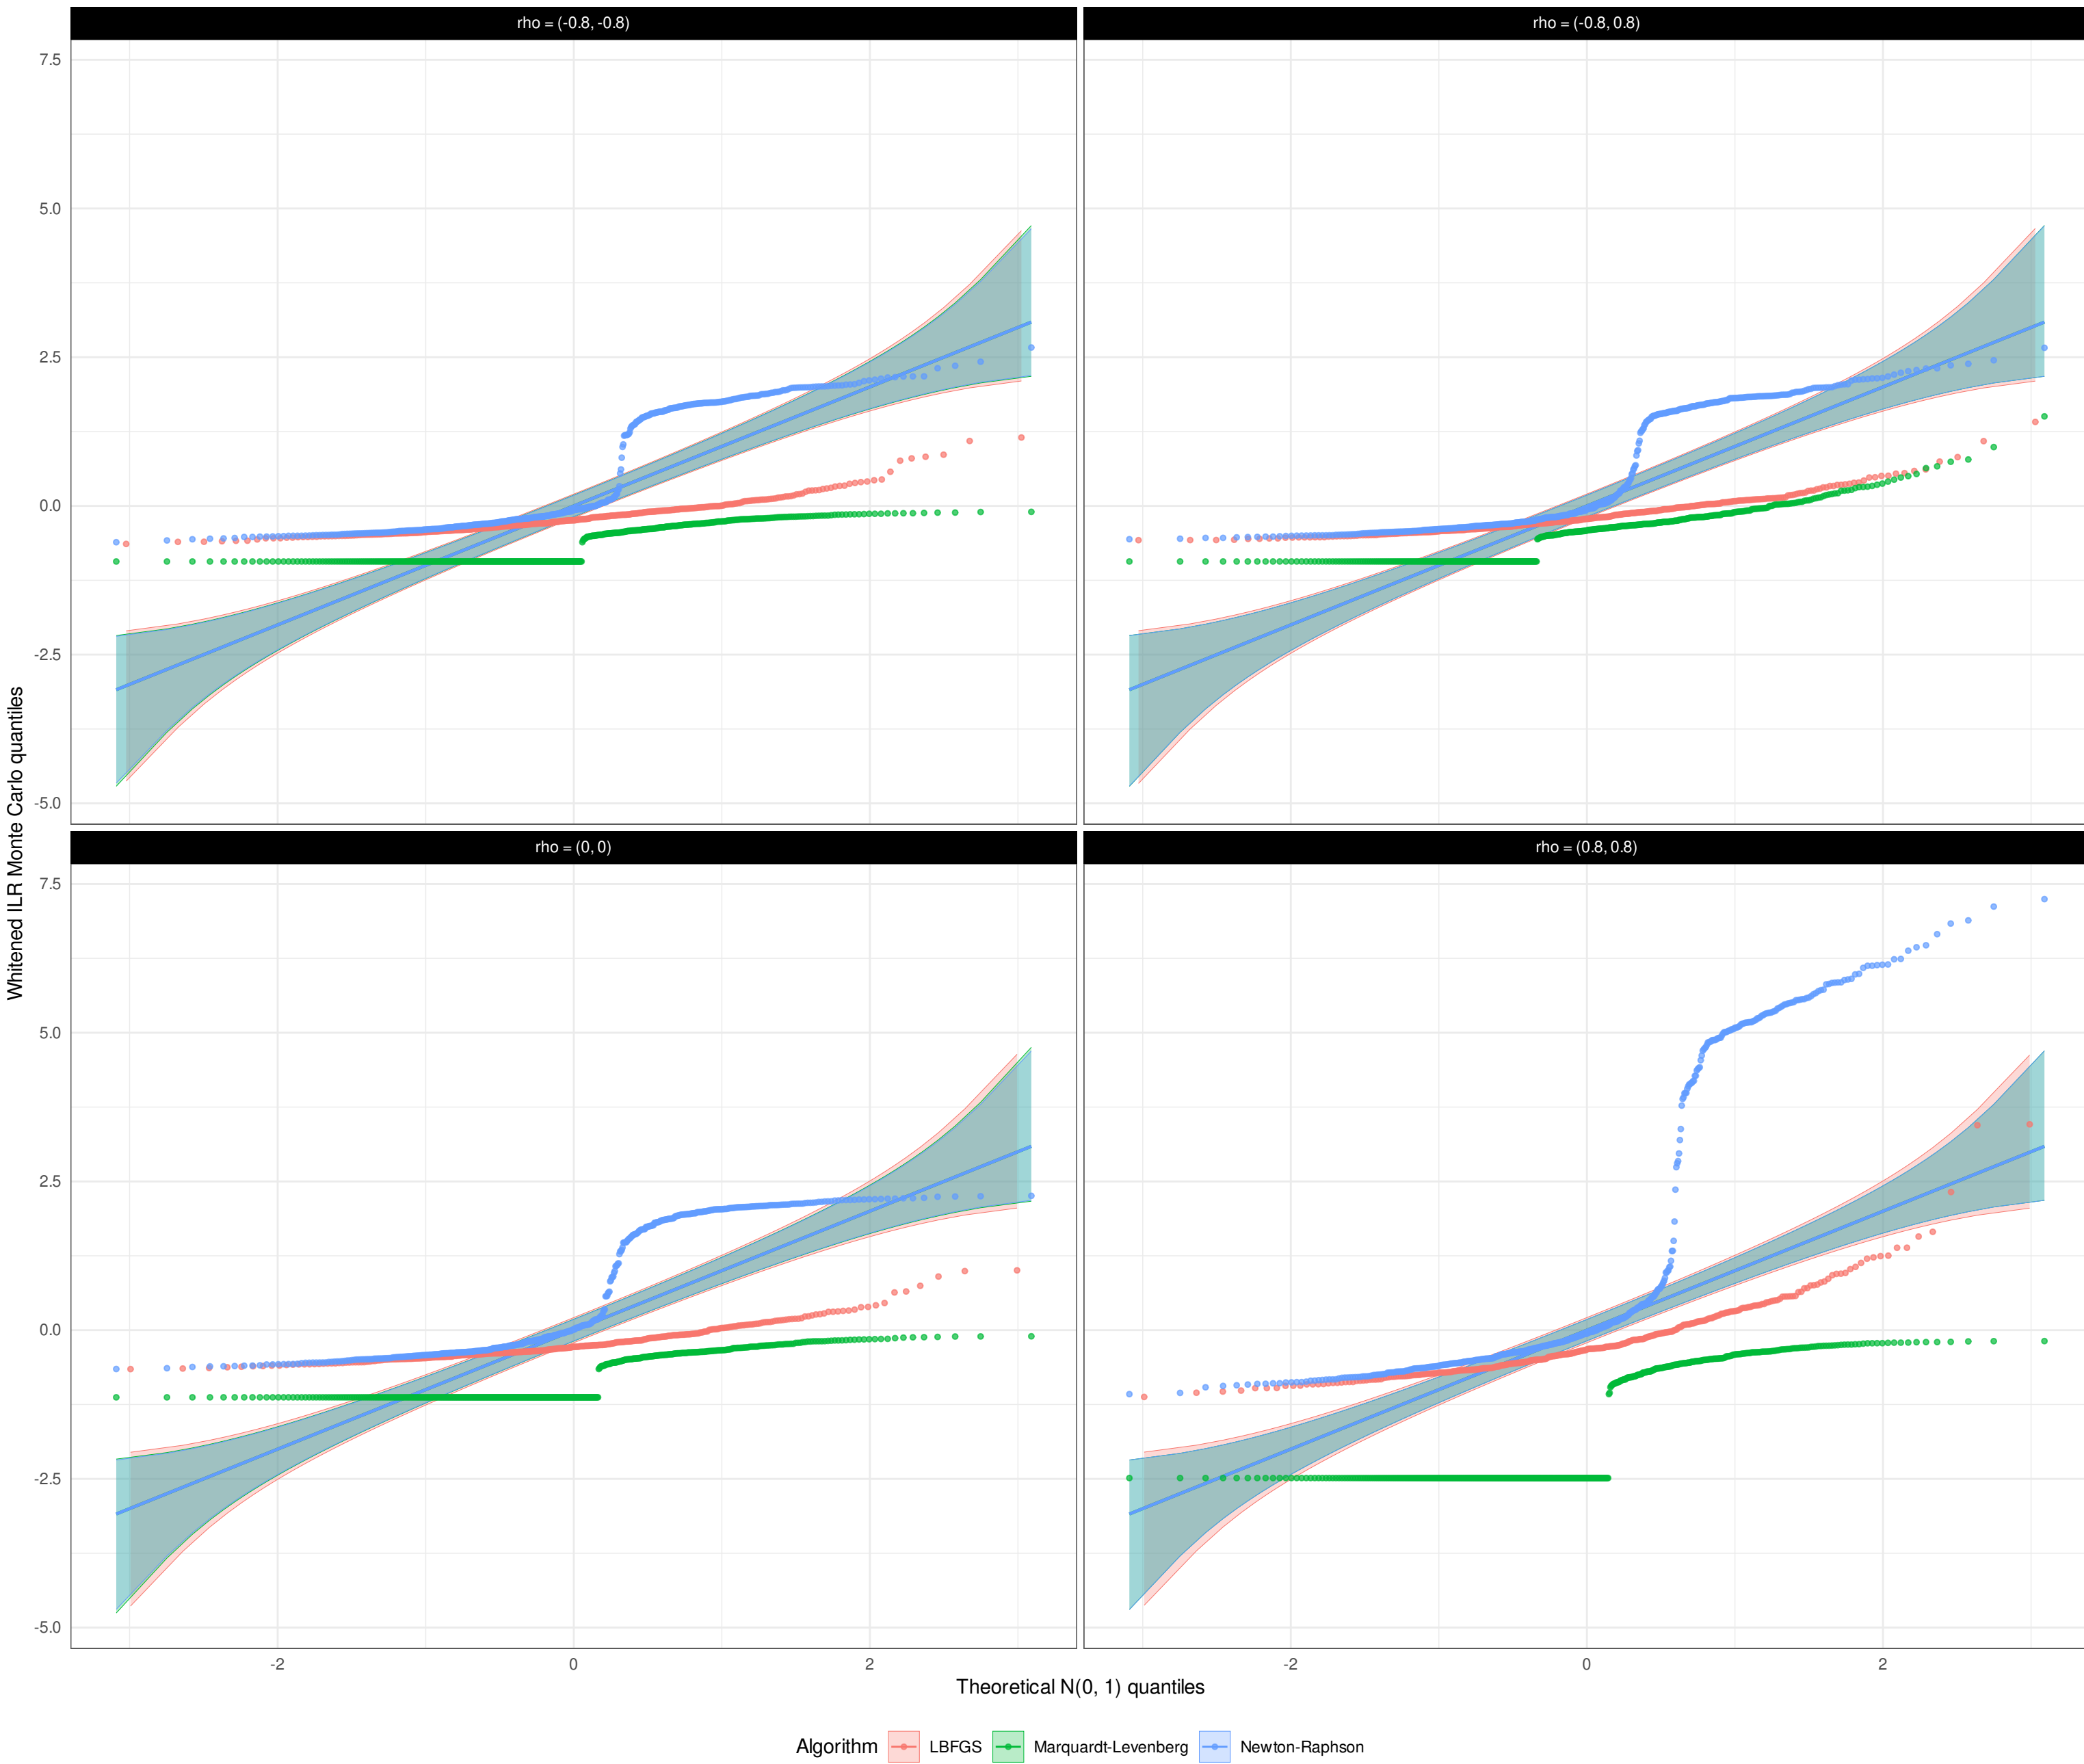

$W = I_z(p^*)^{1/2} (\hat{z} - z^*)$ versus $N(0, 1)$; identity line. Tail-sensitive band (Aldor-Noiman et al.) with $\mu = 0$, $\sigma = 1$. LBFGS, Marquardt-Levenberg and Newton-Raphson only; not detrended.