


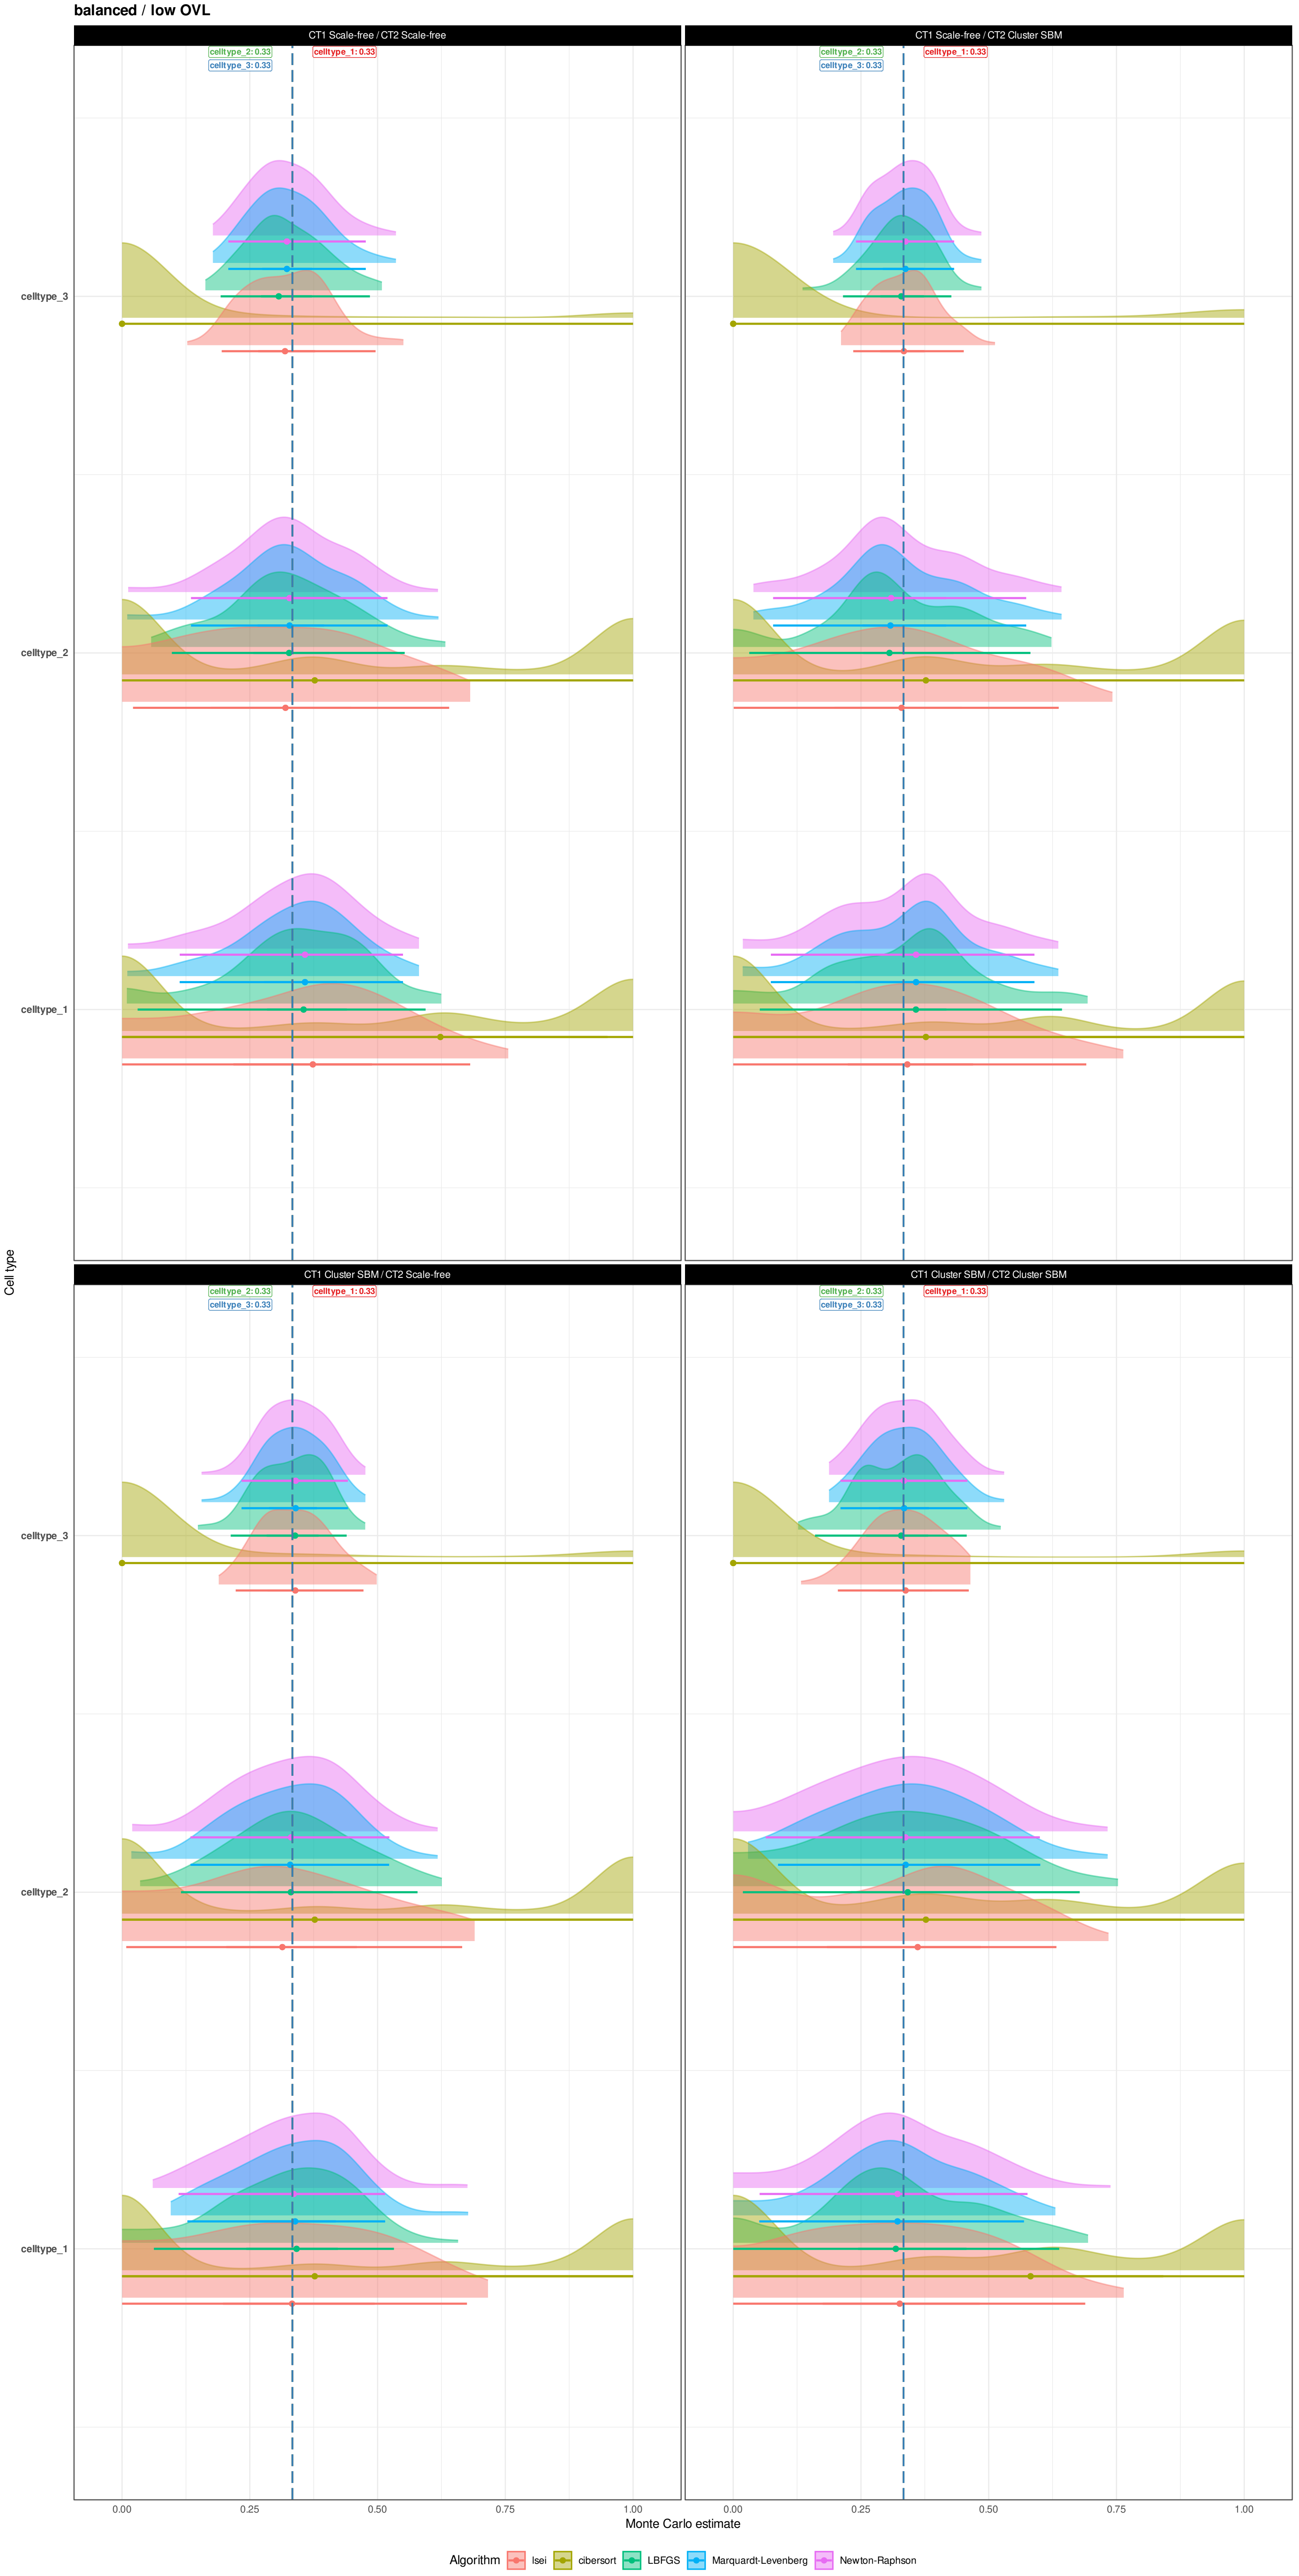
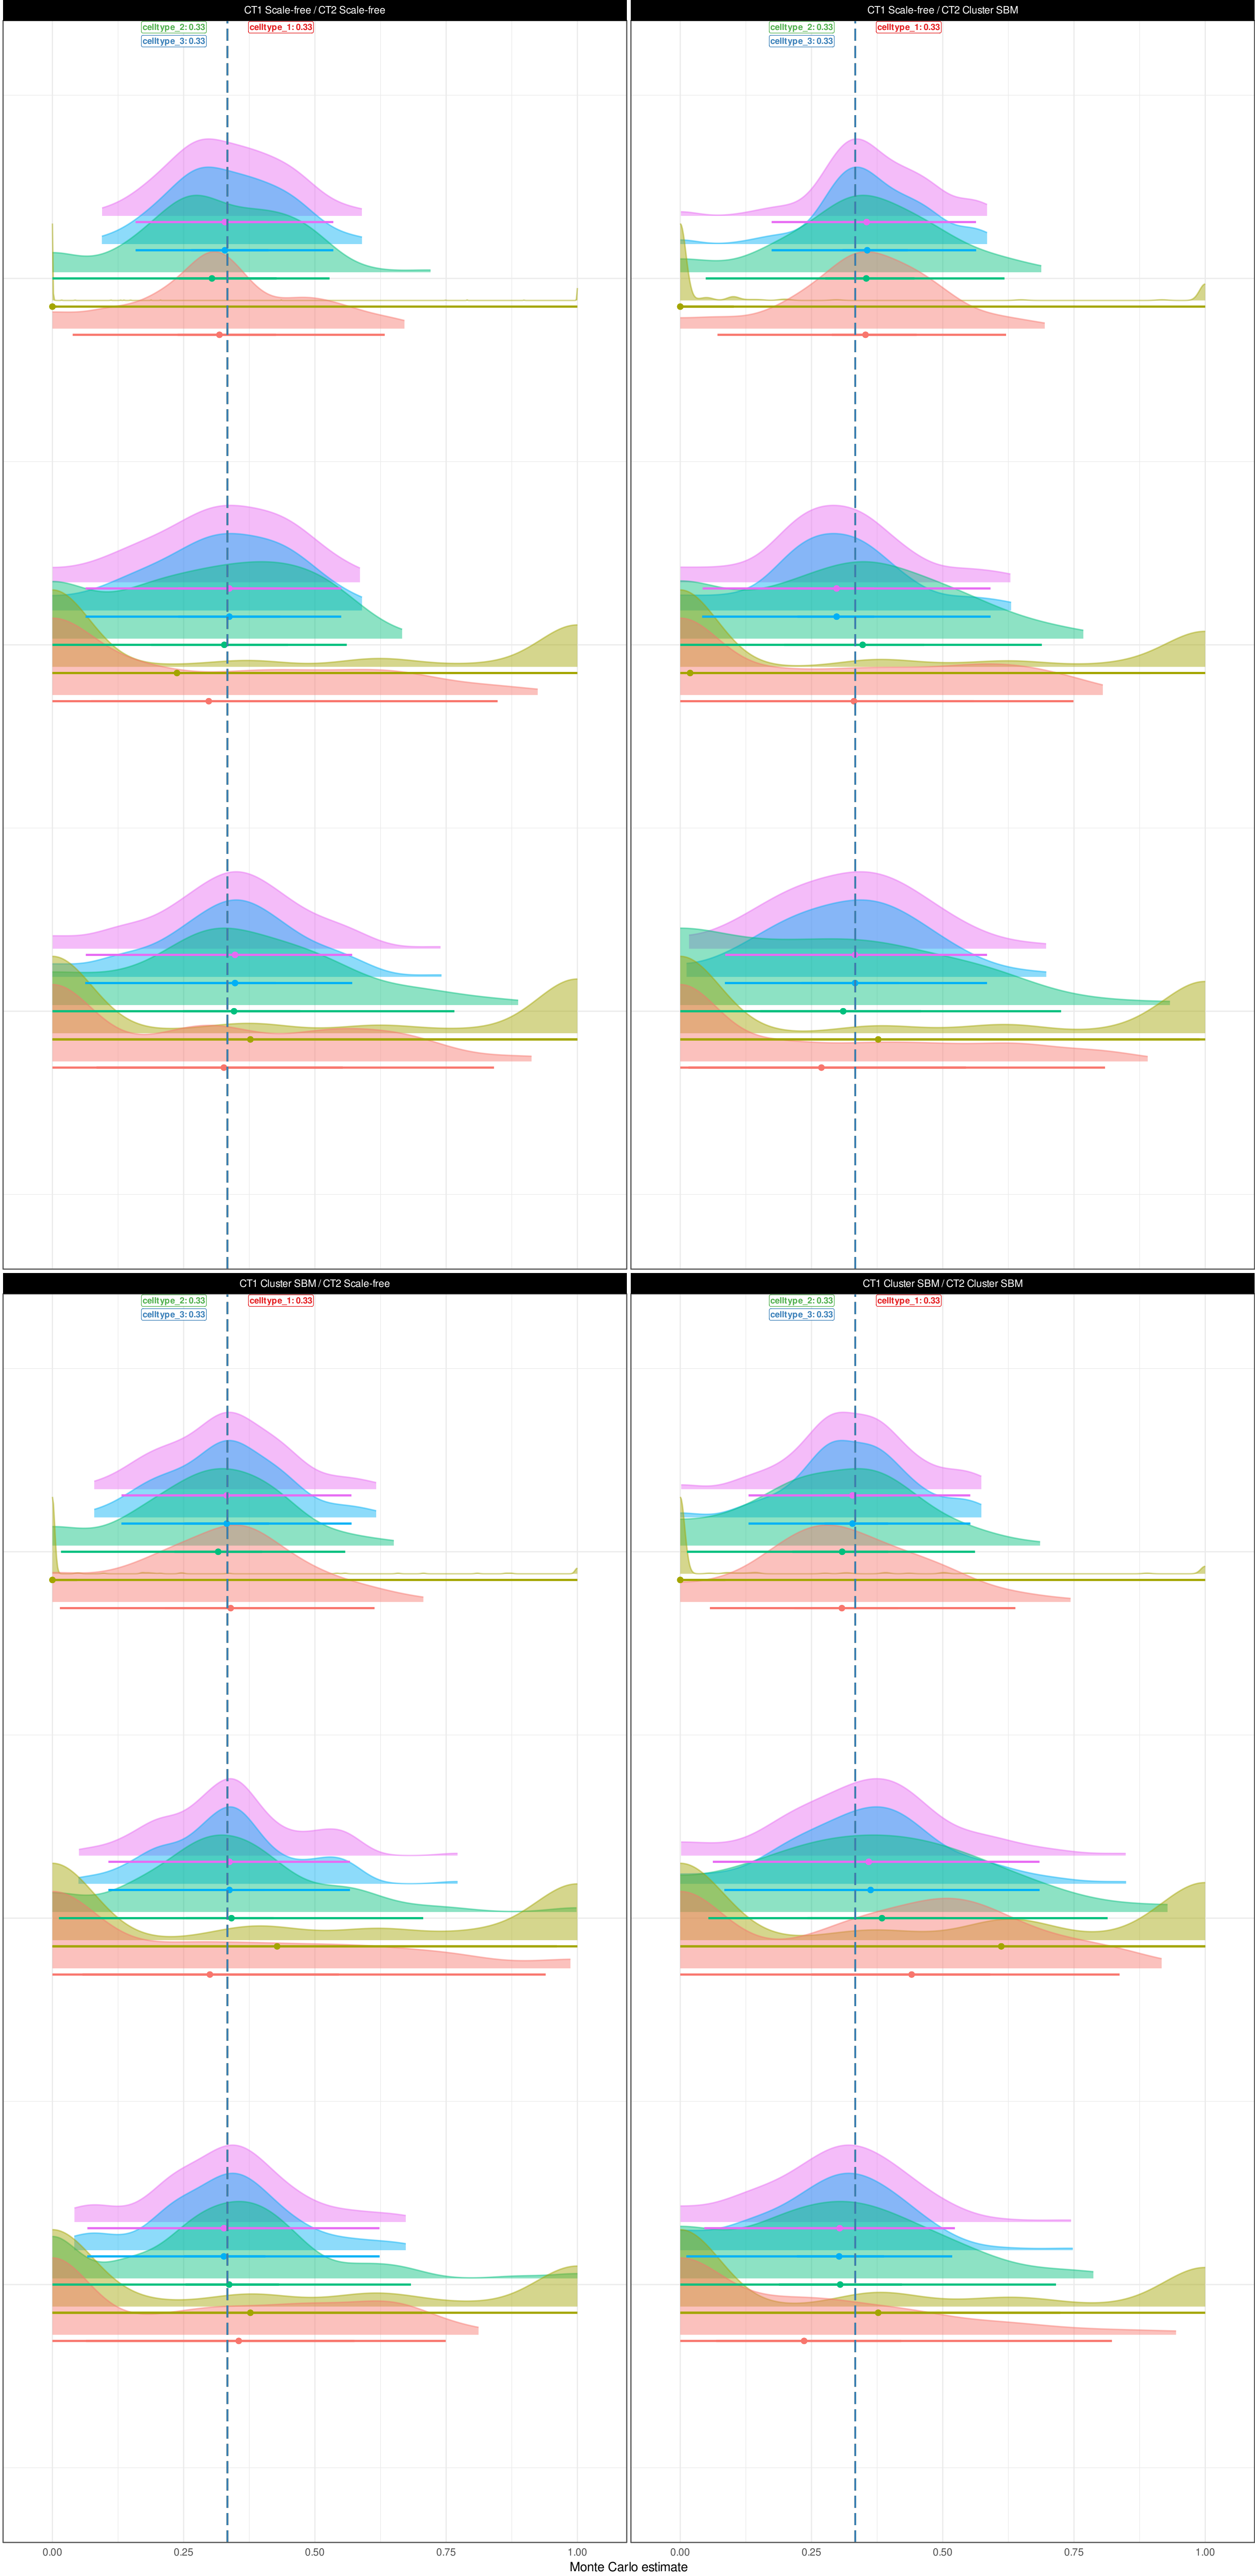
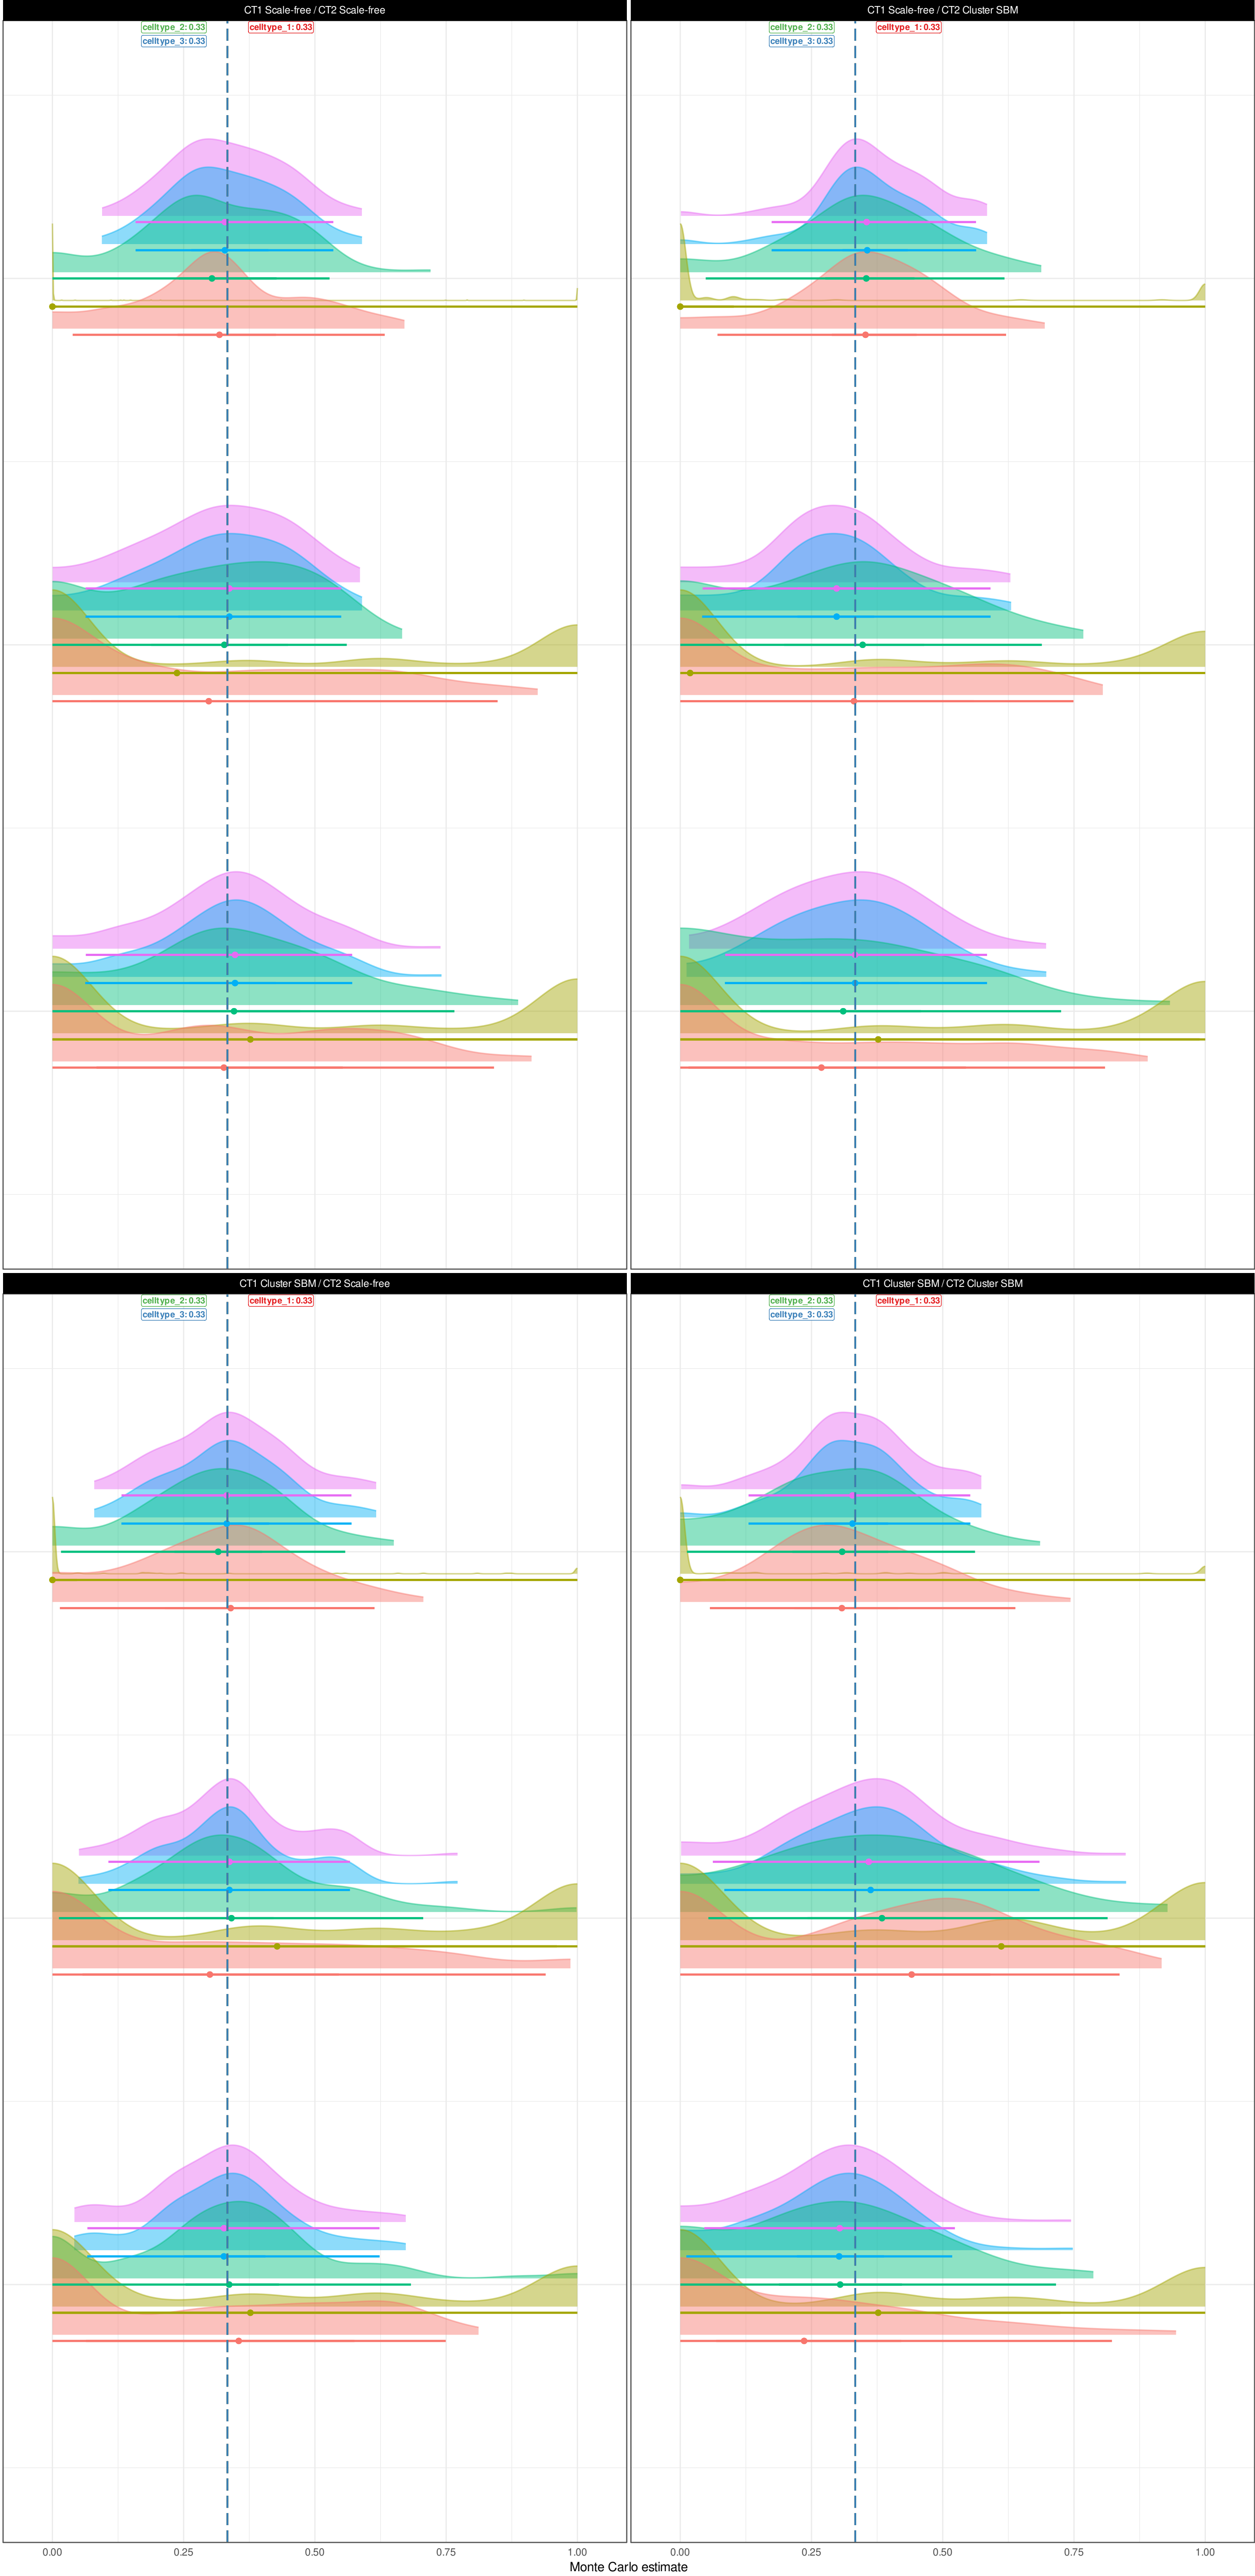


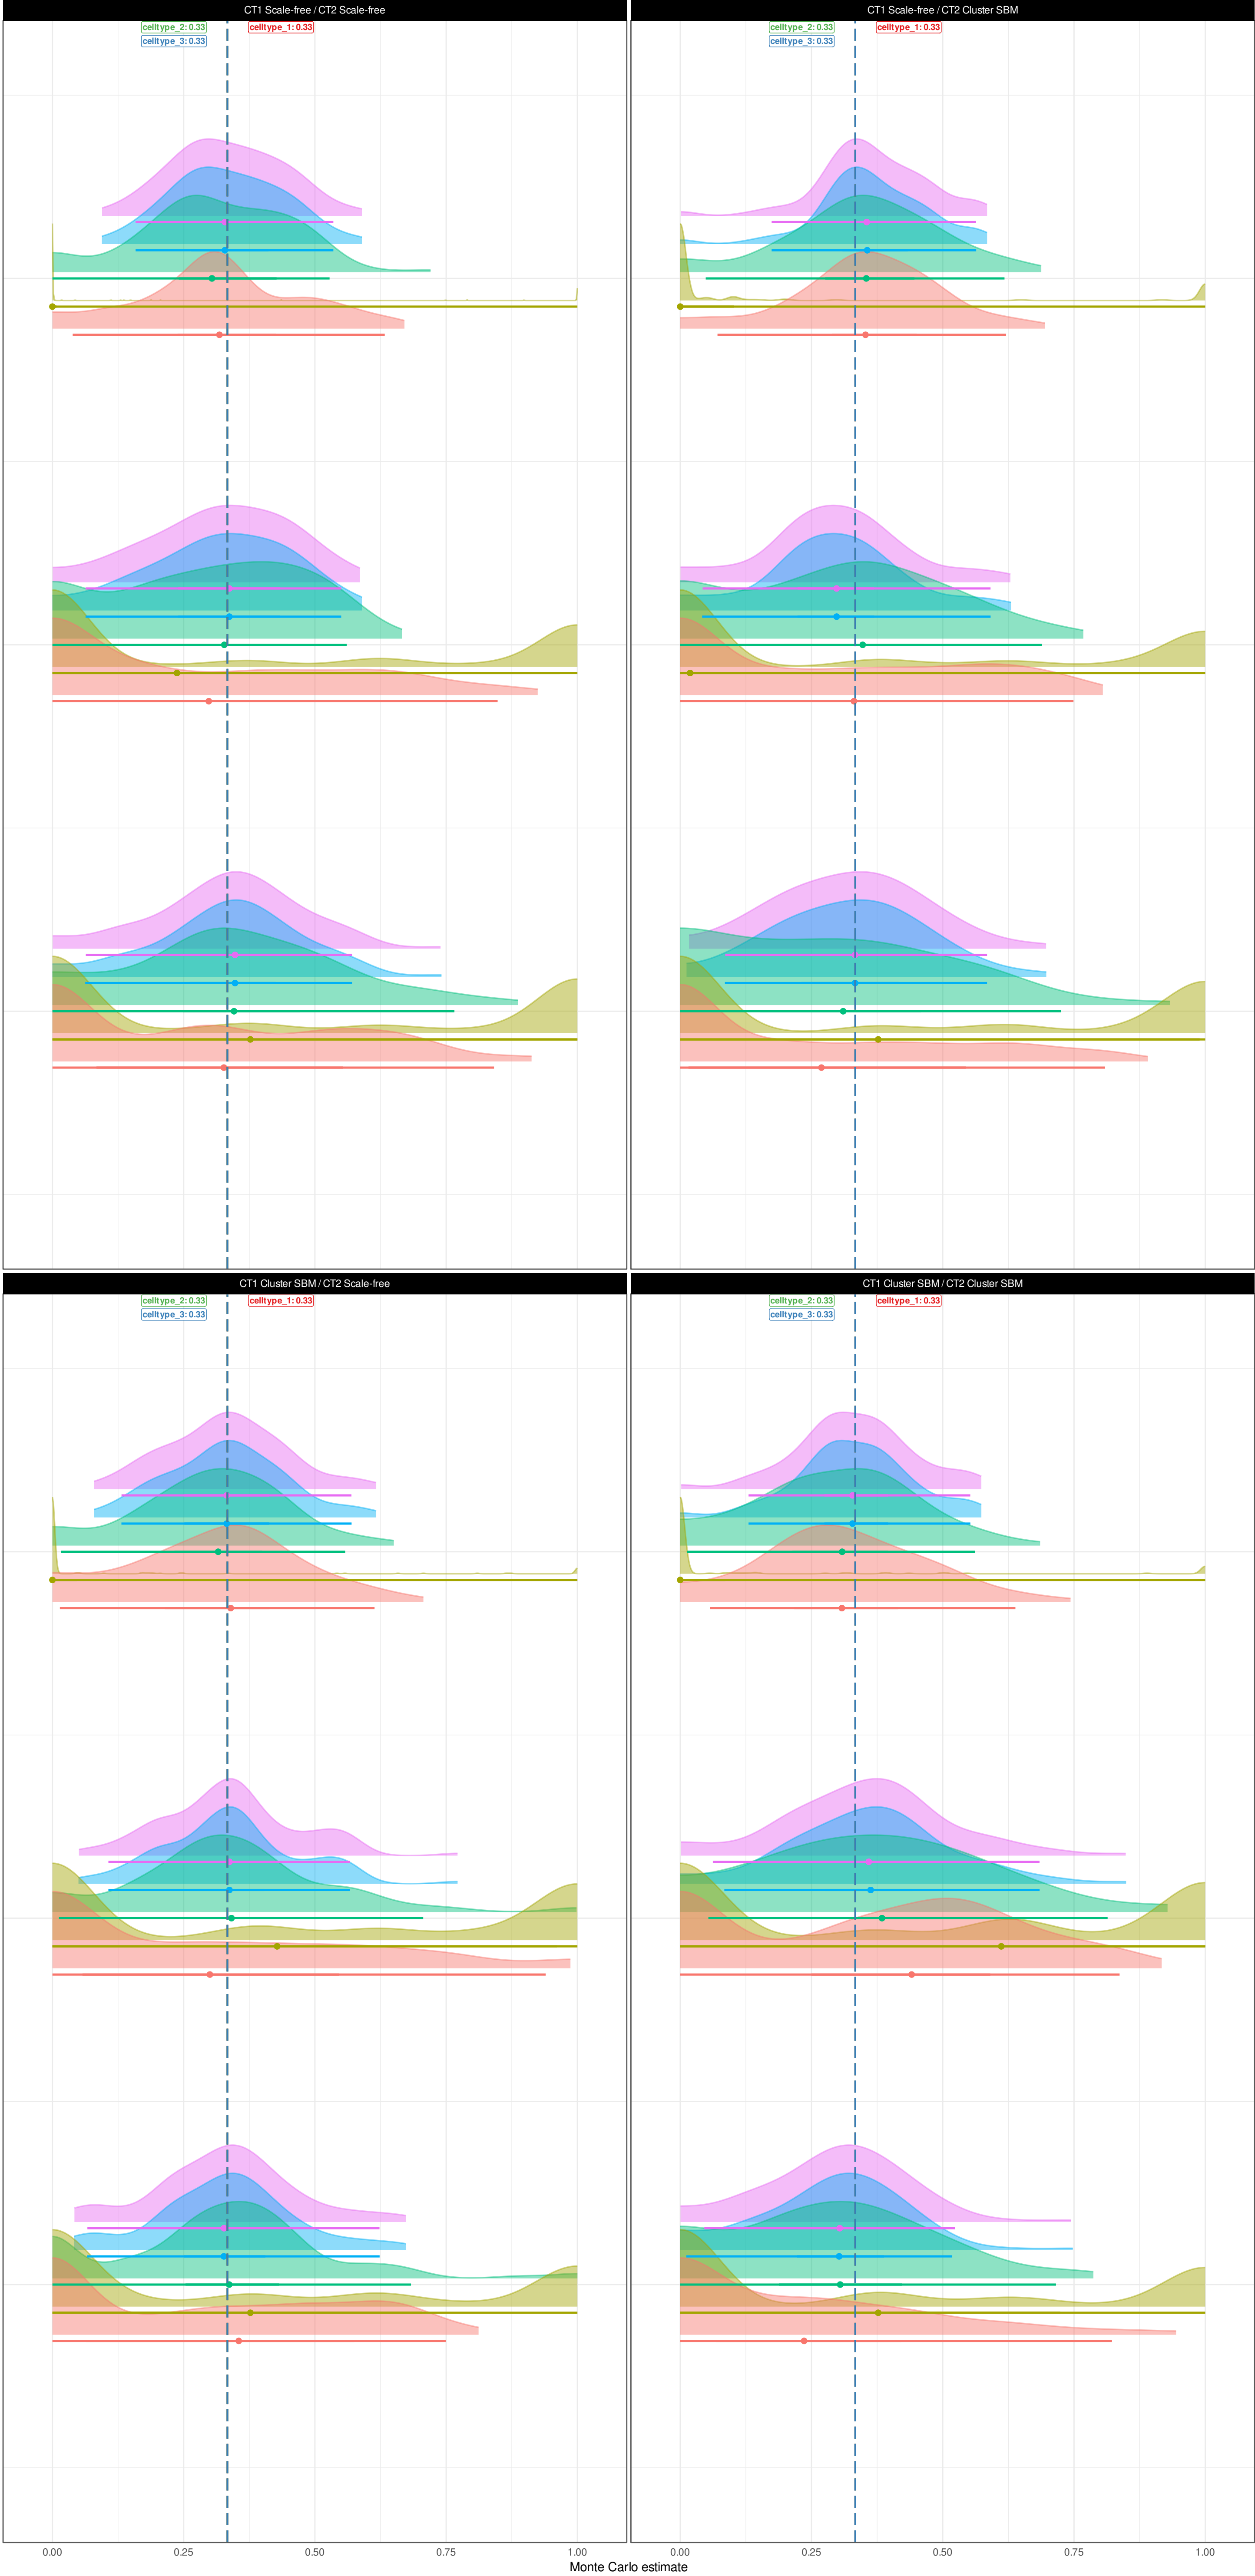

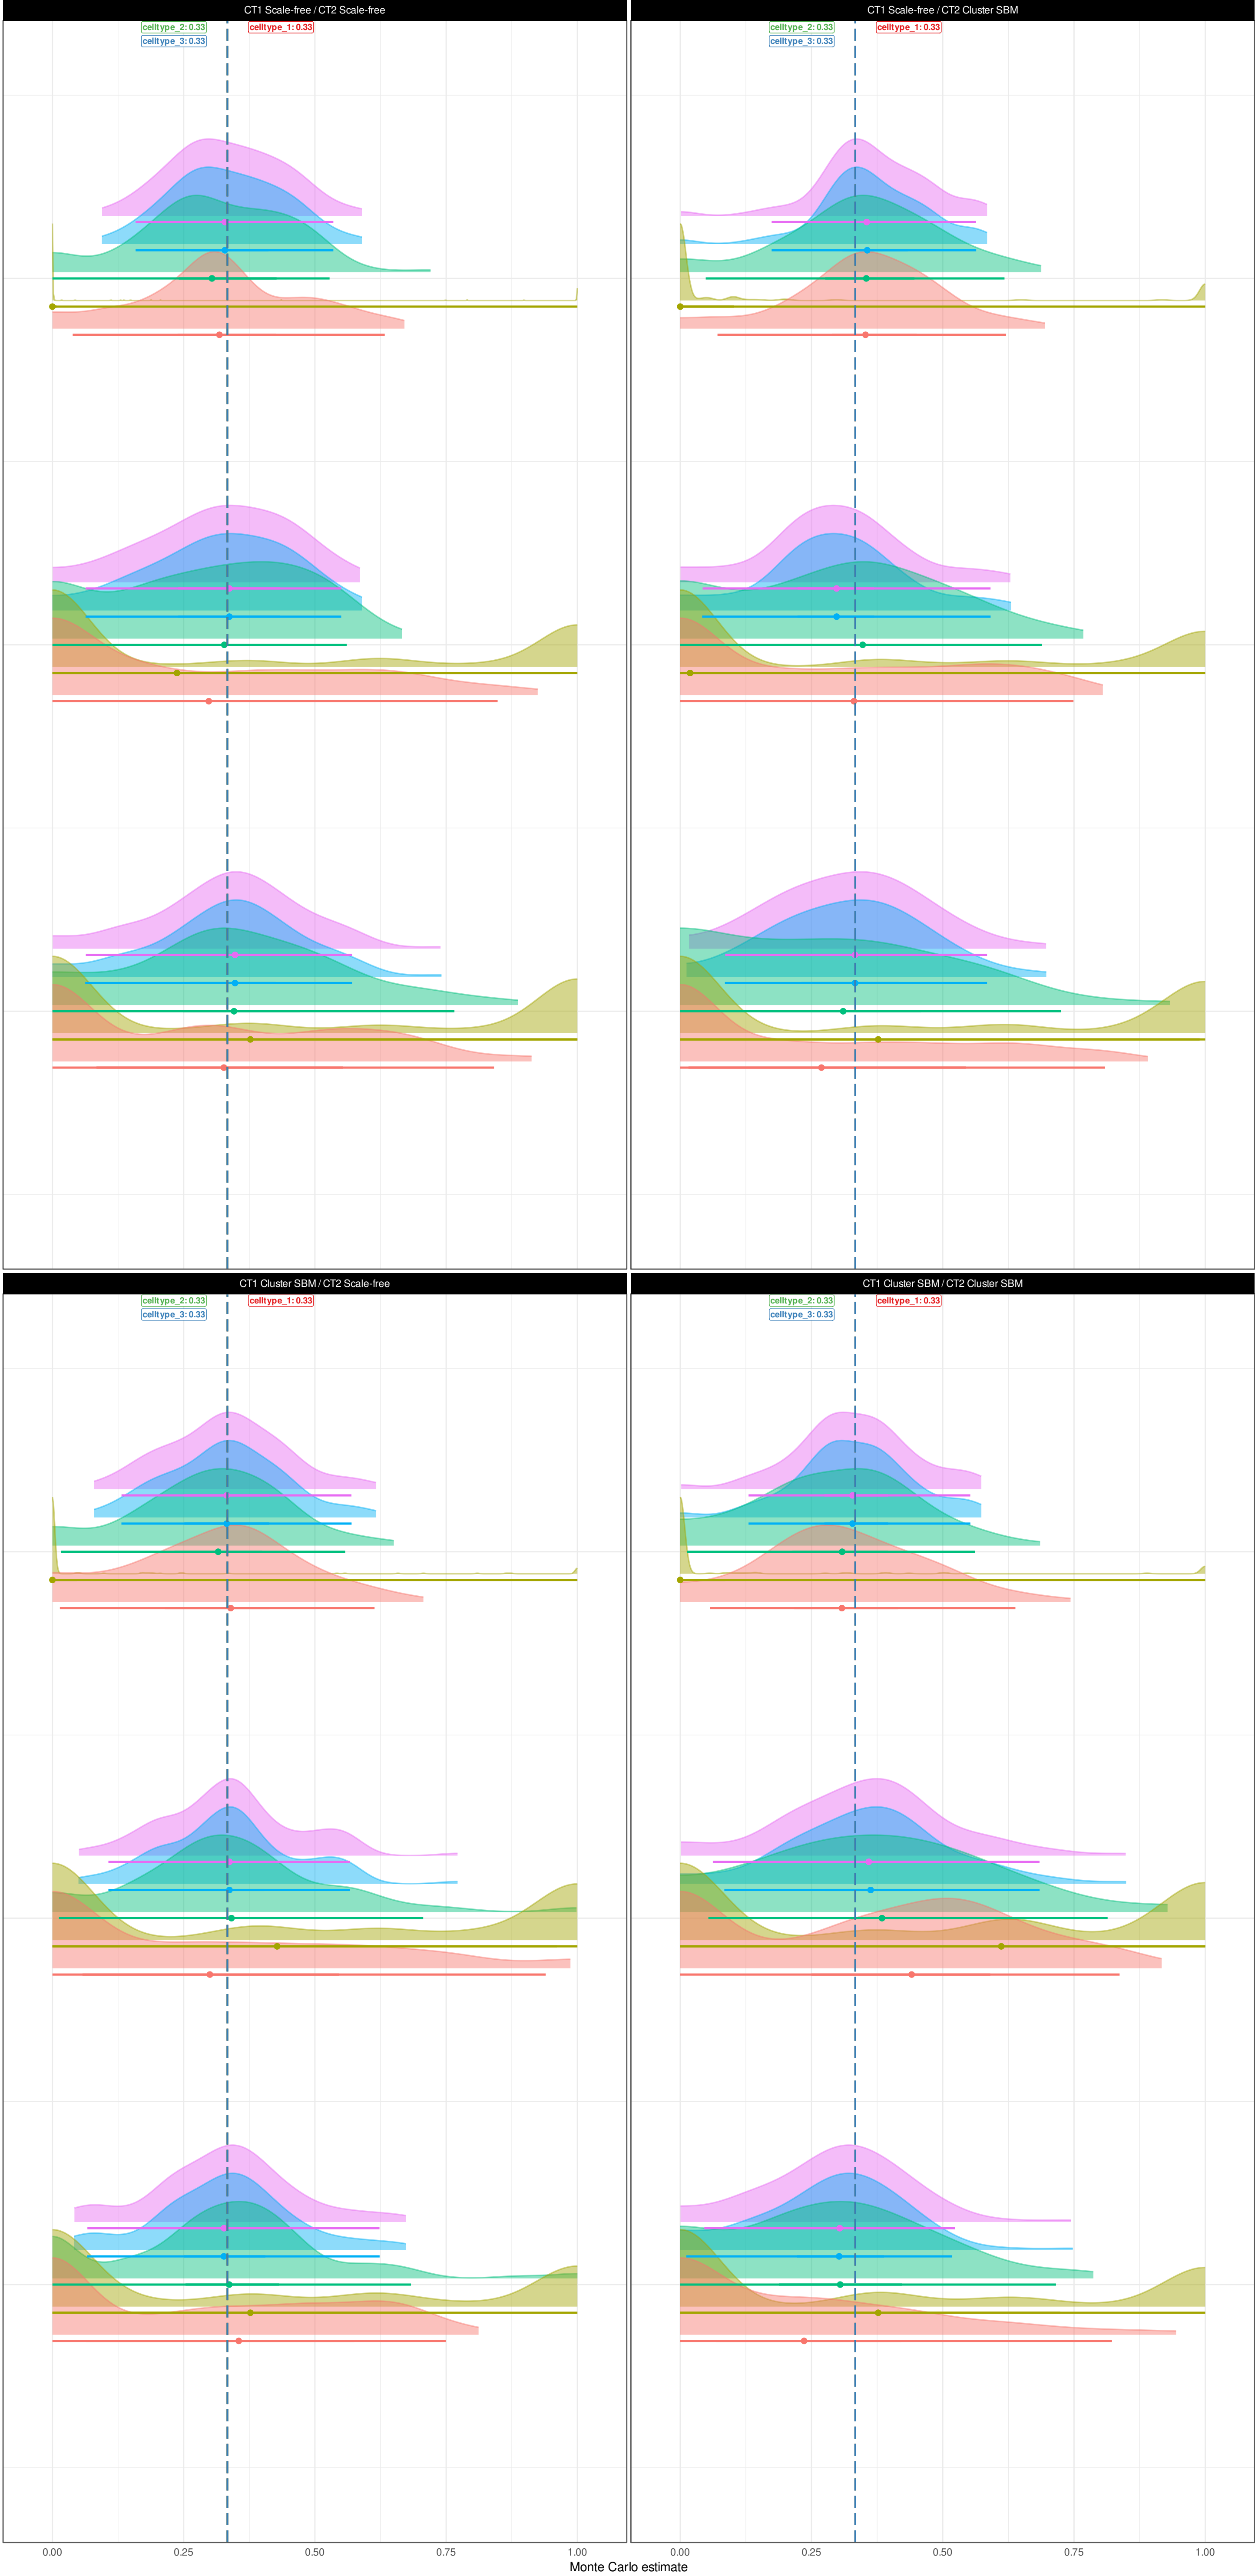


Monte Carlo estimate





Algorithm lsei cibersort LBFGS Marquardt-Levenberg Newton-Raphson

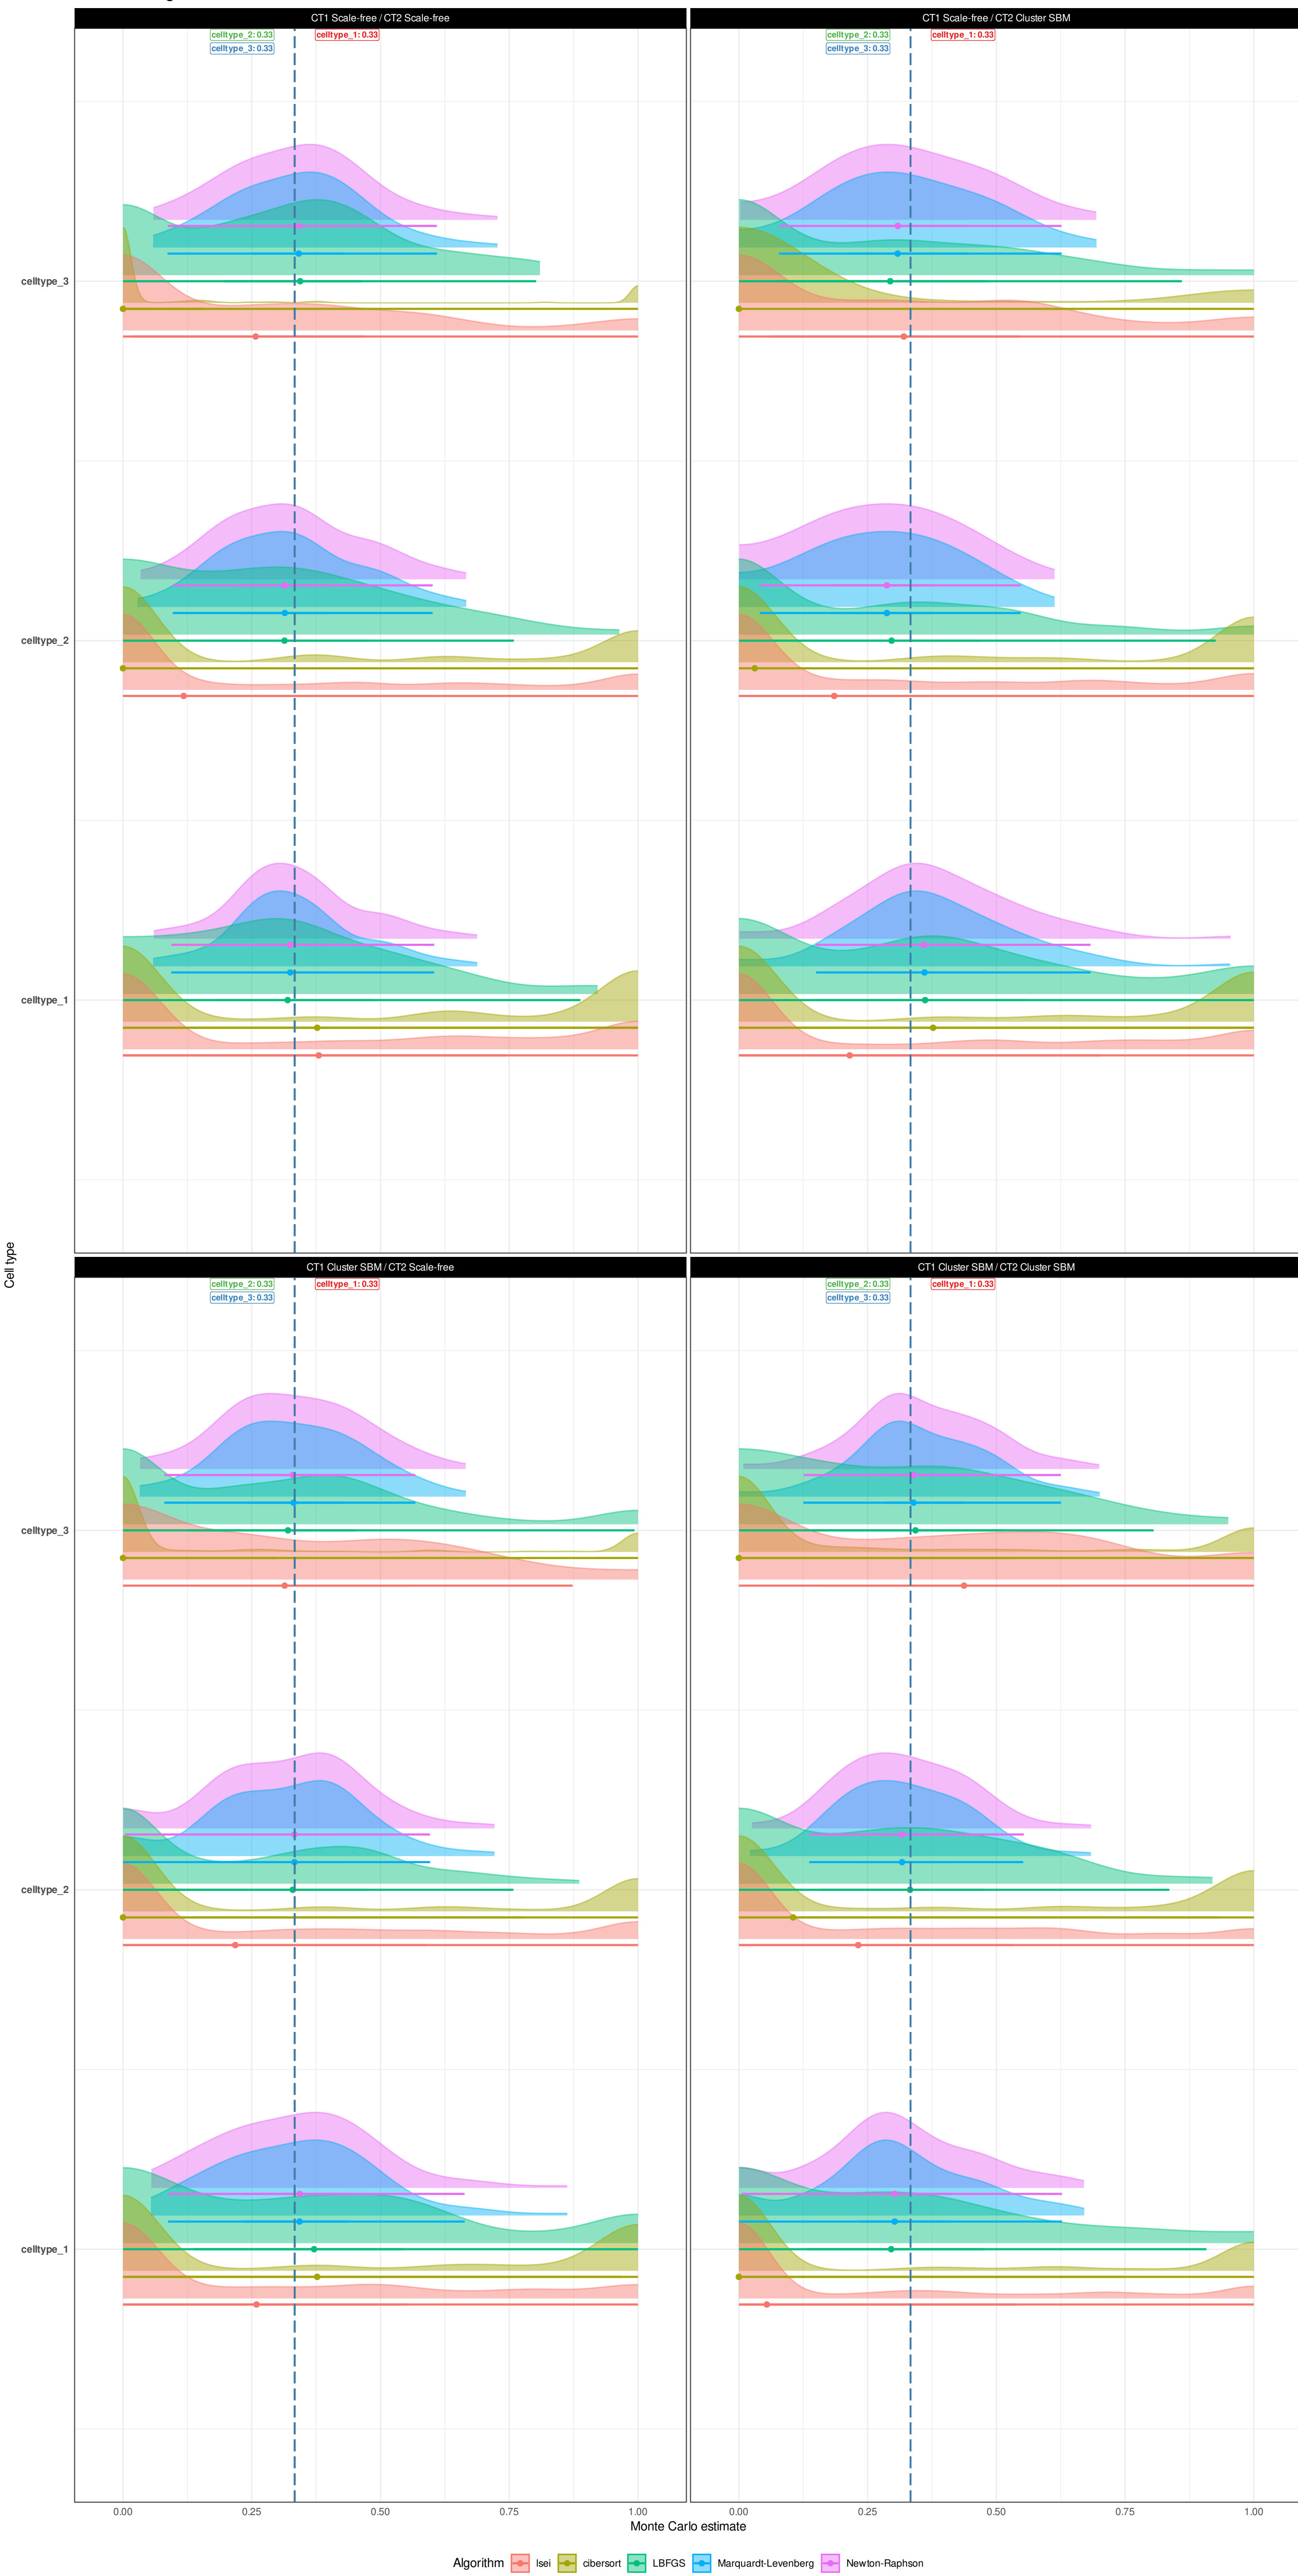

moderately unbalanced / low OVL

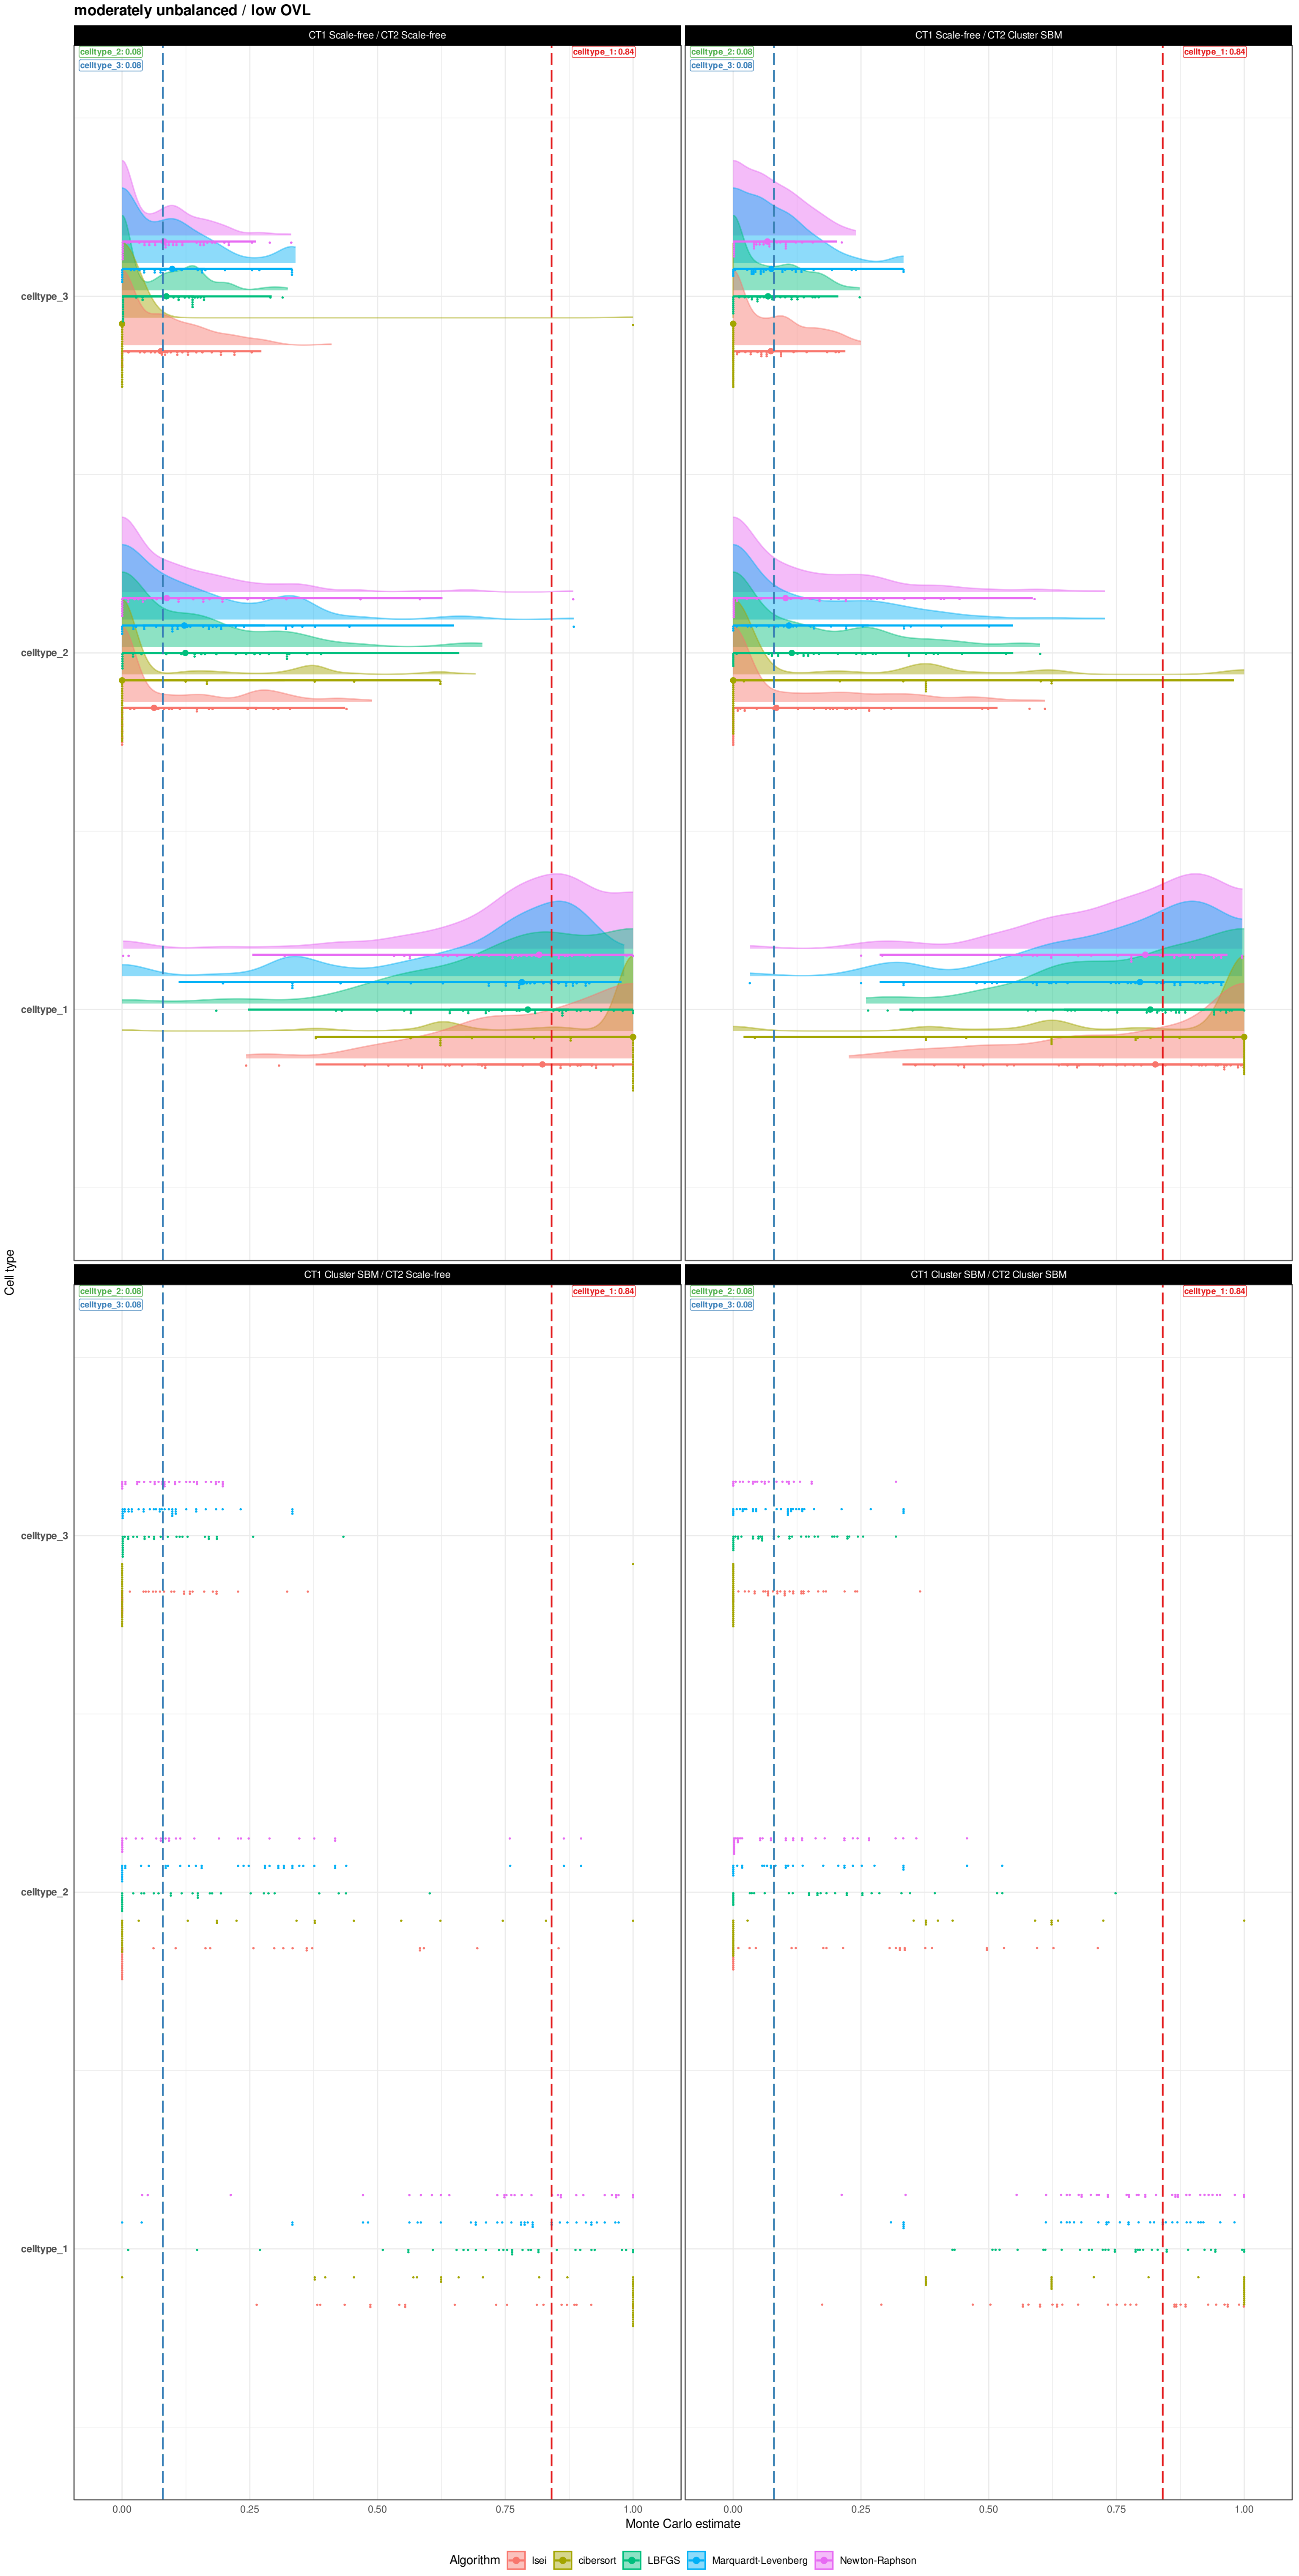


moderately unbalanced / moderate OVL

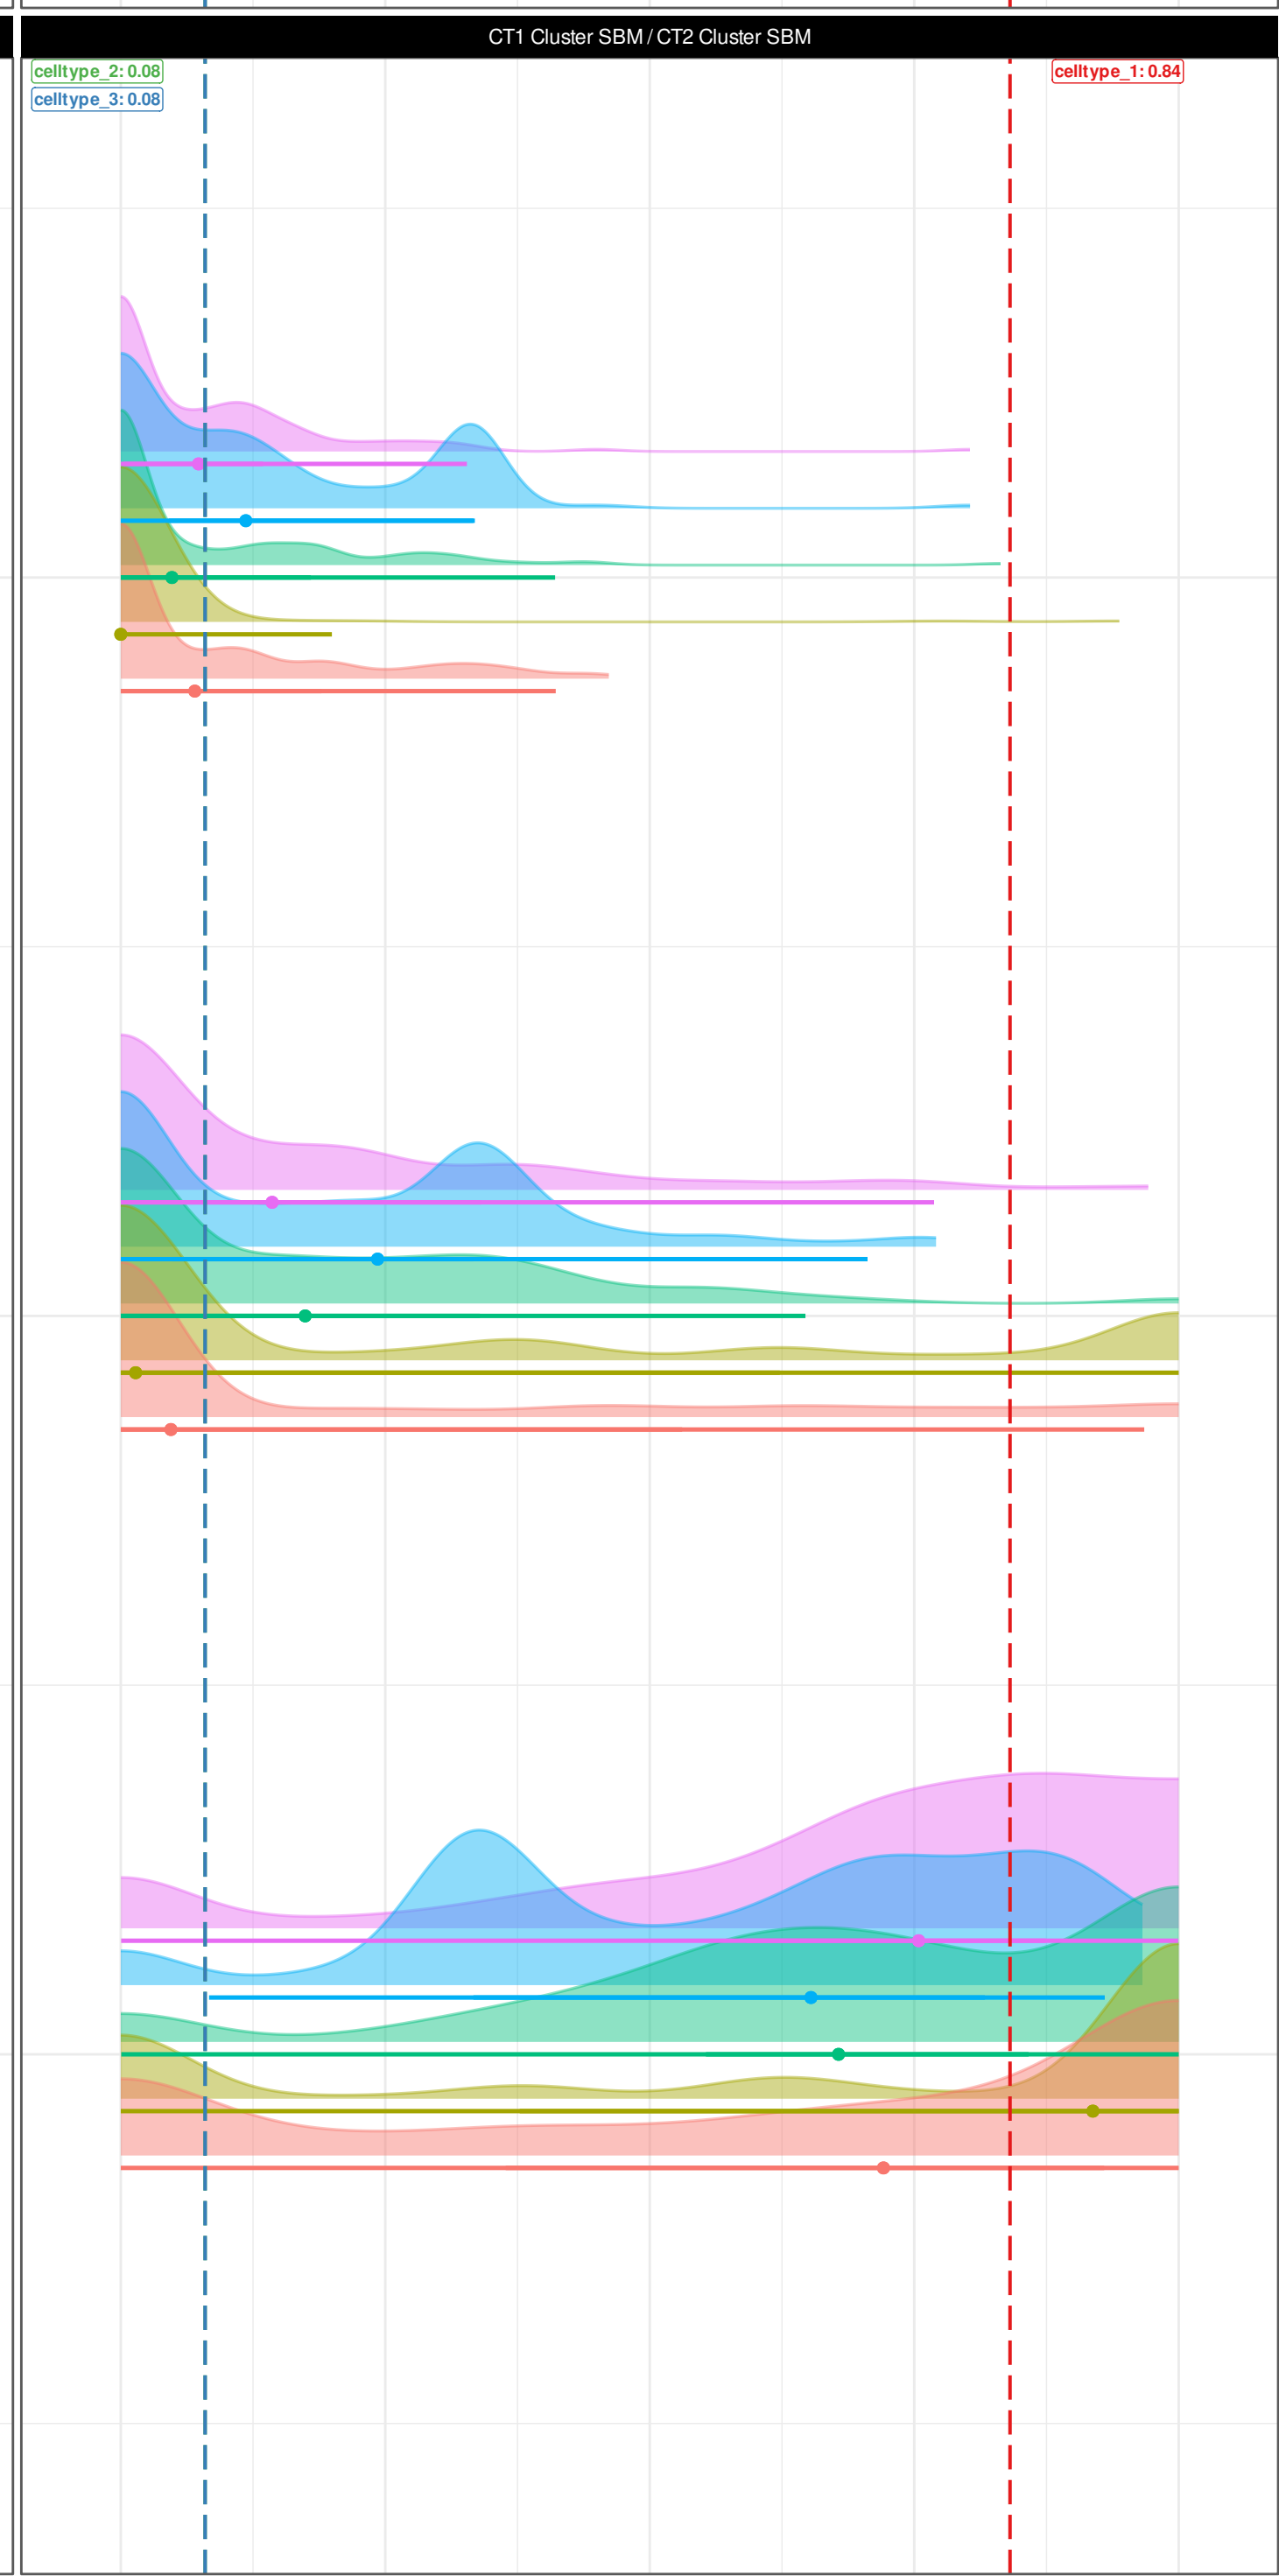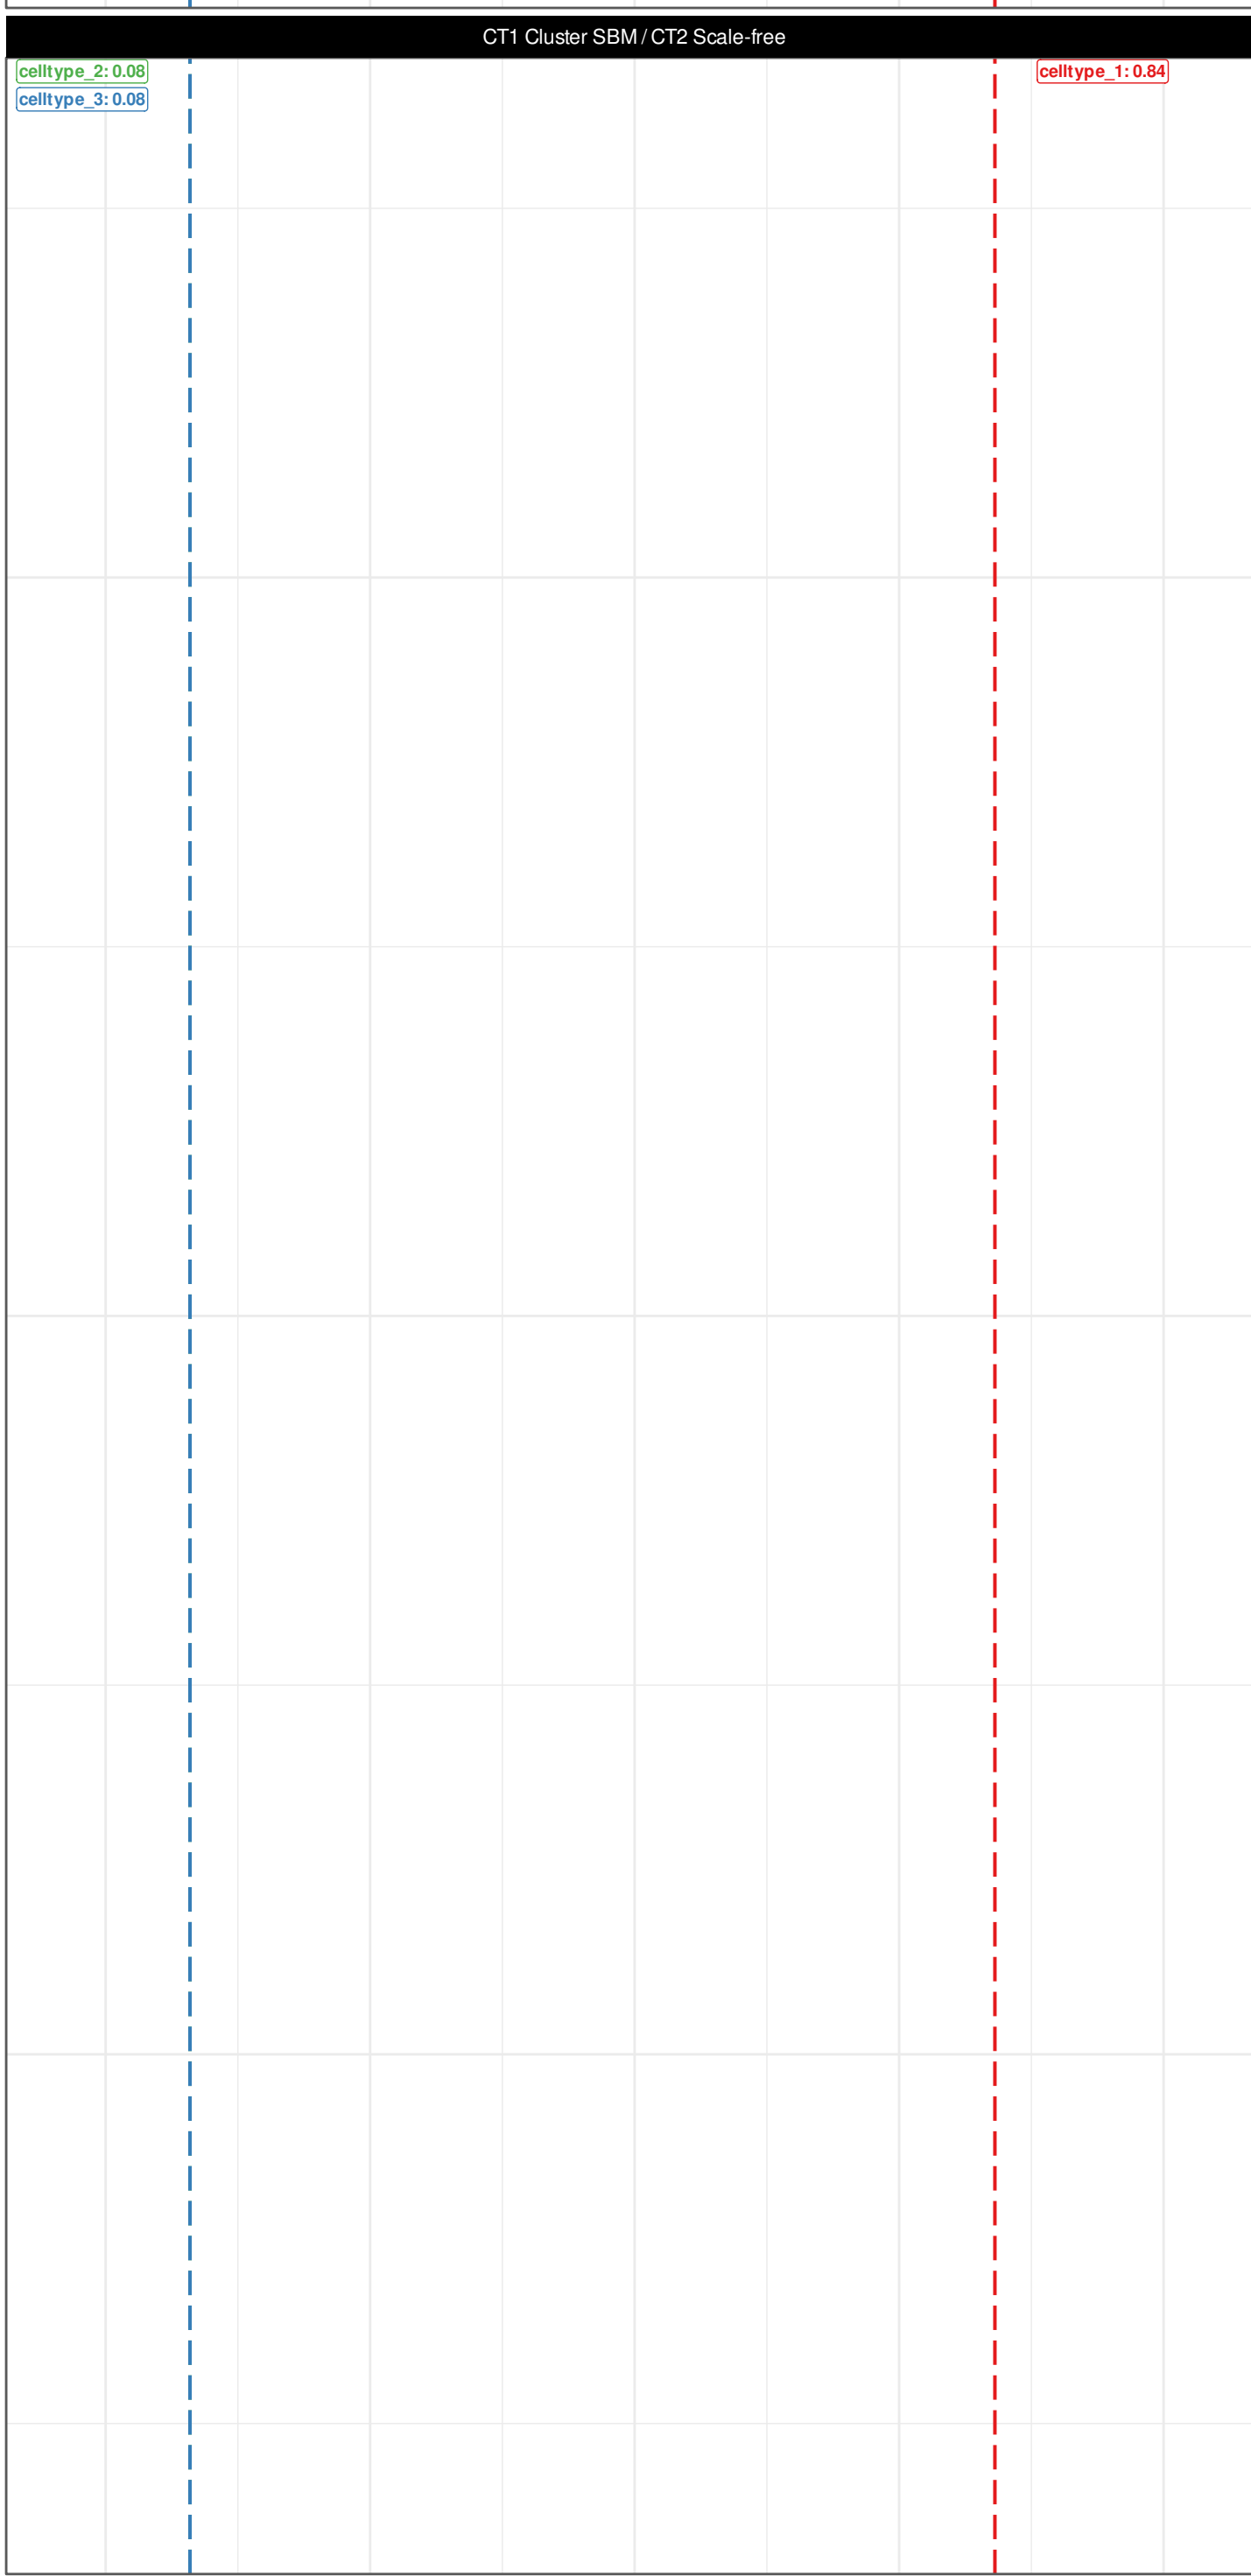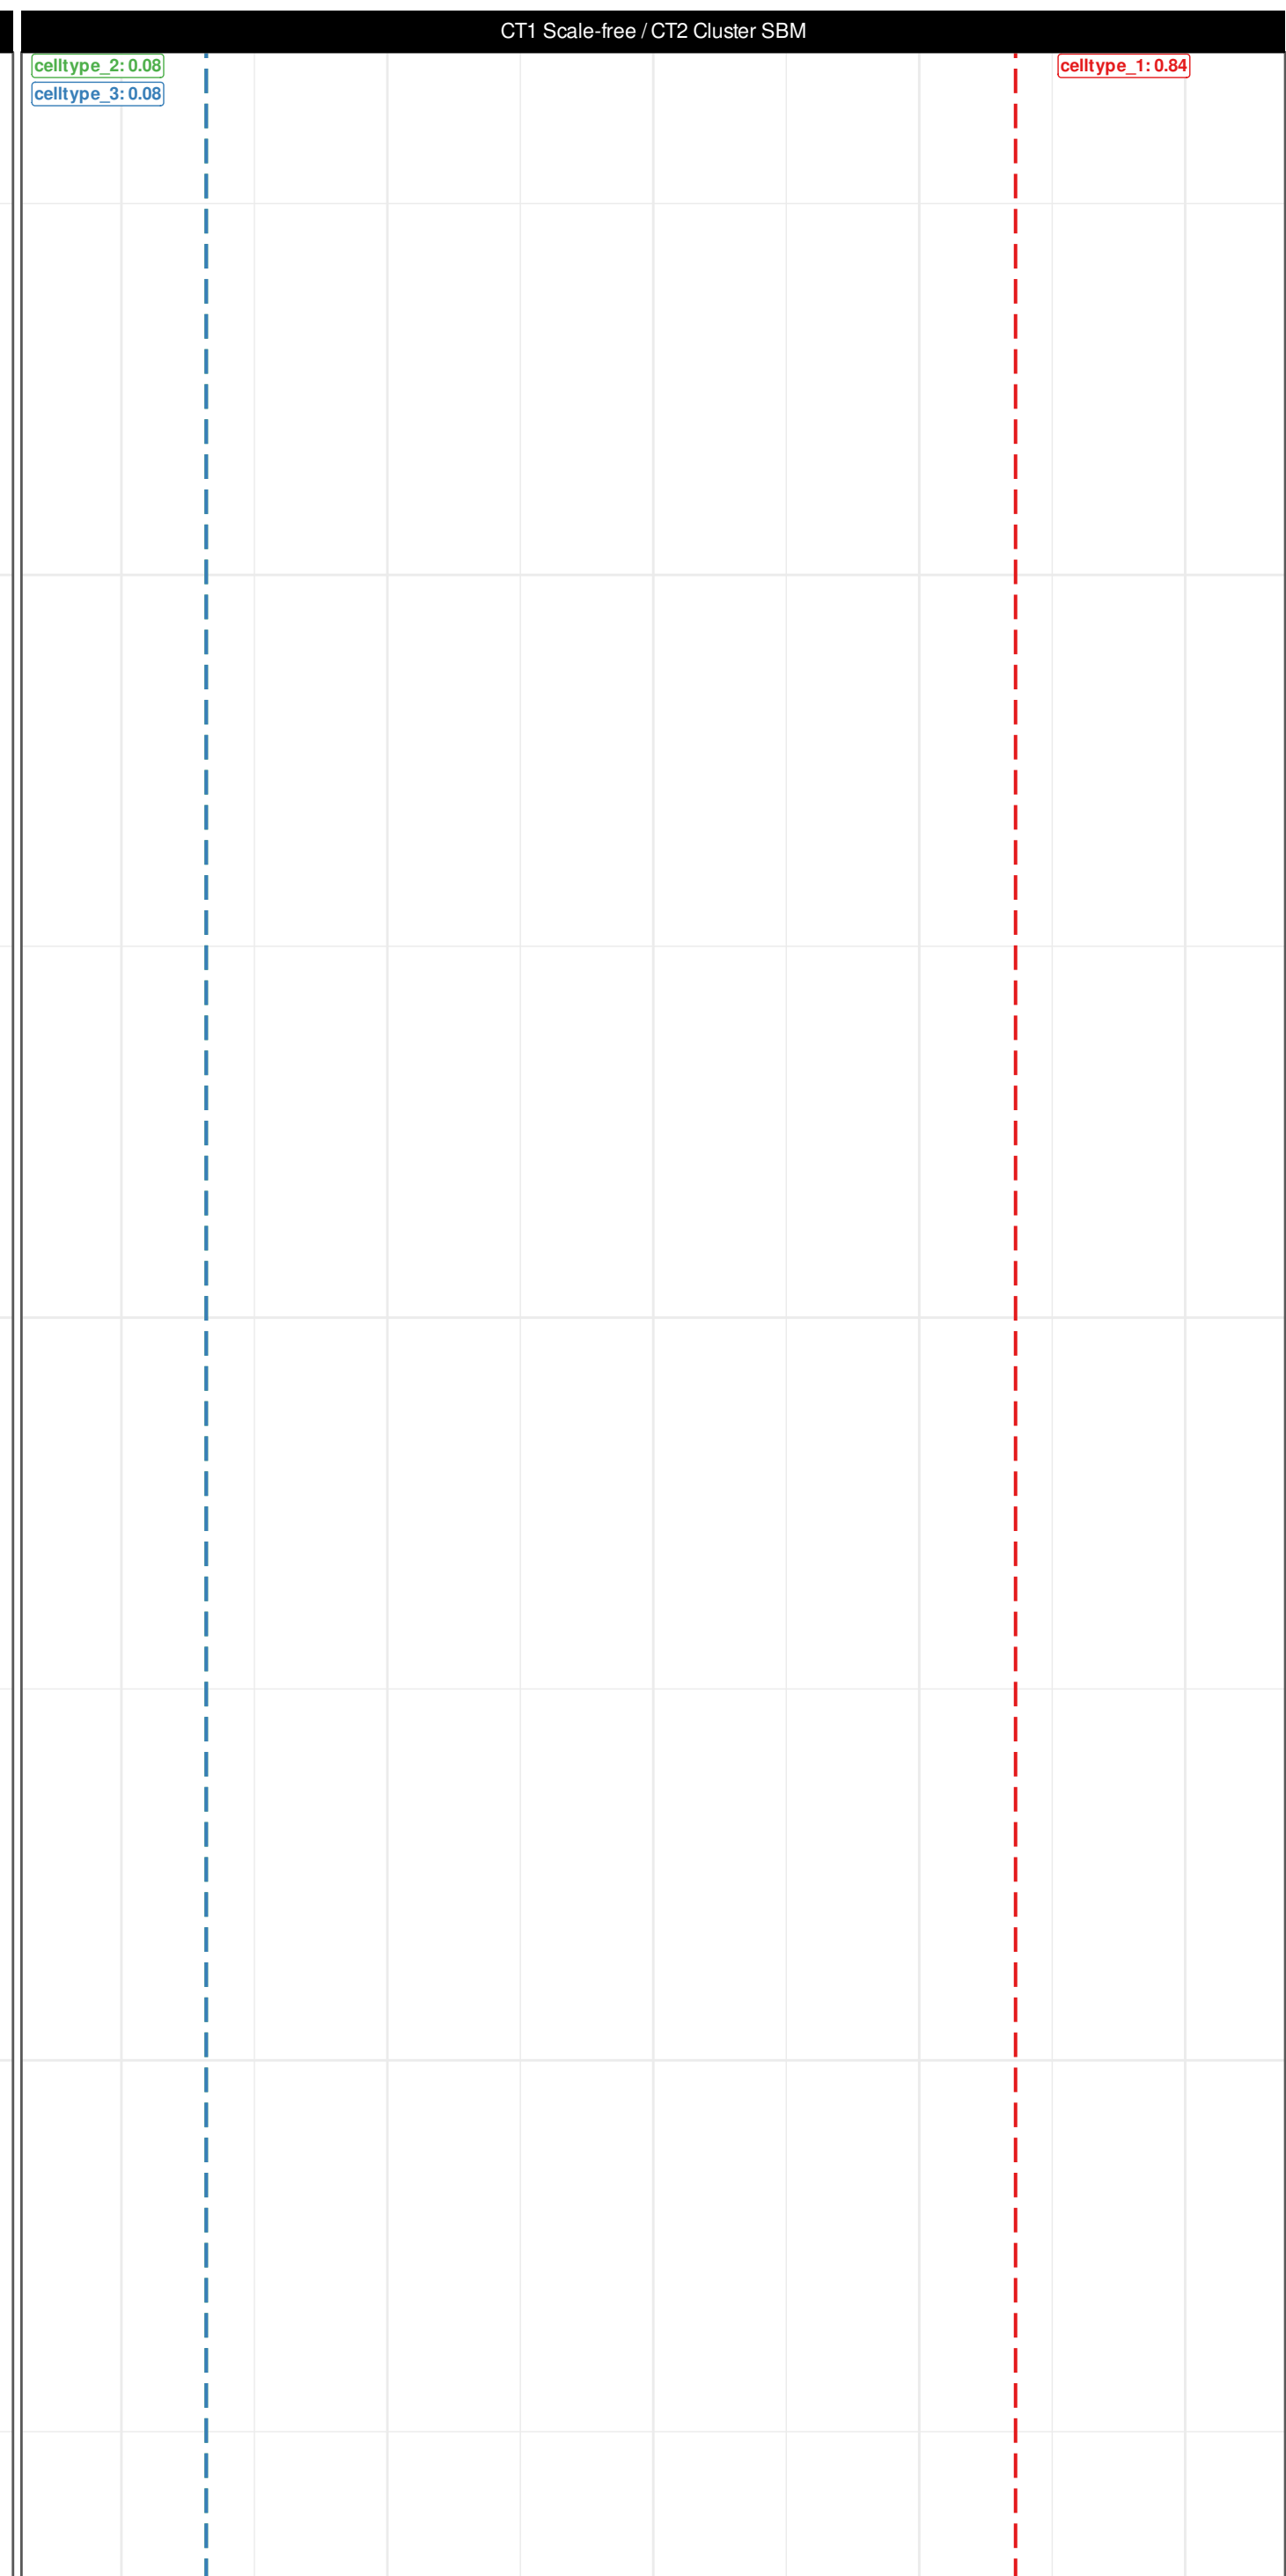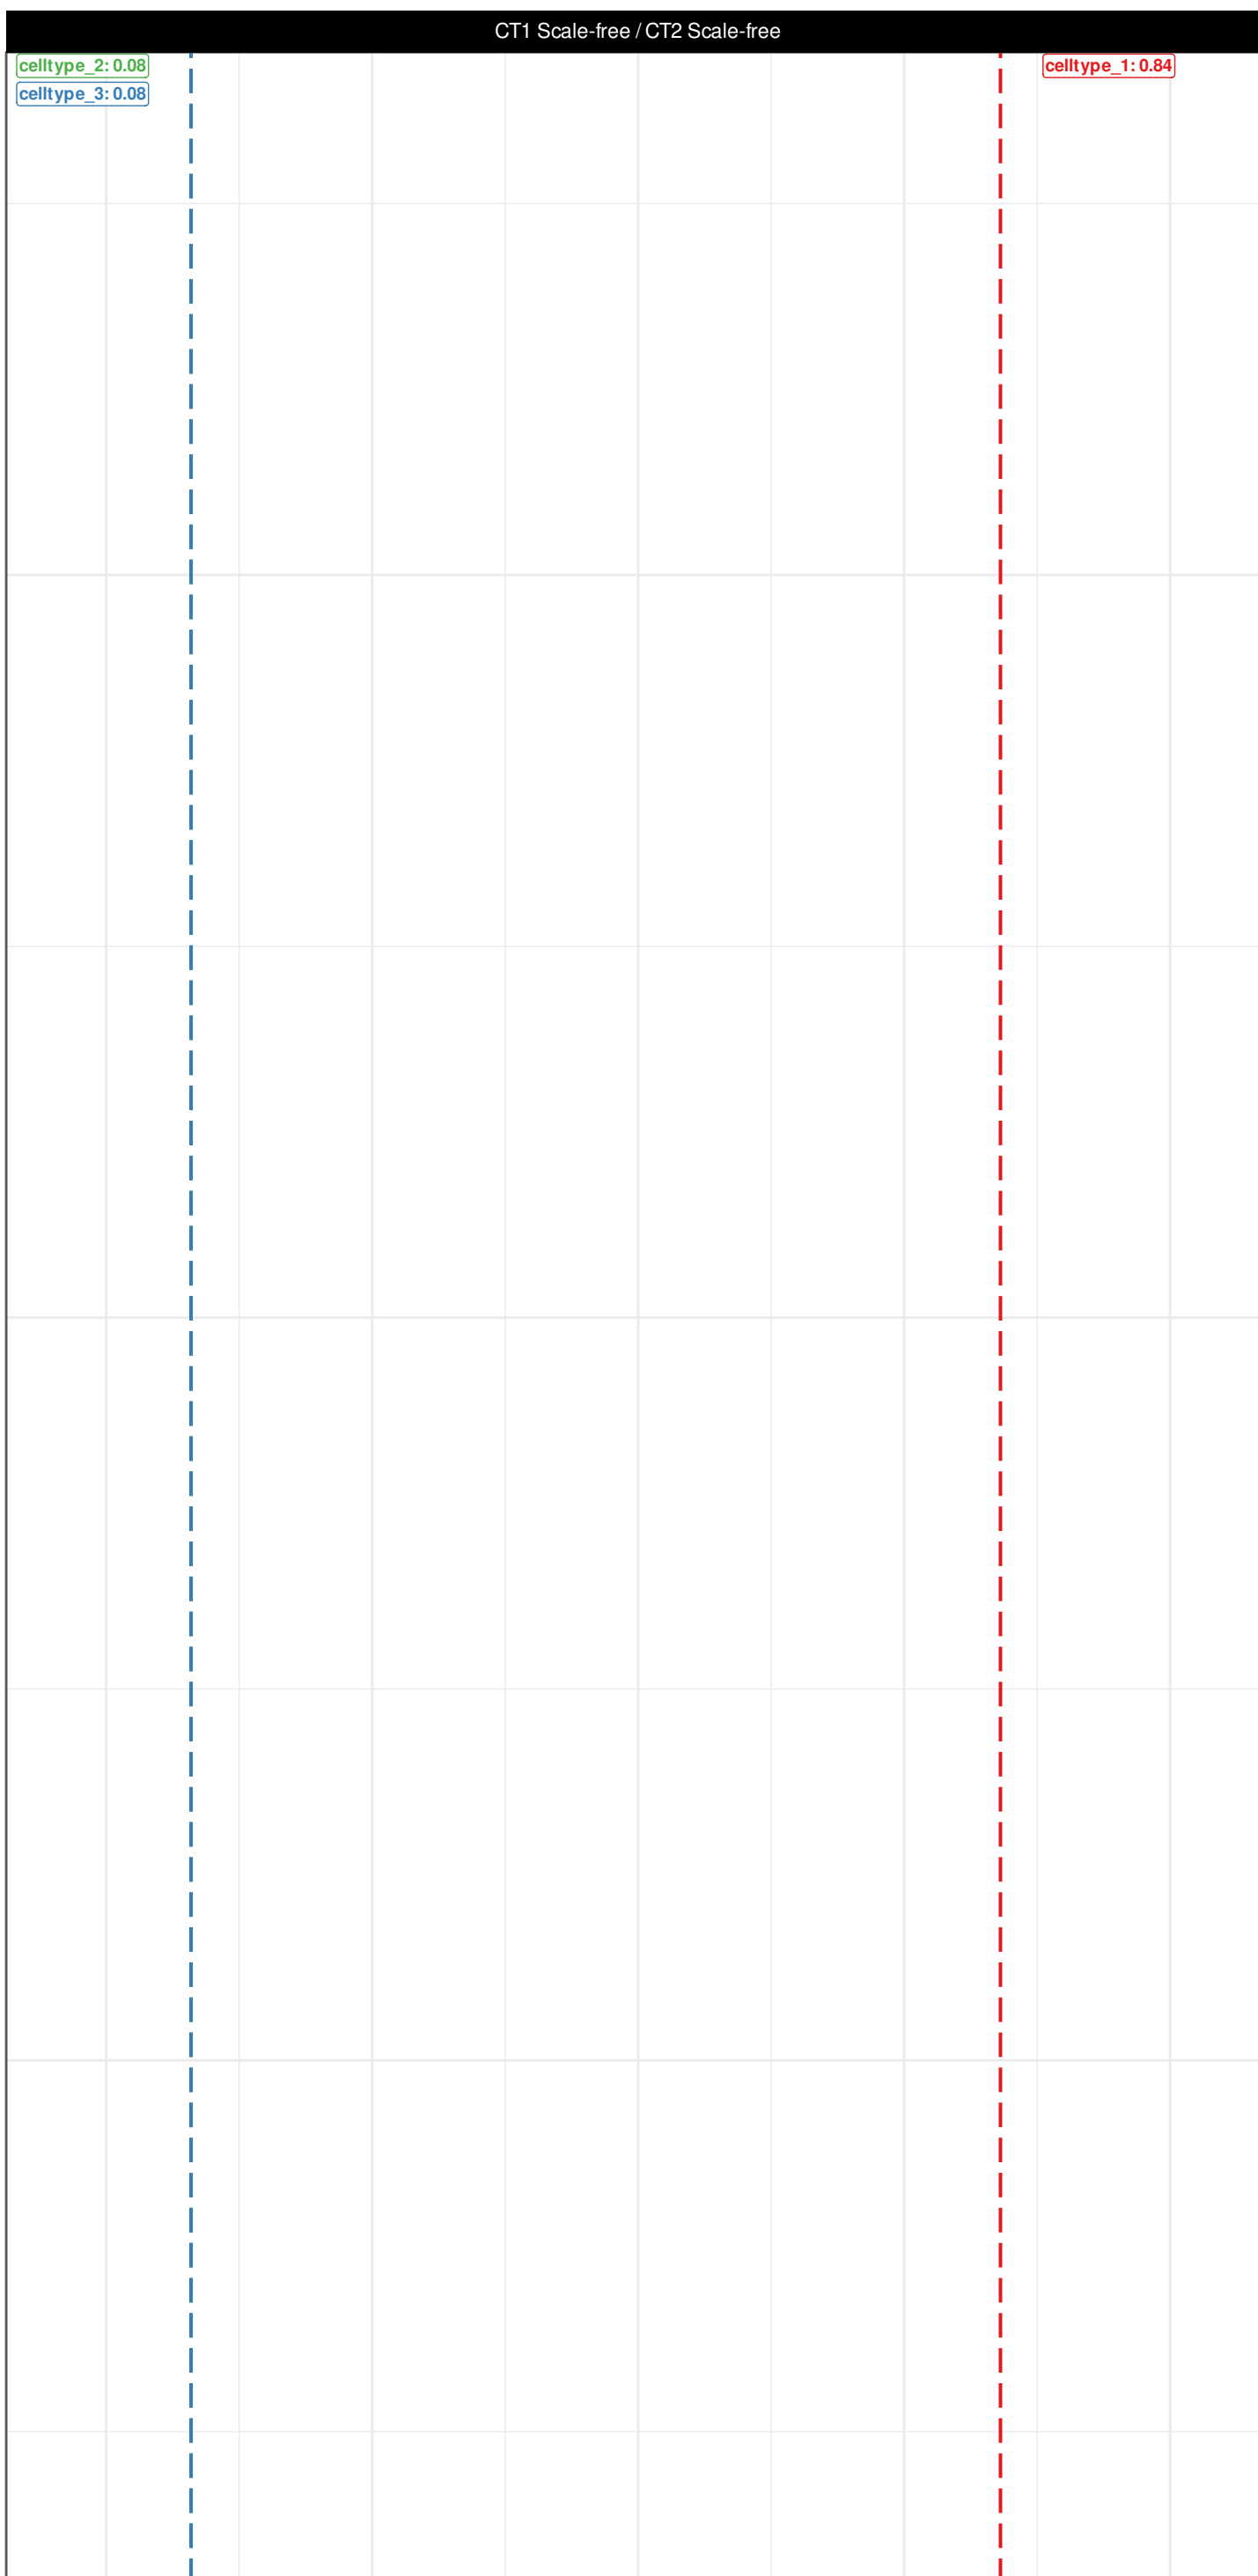


Algorithm  lsei  ciphersort  LBFGS  Marquardt-Levenberg  Newton-Raphson

Central 50% and 95% of Monte Carlo replicates; not a confidence interval for p . Dashed vertical lines and labels: true cell-type proportions (abundant type to the right, others to the left). Slabs are bounded to $[0, 1]$ (unit simplex). When a panel piles on a vertex, dots replace an empty KDE slab.


moderately unbalanced / high OVL

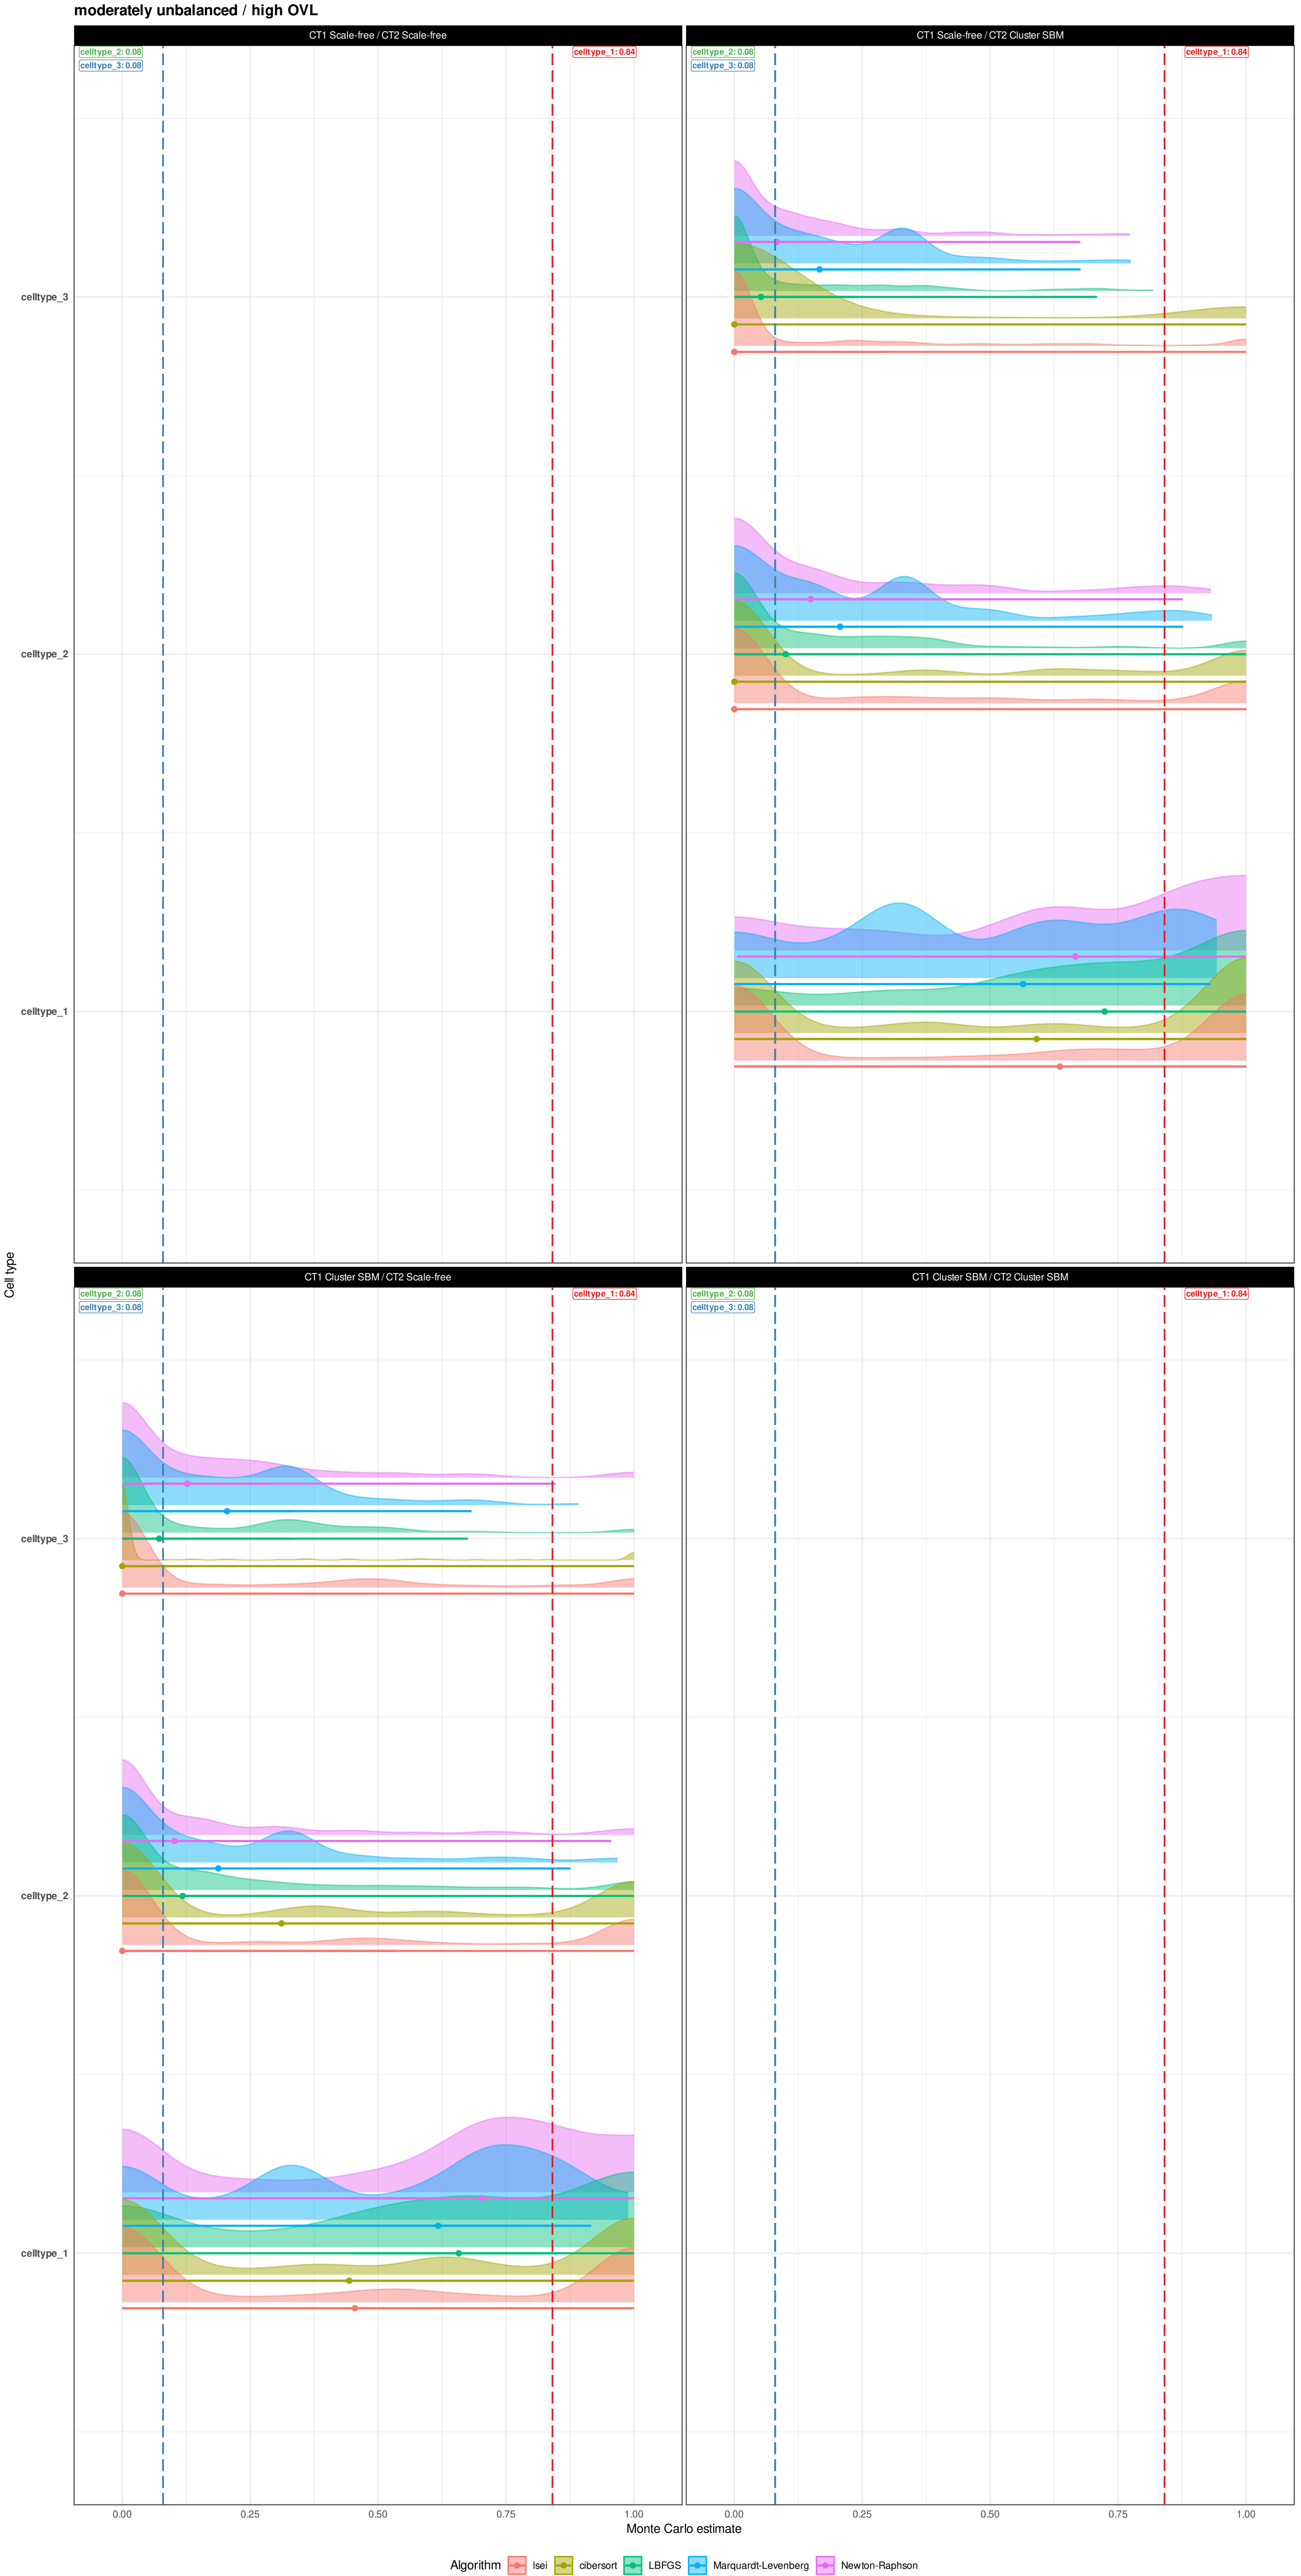


highly unbalanced / low OVL

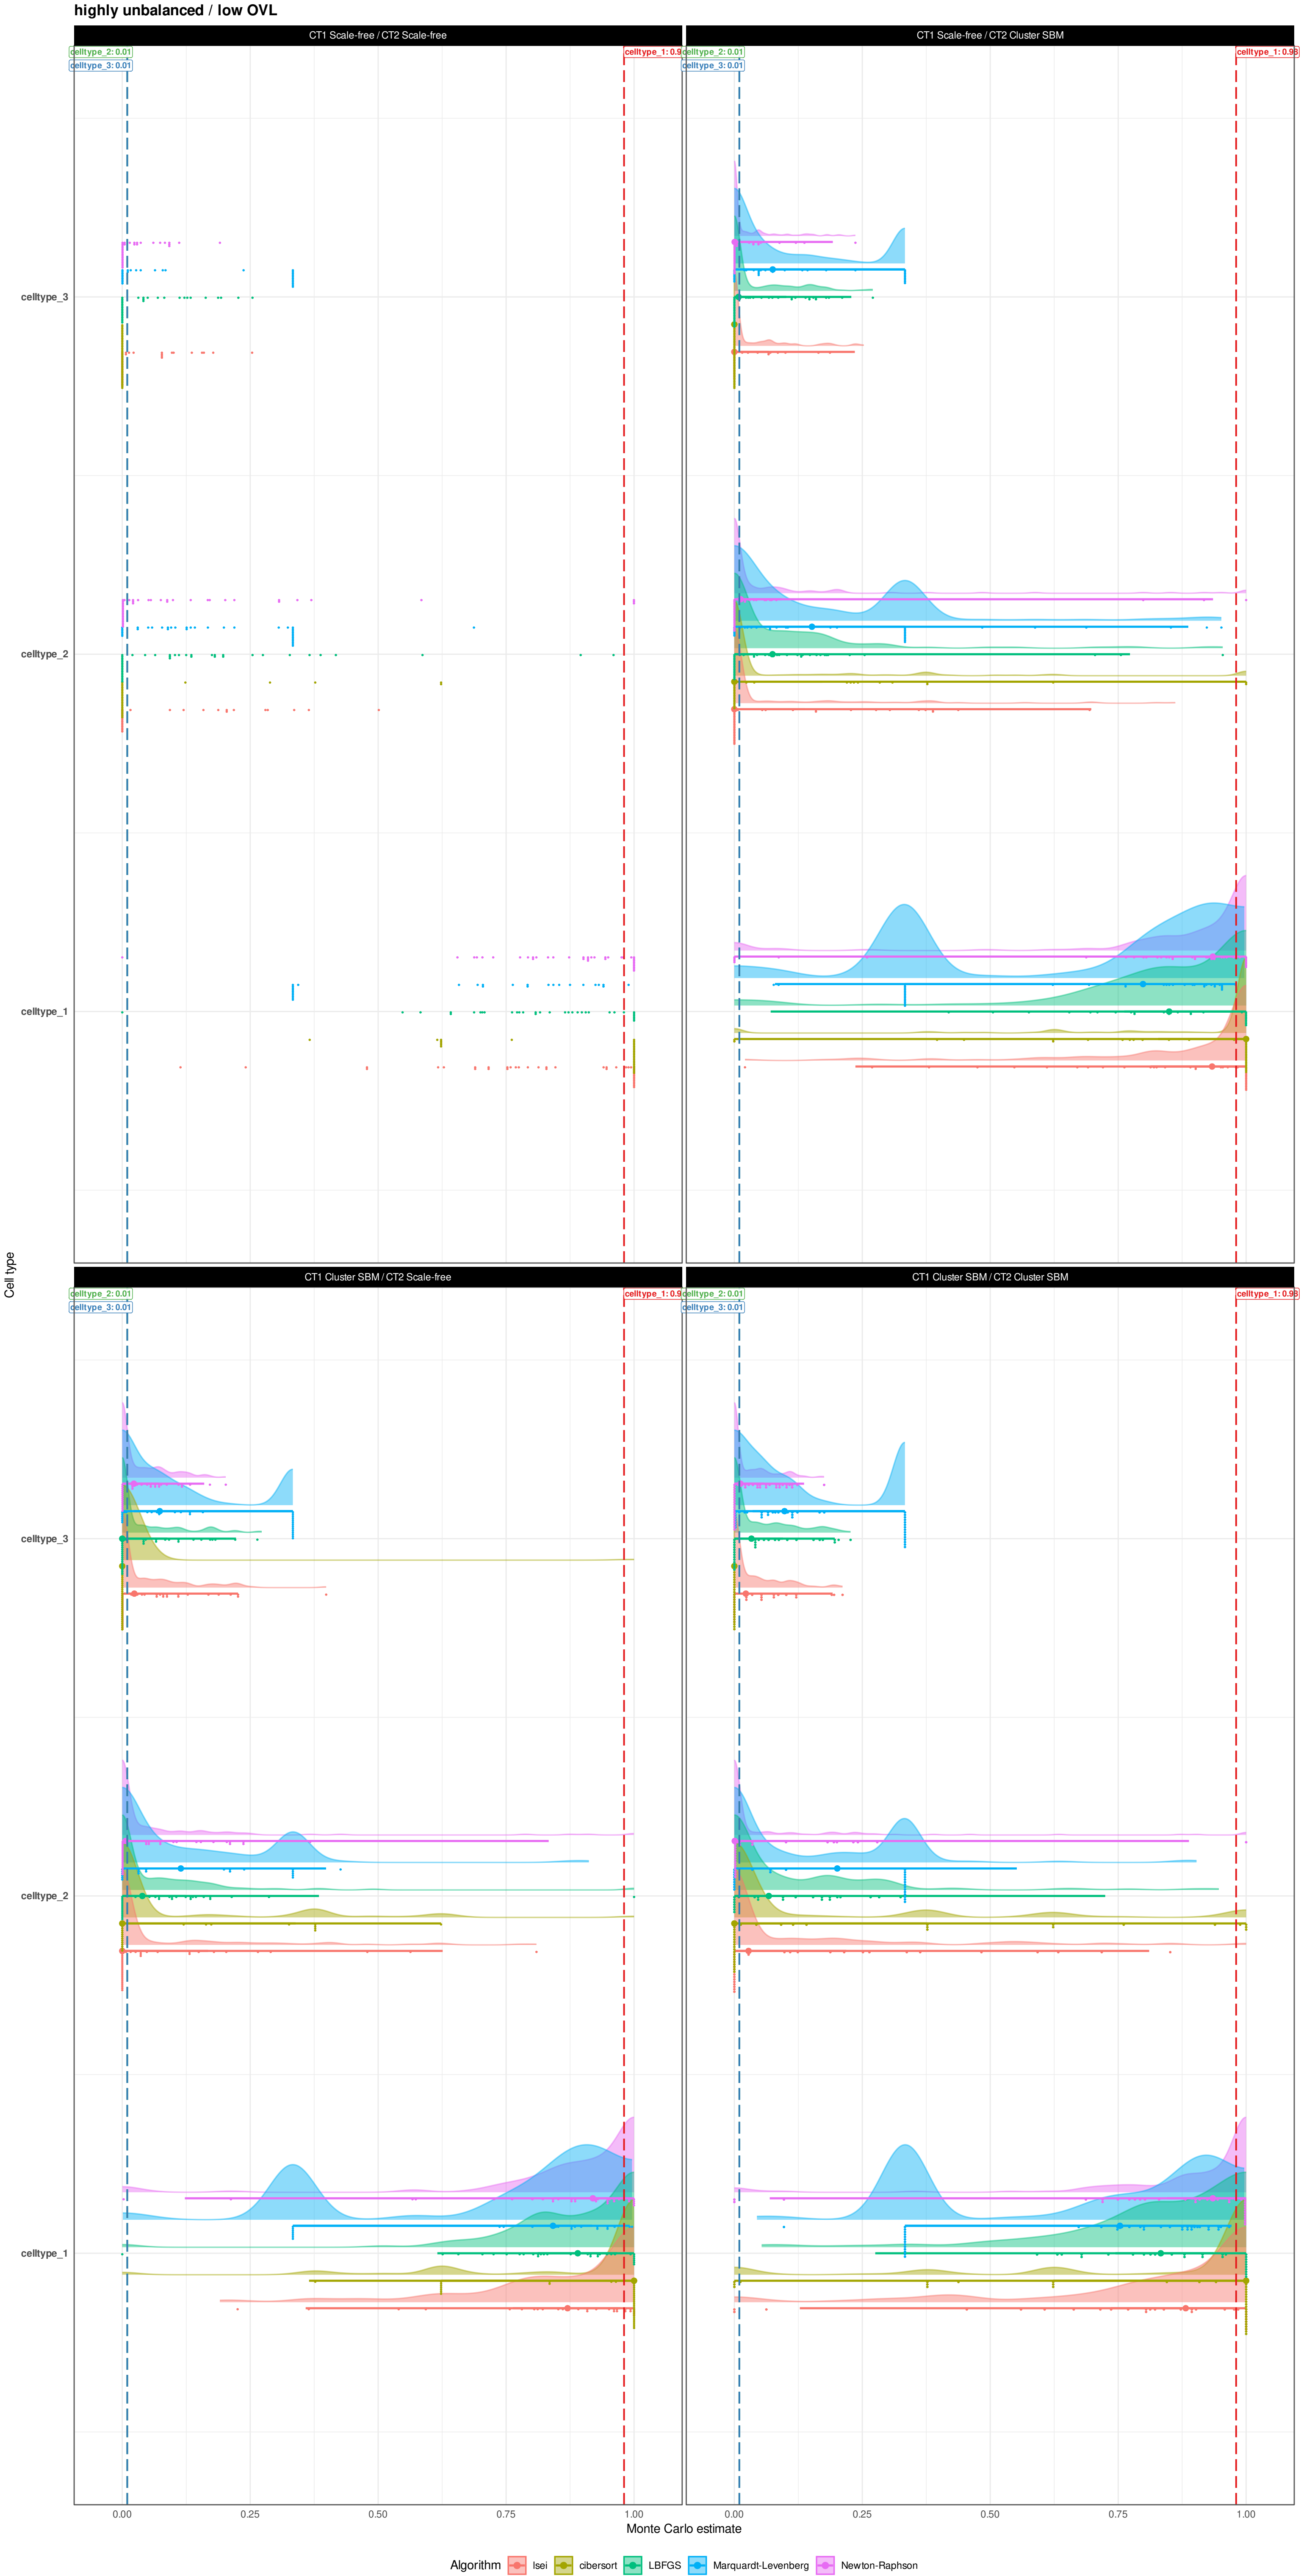

highly unbalanced / moderate OVL

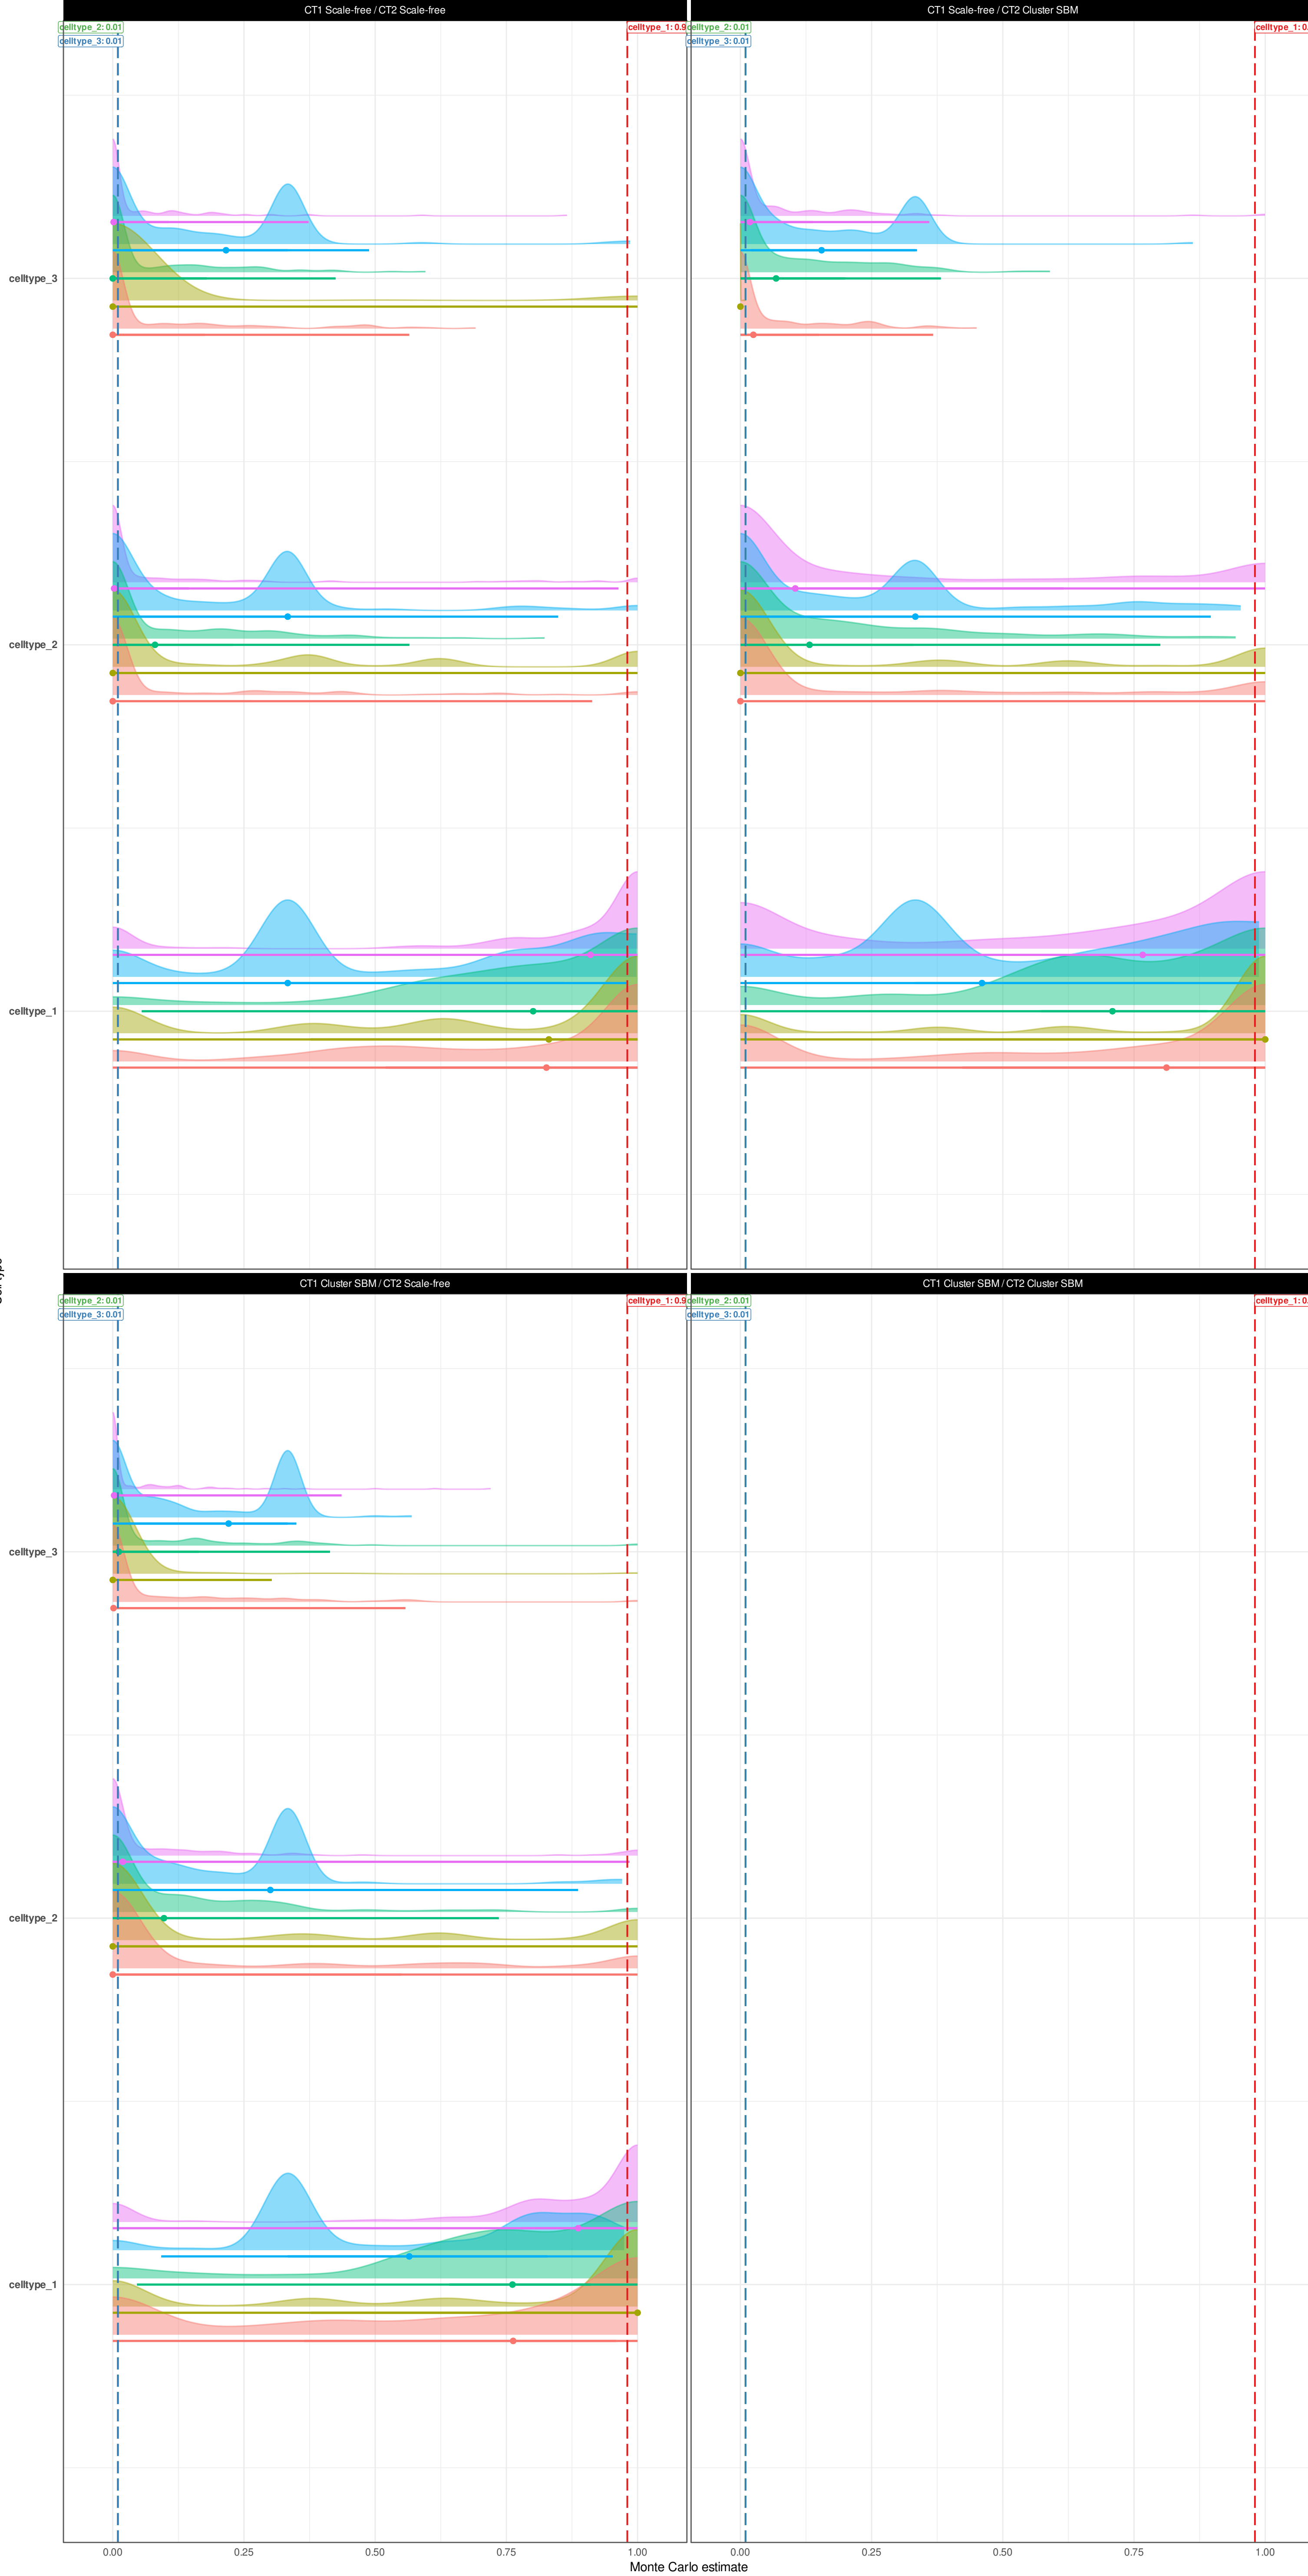

Central 50% and 95% of Monte Carlo replicates; not a confidence interval for p. Dashed vertical lines and labels: true cell-type proportions (abundant type to the right, others to the left). Slabs are bounded to [0, 1] (unit simplex). When a panel piles on a vertex, dots replace an empty KDE slab

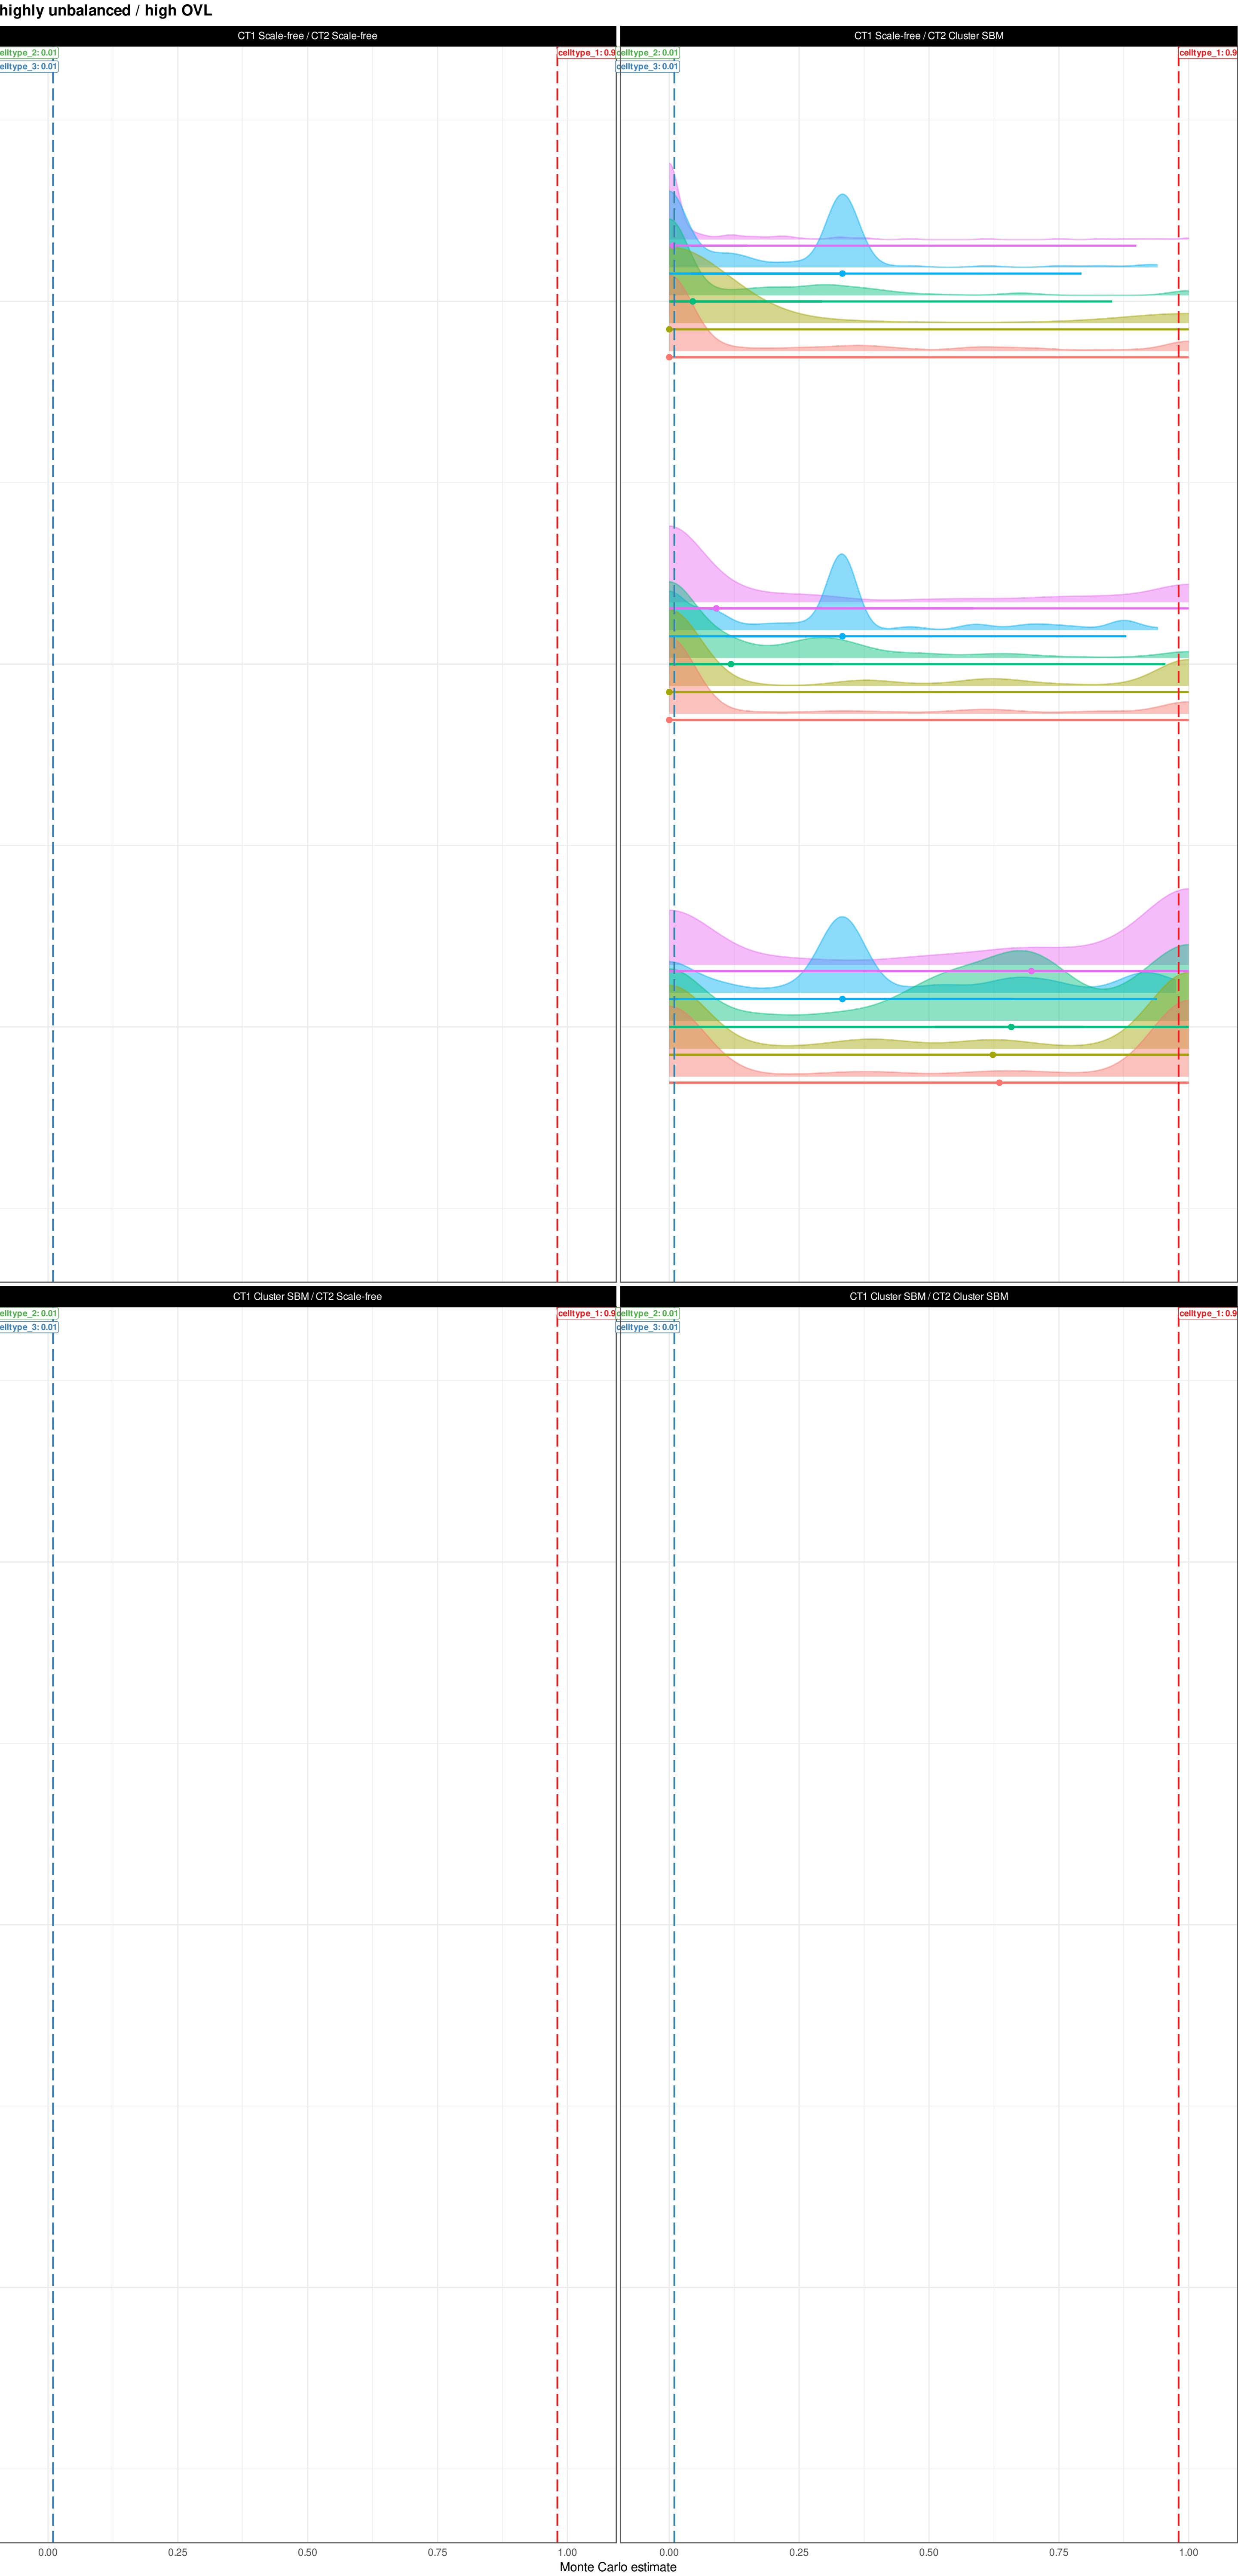

Central 50% and 95% of Monte Carlo replicates; not a confidence interval for p. Dashed vertical lines and labels: true cell-type proportions (abundant type to the right, others to the left). Slabs are bounded to [0, 1] (unit simplex). When a panel piles on a vertex, dots replace an empty KDE slab