
Wald approximation: D^2 of the ILR estimate against chi-square


G = 20 / 1000 cells per bulk / balanced / low sibling overlap

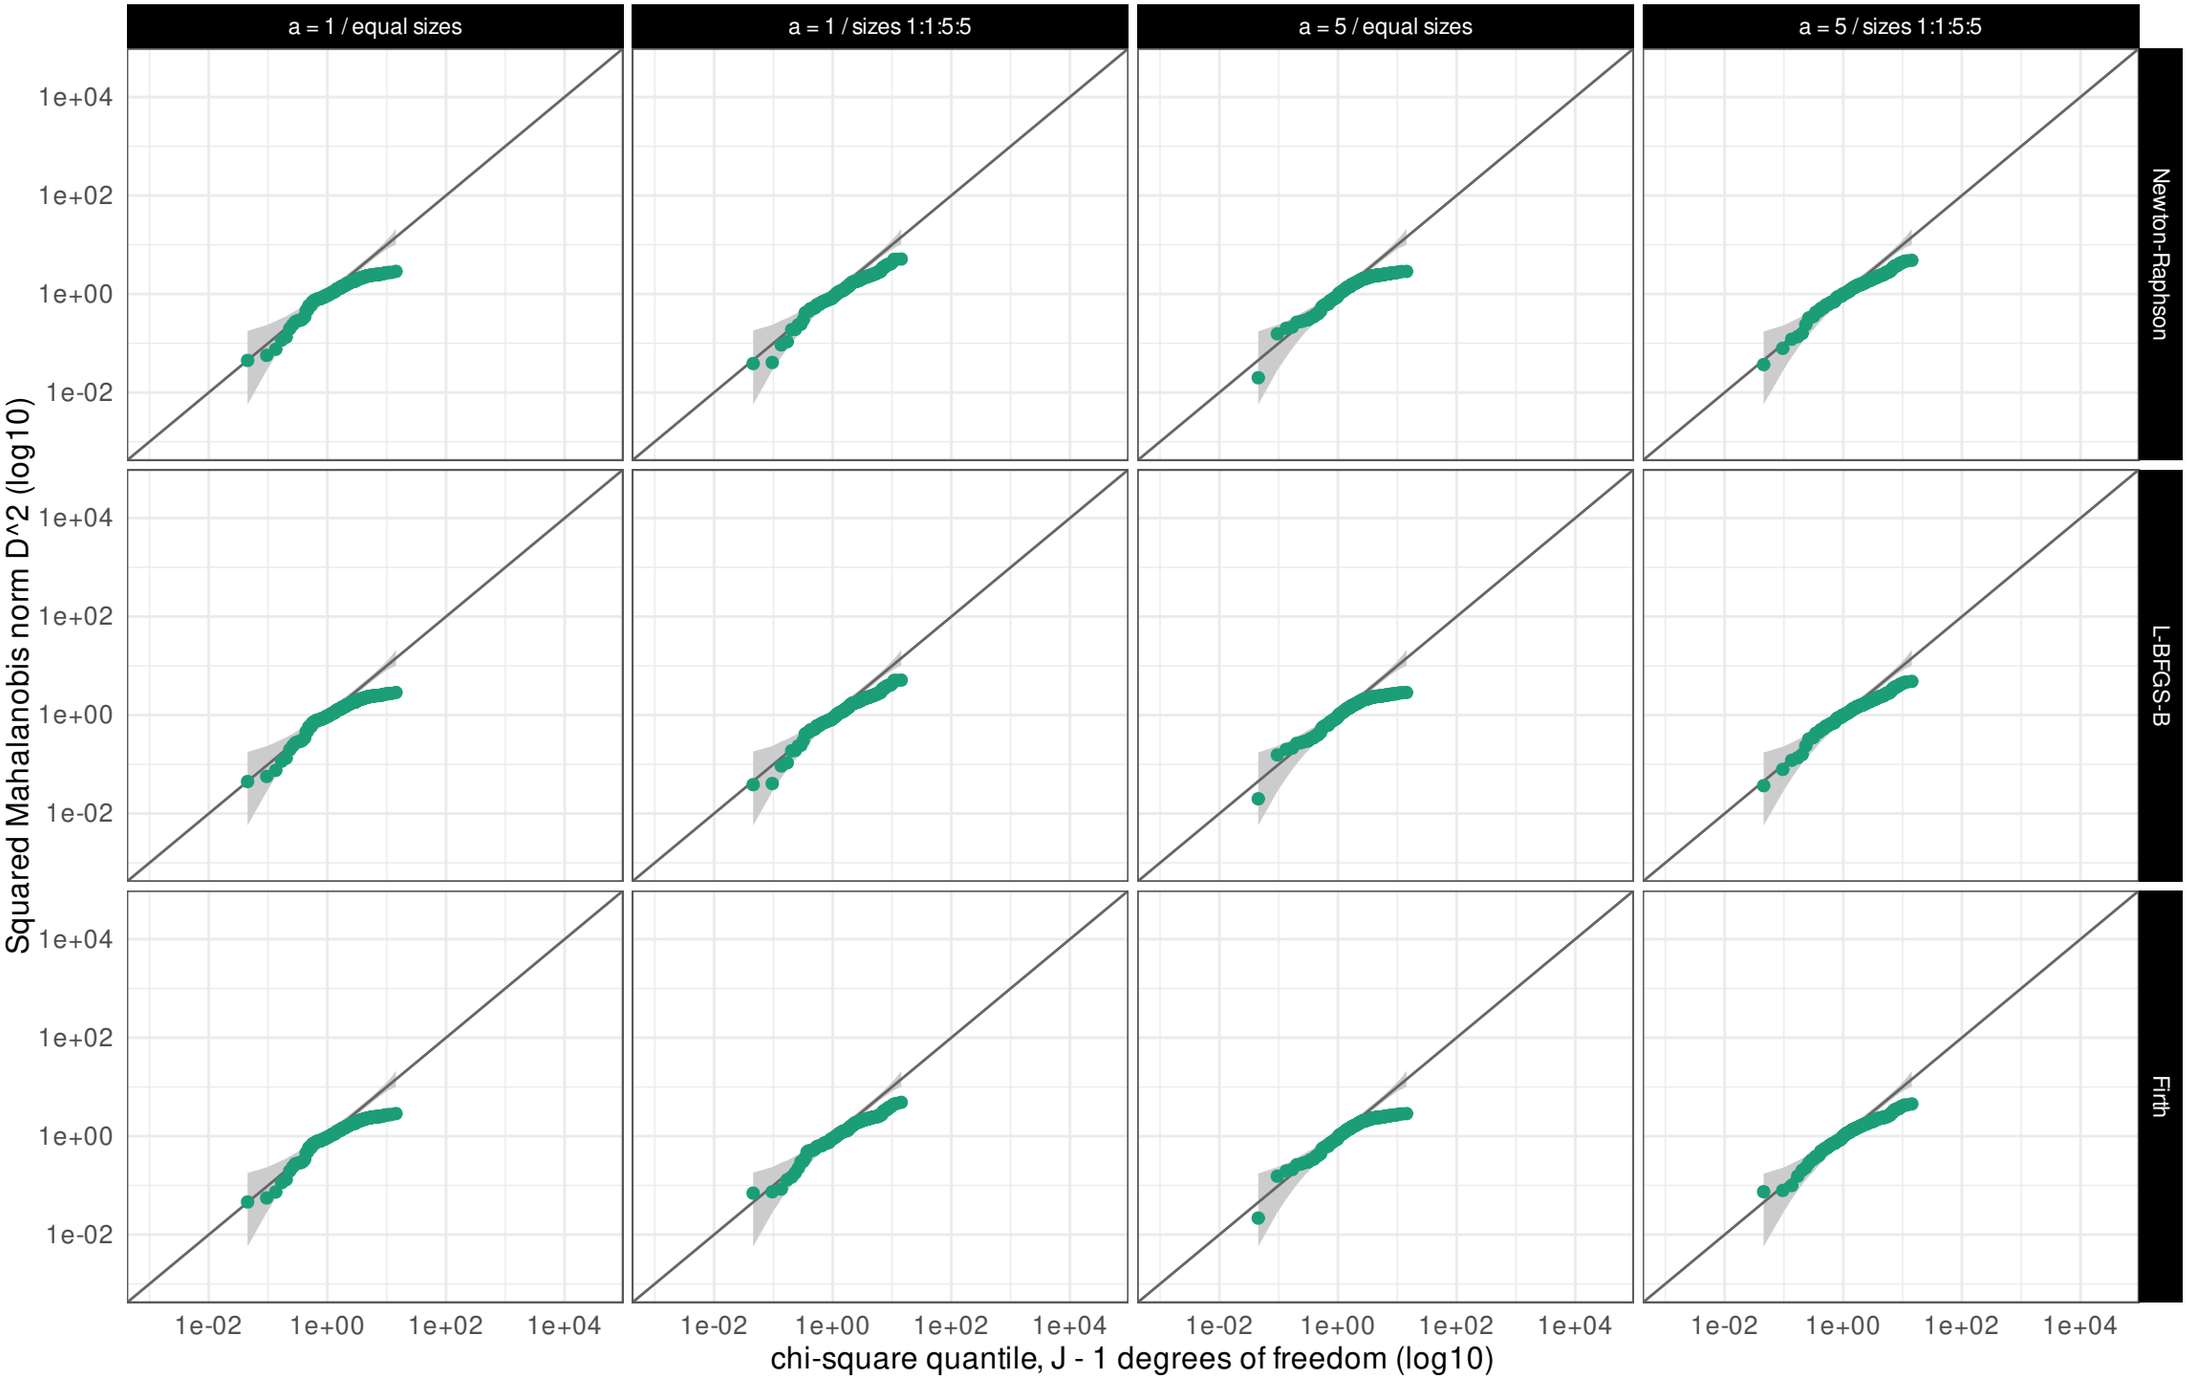

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square


G = 20 / 1000 cells per bulk / balanced / high sibling overlap

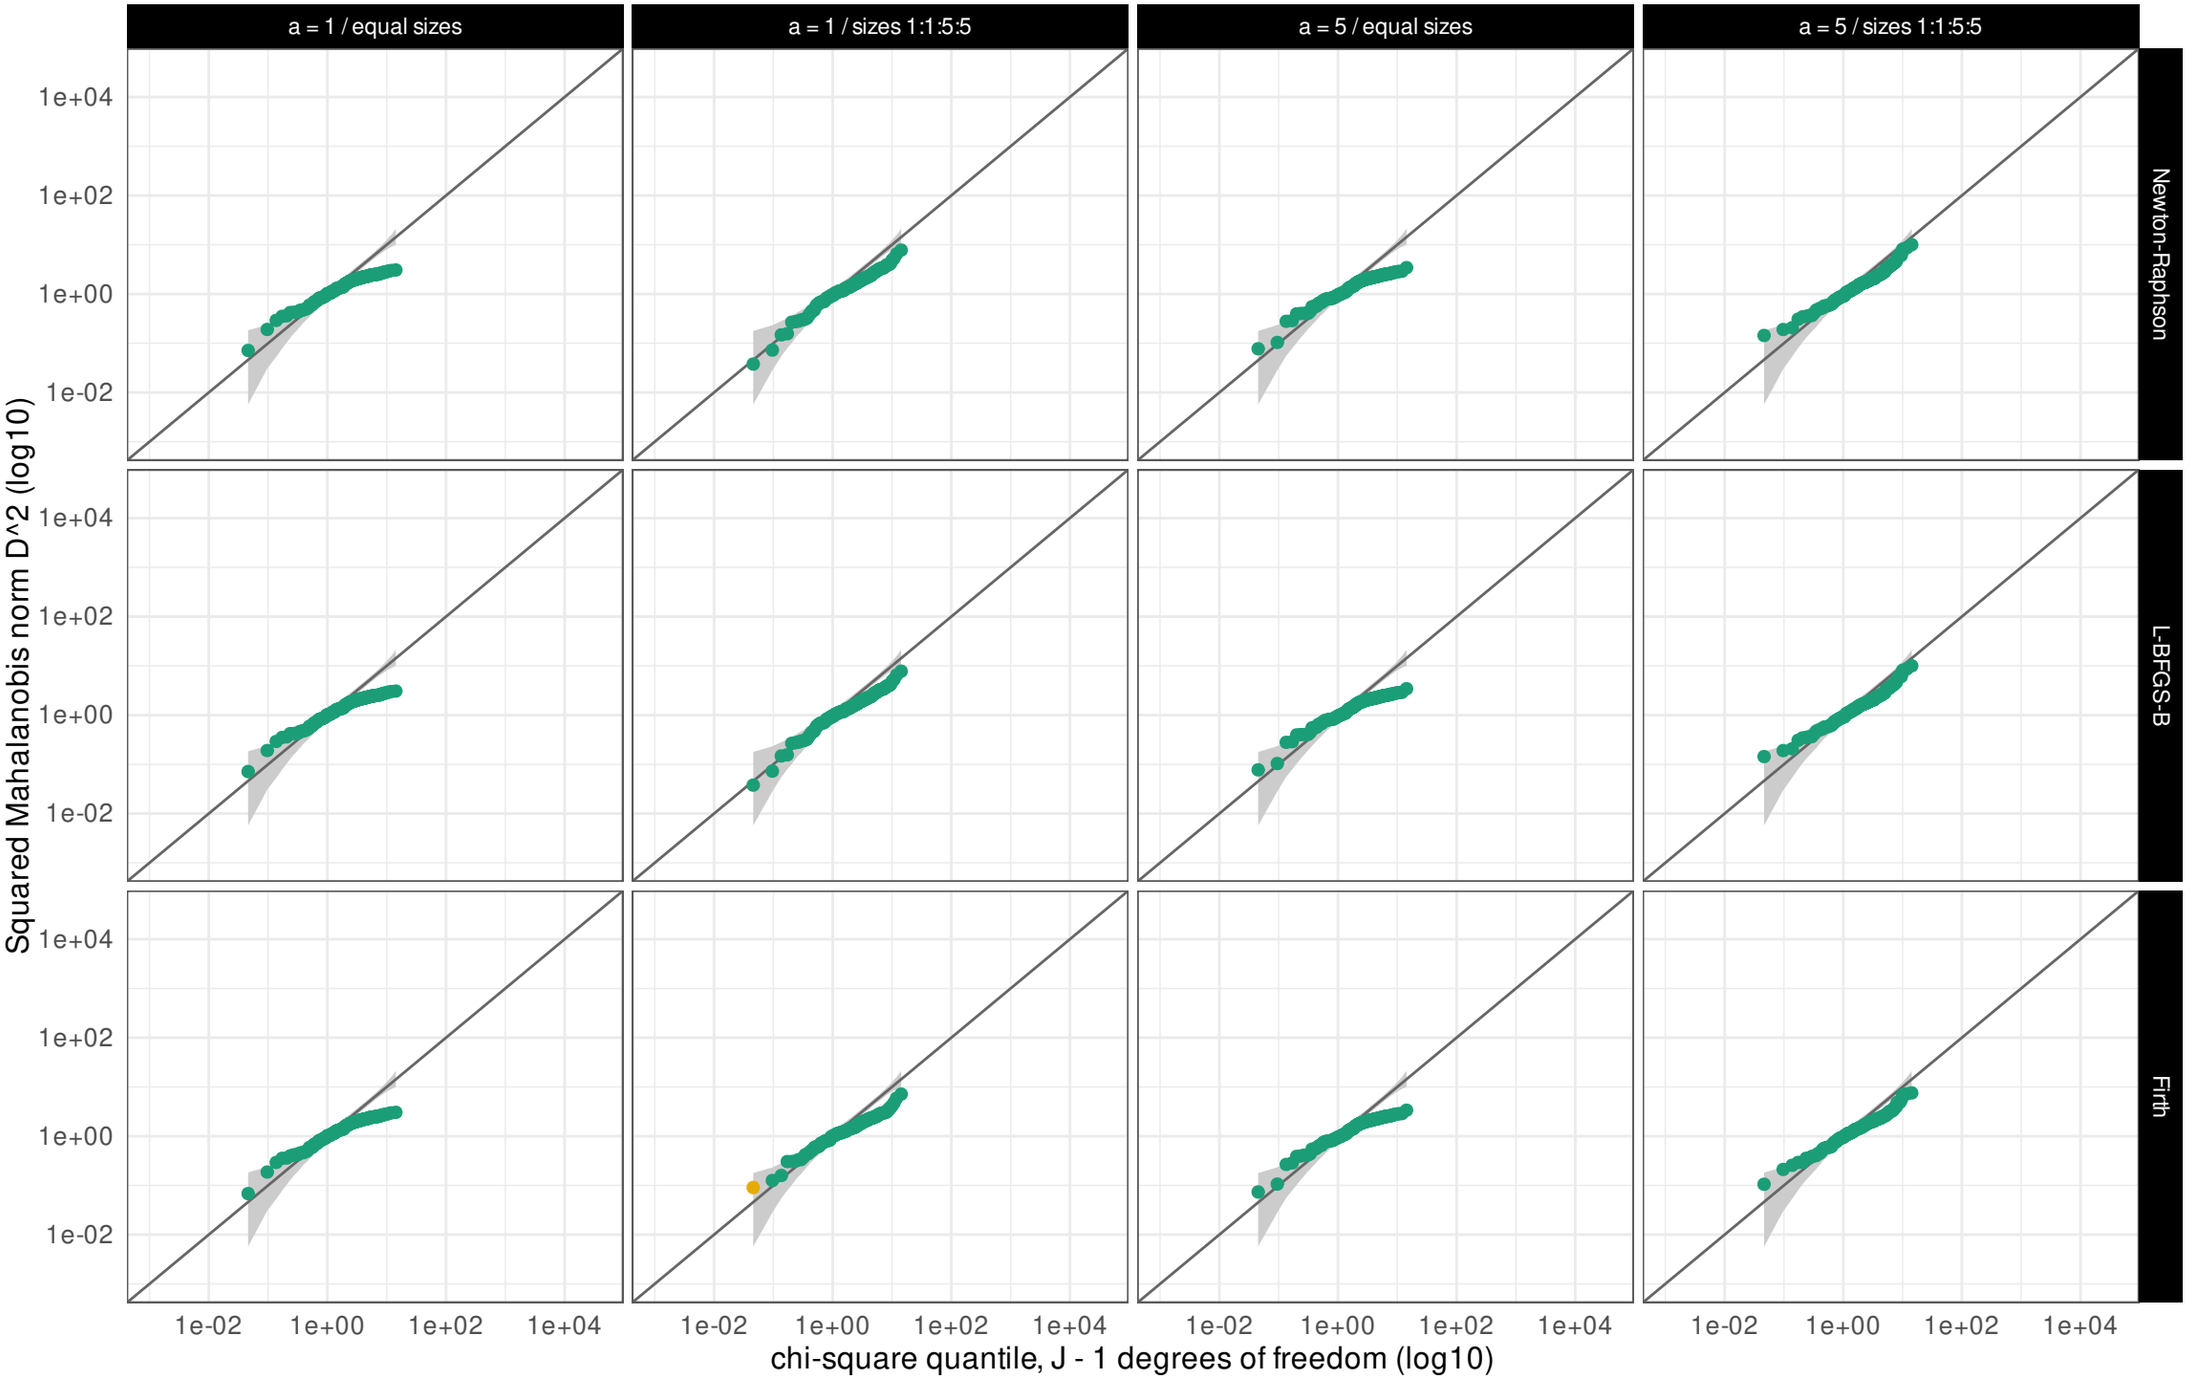

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square

G = 20 / 1000 cells per bulk / unbalanced / low sibling overlap

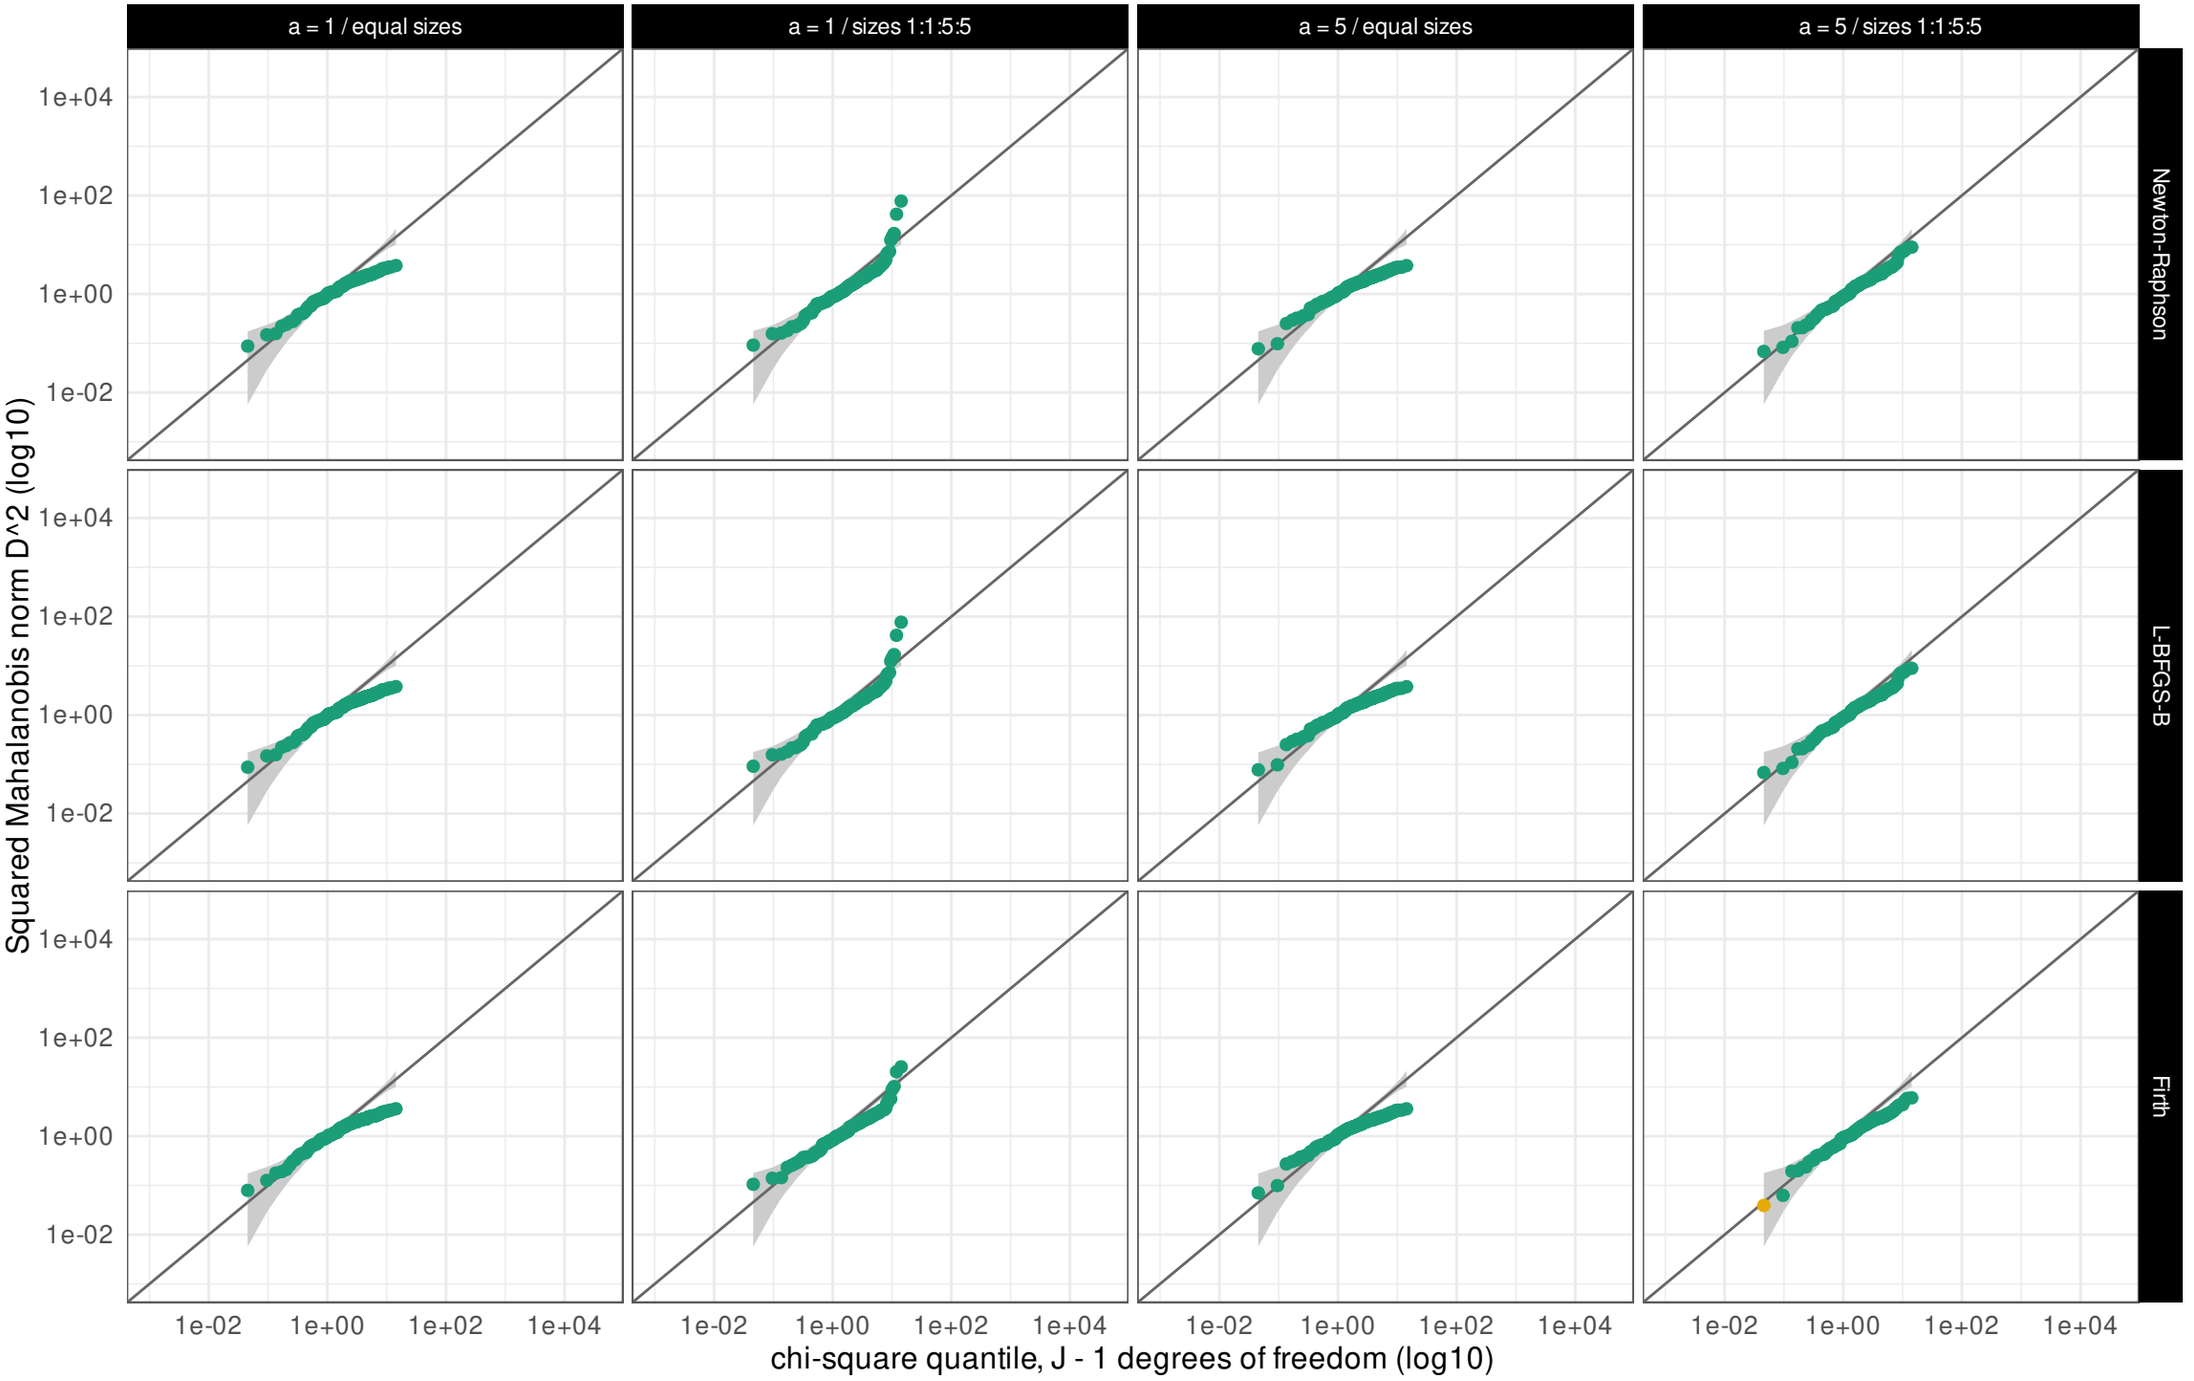


Converged, local maximum Converged, not a local maximum Numerical failure

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square


G = 20 / 1000 cells per bulk / unbalanced / high sibling overlap

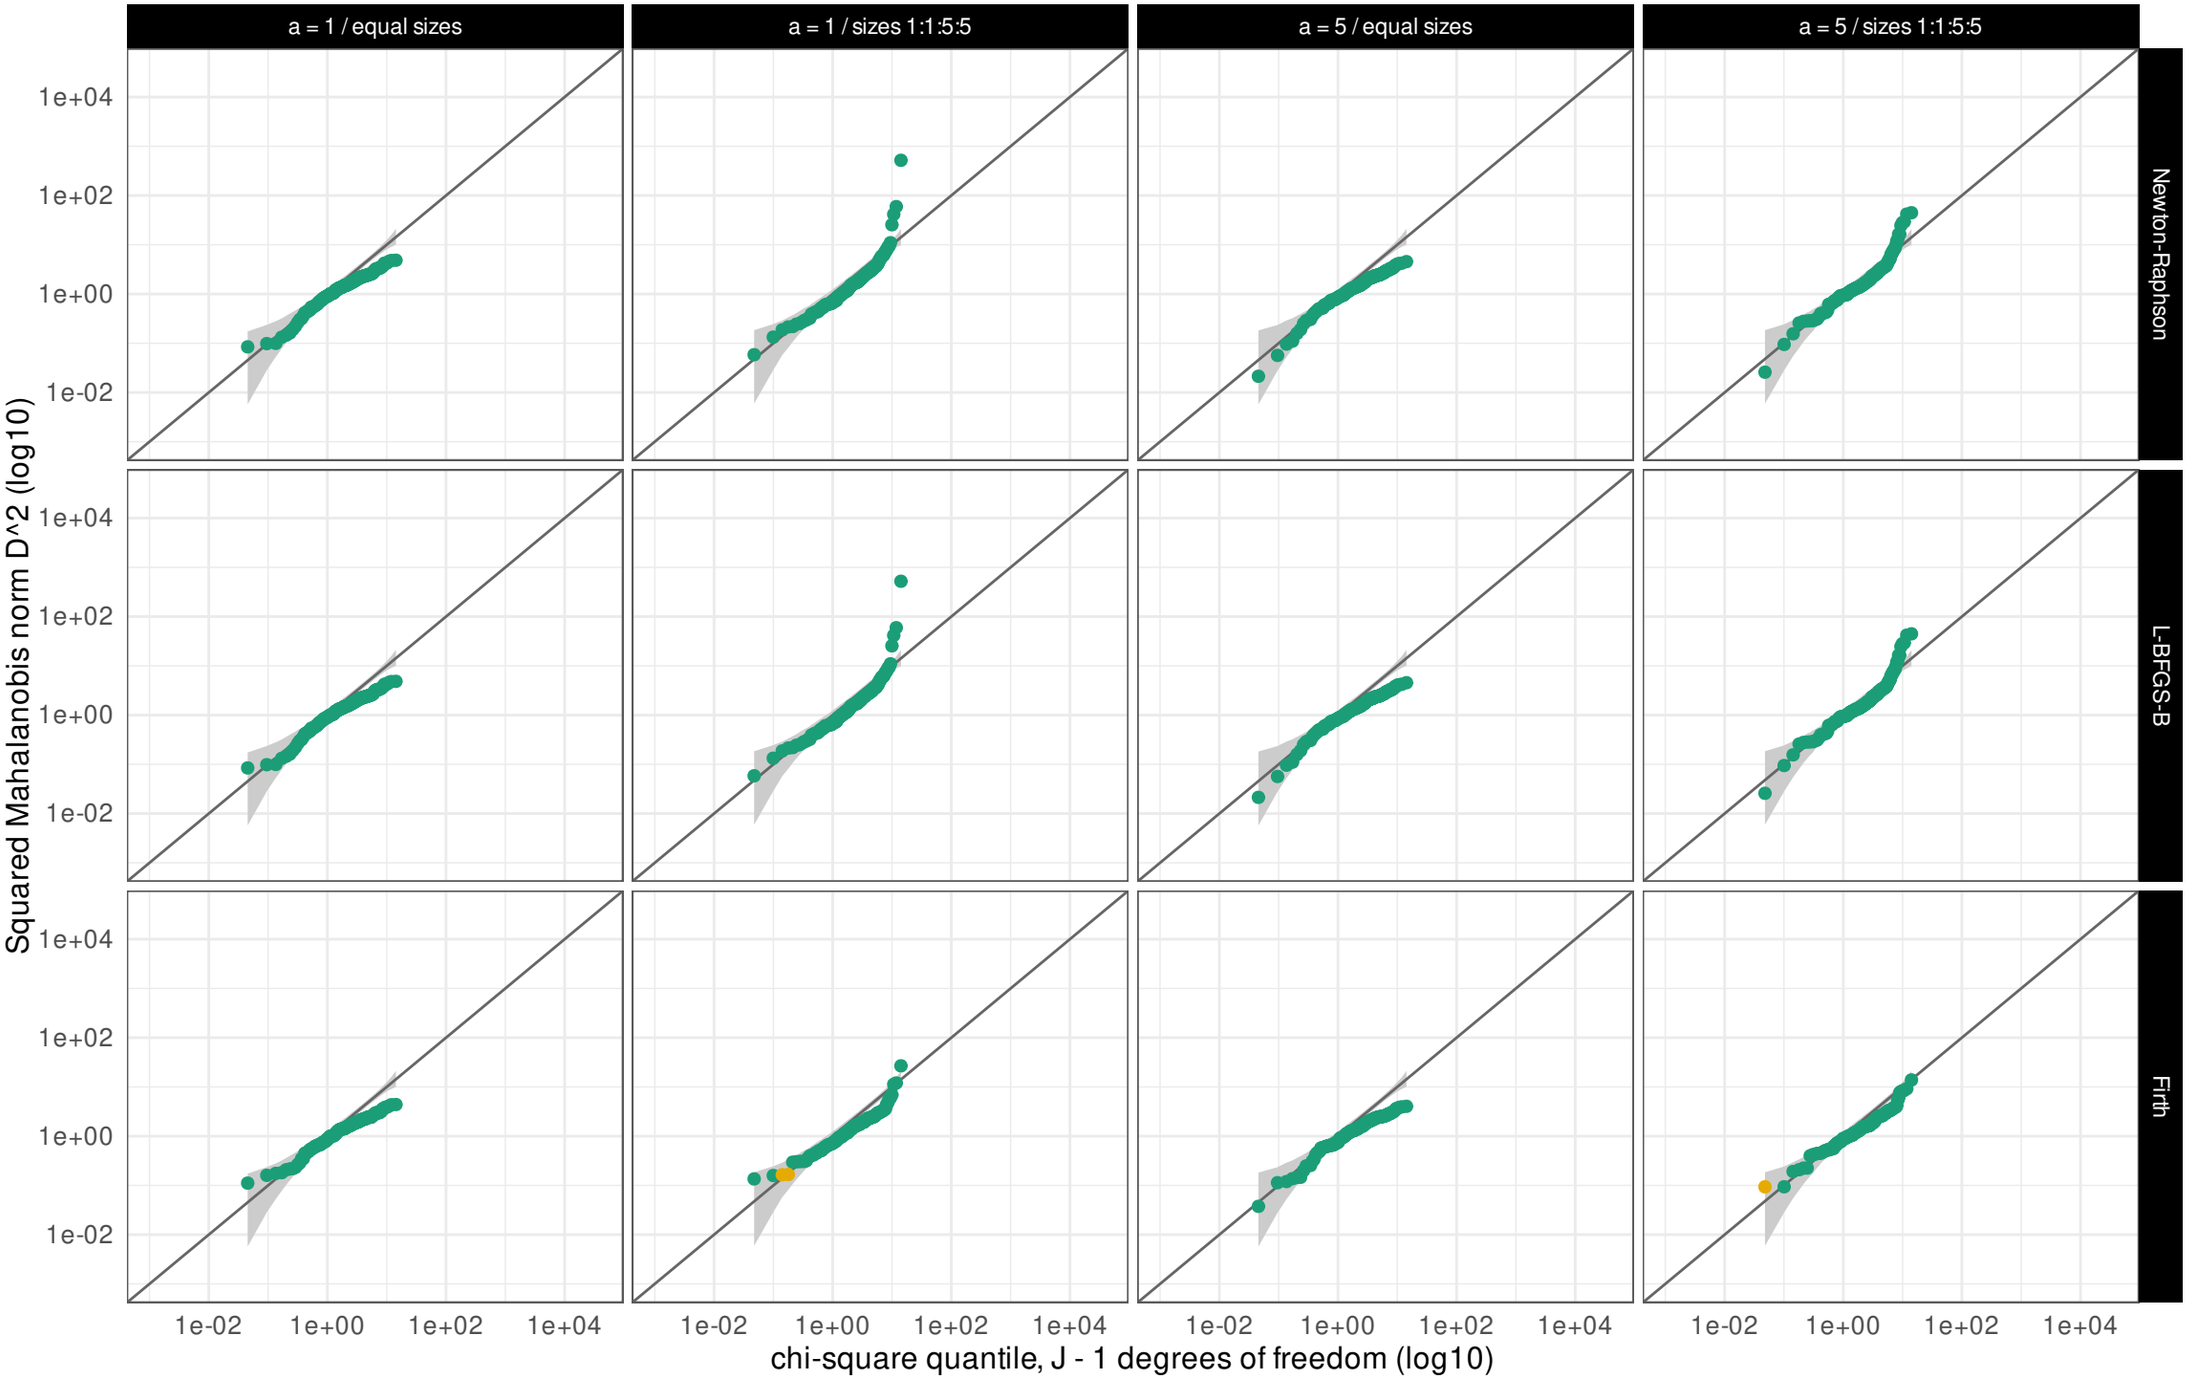

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square


G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap

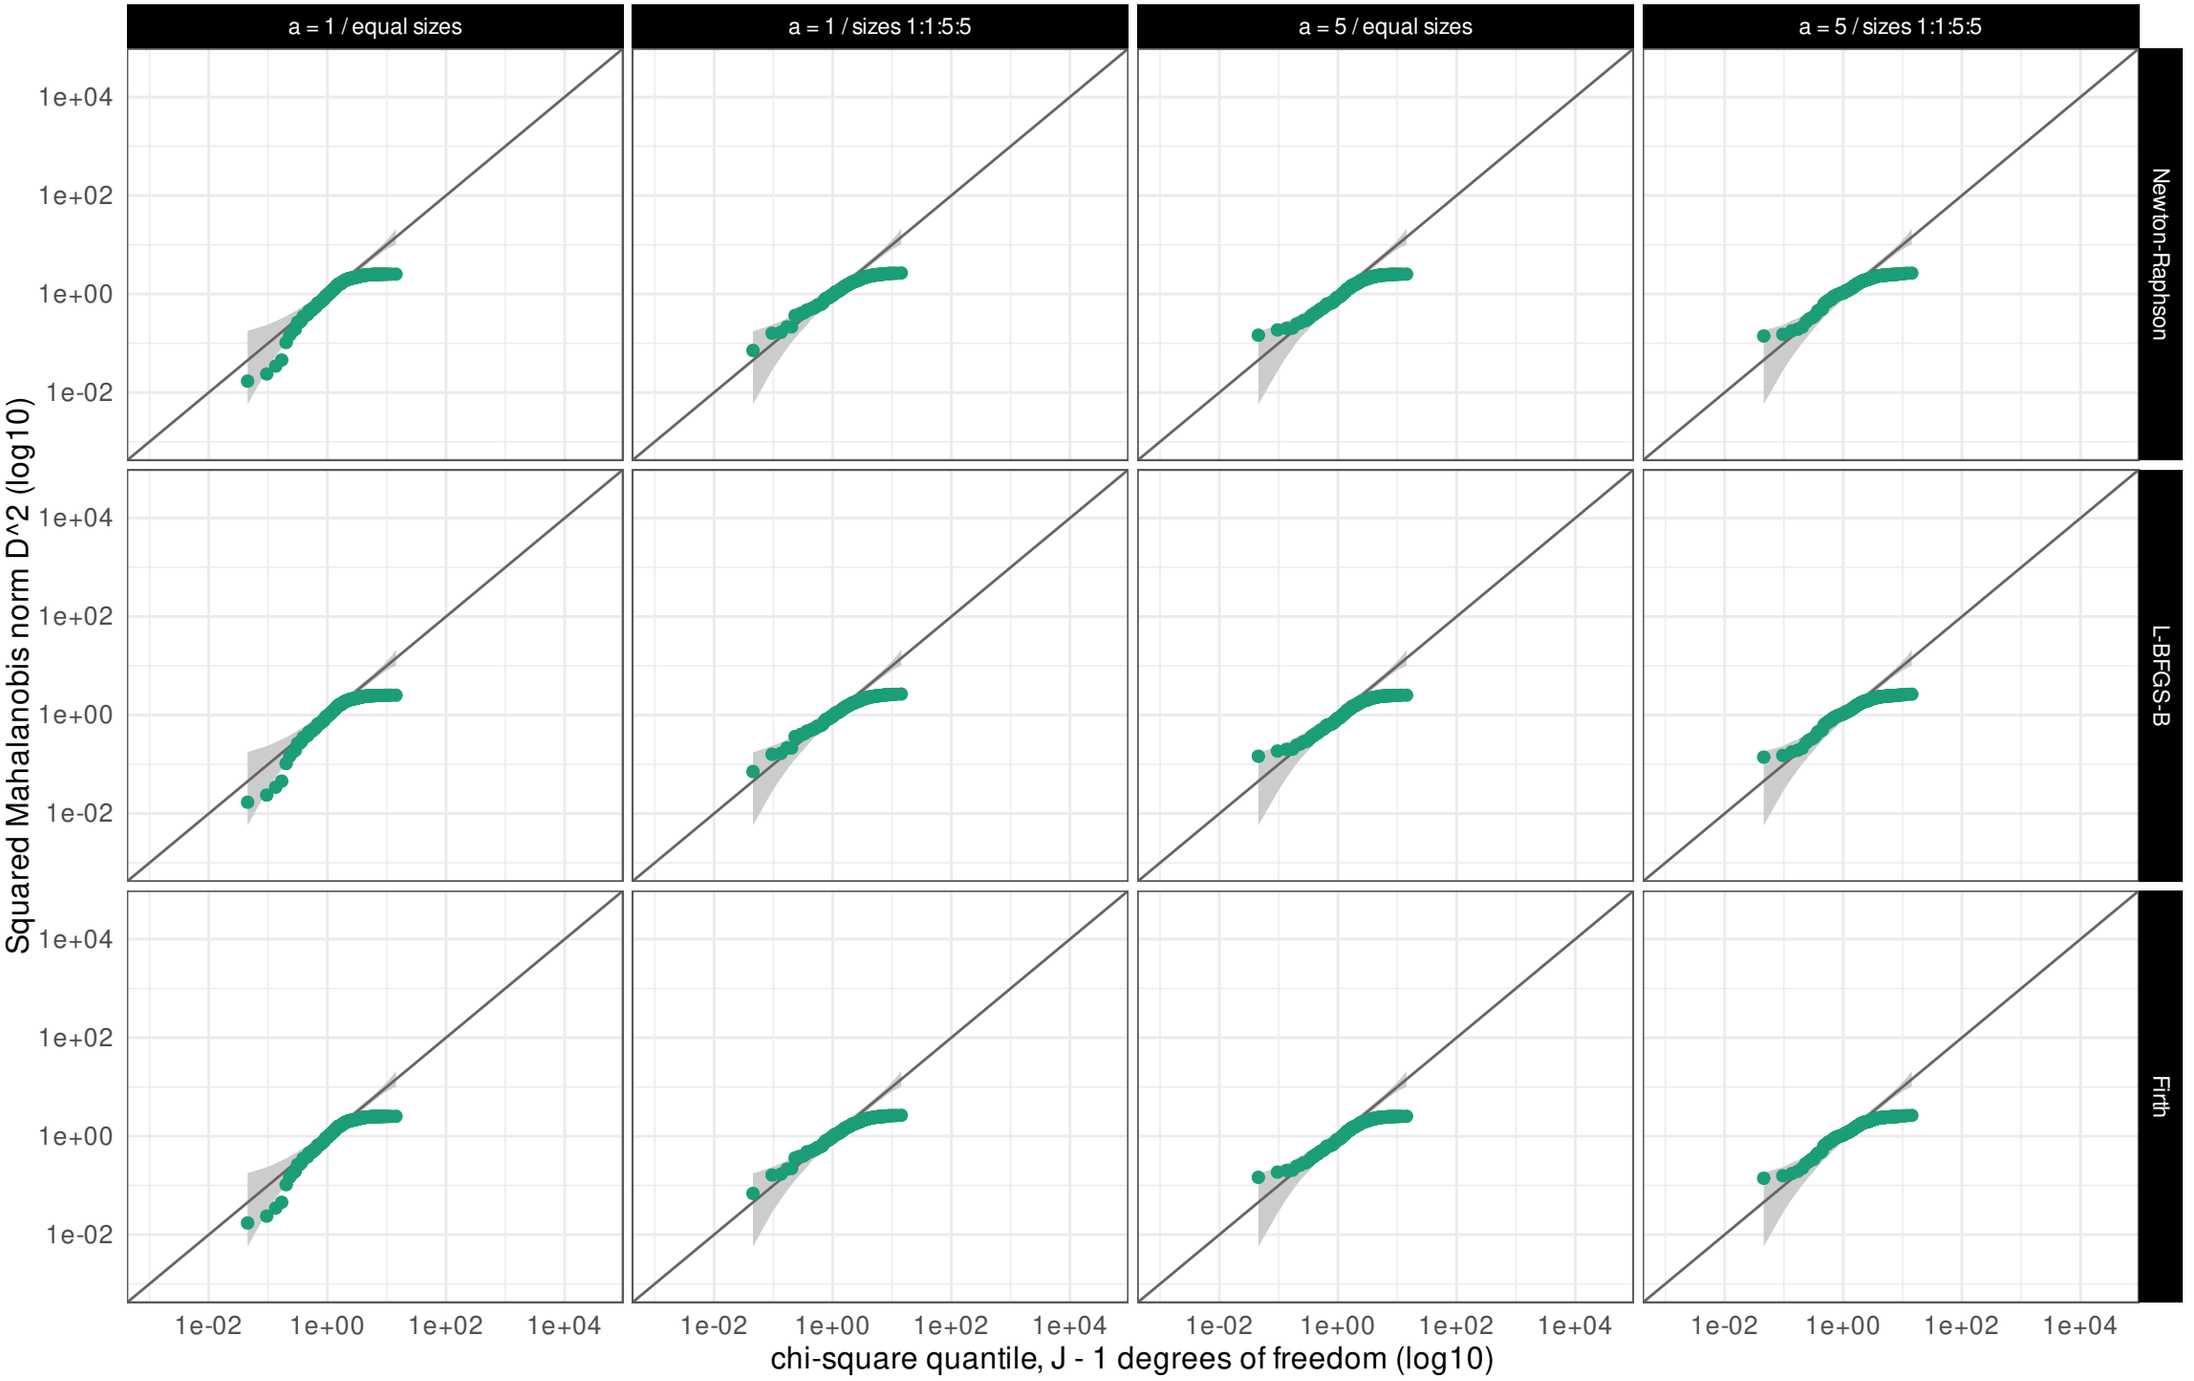

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square


G = 20 / 1e+05 cells per bulk / balanced / high sibling overlap

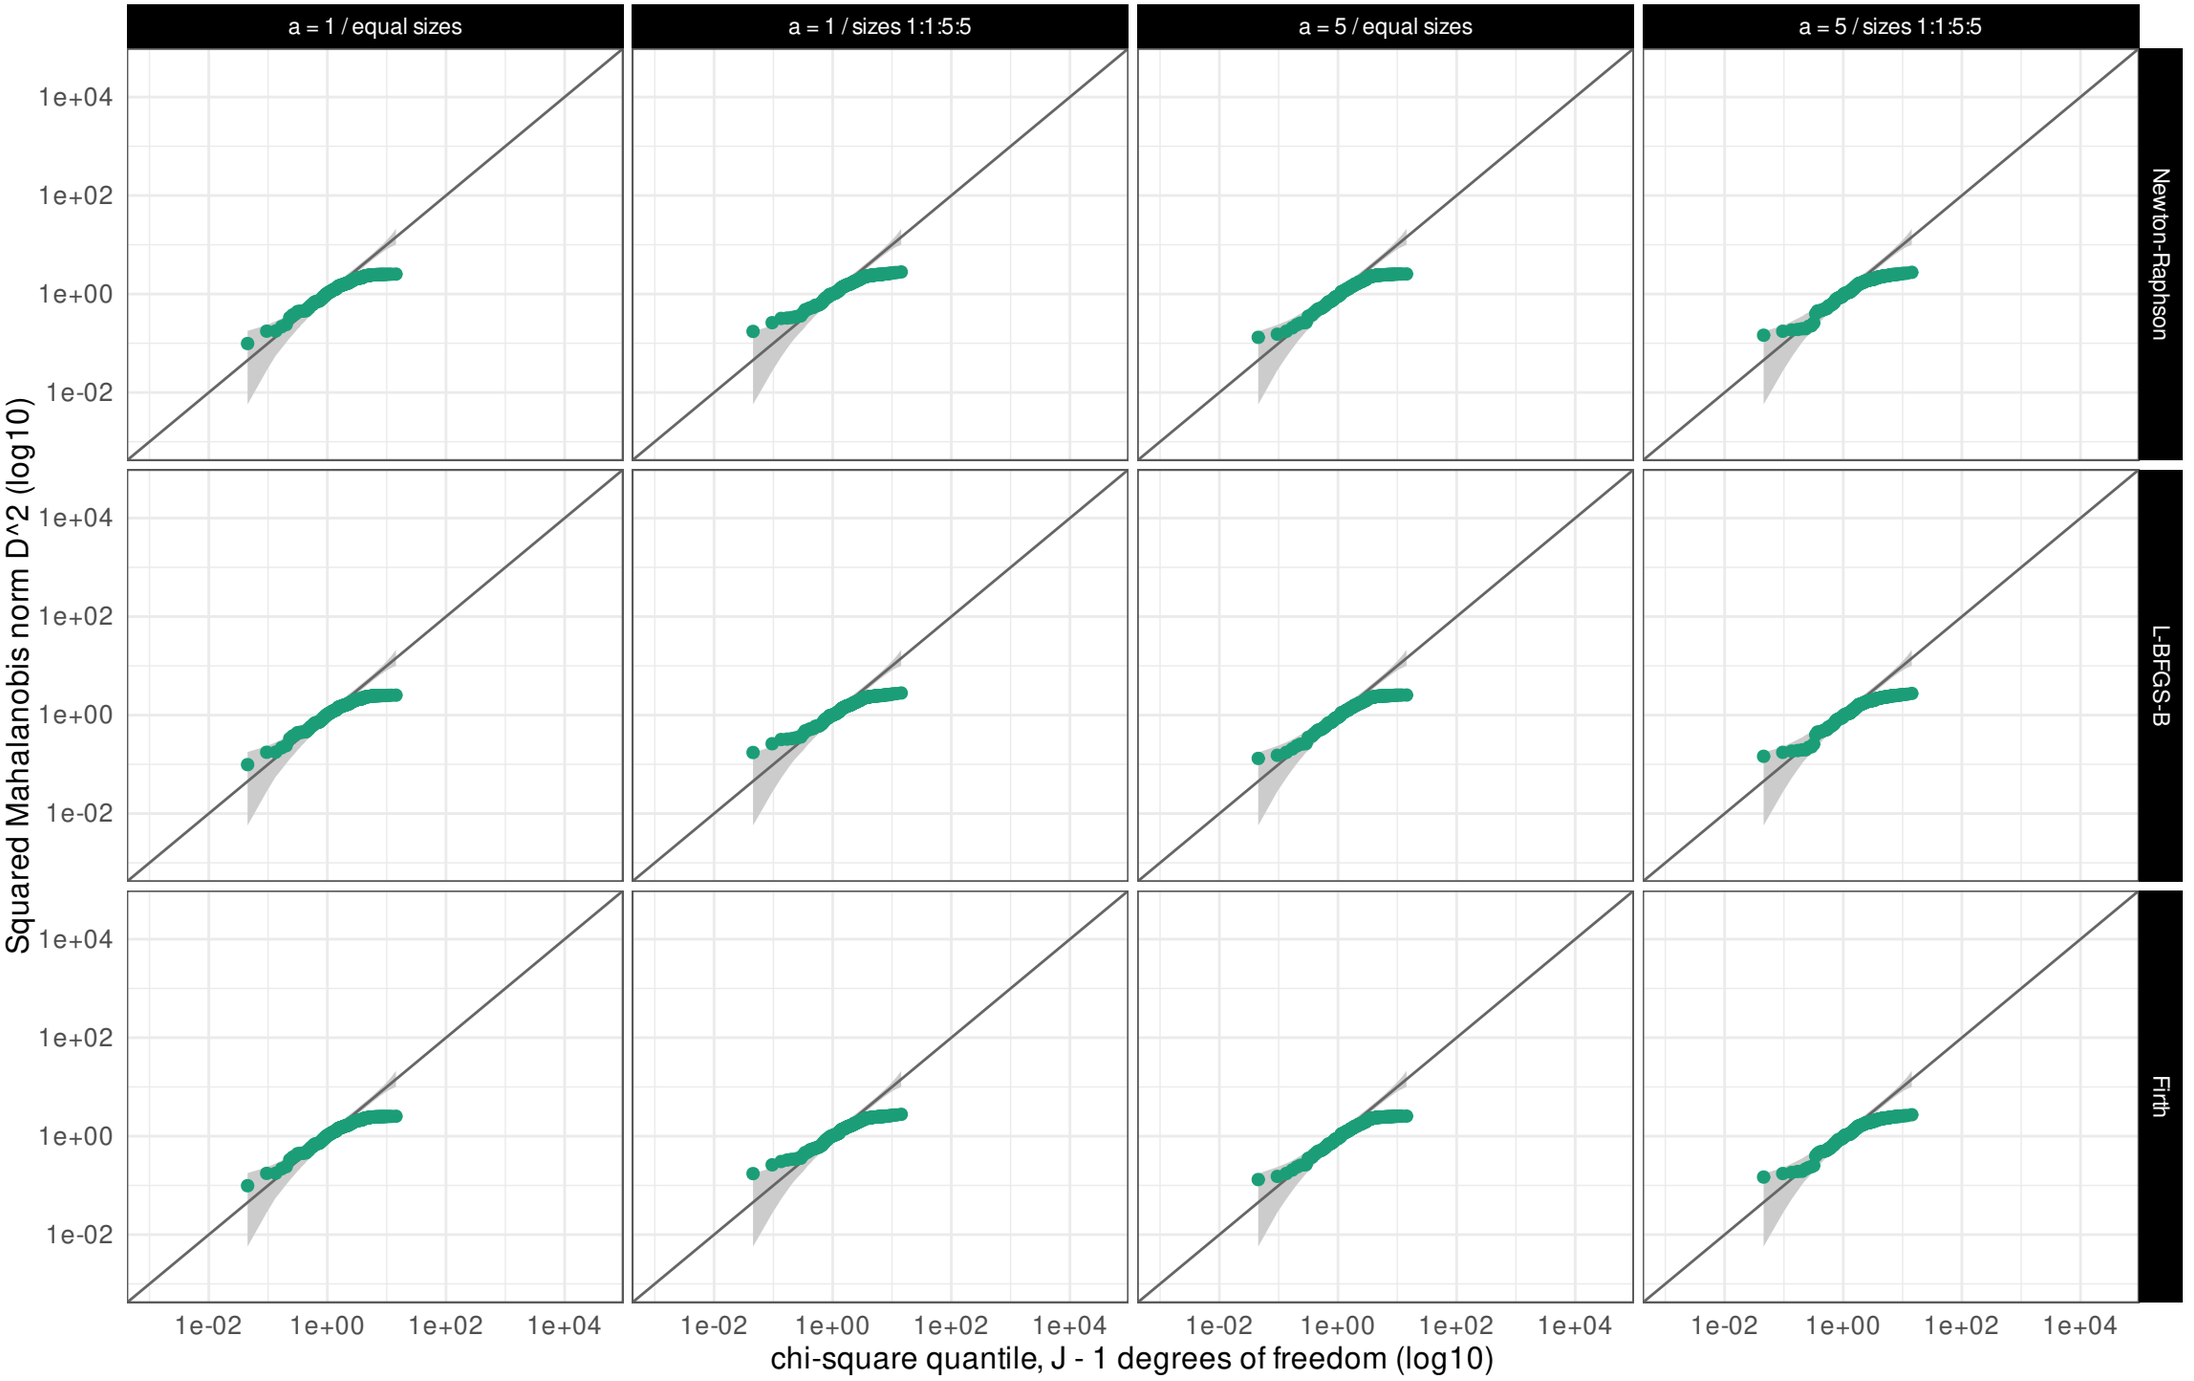

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square


G = 20 / 1e+05 cells per bulk / unbalanced / low sibling overlap

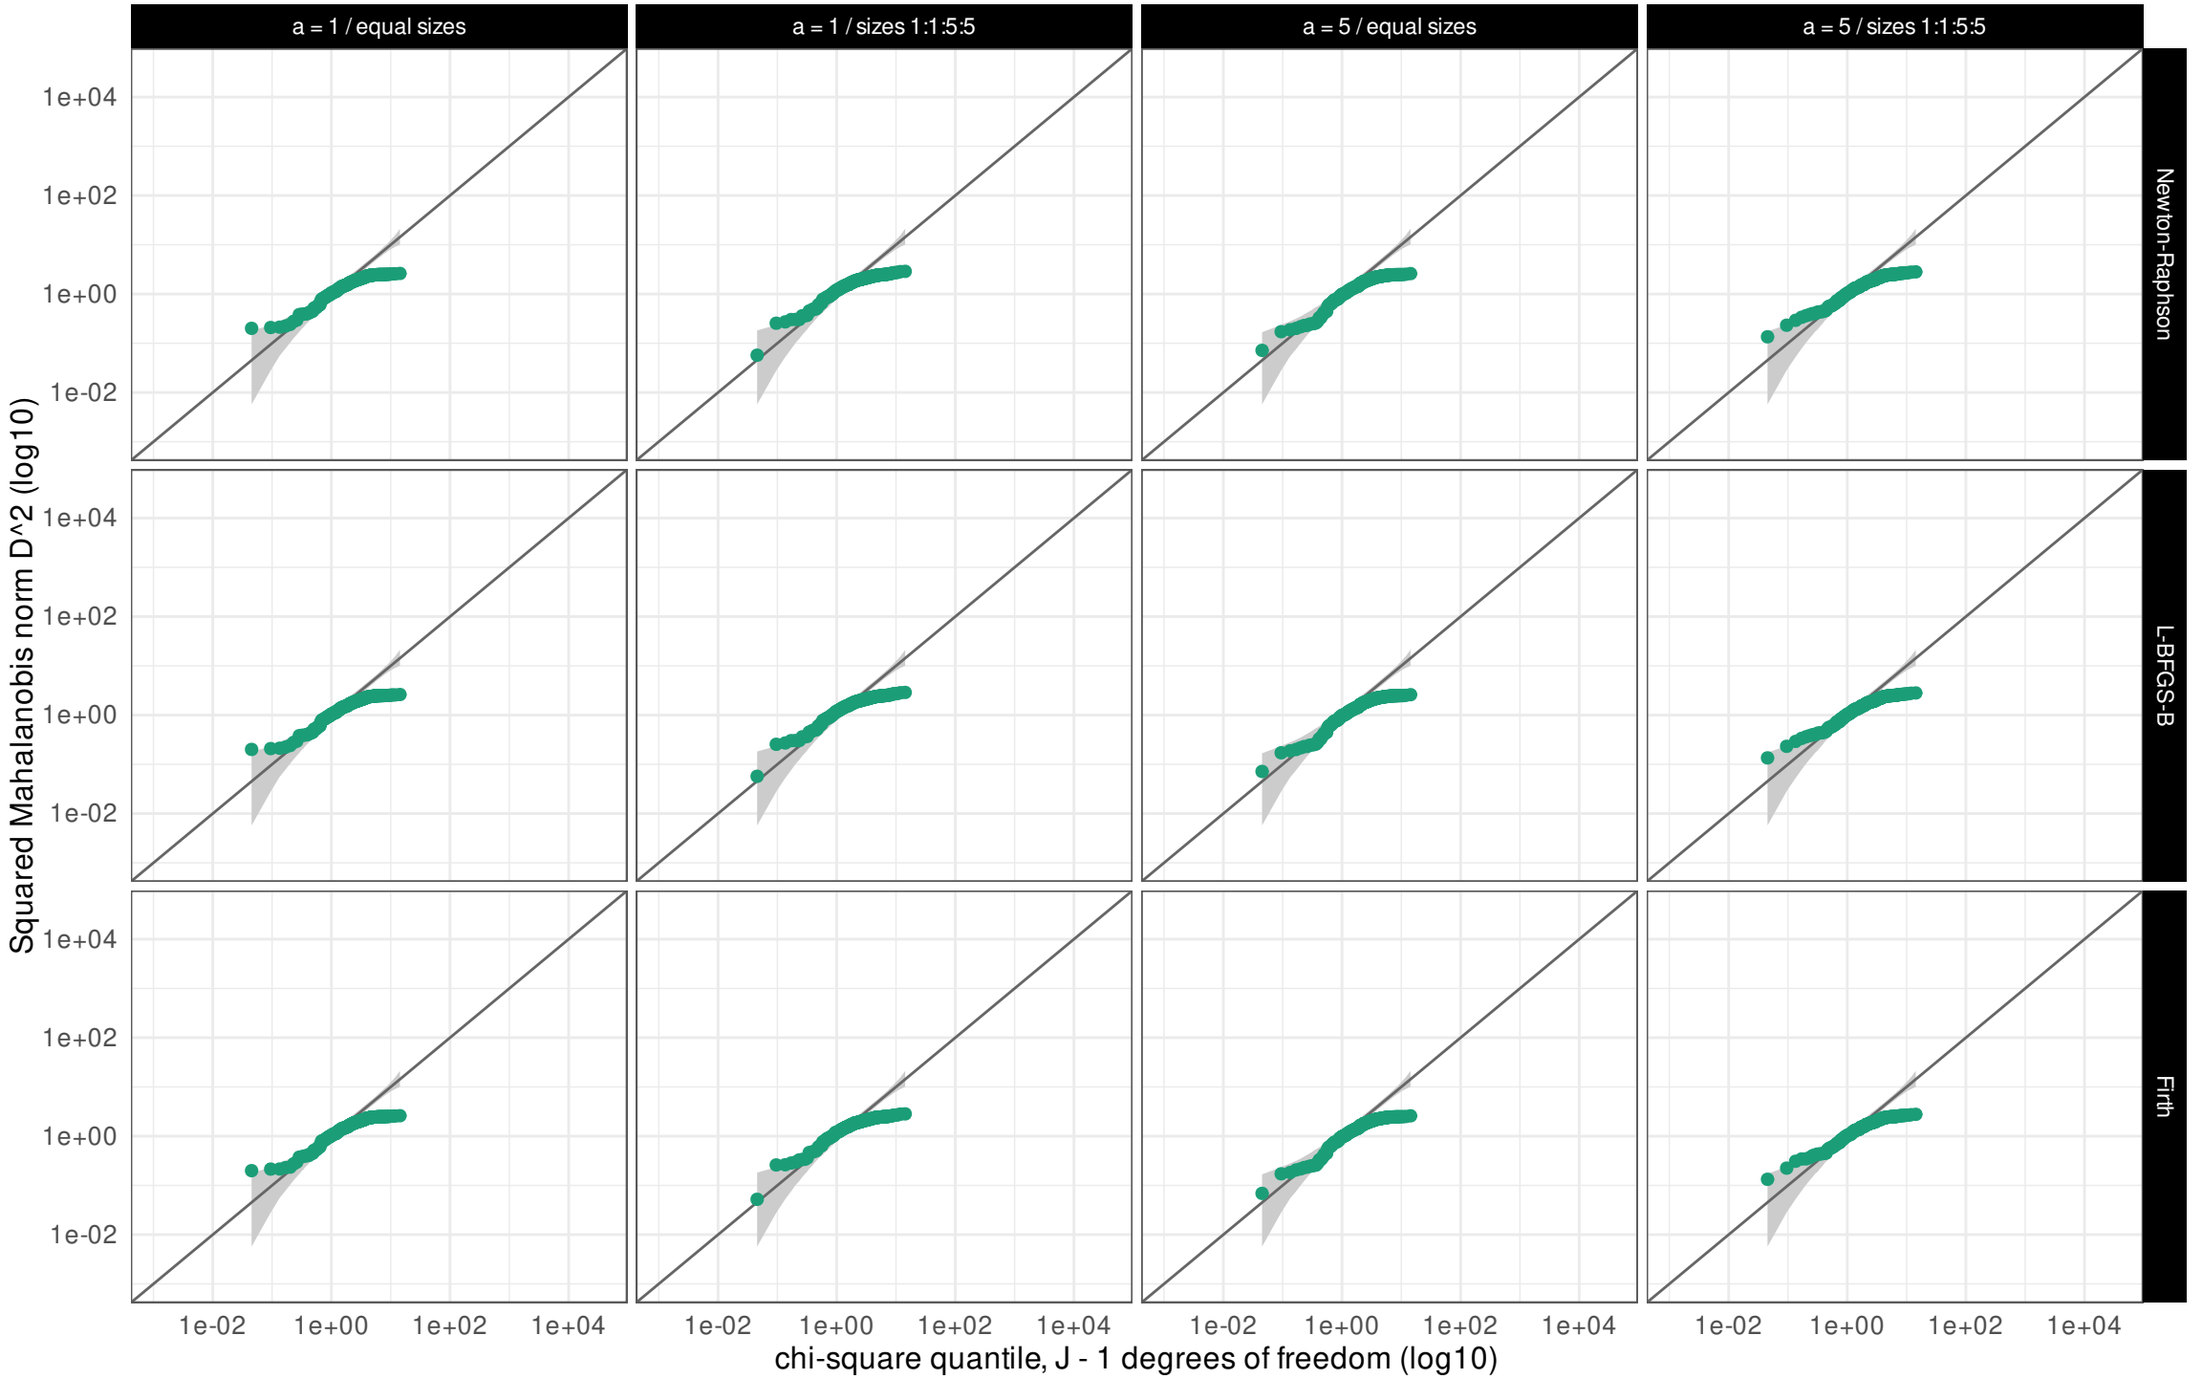

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square


G = 20 / 1e+05 cells per bulk / unbalanced / high sibling overlap

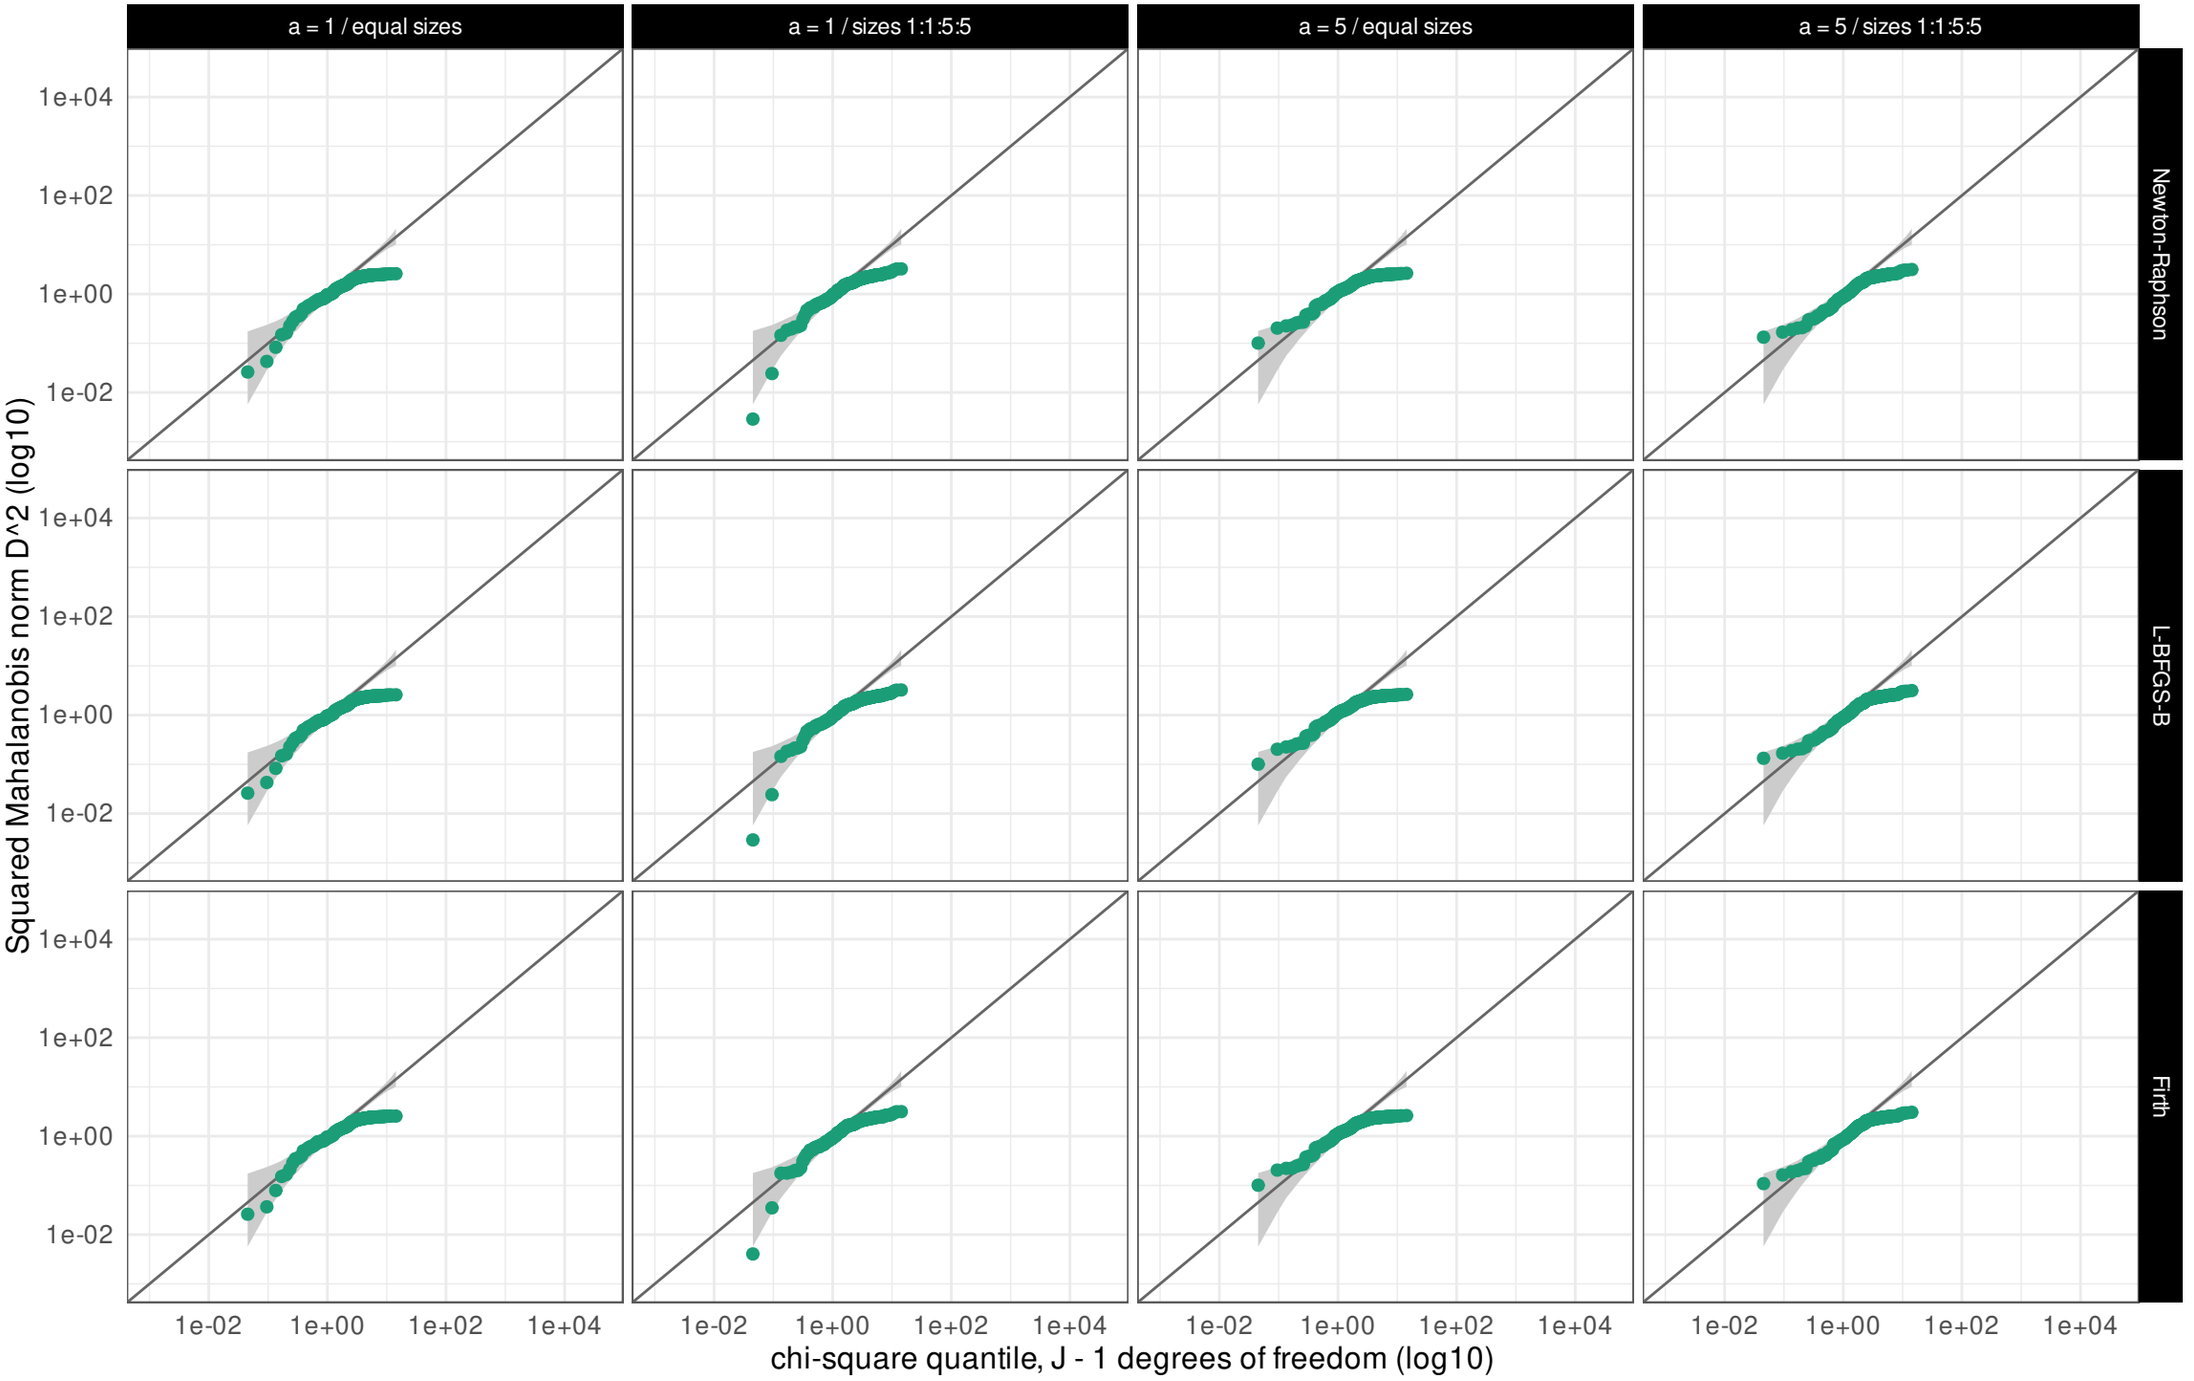

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square


G = 200 / 1000 cells per bulk / balanced / low sibling overlap

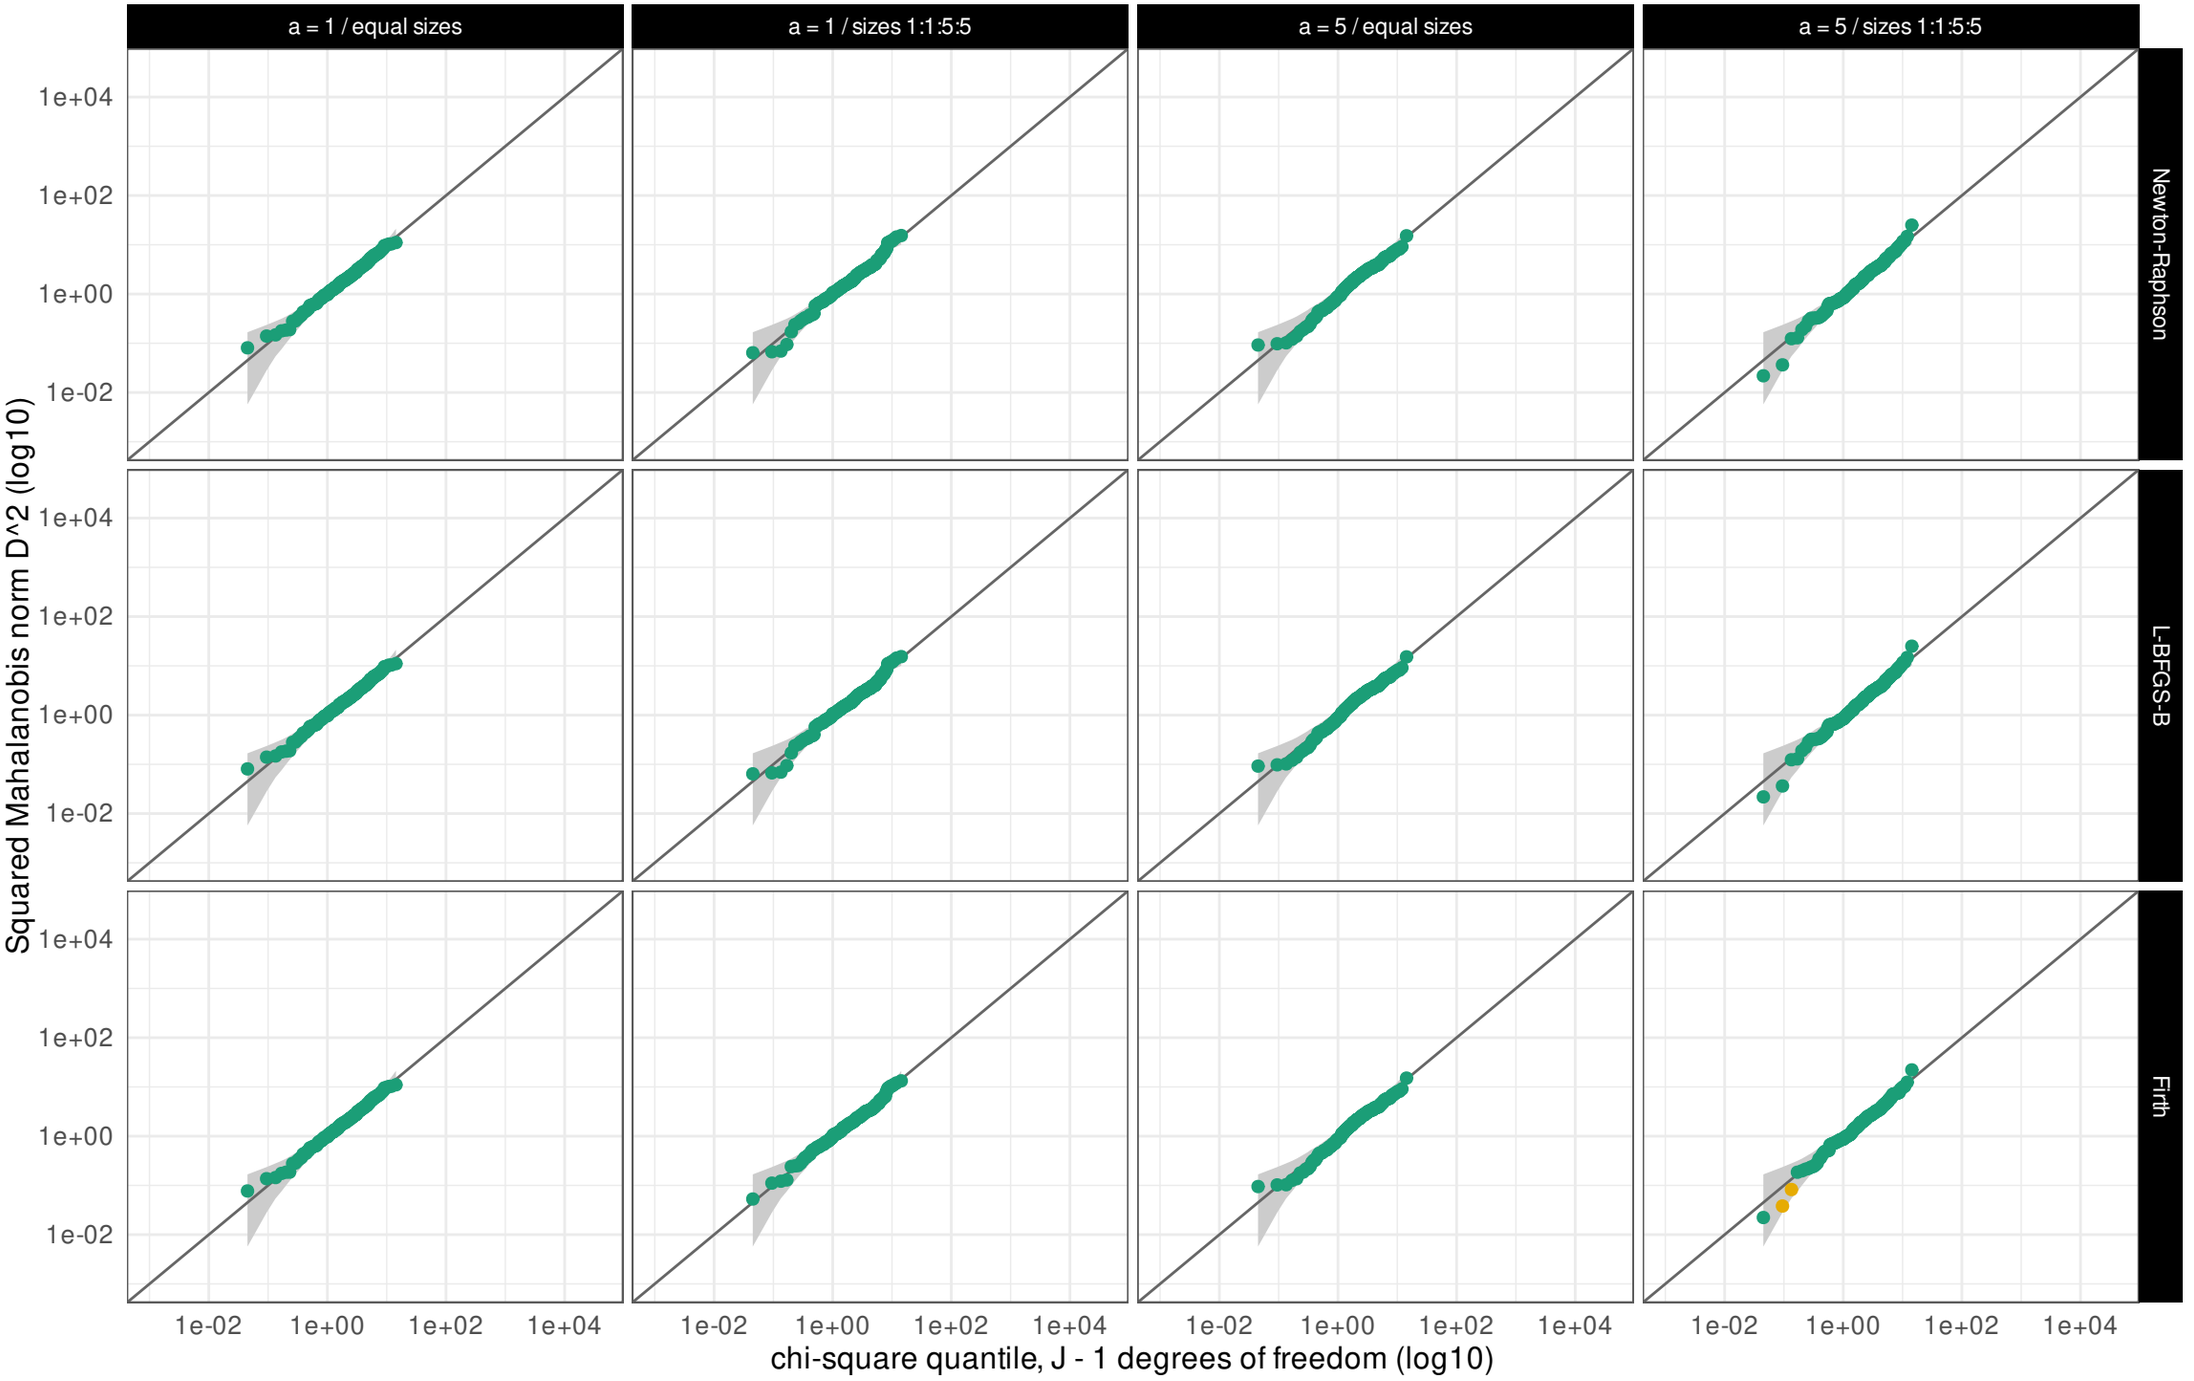

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square


G = 200 / 1000 cells per bulk / balanced / high sibling overlap

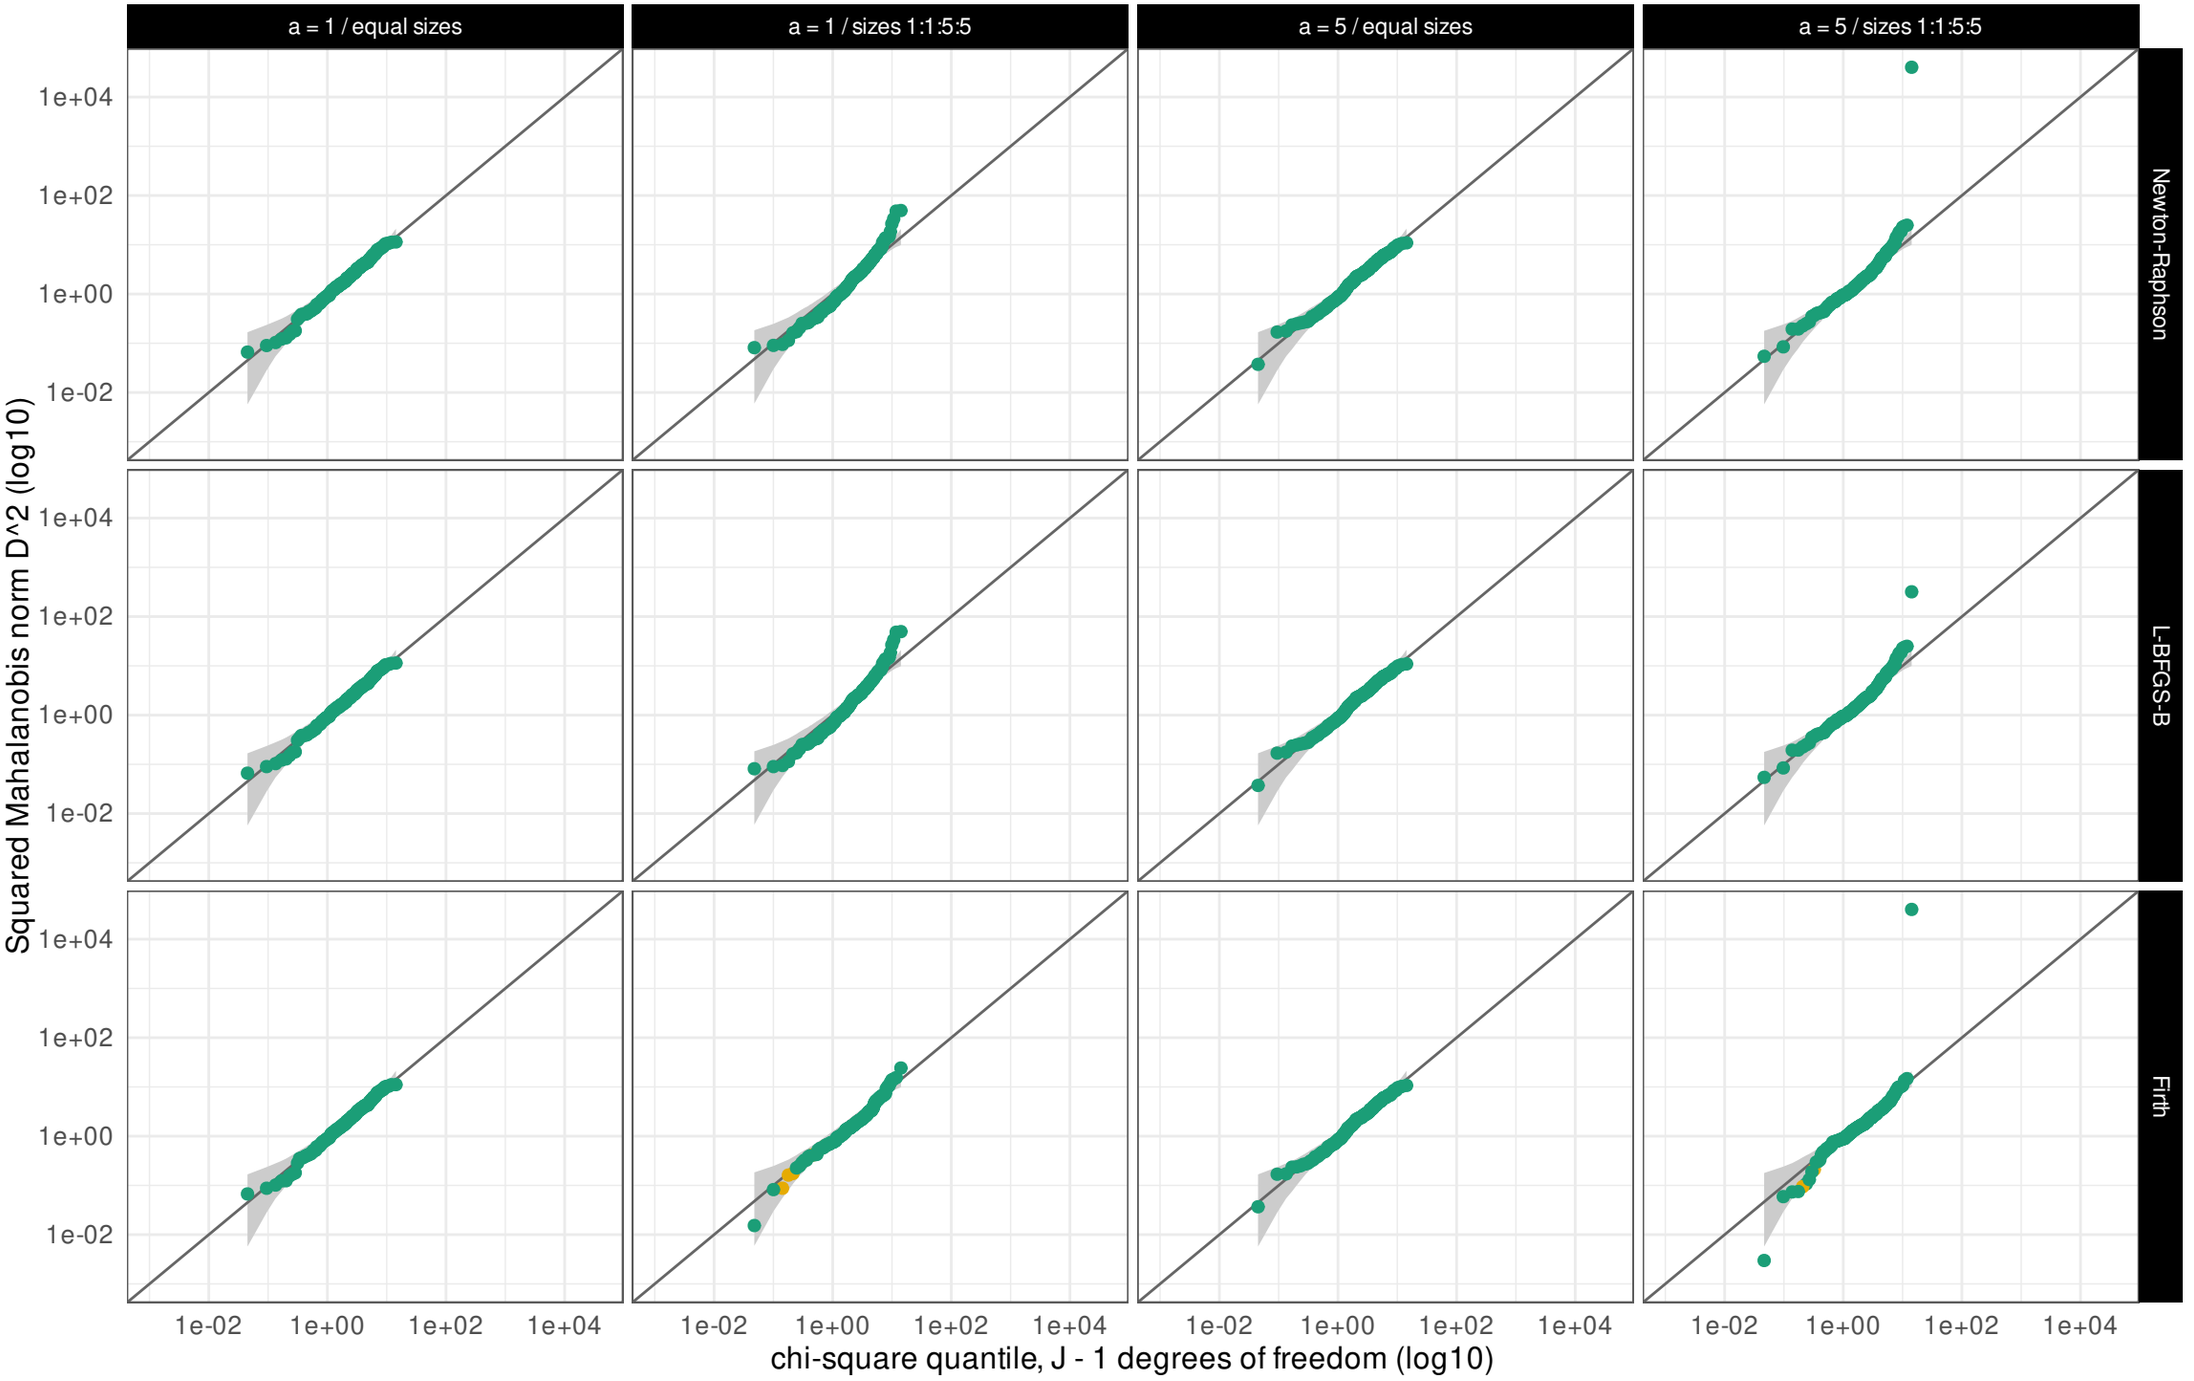

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square


G = 200 / 1000 cells per bulk / unbalanced / low sibling overlap

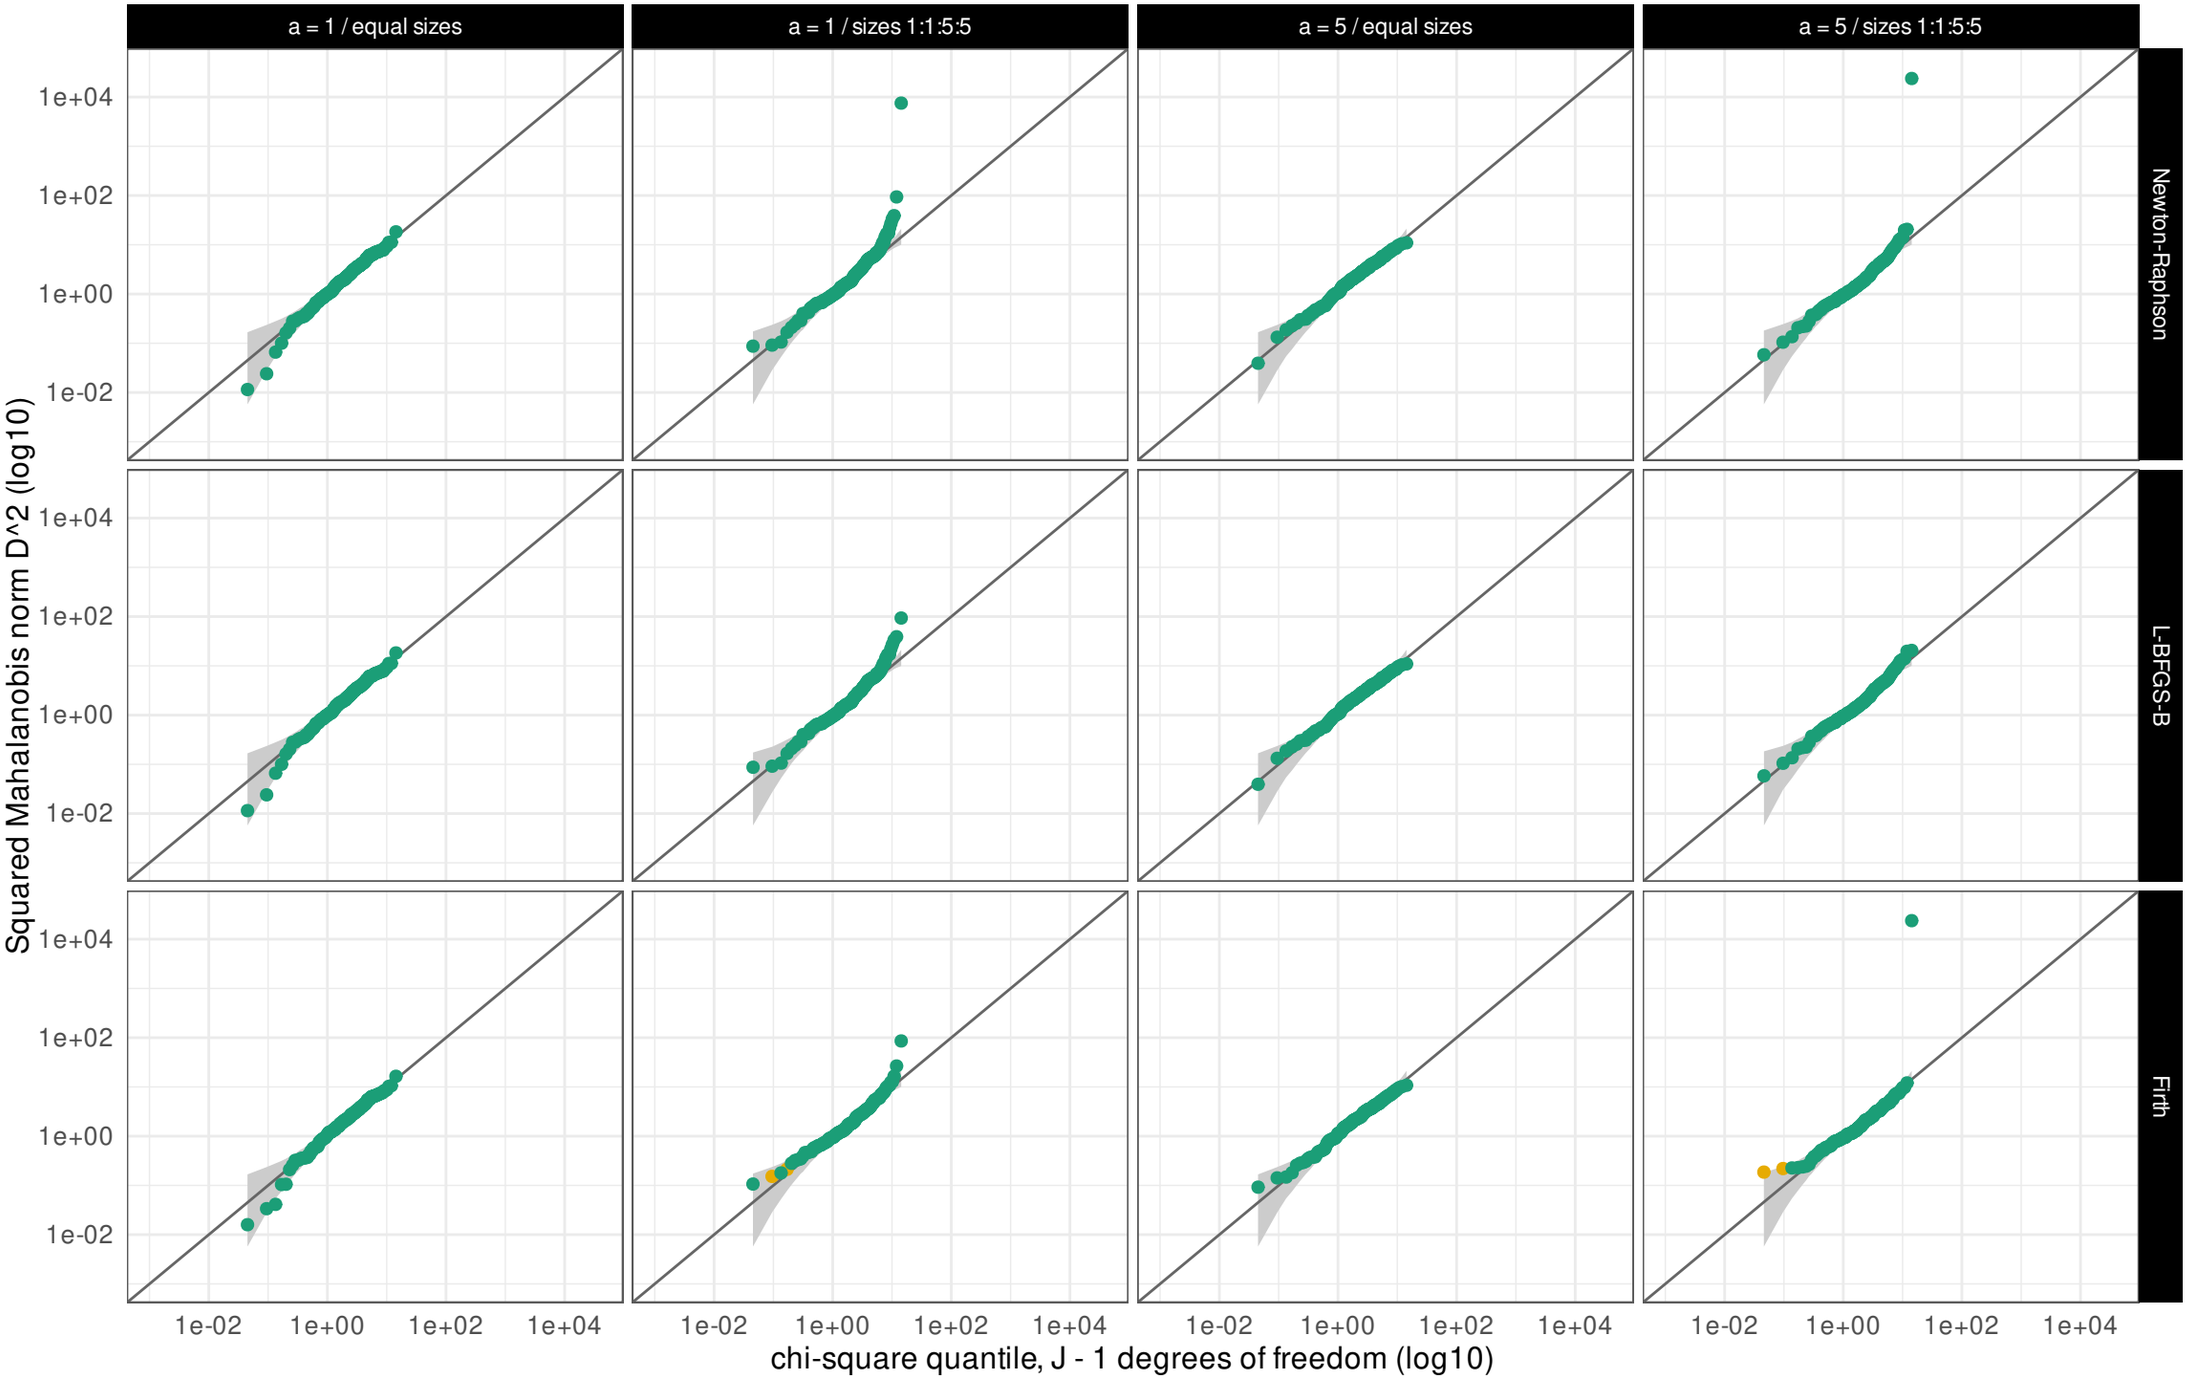

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square


G = 200 / 1000 cells per bulk / unbalanced / high sibling overlap

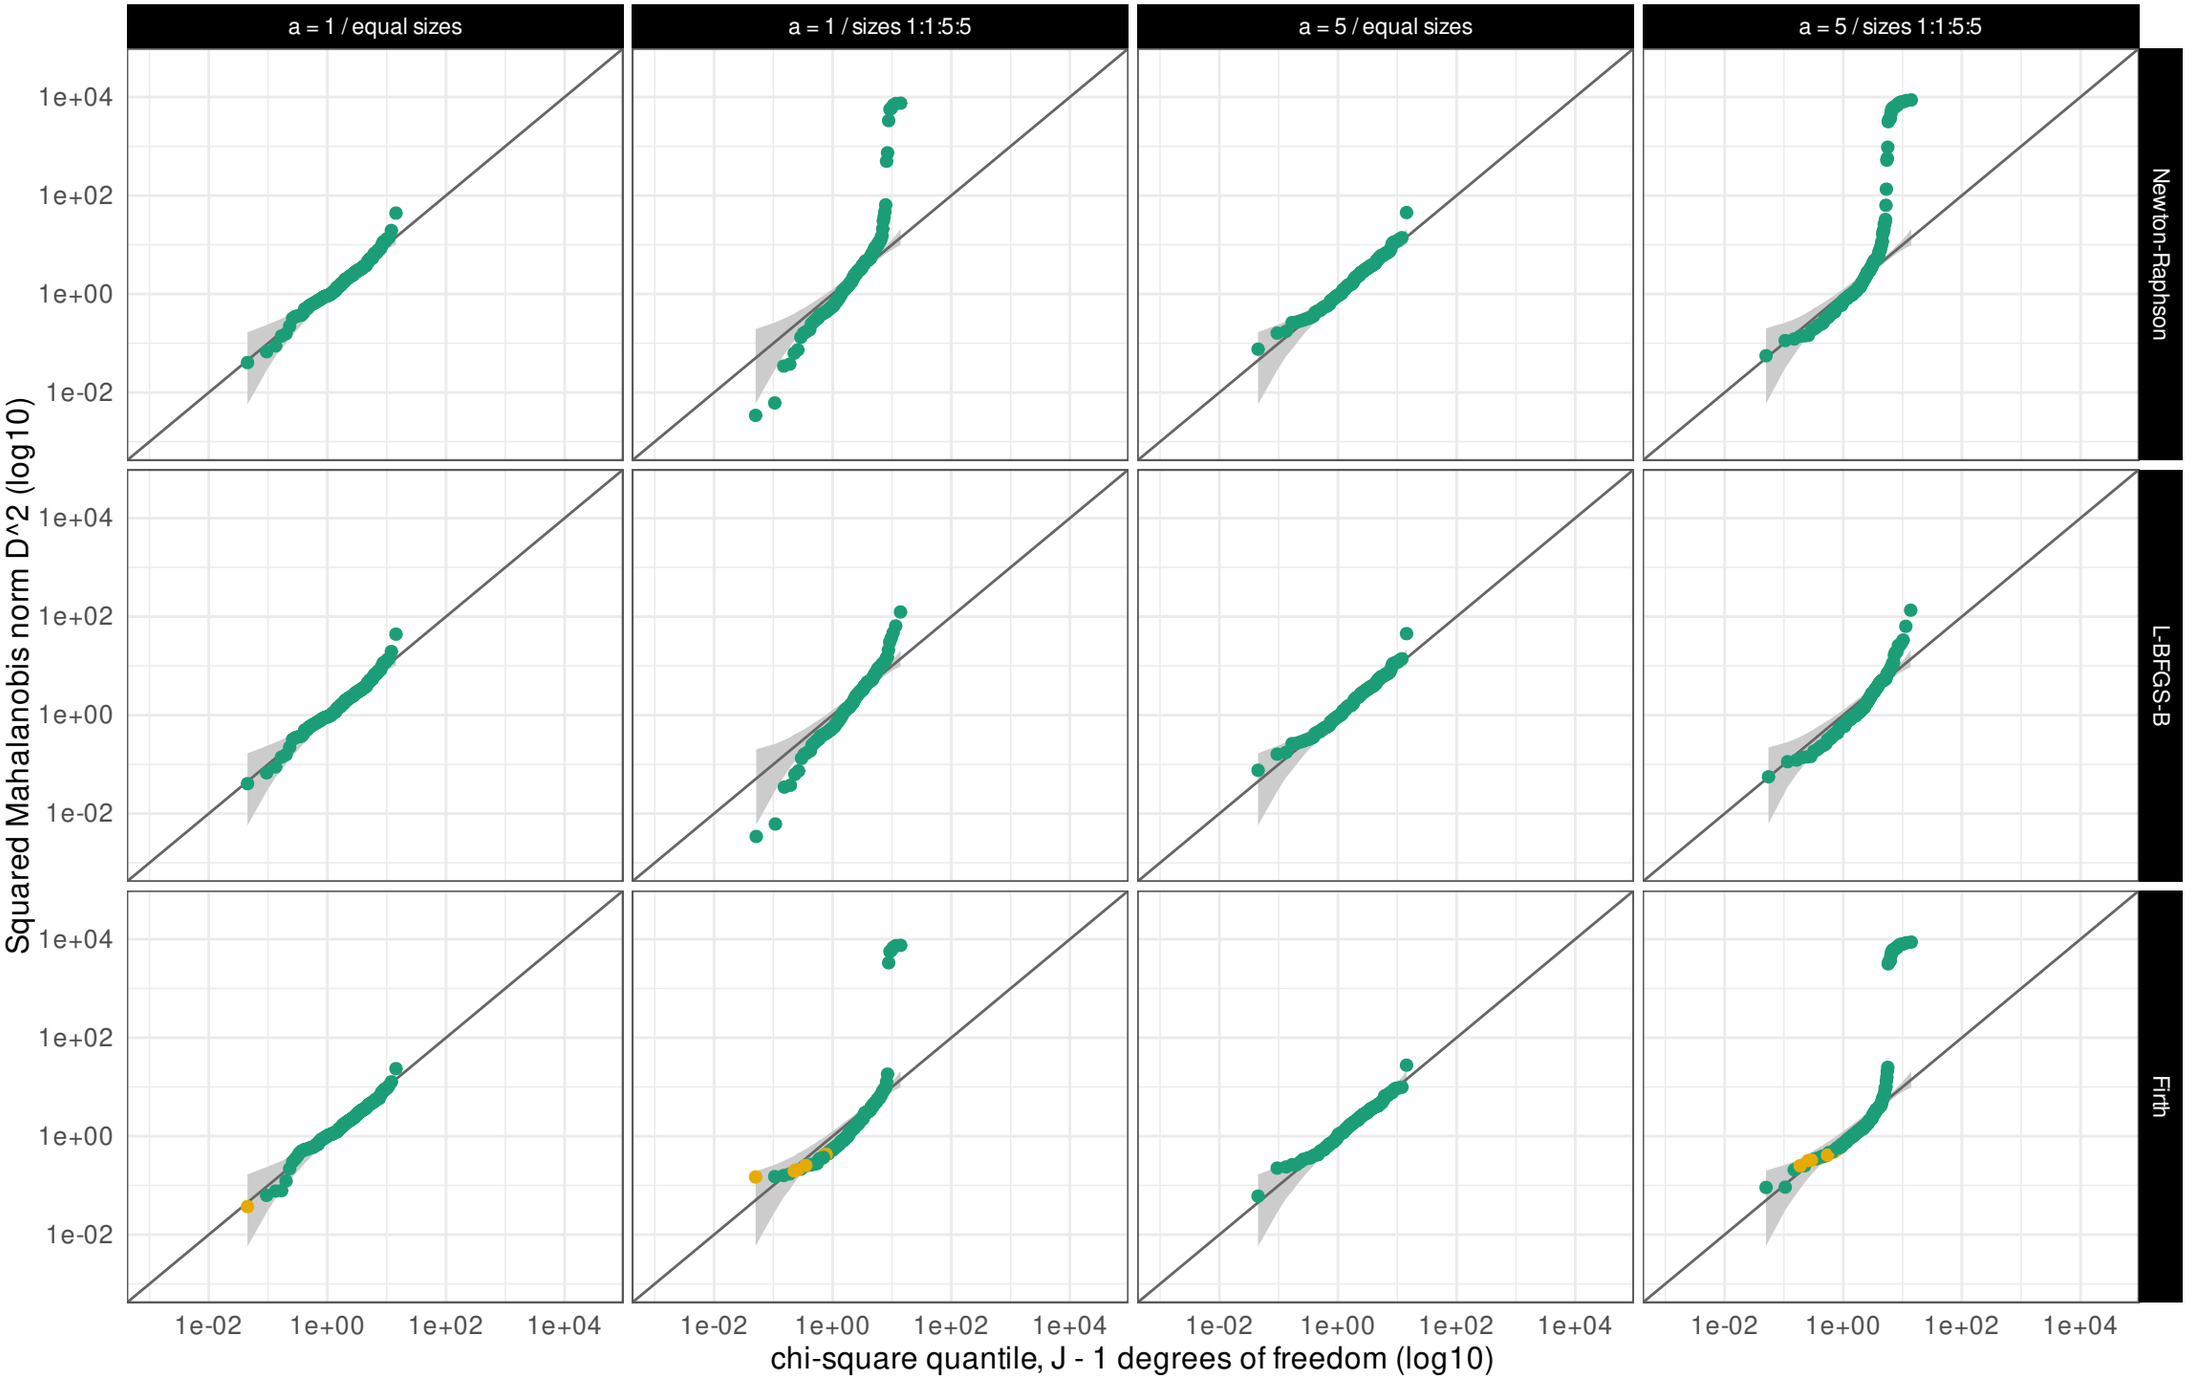

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square


G = 200 / 1e+05 cells per bulk / balanced / low sibling overlap

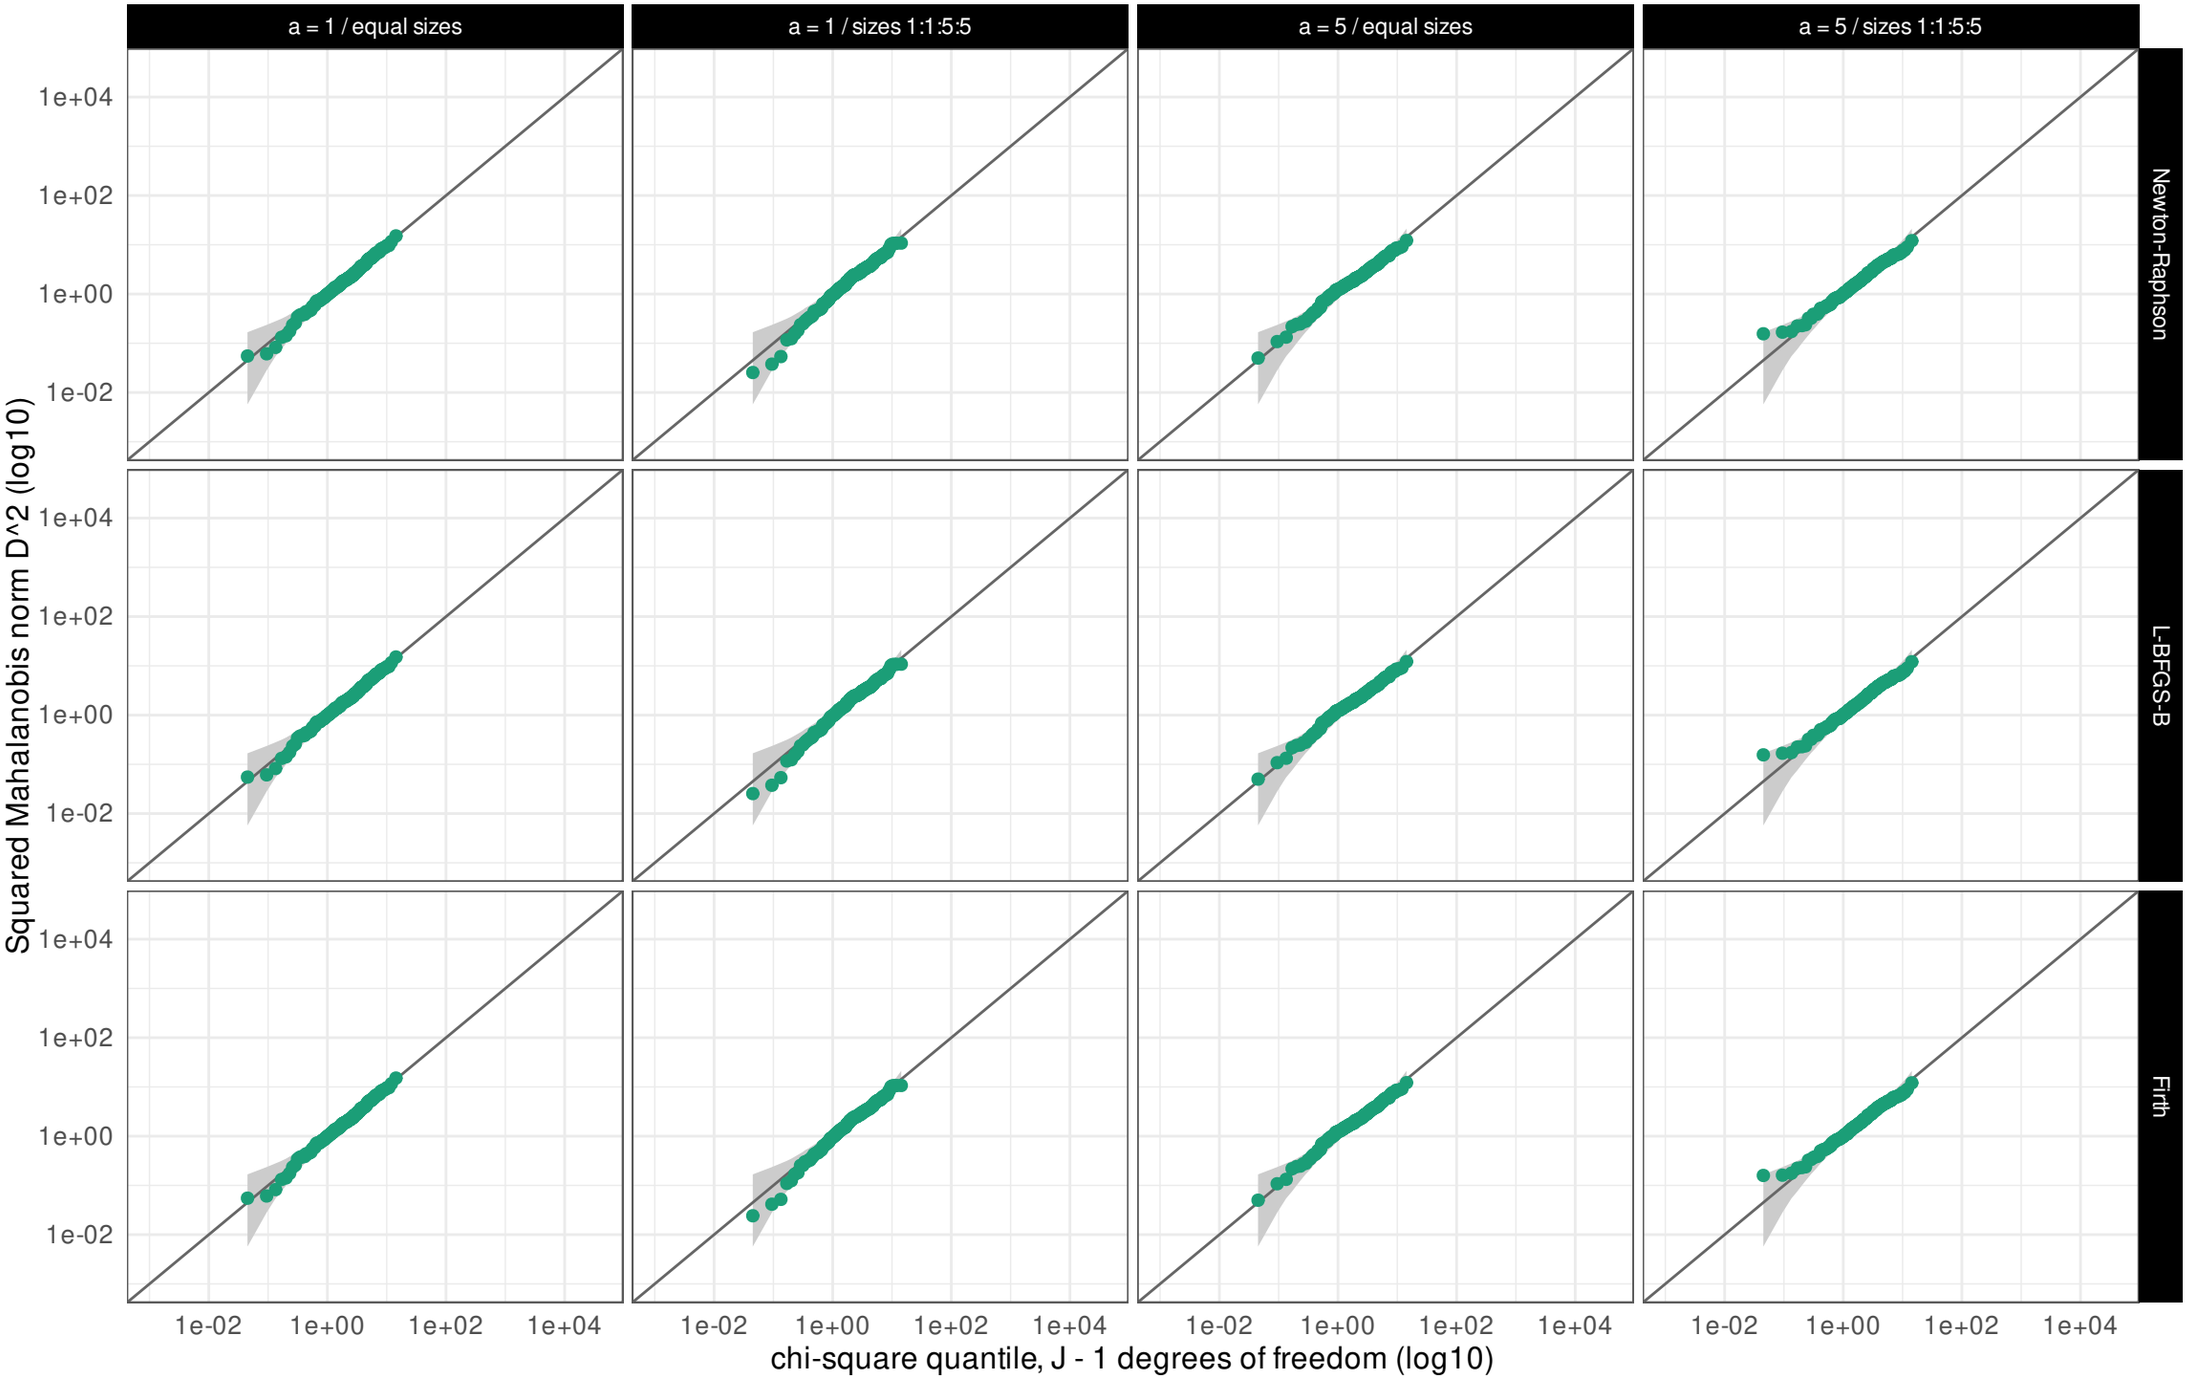

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square


G = 200 / 1e+05 cells per bulk / balanced / high sibling overlap

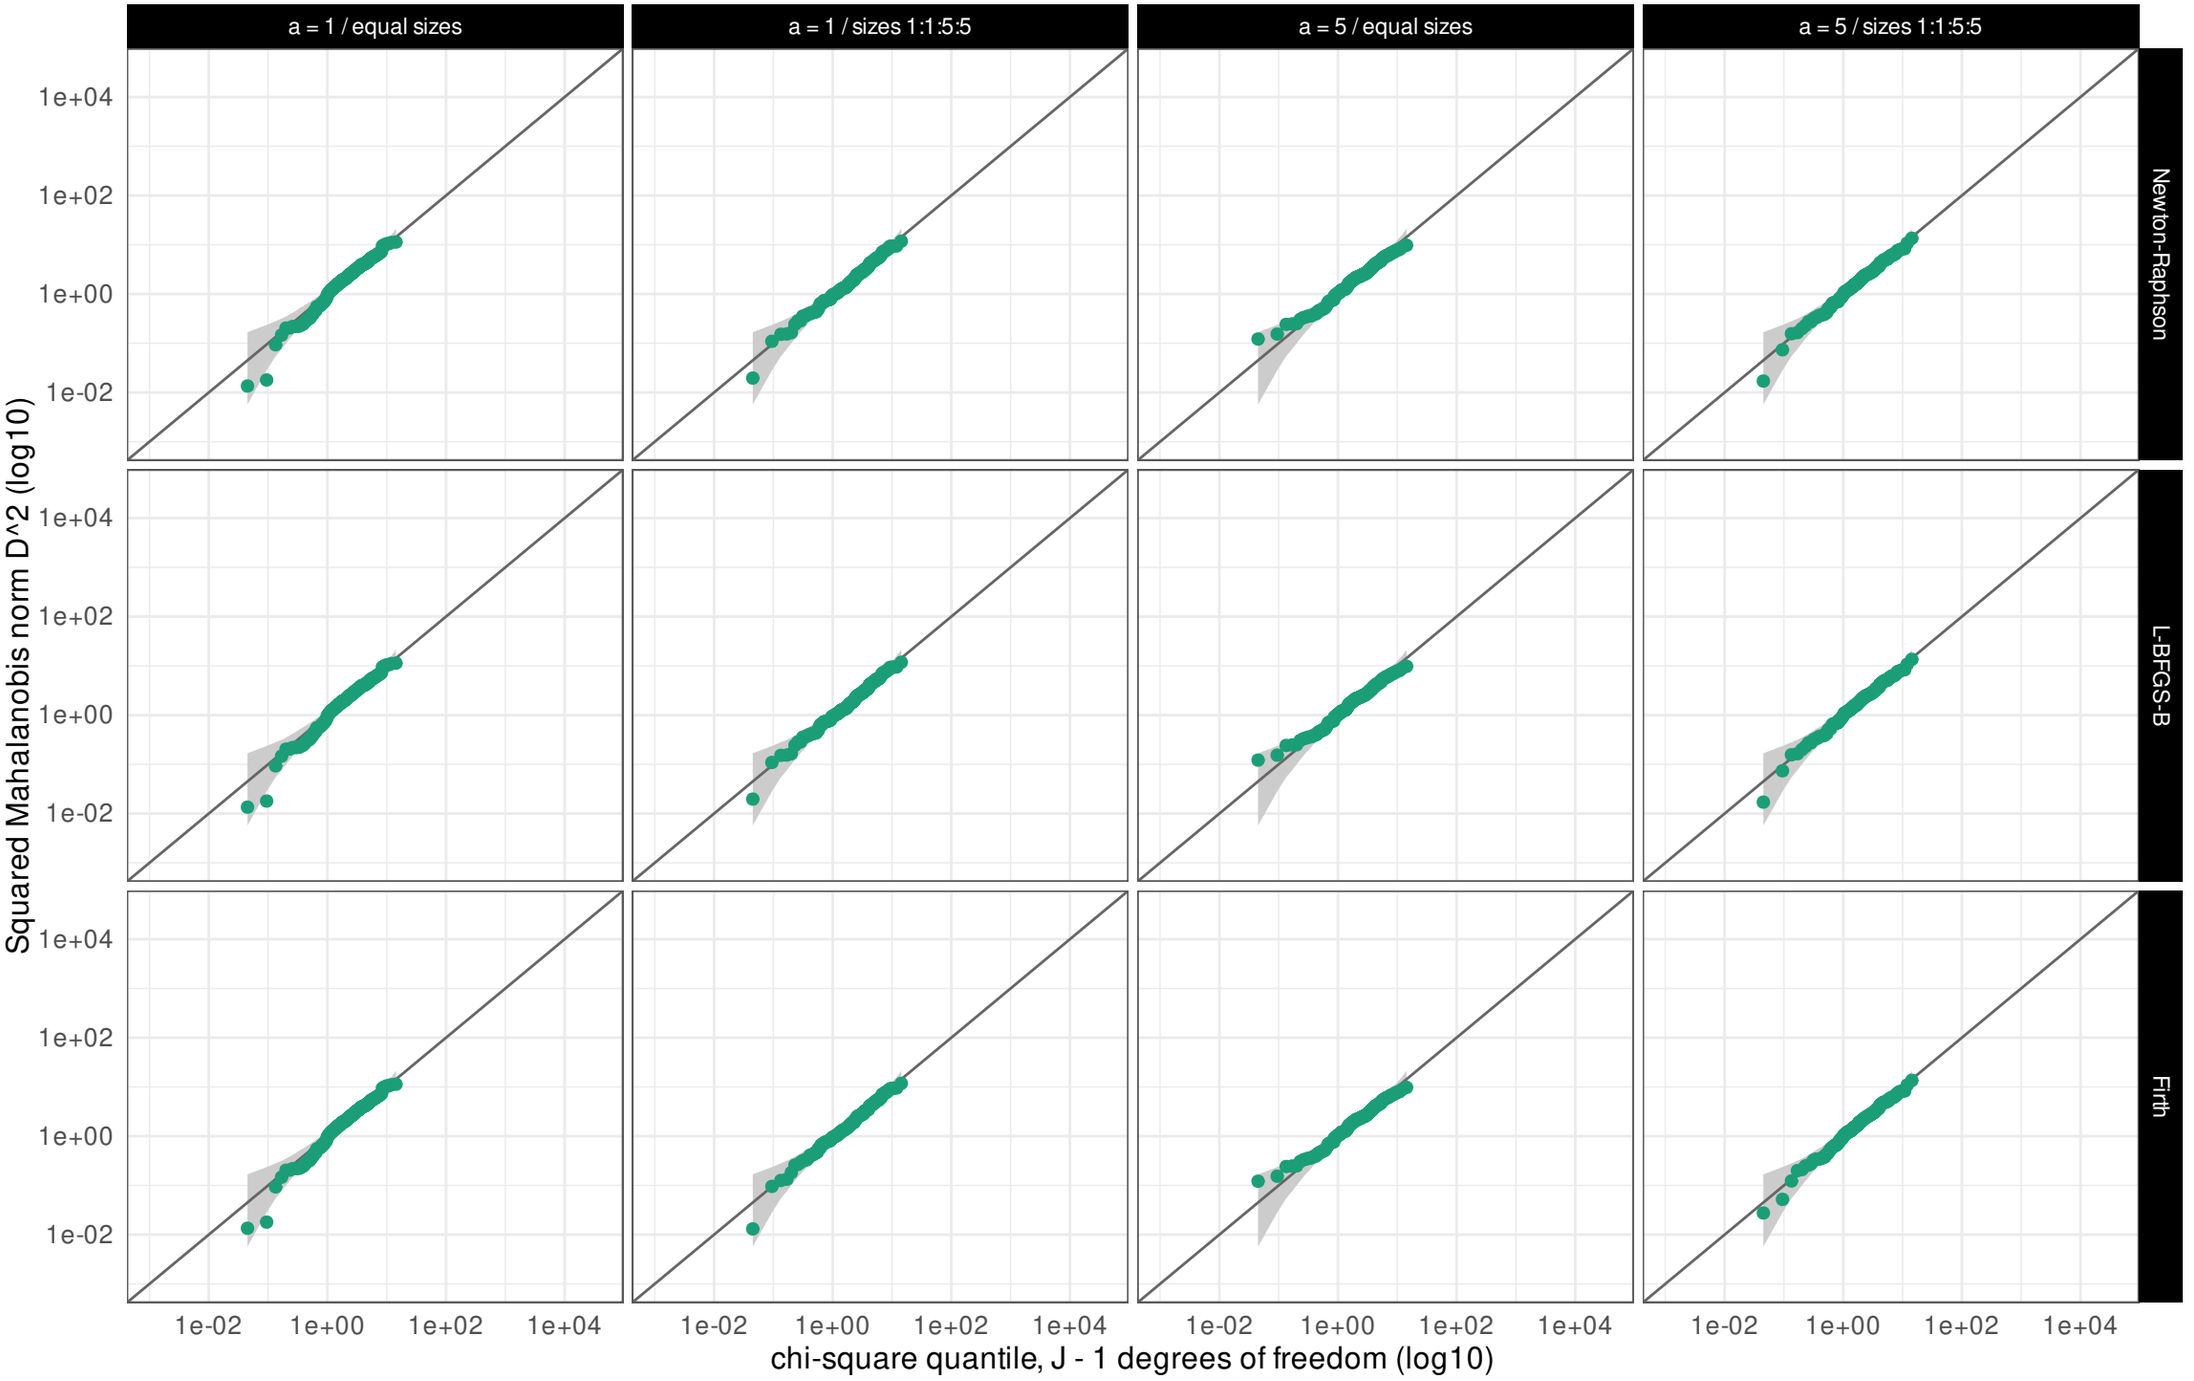

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square


G = 200 / 1e+05 cells per bulk / unbalanced / low sibling overlap

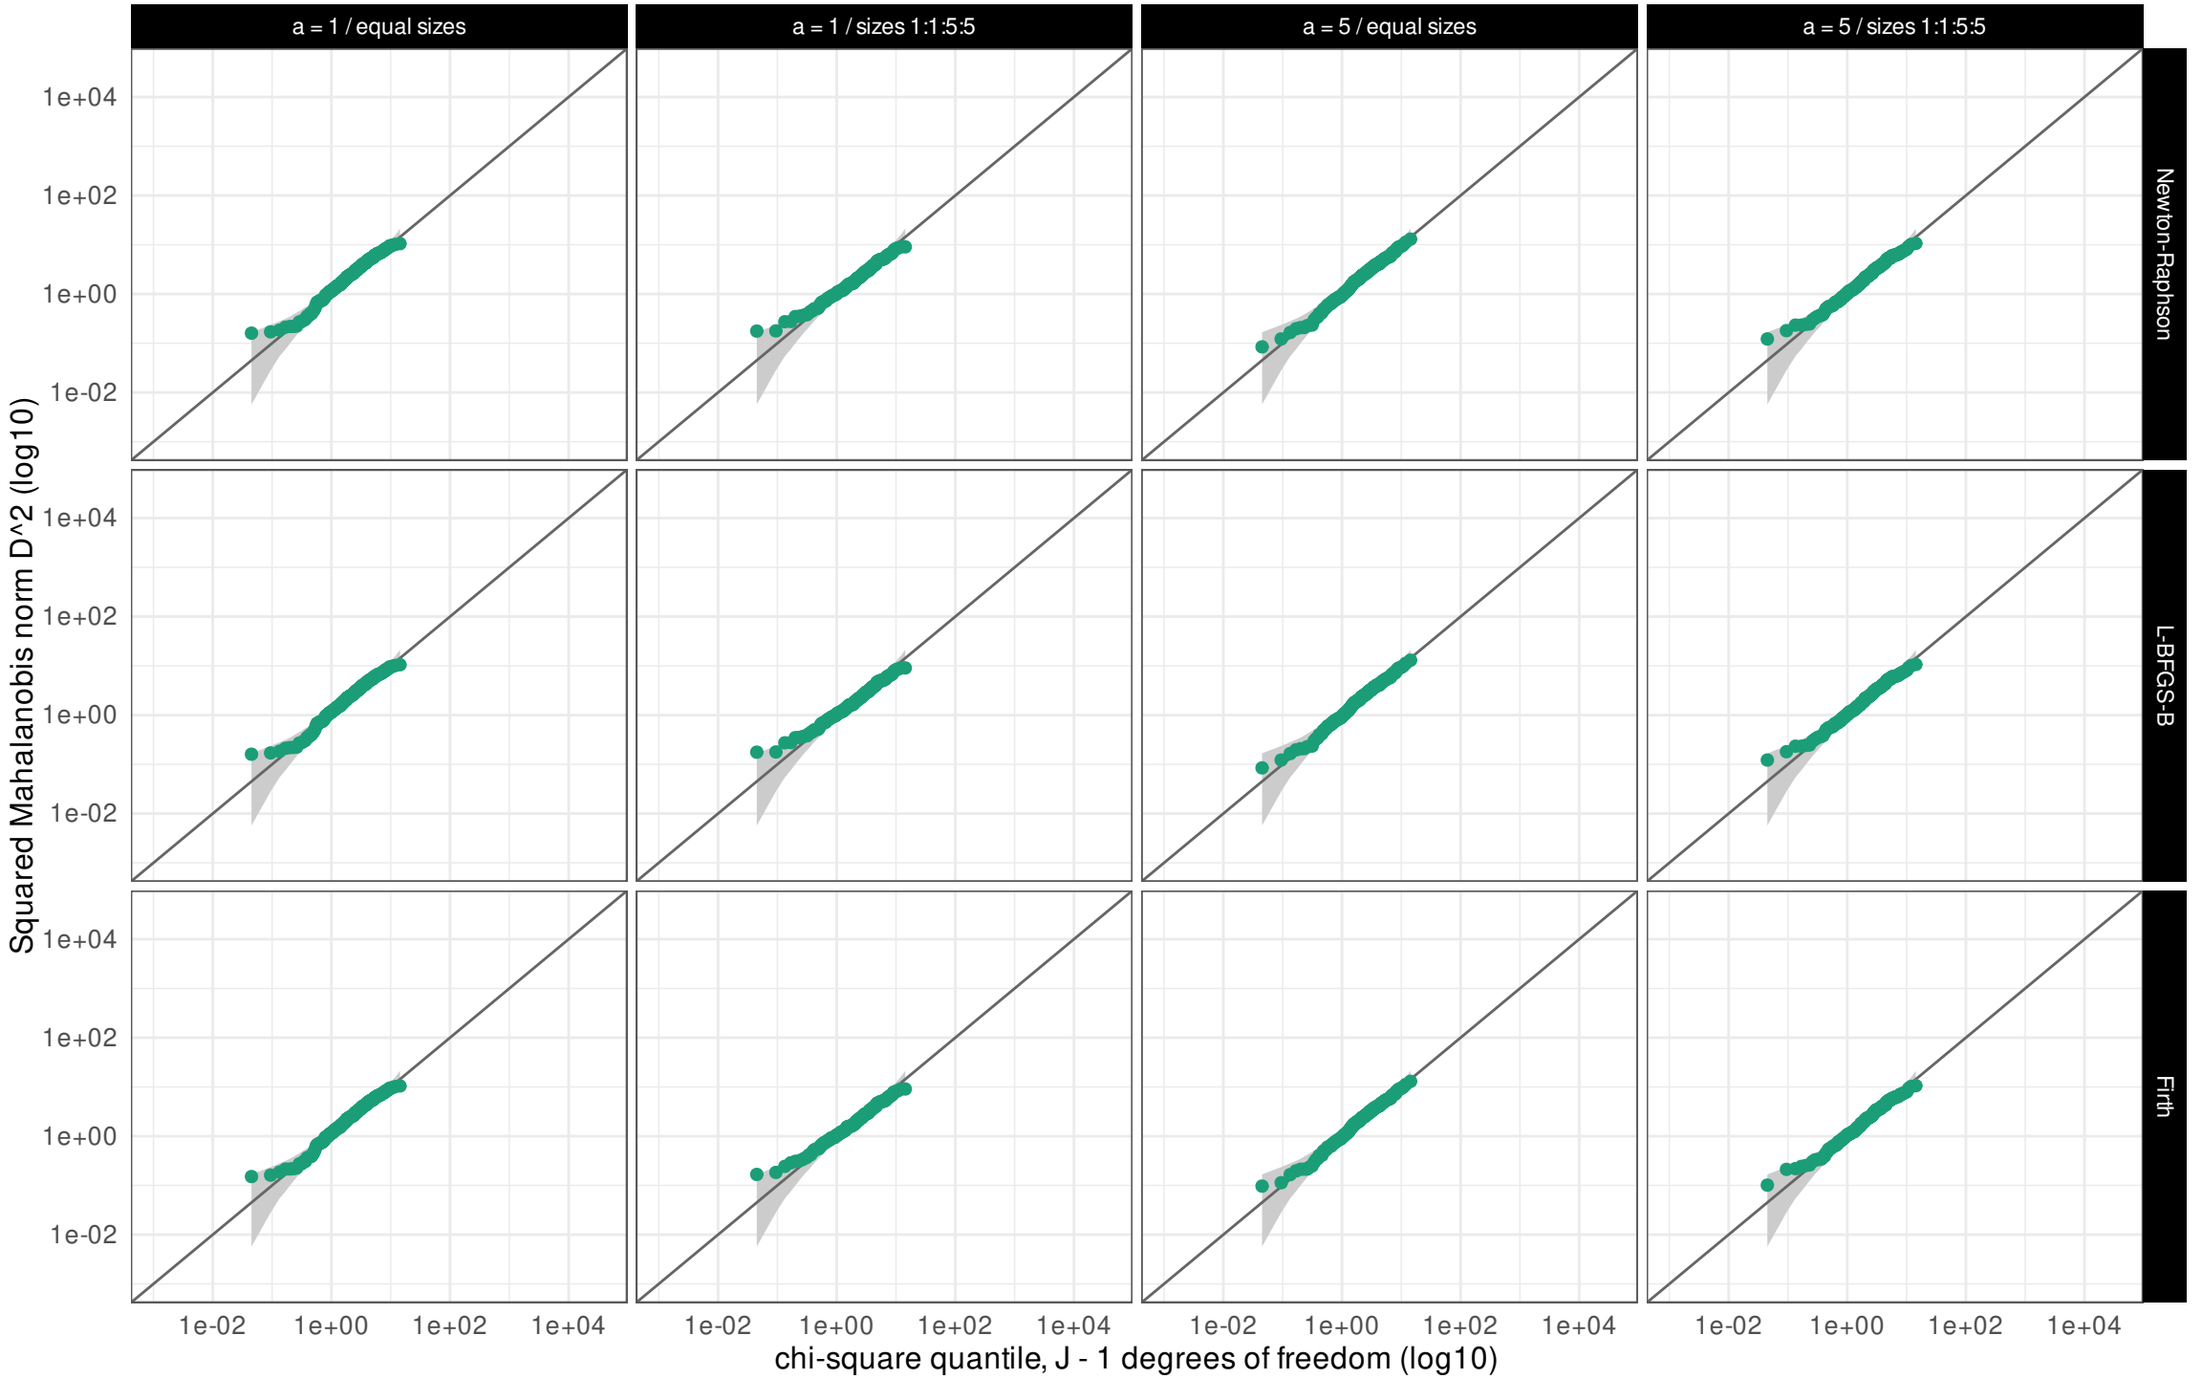

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.

Wald approximation: D^2 of the ILR estimate against chi-square

G = 200 / 1e+05 cells per bulk / unbalanced / high sibling overlap

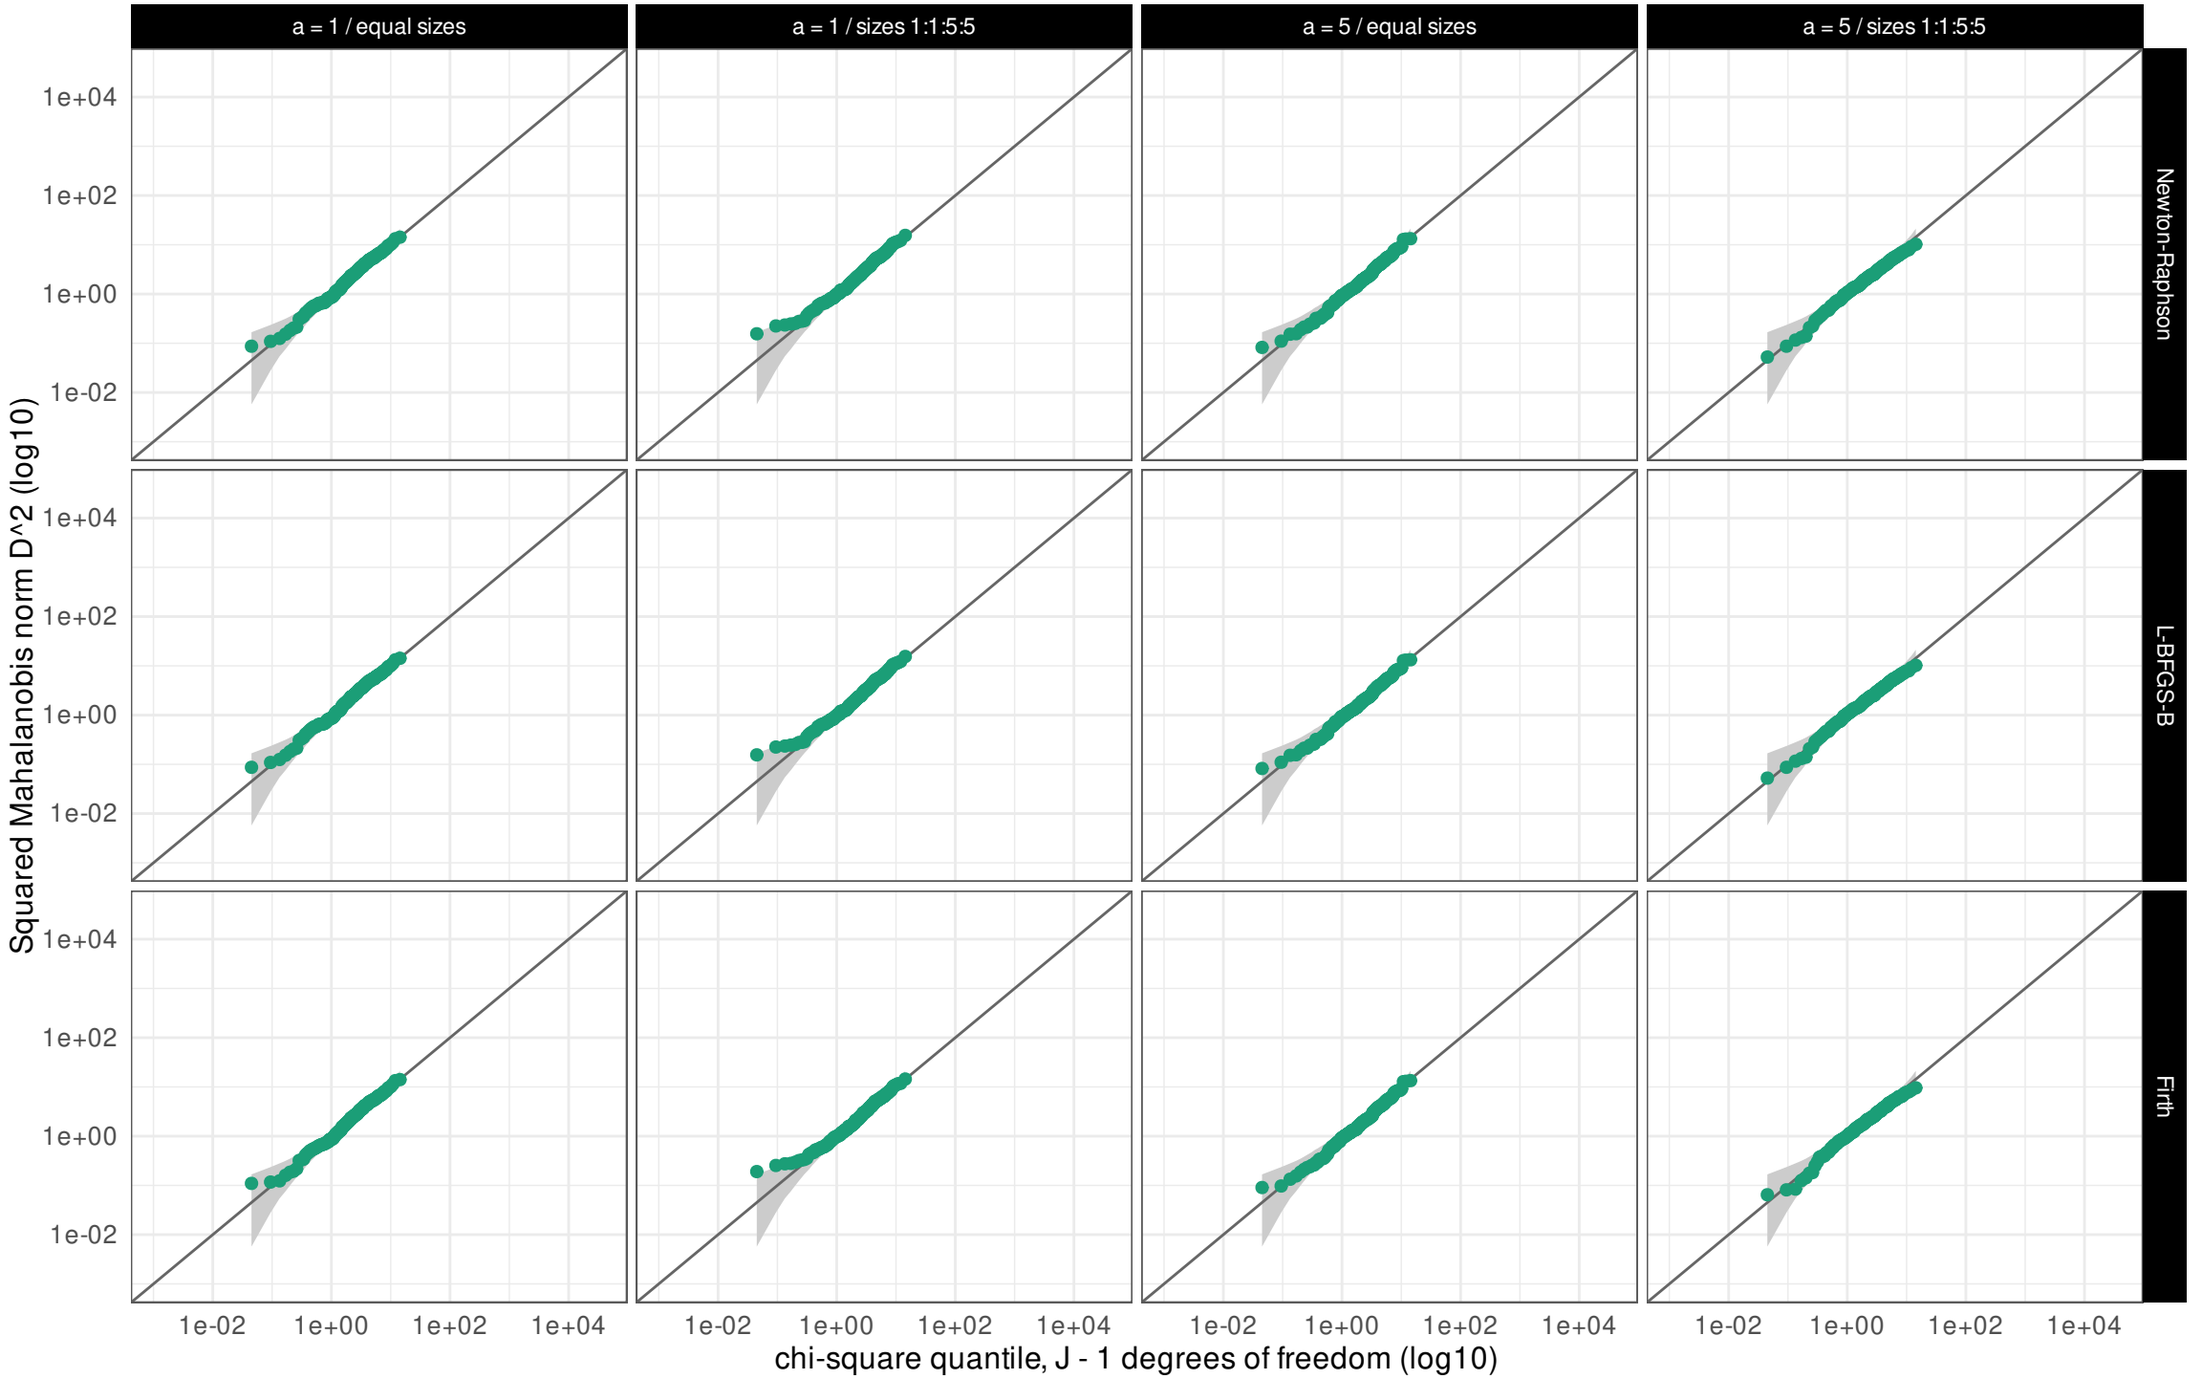

Converged, local maximum Converged, not a local maximum Numerical failure

Grey band: 95% pointwise Monte Carlo envelope of sorted chi-square samples of the same size.
Log axes keep the bulk of the points visible next to the large values of estimates near a face.