
Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.567
ILR, mapped back	1	[0.57, 1]	w = 0.528
Profile likelihood	1	[0.57, 1]	w = 0.468
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.289
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.596
Wald (delta)	1	[0.57, 1]	w = 0.567
ILR, mapped back	1	[0.57, 1]	w = 0.522
Profile likelihood	1	[0.57, 1]	w = 0.468
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.301
Wald (delta)	1	[0.57, 1]	w = 0.576
ILR, mapped back	1	[0.57, 1]	w = 0.532
Method's own interval	1	[0.57, 1]	w = 0.737
Own interval, transcript fractions	1	[0.57, 1]	w = 0.737
Fisher information (Wald)	1	[0.57, 1]	w = 0.932
Godambe sandwich	1	[0.57, 1]	w = 0.846
Released code, as published	1	[0.57, 1]	w = 0.846

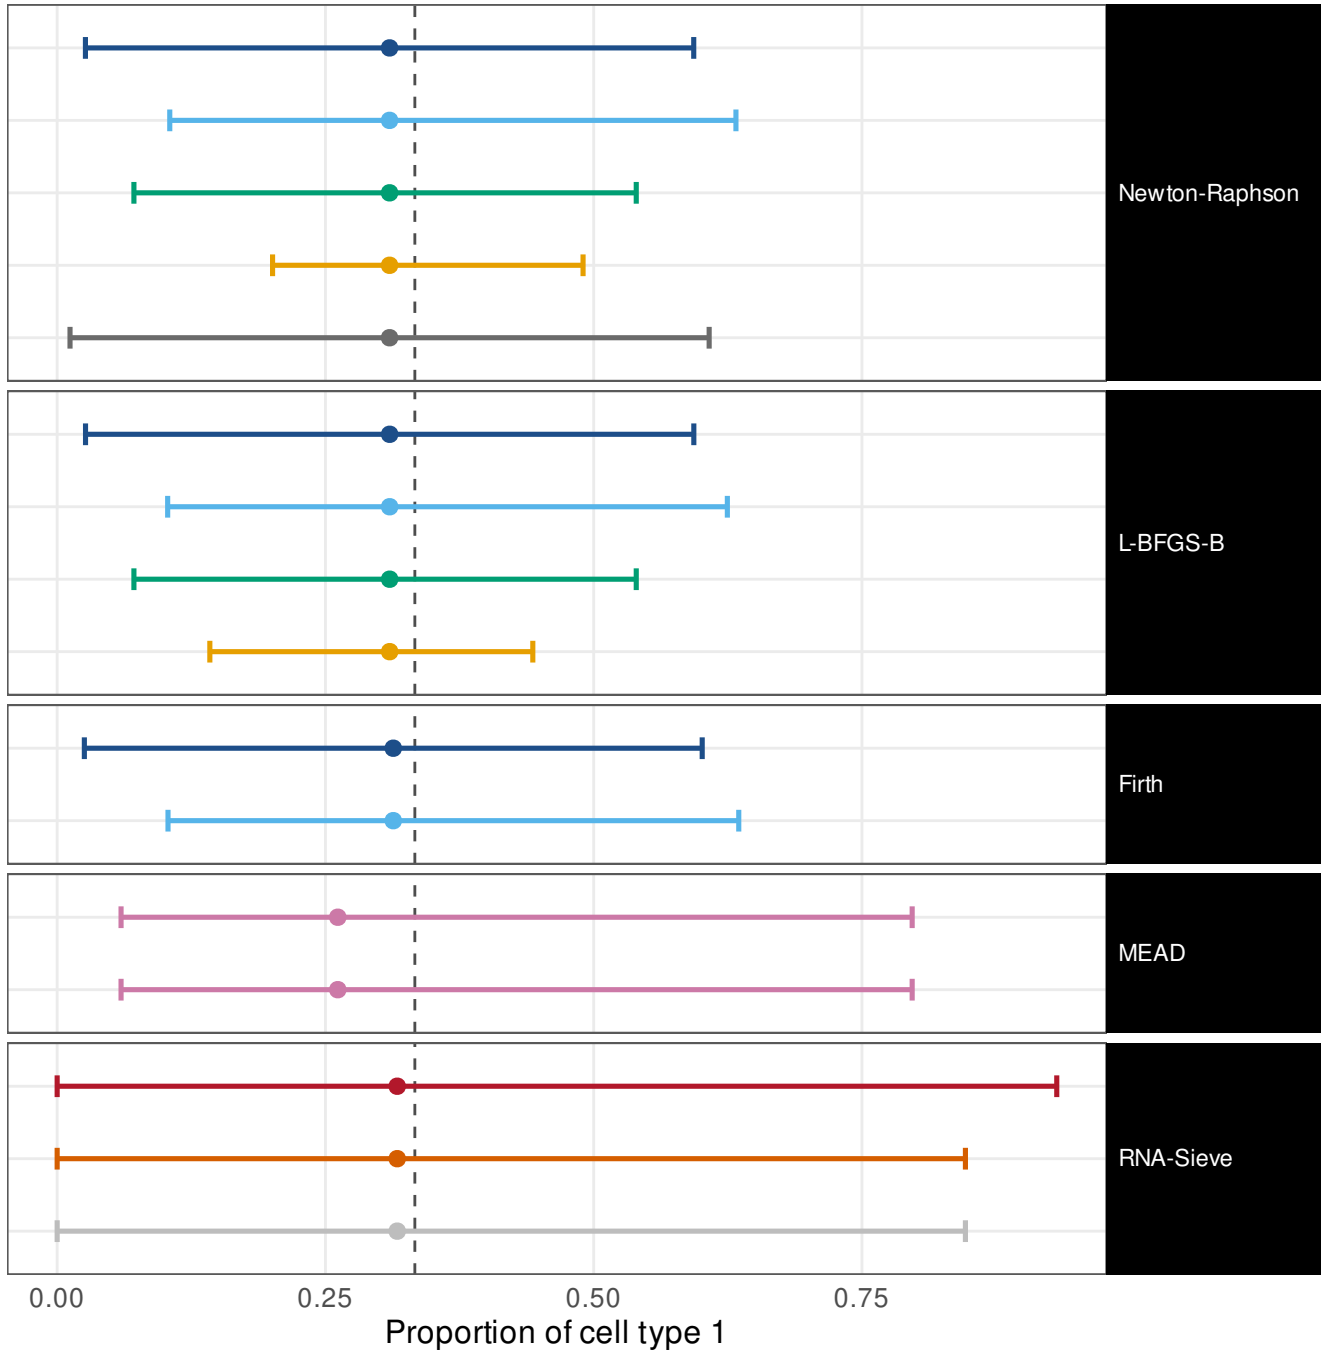


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.567
ILR, mapped back	1	[0.57, 1]	w = 0.516
Profile likelihood	1	[0.57, 1]	w = 0.509
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.237
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.59
Wald (delta)	1	[0.57, 1]	w = 0.567
ILR, mapped back	1	[0.57, 1]	w = 0.517
Profile likelihood	1	[0.57, 1]	w = 0.509
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.302
Wald (delta)	1	[0.57, 1]	w = 0.575
ILR, mapped back	1	[0.57, 1]	w = 0.519
Method's own interval	1	[0.57, 1]	w = 0.793
Own interval, transcript fractions	1	[0.57, 1]	w = 0.793
Fisher information (Wald)	1	[0.57, 1]	w = 0.935
Godambe sandwich	1	[0.57, 1]	w = 0.888
Released code, as published	1	[0.57, 1]	w = 0.888

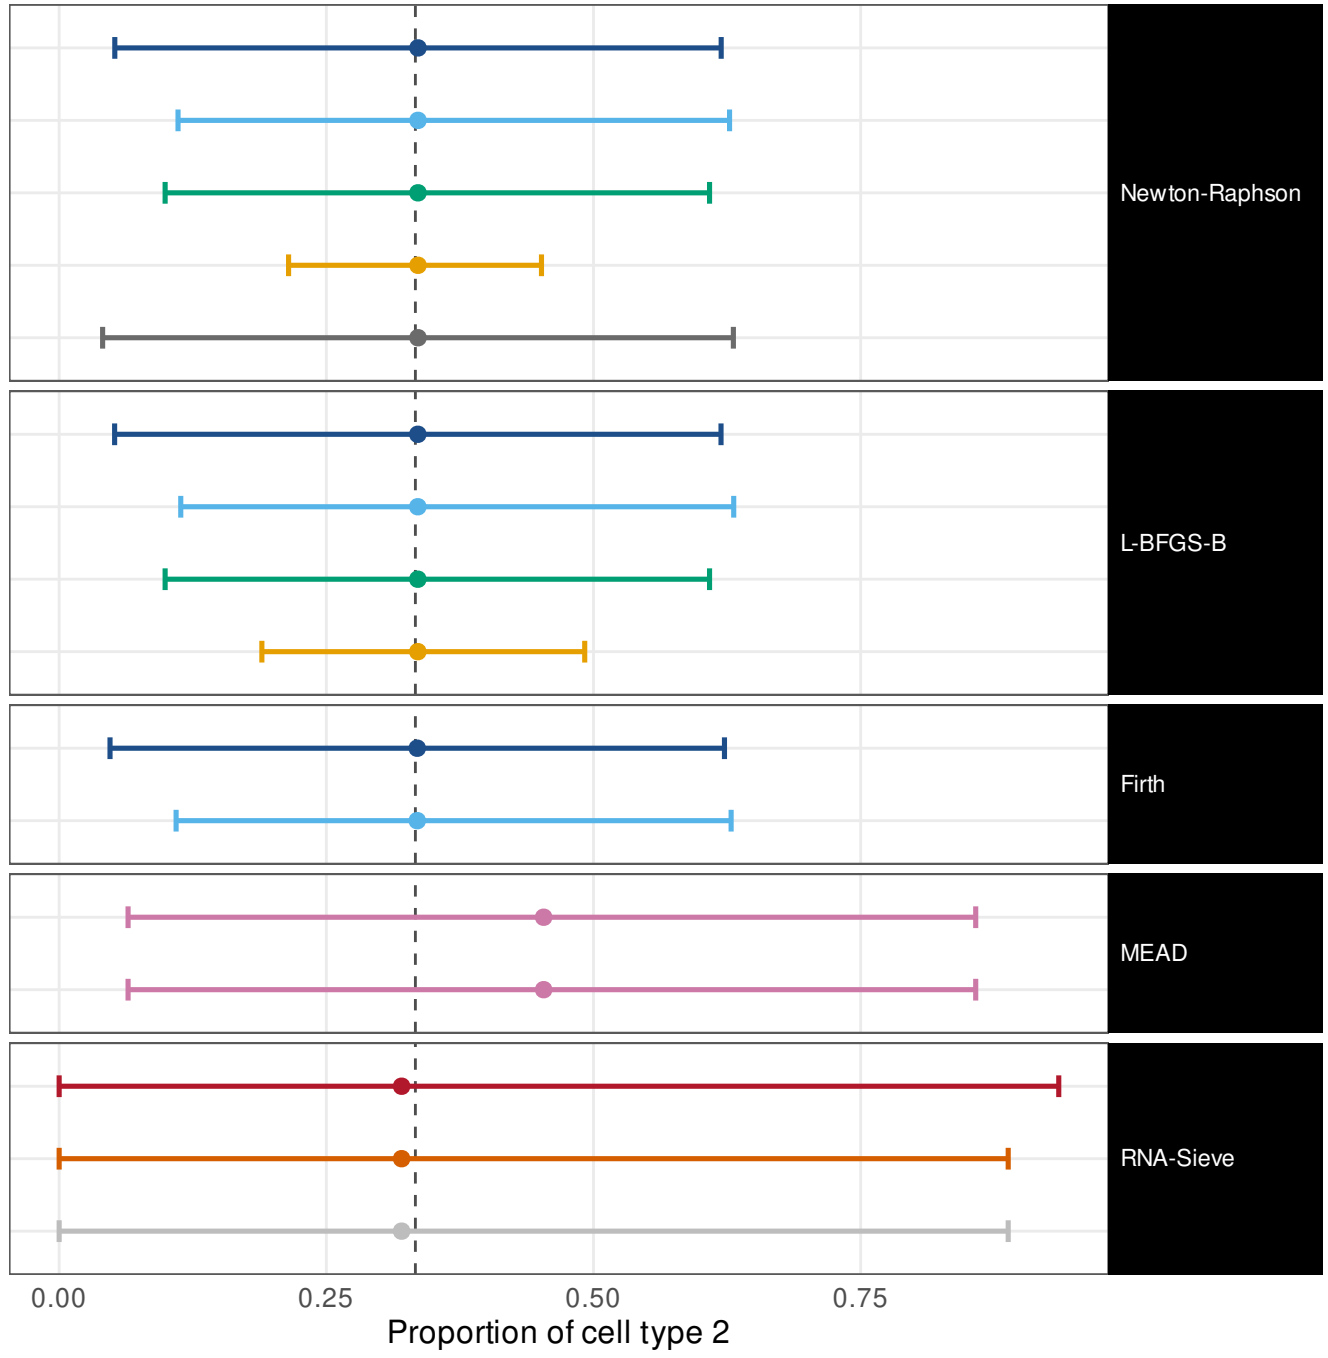


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.264
ILR, mapped back	1	[0.57, 1]	w = 0.274
Profile likelihood	1	[0.57, 1]	w = 0.265
Parametric bootstrap	1	[0.57, 1]	w = 0.194
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.257
Wald (delta)	1	[0.57, 1]	w = 0.264
ILR, mapped back	1	[0.57, 1]	w = 0.279
Profile likelihood	1	[0.57, 1]	w = 0.265
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.161
Wald (delta)	1	[0.57, 1]	w = 0.262
ILR, mapped back	1	[0.57, 1]	w = 0.273
Method's own interval	0.8	[0.38, 0.96]	w = 0.371
Own interval, transcript fractions	1	[0.57, 1]	w = 0.371
Fisher information (Wald)	1	[0.57, 1]	w = 0.764
Godambe sandwich	1	[0.57, 1]	w = 0.731
Released code, as published	1	[0.57, 1]	w = 0.731

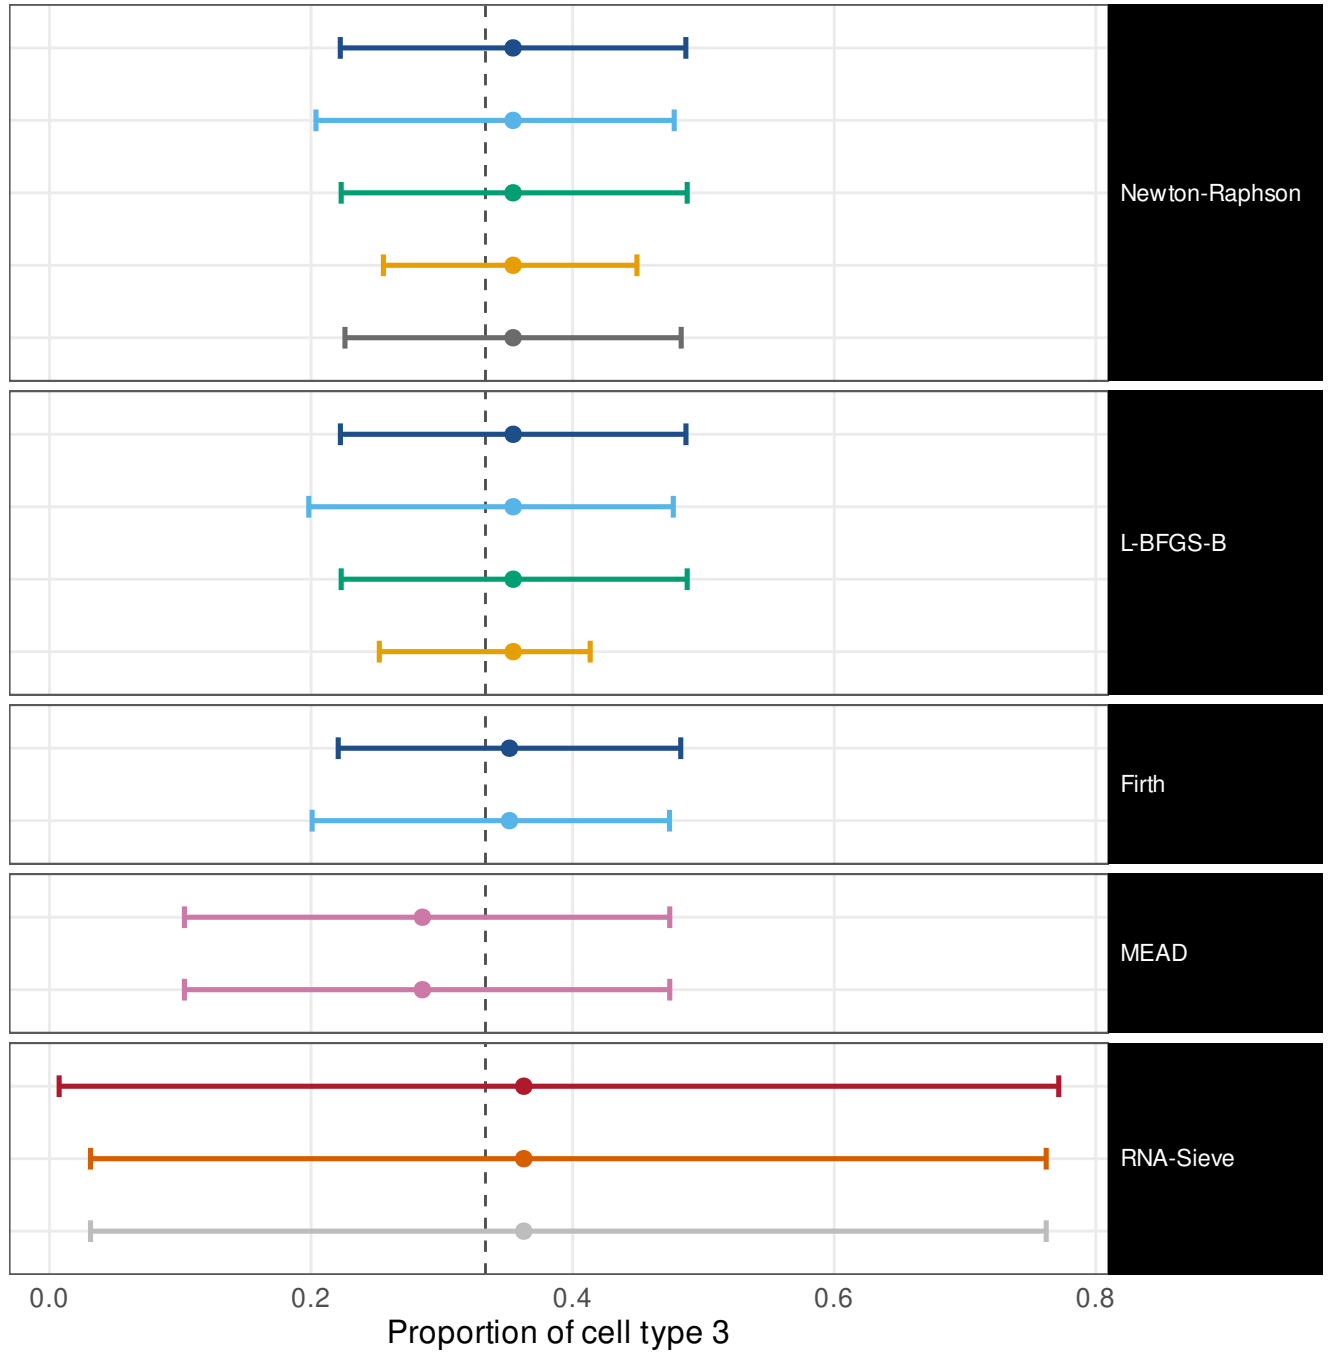


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.544
ILR, mapped back	1	[0.57, 1]	w = 0.491
Profile likelihood	1	[0.57, 1]	w = 0.518
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.299
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.562
Wald (delta)	1	[0.57, 1]	w = 0.544
ILR, mapped back	1	[0.57, 1]	w = 0.502
Profile likelihood	1	[0.57, 1]	w = 0.518
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.27
Wald (delta)	1	[0.57, 1]	w = 0.548
ILR, mapped back	1	[0.57, 1]	w = 0.495
Method's own interval	1	[0.57, 1]	w = 0.796
Own interval, transcript fractions	1	[0.57, 1]	w = 0.796
Fisher information (Wald)	1	[0.57, 1]	w = 0.942
Godambe sandwich	1	[0.57, 1]	w = 0.89
Released code, as published	1	[0.57, 1]	w = 0.89

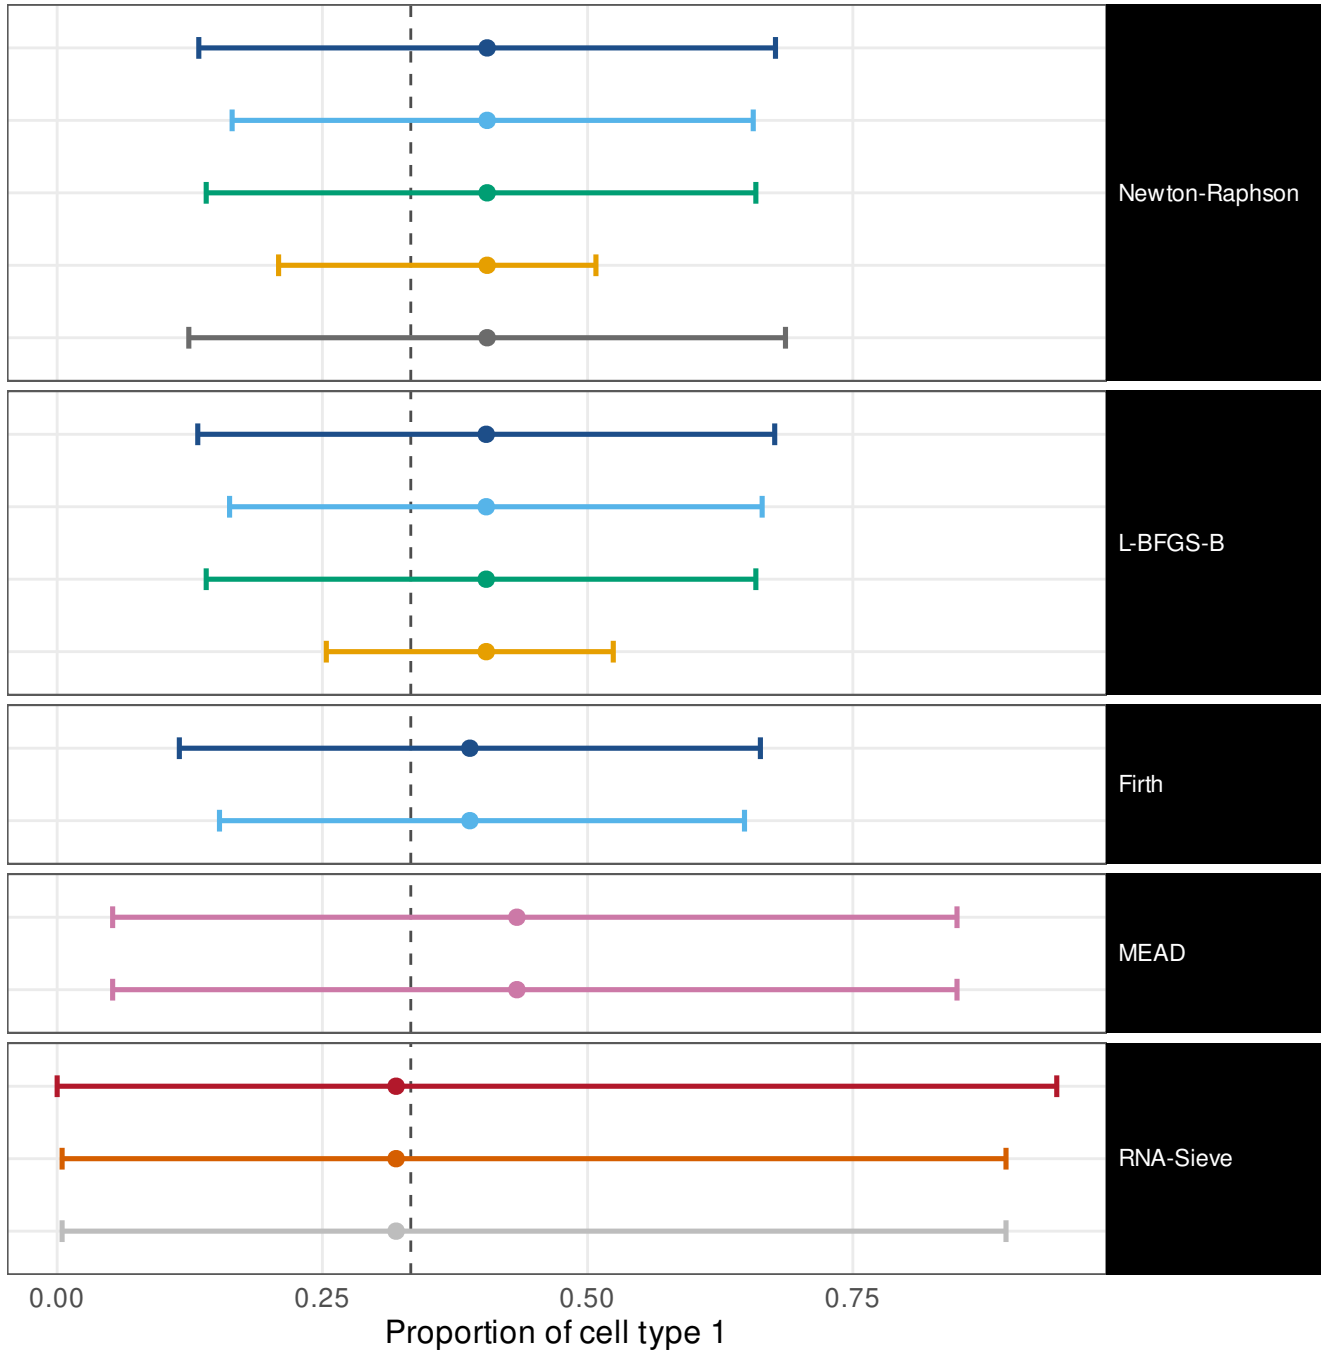


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.541
ILR, mapped back	1	[0.57, 1]	w = 0.5
Profile likelihood	1	[0.57, 1]	w = 0.483
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.279
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.556
Wald (delta)	1	[0.57, 1]	w = 0.541
ILR, mapped back	1	[0.57, 1]	w = 0.512
Profile likelihood	1	[0.57, 1]	w = 0.483
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.237
Wald (delta)	1	[0.57, 1]	w = 0.544
ILR, mapped back	1	[0.57, 1]	w = 0.508
Method's own interval	1	[0.57, 1]	w = 0.778
Own interval, transcript fractions	1	[0.57, 1]	w = 0.778
Fisher information (Wald)	1	[0.57, 1]	w = 0.894
Godambe sandwich	1	[0.57, 1]	w = 0.887
Released code, as published	1	[0.57, 1]	w = 0.887

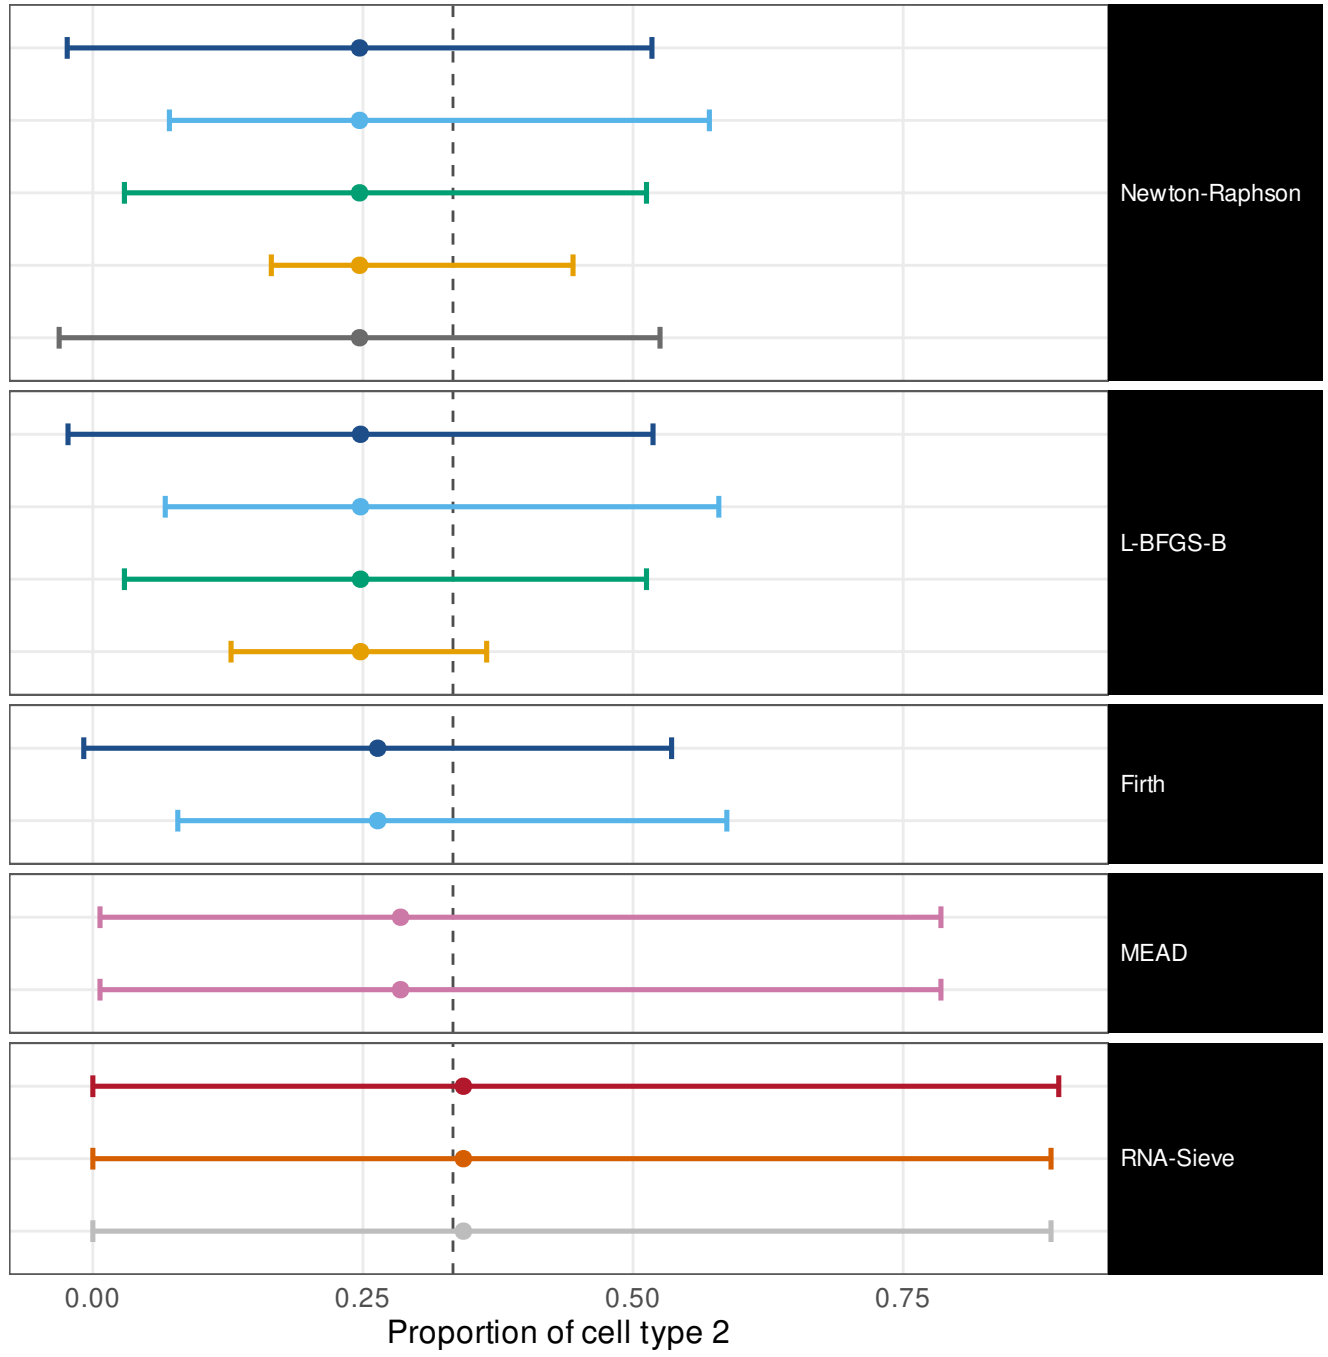


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.248
ILR, mapped back	1	[0.57, 1]	w = 0.258
Profile likelihood	0.8	[0.38, 0.96]	w = 0.251
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.107
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.236
Wald (delta)	1	[0.57, 1]	w = 0.248
ILR, mapped back	1	[0.57, 1]	w = 0.258
Profile likelihood	0.8	[0.38, 0.96]	w = 0.251
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.184
Wald (delta)	1	[0.57, 1]	w = 0.244
ILR, mapped back	1	[0.57, 1]	w = 0.254
Method's own interval	0.8	[0.38, 0.96]	w = 0.305
Own interval, transcript fractions	0.8	[0.38, 0.96]	w = 0.305
Fisher information (Wald)	1	[0.57, 1]	w = 0.835
Godambe sandwich	1	[0.57, 1]	w = 0.537
Released code, as published	1	[0.57, 1]	w = 0.537

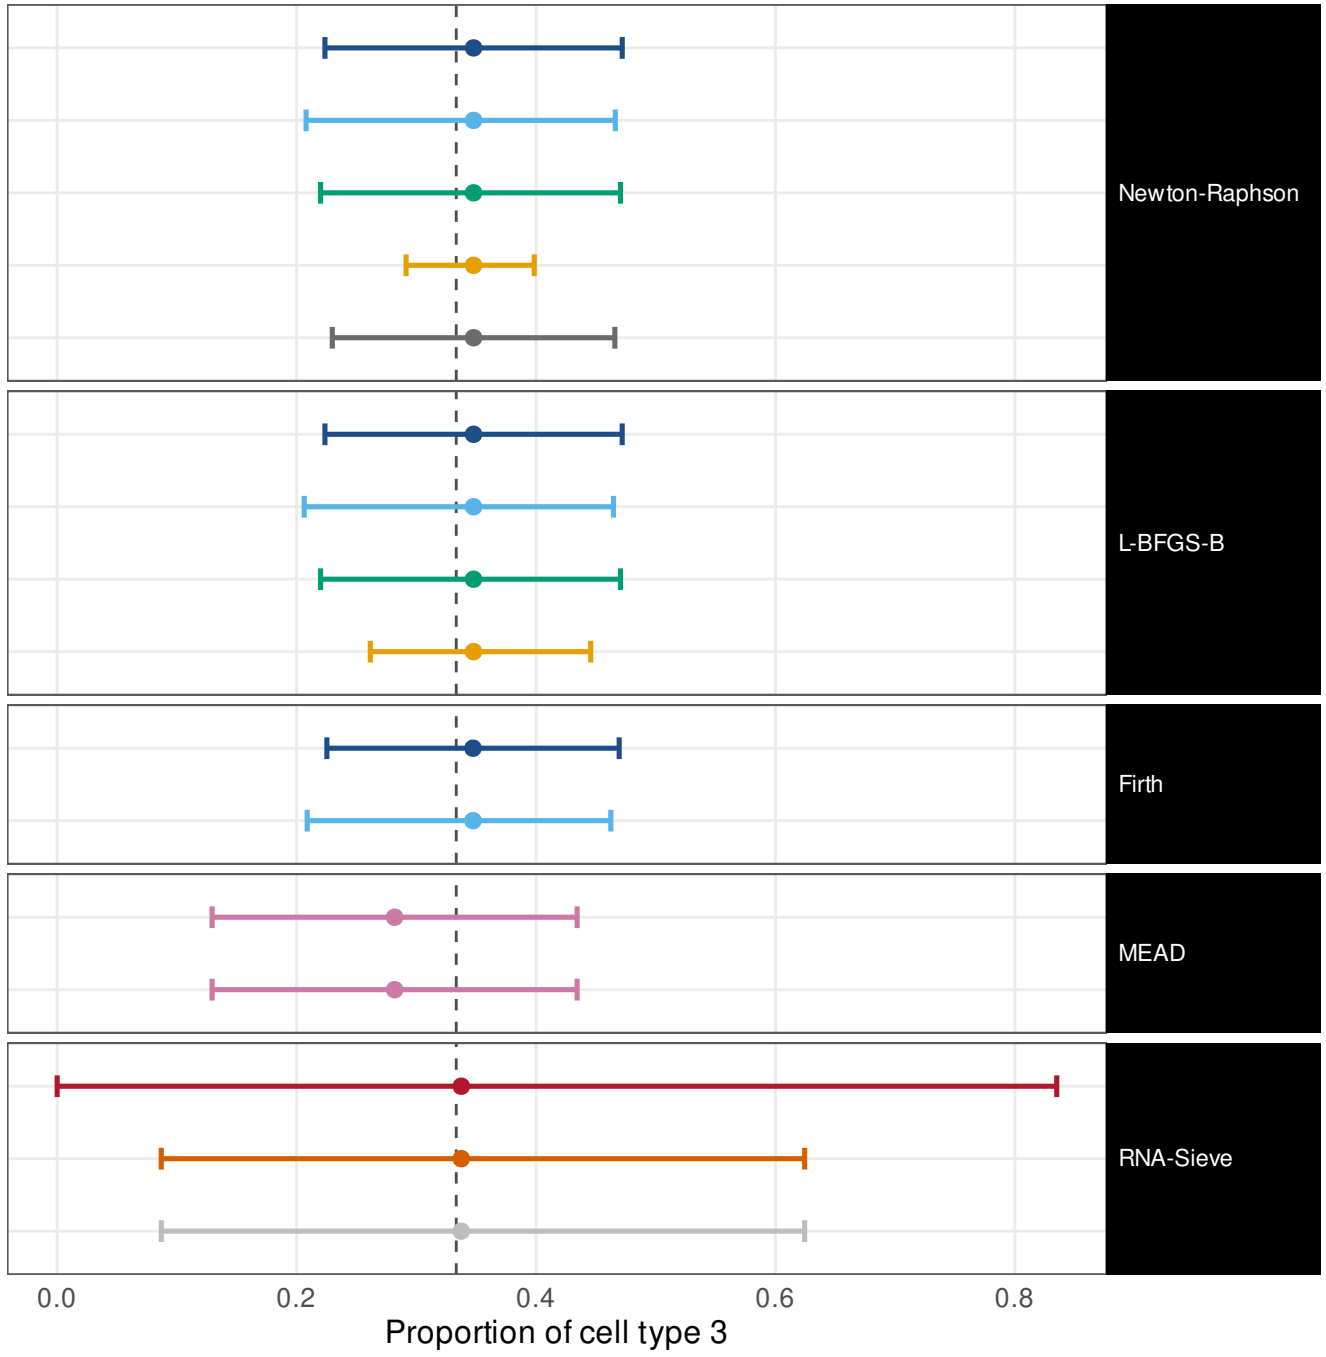


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.8	[0.38, 0.96]	w = 0.544
ILR, mapped back	1	[0.57, 1]	w = 0.603
Profile likelihood	0.8	[0.38, 0.96]	w = 0.472
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.256
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.569
Wald (delta)	1	[0.51, 1]	w = 0.561
ILR, mapped back	1	[0.51, 1]	w = 0.501
Profile likelihood	0.8	[0.38, 0.96]	w = 0.472
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.327
Wald (delta)	1	[0.51, 1]	w = 0.562
ILR, mapped back	1	[0.51, 1]	w = 0.511
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 1
Godambe sandwich	1	[0.57, 1]	w = 0.907
Released code, as published	1	[0.57, 1]	w = 0.907

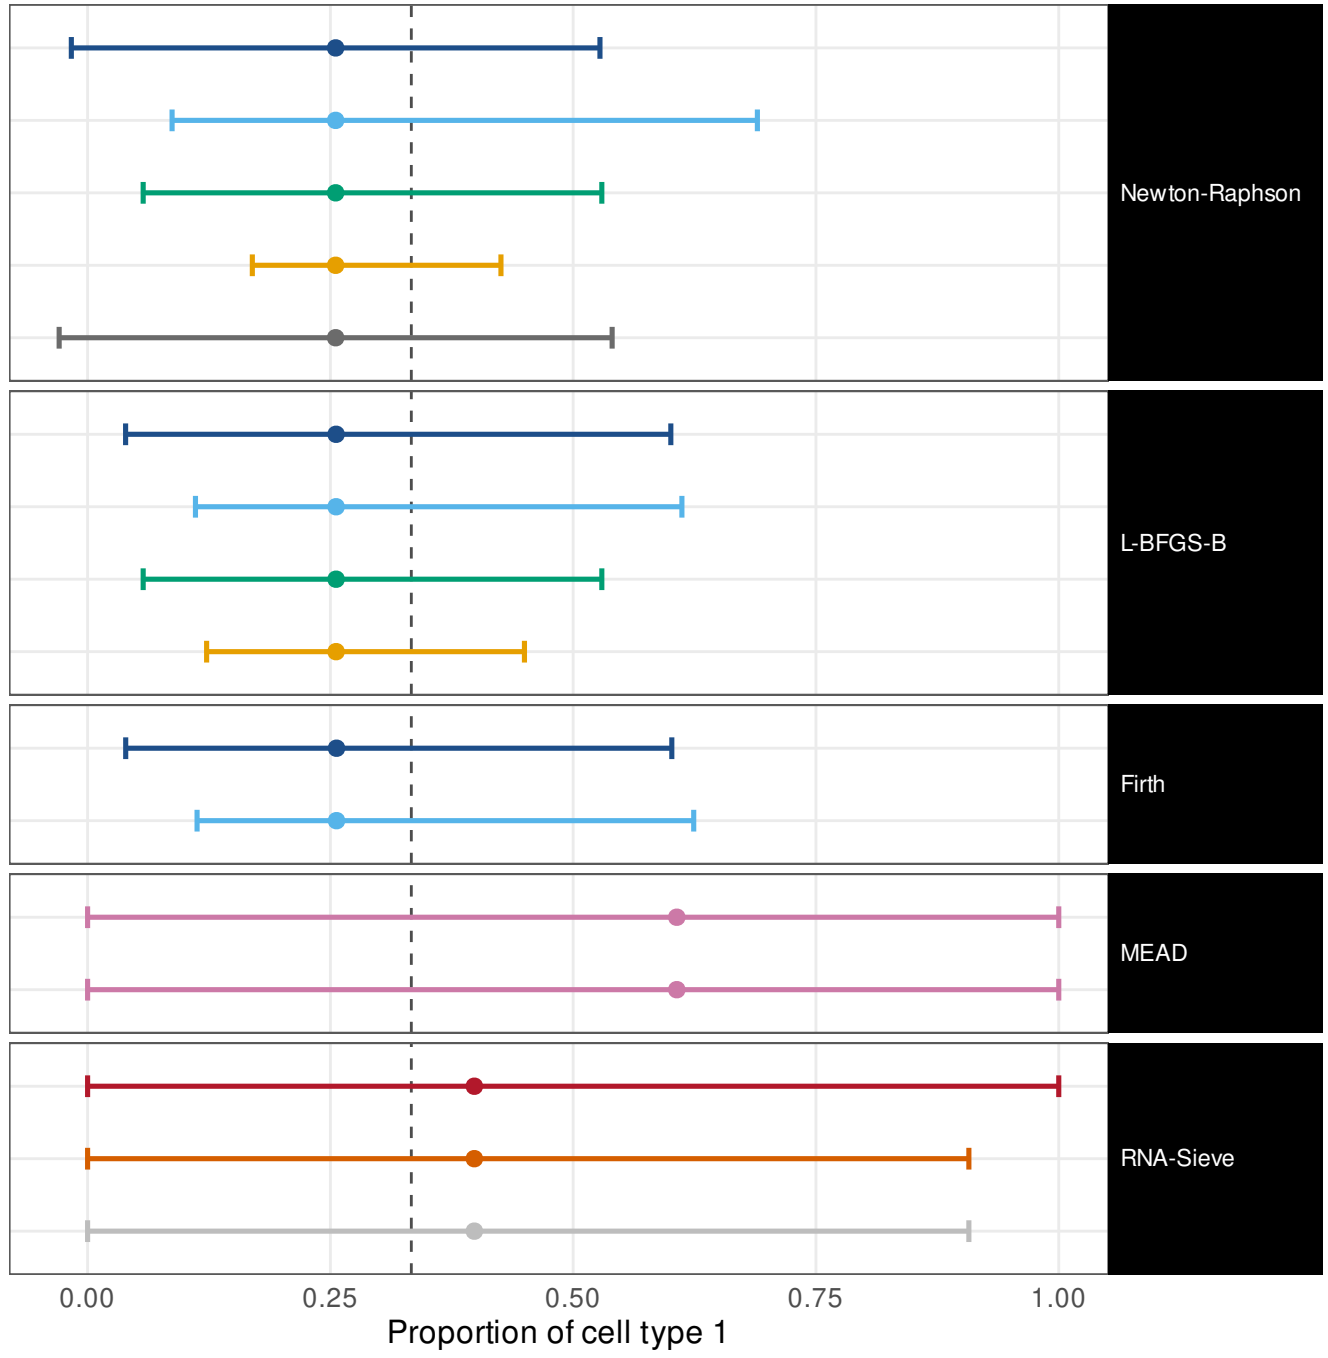


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 Scale-free / CT2 SBM


Wald (delta)	0.8	[0.38, 0.96]	w = 0.542
ILR, mapped back	1	[0.57, 1]	w = 0.561
Profile likelihood	0.8	[0.38, 0.96]	w = 0.483
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.235
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.569
Wald (delta)	1	[0.51, 1]	w = 0.557
ILR, mapped back	1	[0.51, 1]	w = 0.501
Profile likelihood	0.8	[0.38, 0.96]	w = 0.483
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.291
Wald (delta)	1	[0.51, 1]	w = 0.558
ILR, mapped back	1	[0.51, 1]	w = 0.506
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 1
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.914
Released code, as published	0.8	[0.38, 0.96]	w = 0.914

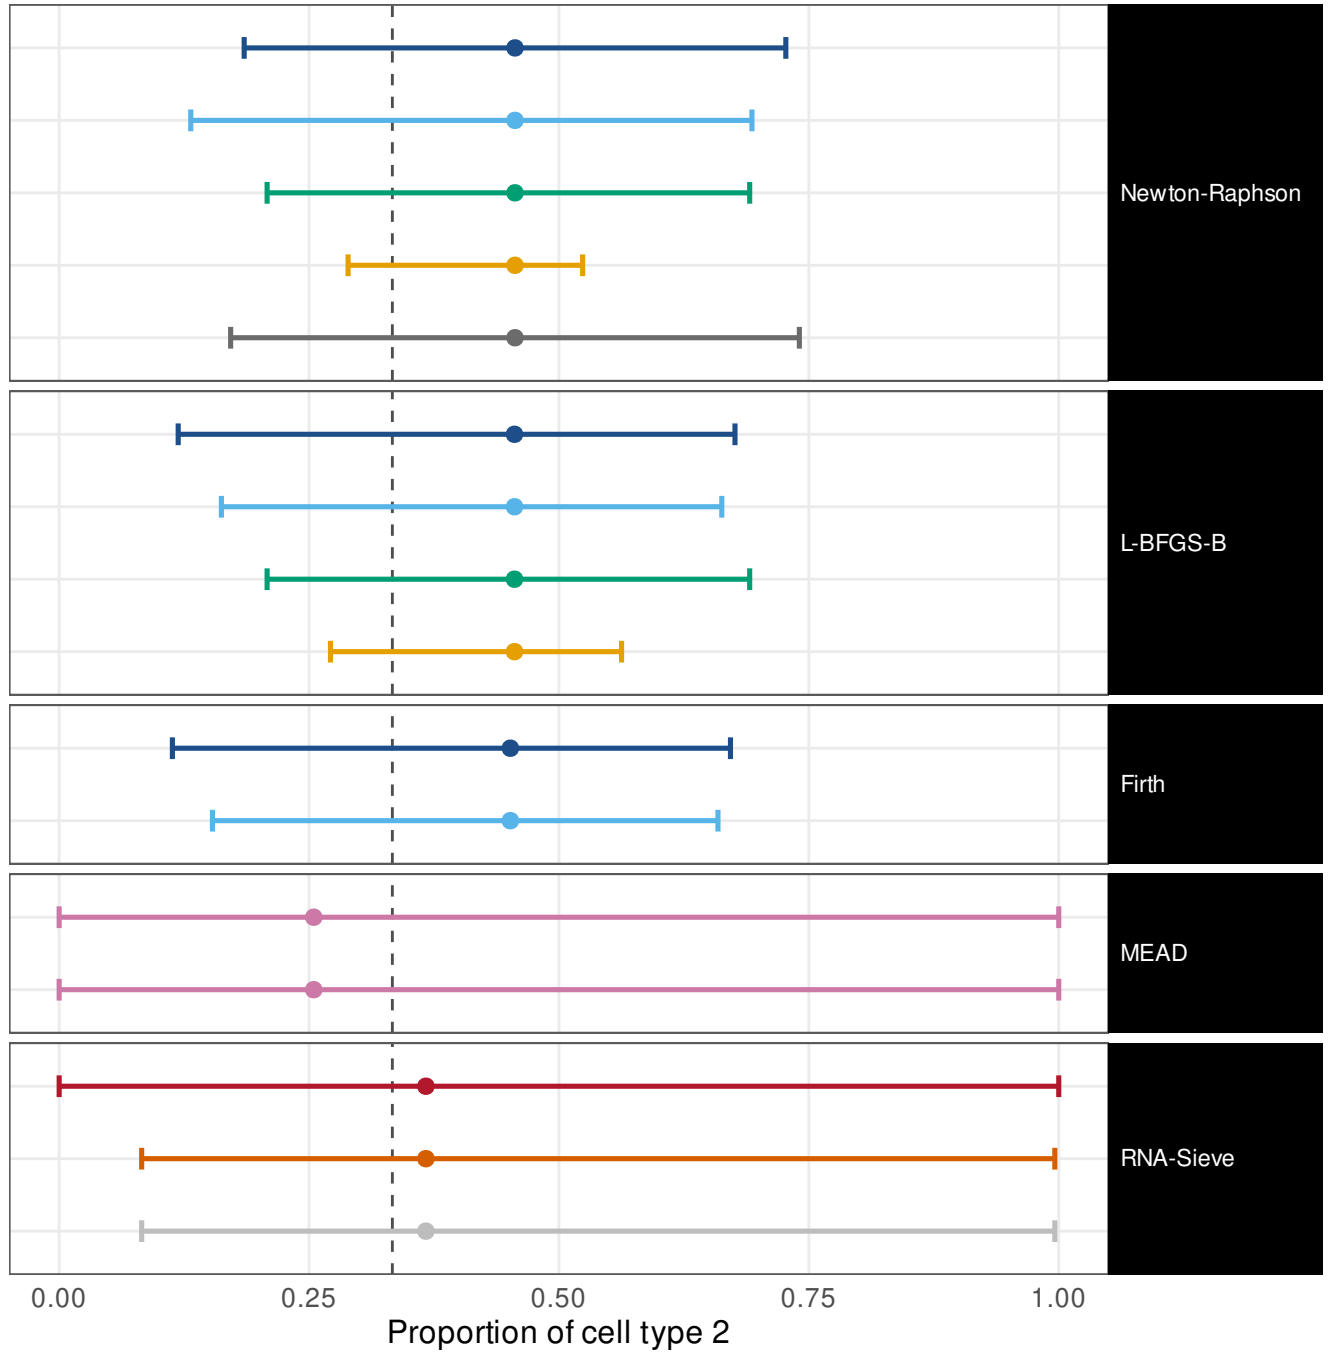

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w


balanced / low overlap / CT1 Scale-free / CT2 SBM

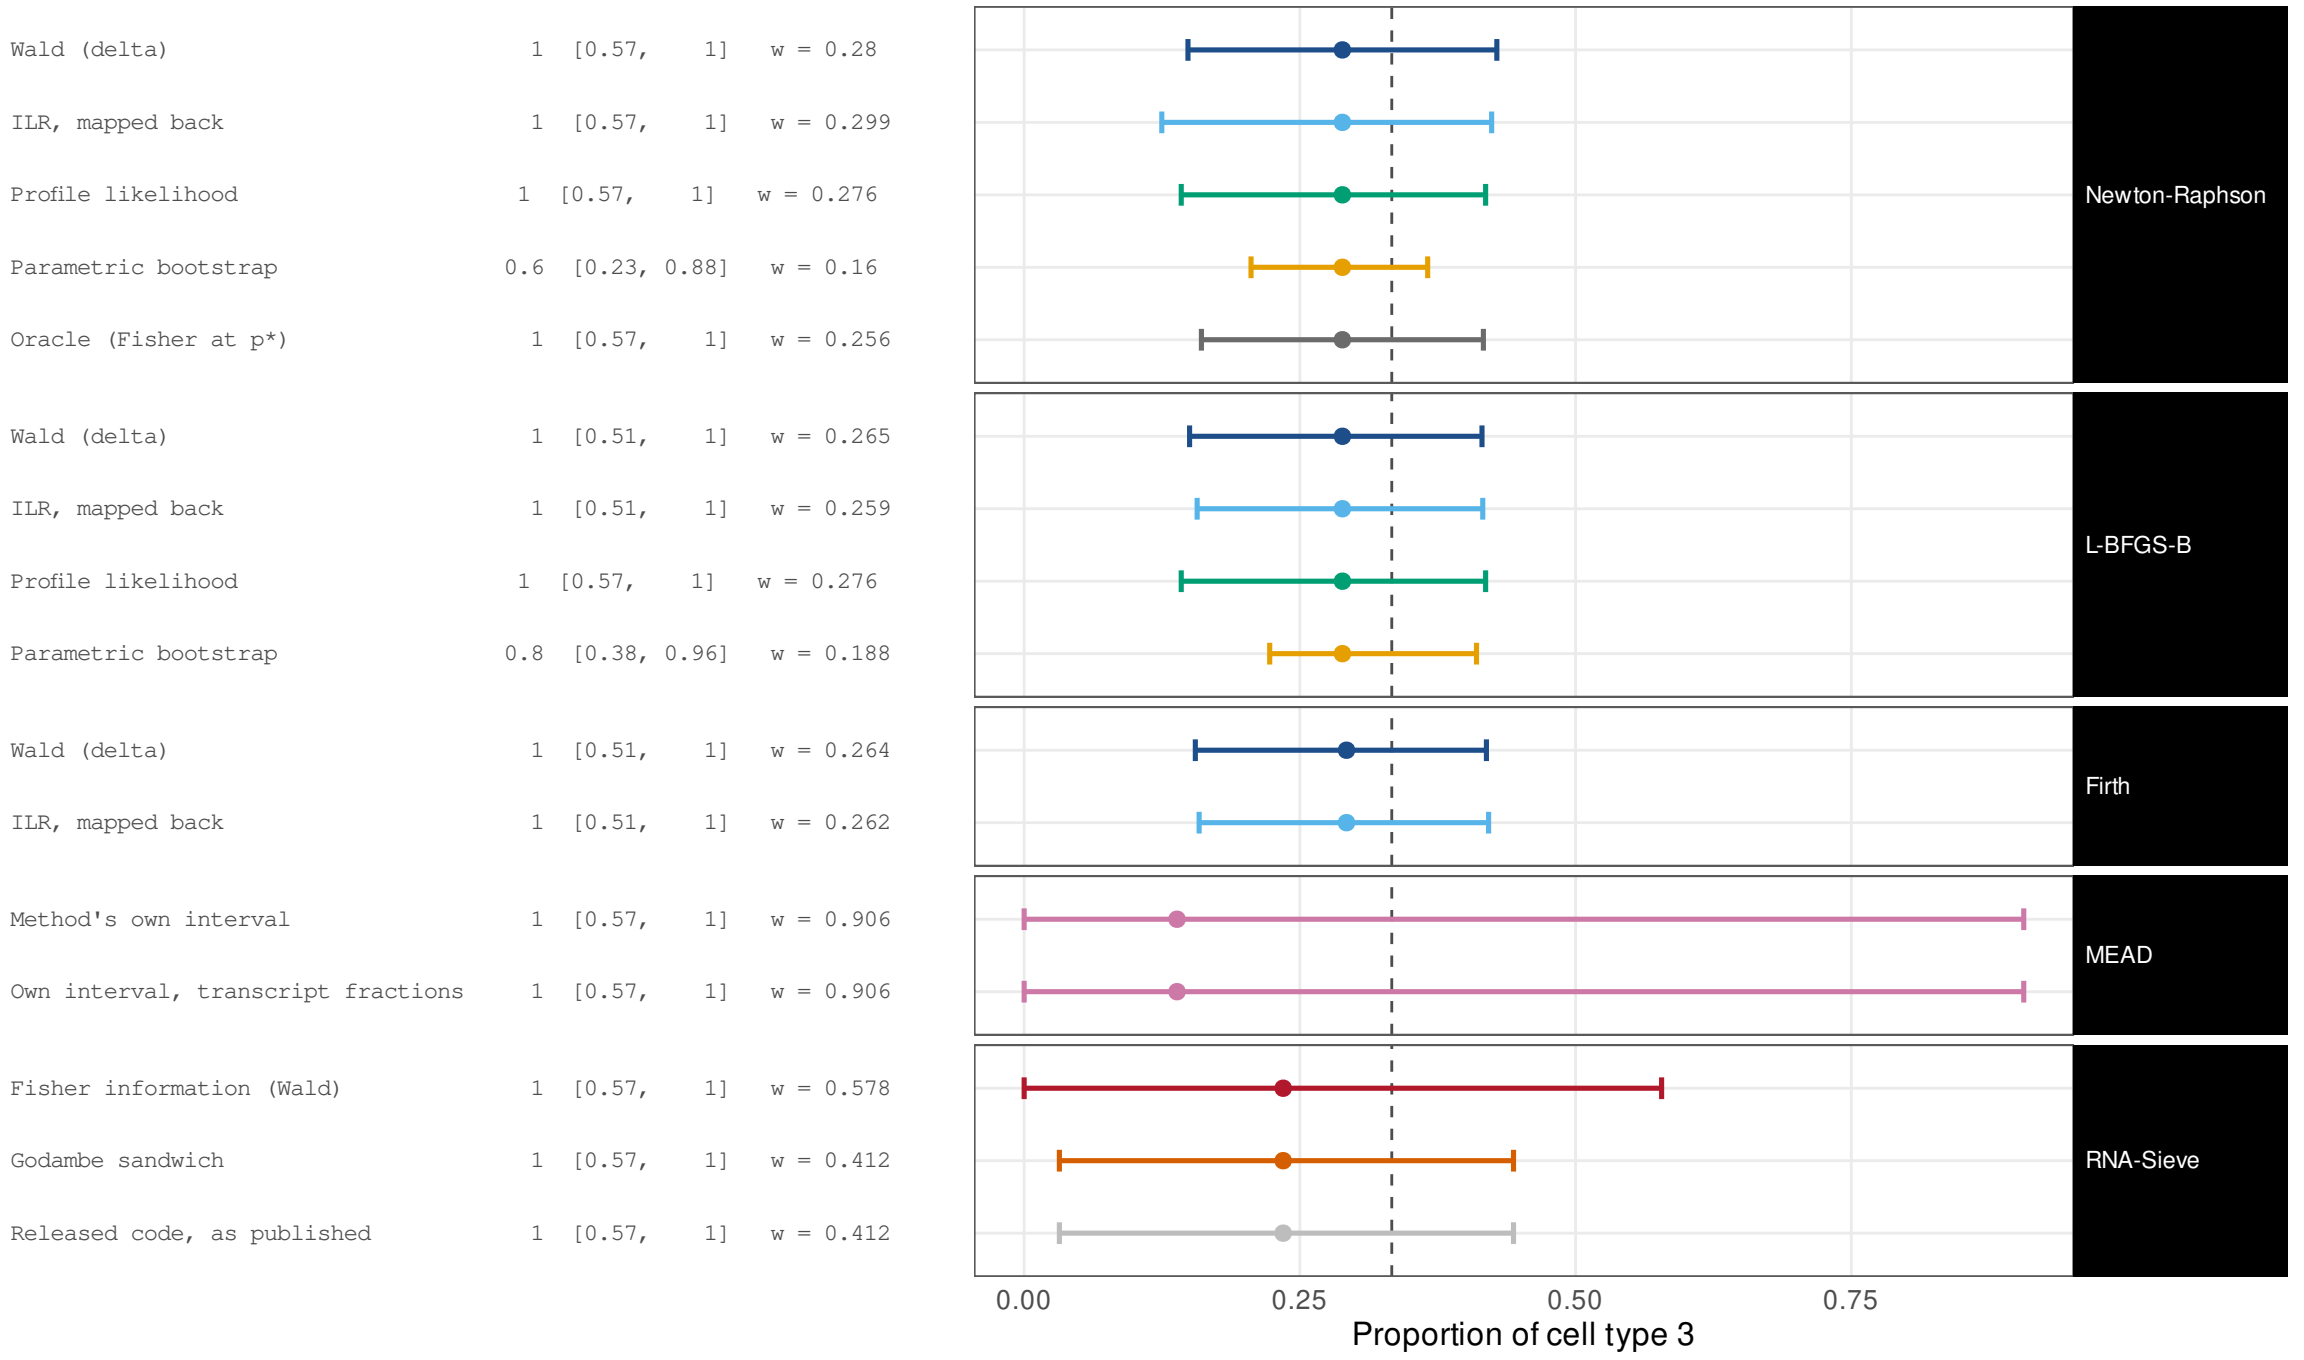

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 SBM / CT2 SBM

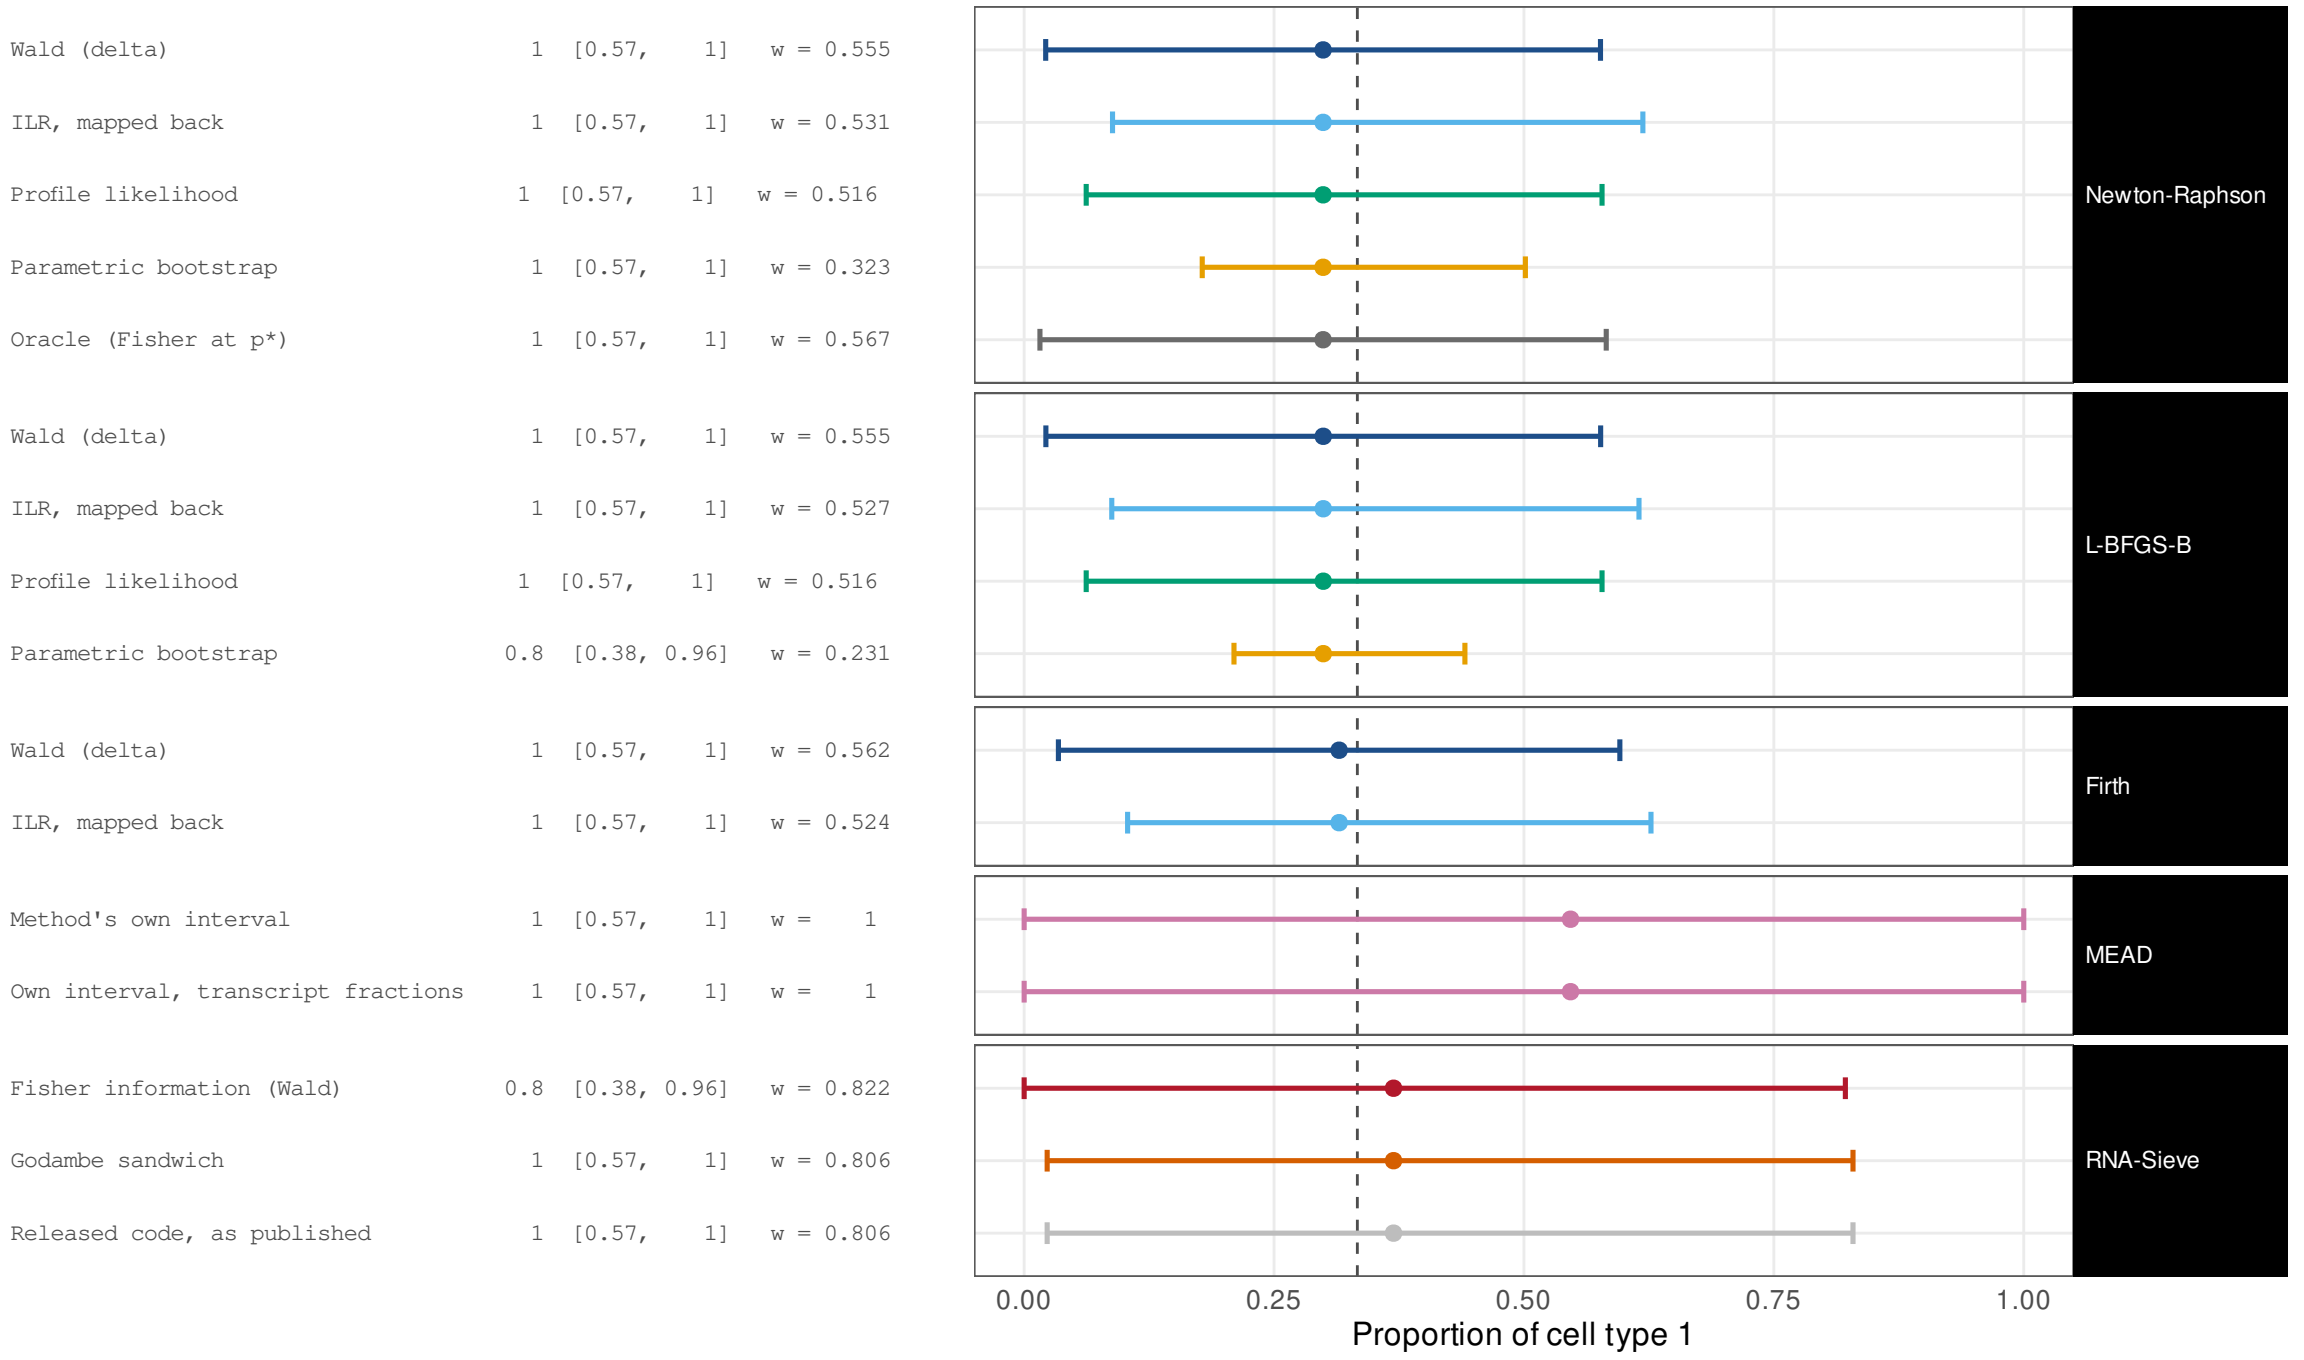


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 SBM / CT2 SBM


Wald (delta)	1	[0.57, 1]	w = 0.547
ILR, mapped back	1	[0.57, 1]	w = 0.534
Profile likelihood	0.8	[0.38, 0.96]	w = 0.532
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.278
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.566
Wald (delta)	1	[0.57, 1]	w = 0.547
ILR, mapped back	1	[0.57, 1]	w = 0.541
Profile likelihood	0.8	[0.38, 0.96]	w = 0.532
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.245
Wald (delta)	1	[0.57, 1]	w = 0.557
ILR, mapped back	1	[0.57, 1]	w = 0.513
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.923
Godambe sandwich	1	[0.57, 1]	w = 0.736
Released code, as published	1	[0.57, 1]	w = 0.736

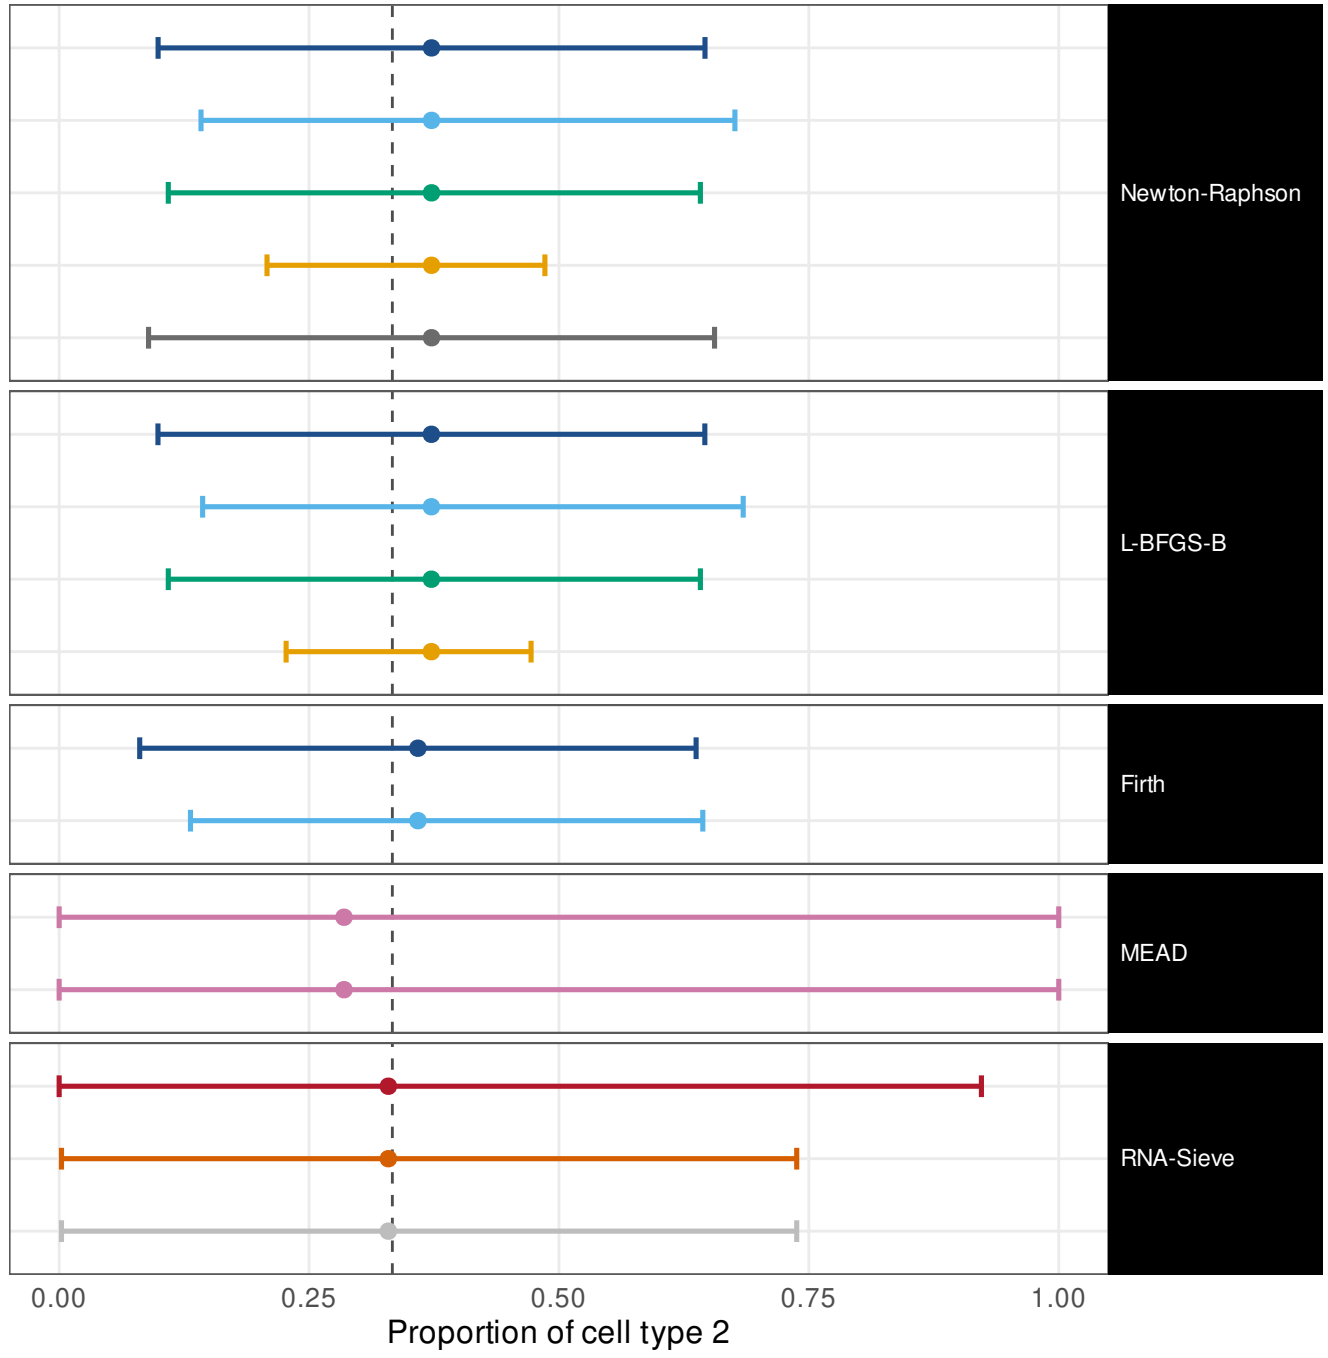

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / low overlap / CT1 SBM / CT2 SBM

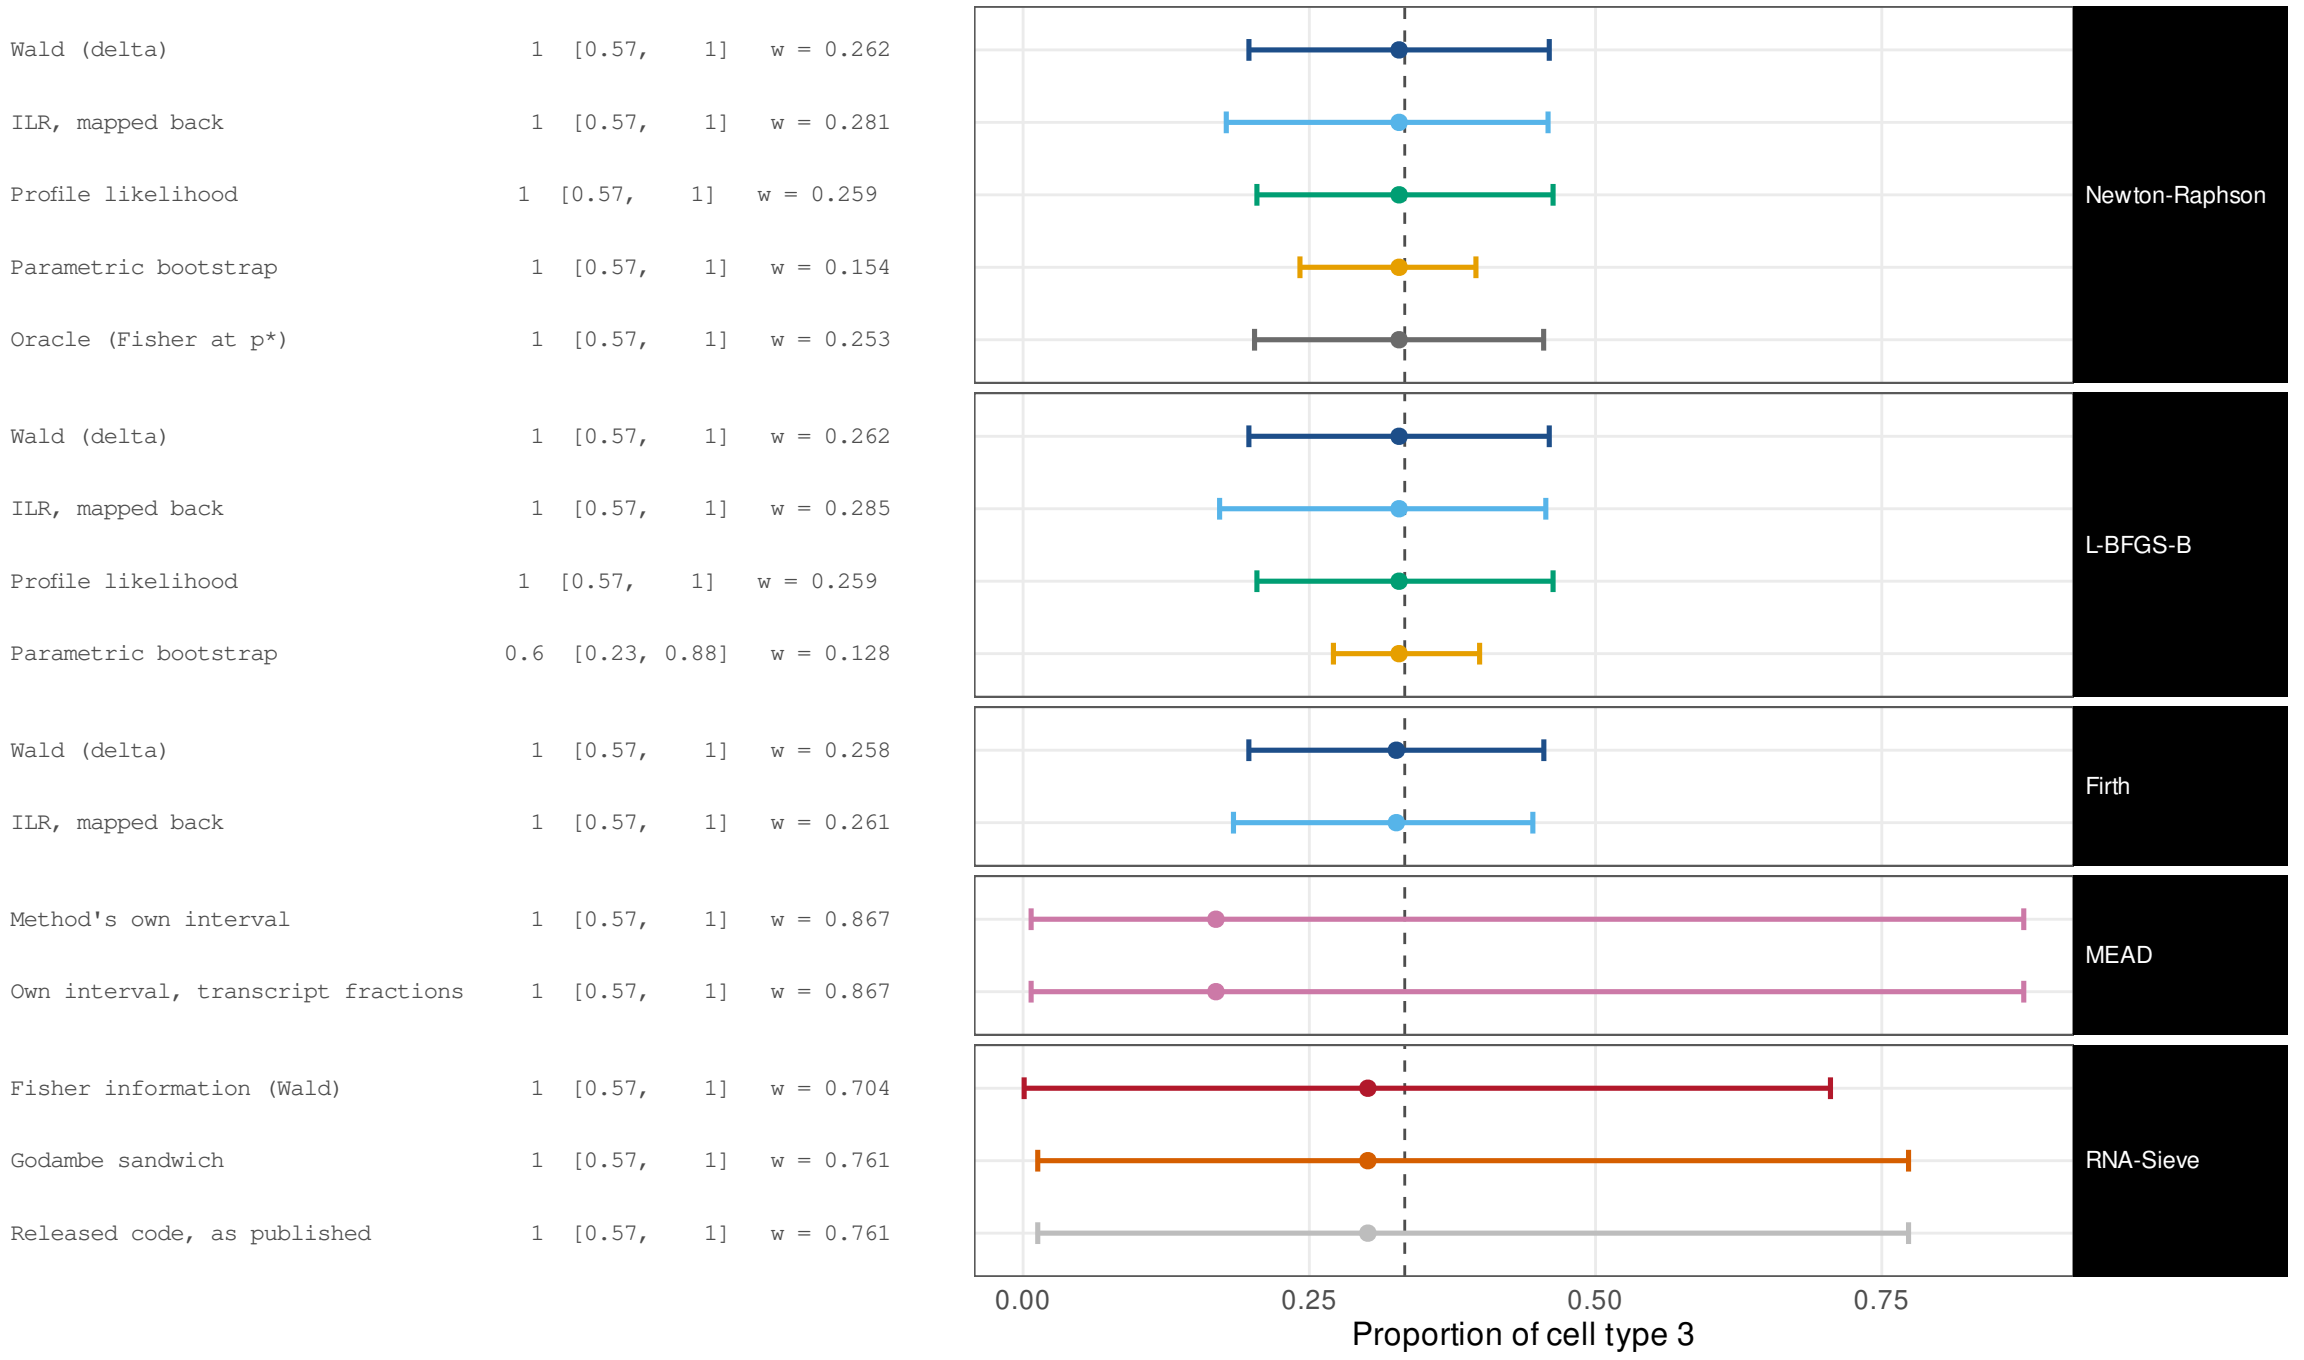


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.816
ILR, mapped back	1	[0.57, 1]	w = 0.701
Profile likelihood	1	[0.57, 1]	w = 0.592
Parametric bootstrap	1	[0.57, 1]	w = 0.36
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.831
Wald (delta)	1	[0.57, 1]	w = 0.816
ILR, mapped back	1	[0.57, 1]	w = 0.7
Profile likelihood	1	[0.57, 1]	w = 0.592
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.3
Wald (delta)	1	[0.57, 1]	w = 0.812
ILR, mapped back	1	[0.57, 1]	w = 0.69
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.63
Godambe sandwich	0.4	[0.12, 0.77]	w = 0.352
Released code, as published	0.4	[0.12, 0.77]	w = 0.352

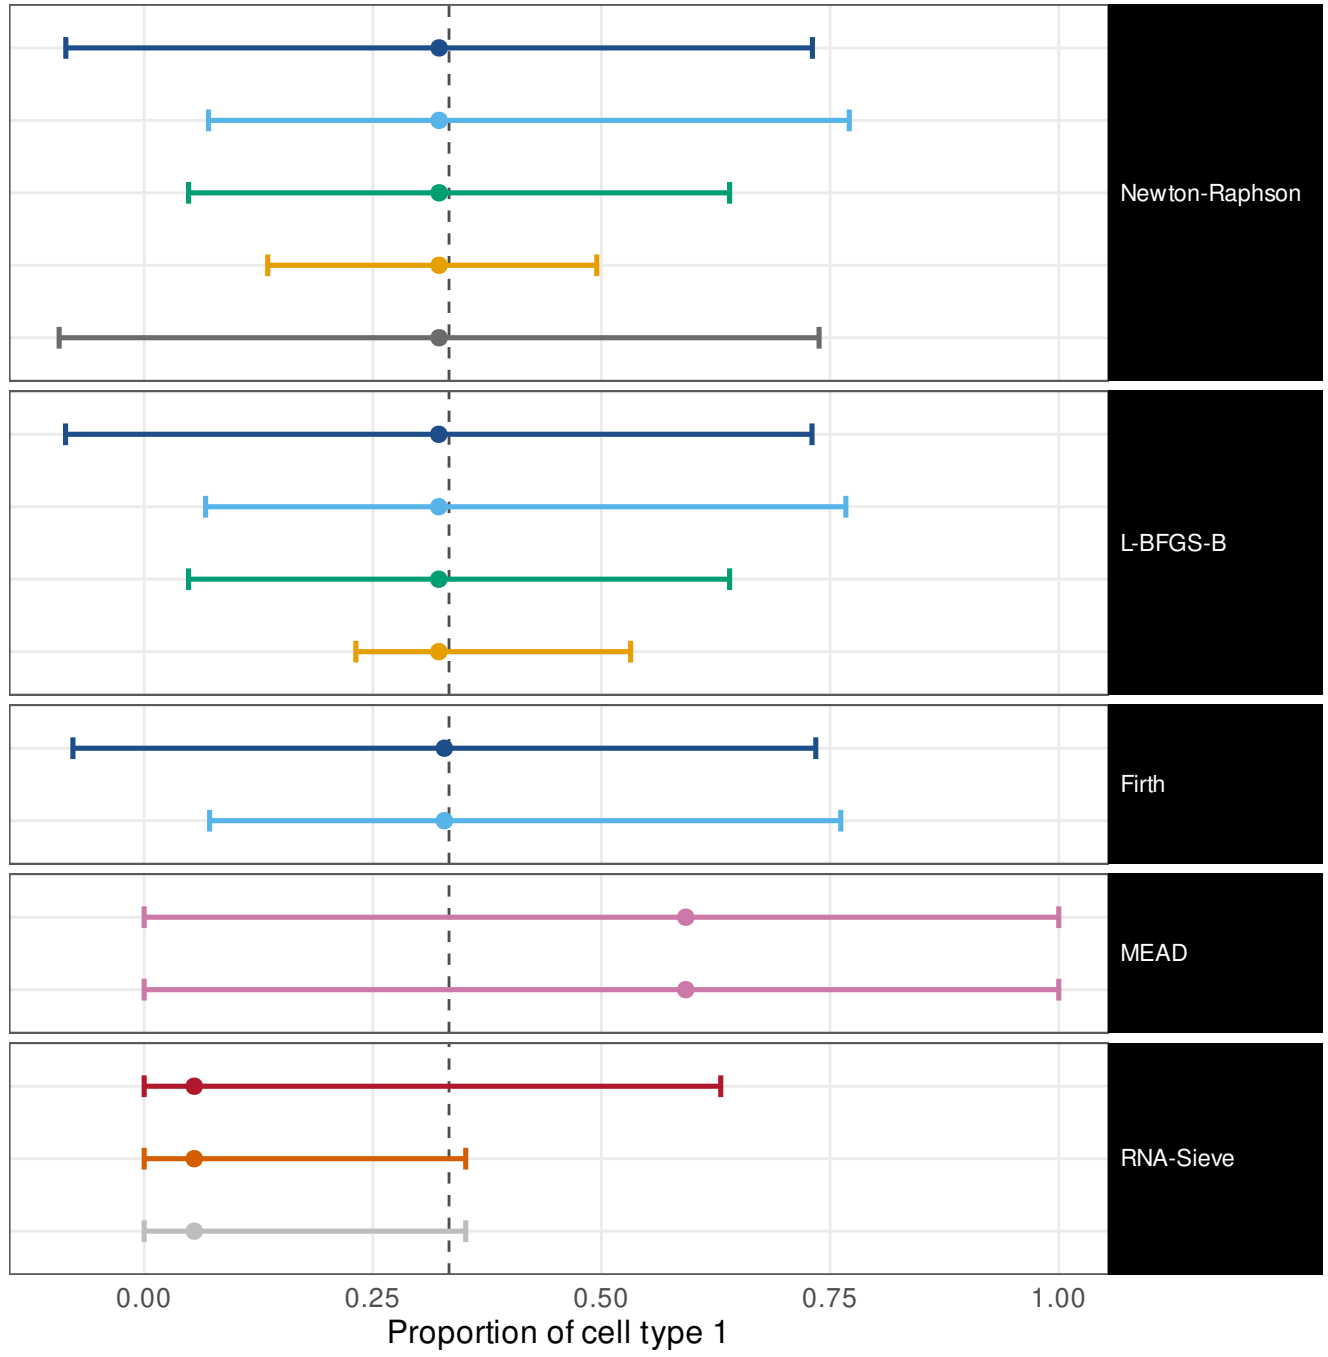


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 Scale-free / CT2 Scale-free


Wald (delta)	1	[0.57, 1]	w = 0.807
ILR, mapped back	1	[0.57, 1]	w = 0.663
Profile likelihood	1	[0.57, 1]	w = 0.648
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.298
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.816
Wald (delta)	1	[0.57, 1]	w = 0.807
ILR, mapped back	1	[0.57, 1]	w = 0.672
Profile likelihood	1	[0.57, 1]	w = 0.648
Parametric bootstrap	1	[0.57, 1]	w = 0.324
Wald (delta)	1	[0.57, 1]	w = 0.803
ILR, mapped back	1	[0.57, 1]	w = 0.66
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.761
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.576
Released code, as published	0.6	[0.23, 0.88]	w = 0.576

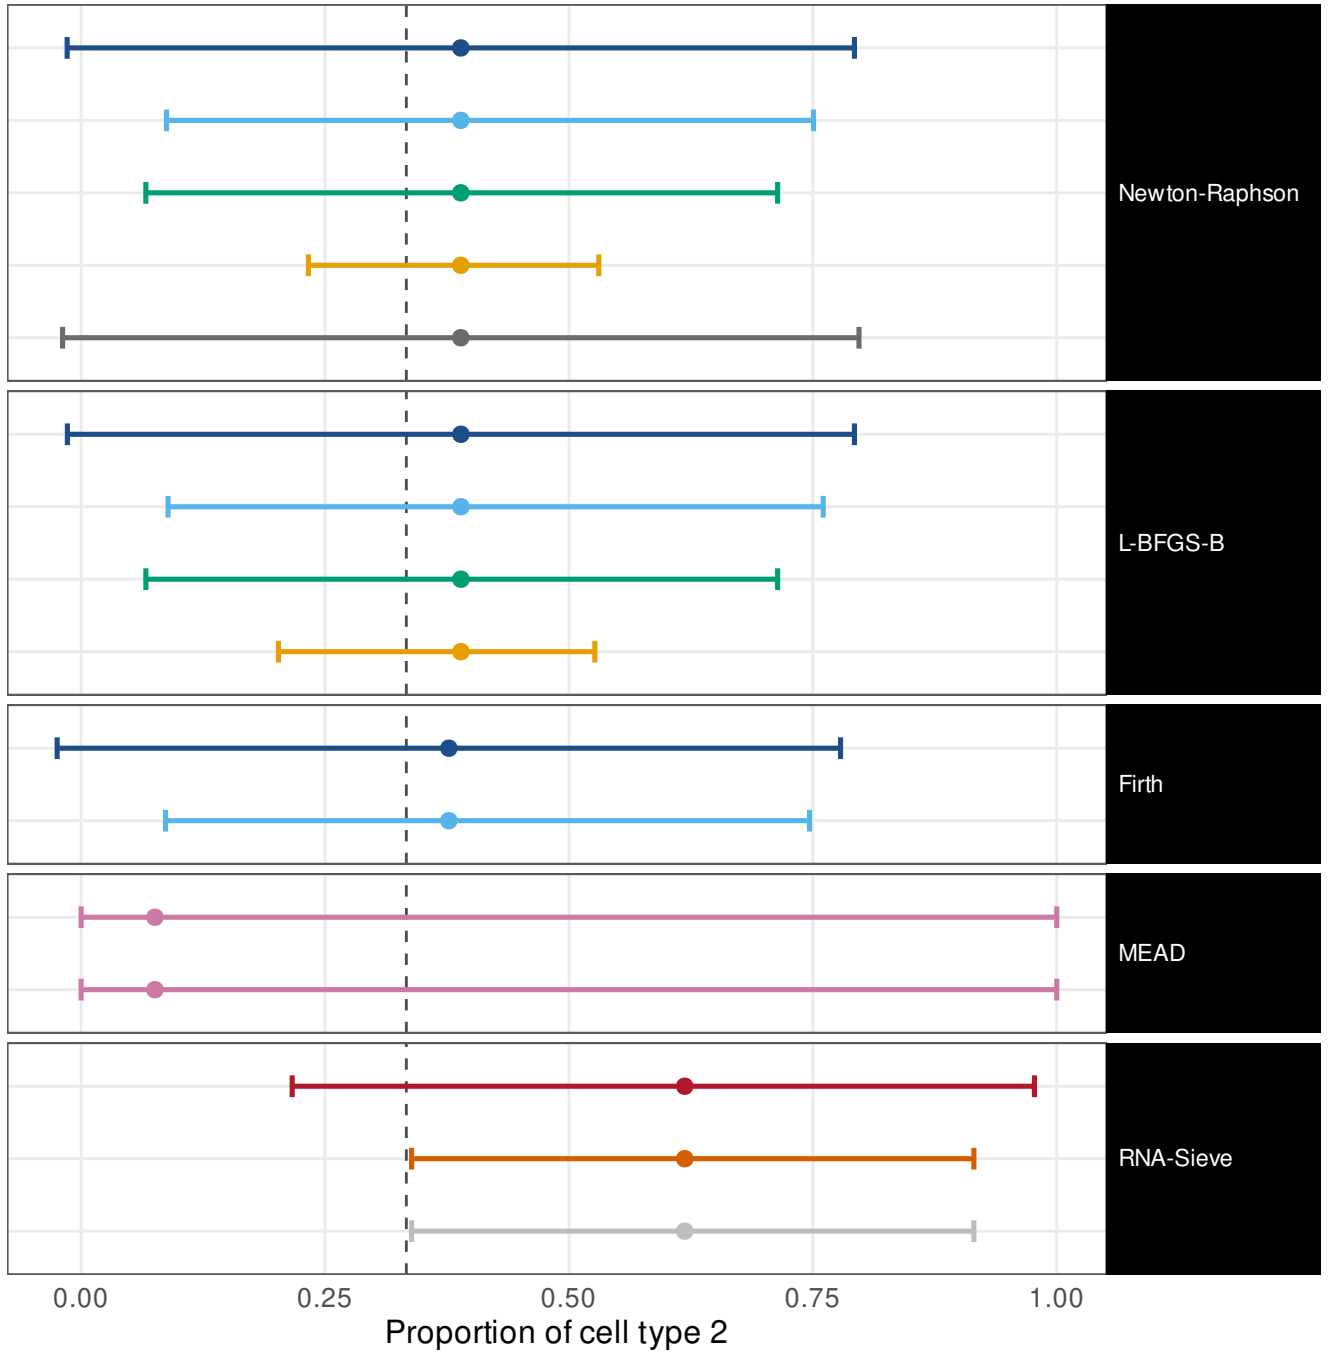

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

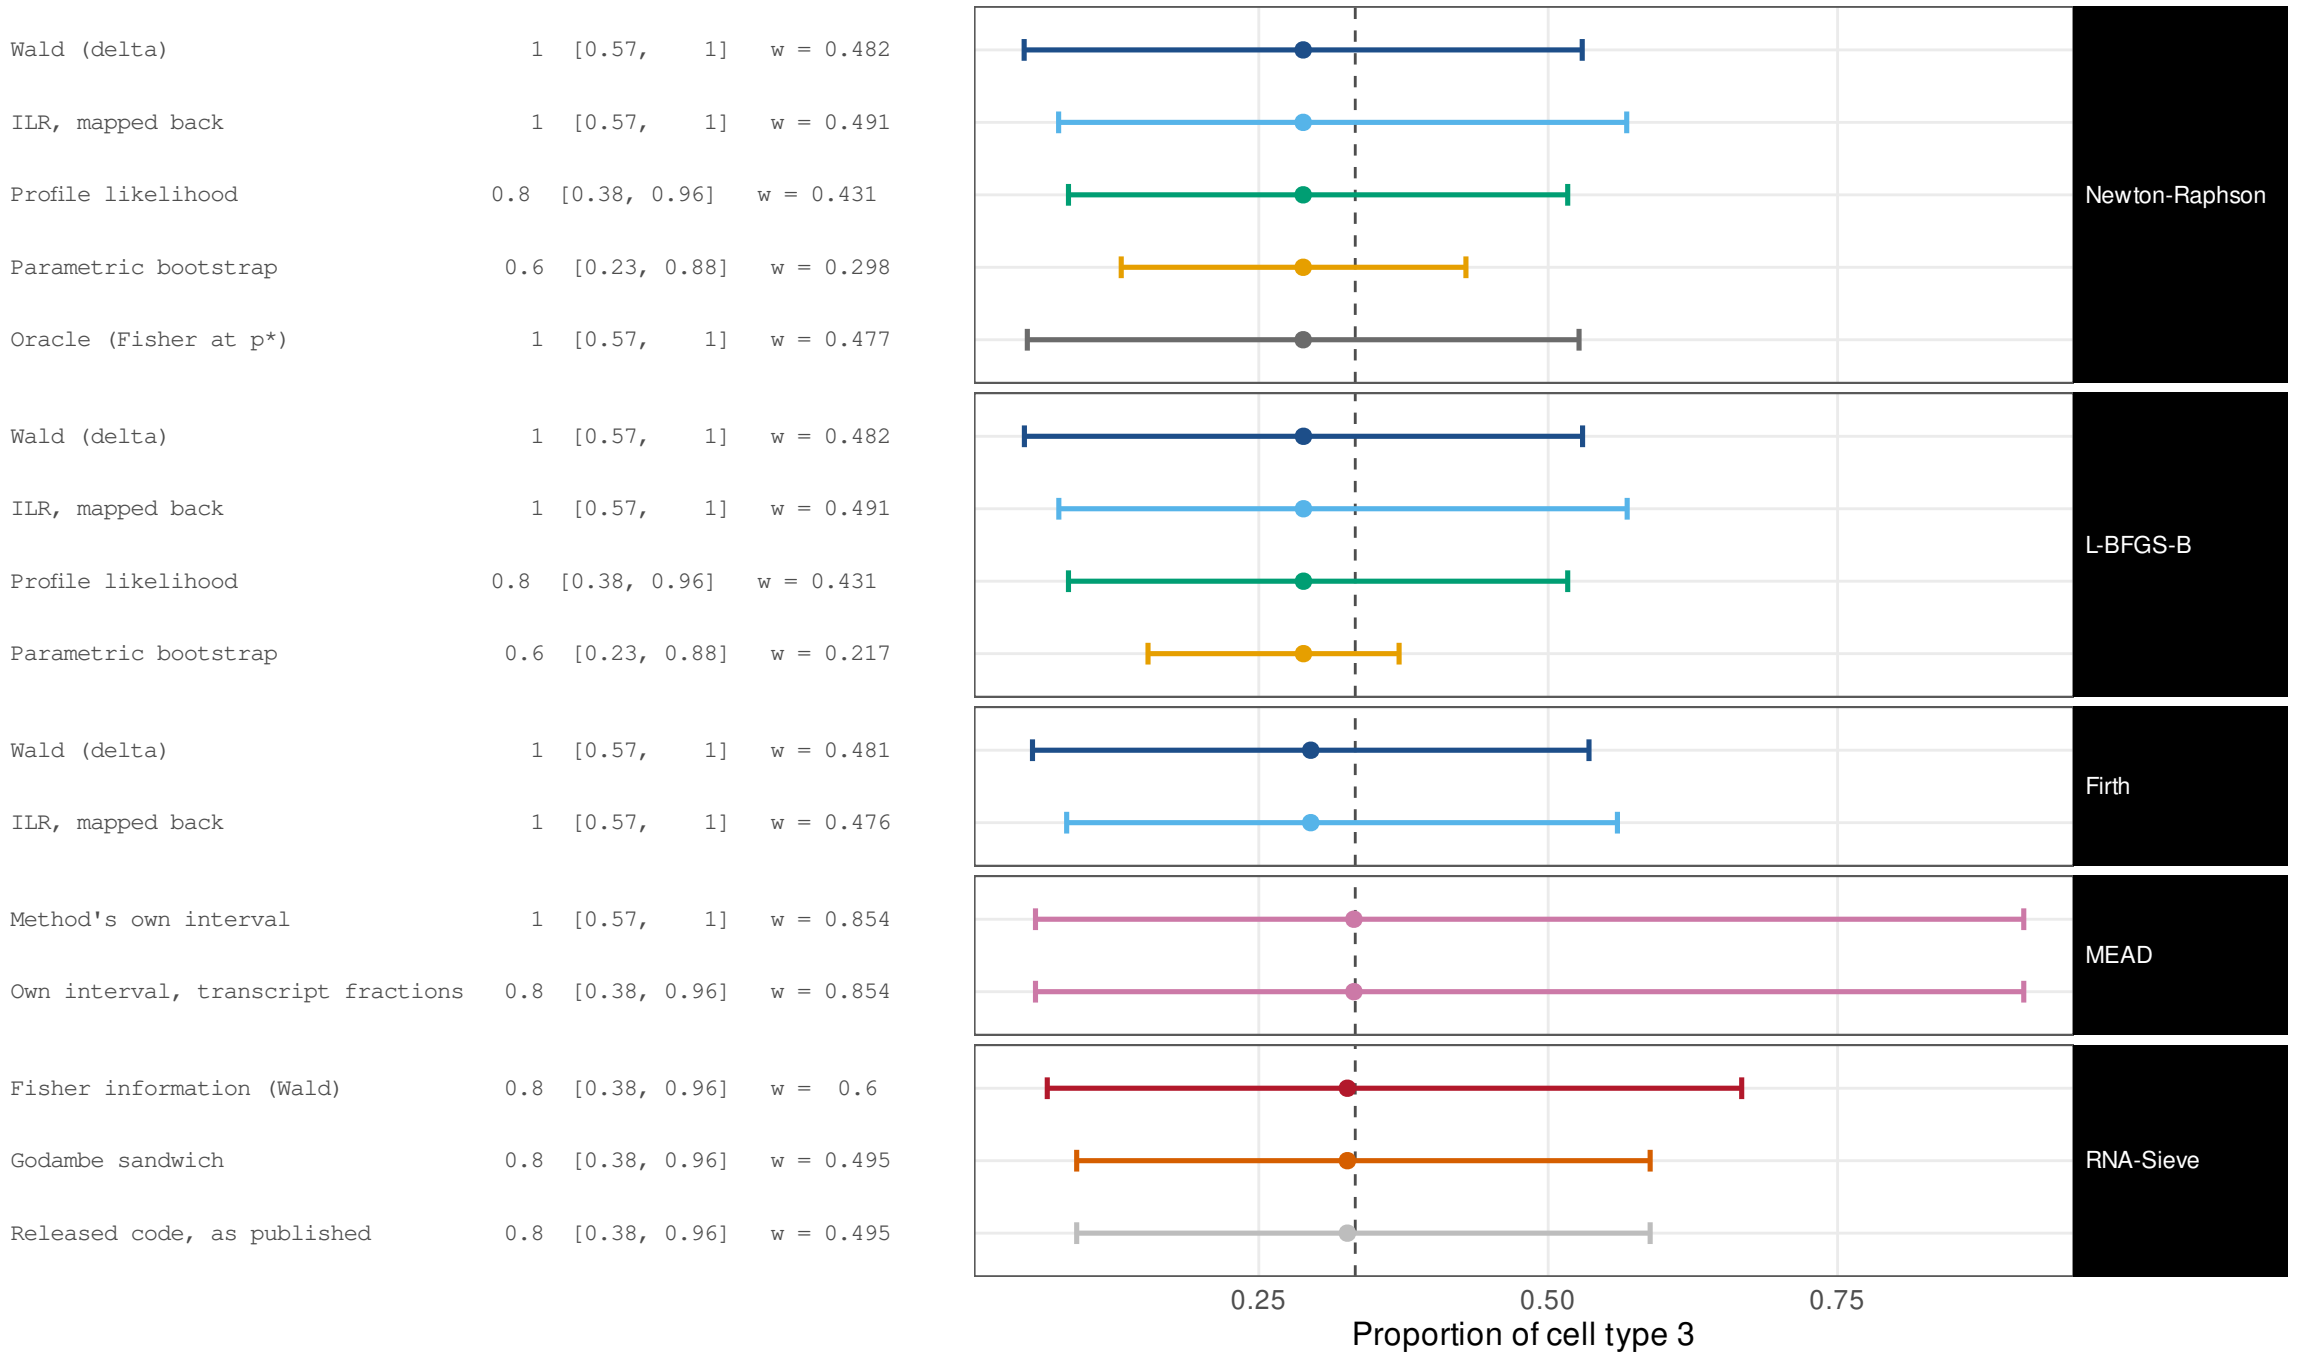


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 SBM / CT2 Scale-free


Wald (delta)	0.8	[0.38, 0.96]	w = 0.648
ILR, mapped back	1	[0.57, 1]	w = 0.69
Profile likelihood	1	[0.57, 1]	w = 0.73
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.282
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.77
Wald (delta)	0.8	[0.38, 0.96]	w = 0.648
ILR, mapped back	1	[0.57, 1]	w = 0.683
Profile likelihood	1	[0.57, 1]	w = 0.73
Parametric bootstrap	1	[0.57, 1]	w = 0.39
Wald (delta)	1	[0.57, 1]	w = 0.672
ILR, mapped back	1	[0.57, 1]	w = 0.631
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.658
Godambe sandwich	0.4	[0.12, 0.77]	w = 0.519
Released code, as published	0.4	[0.12, 0.77]	w = 0.519

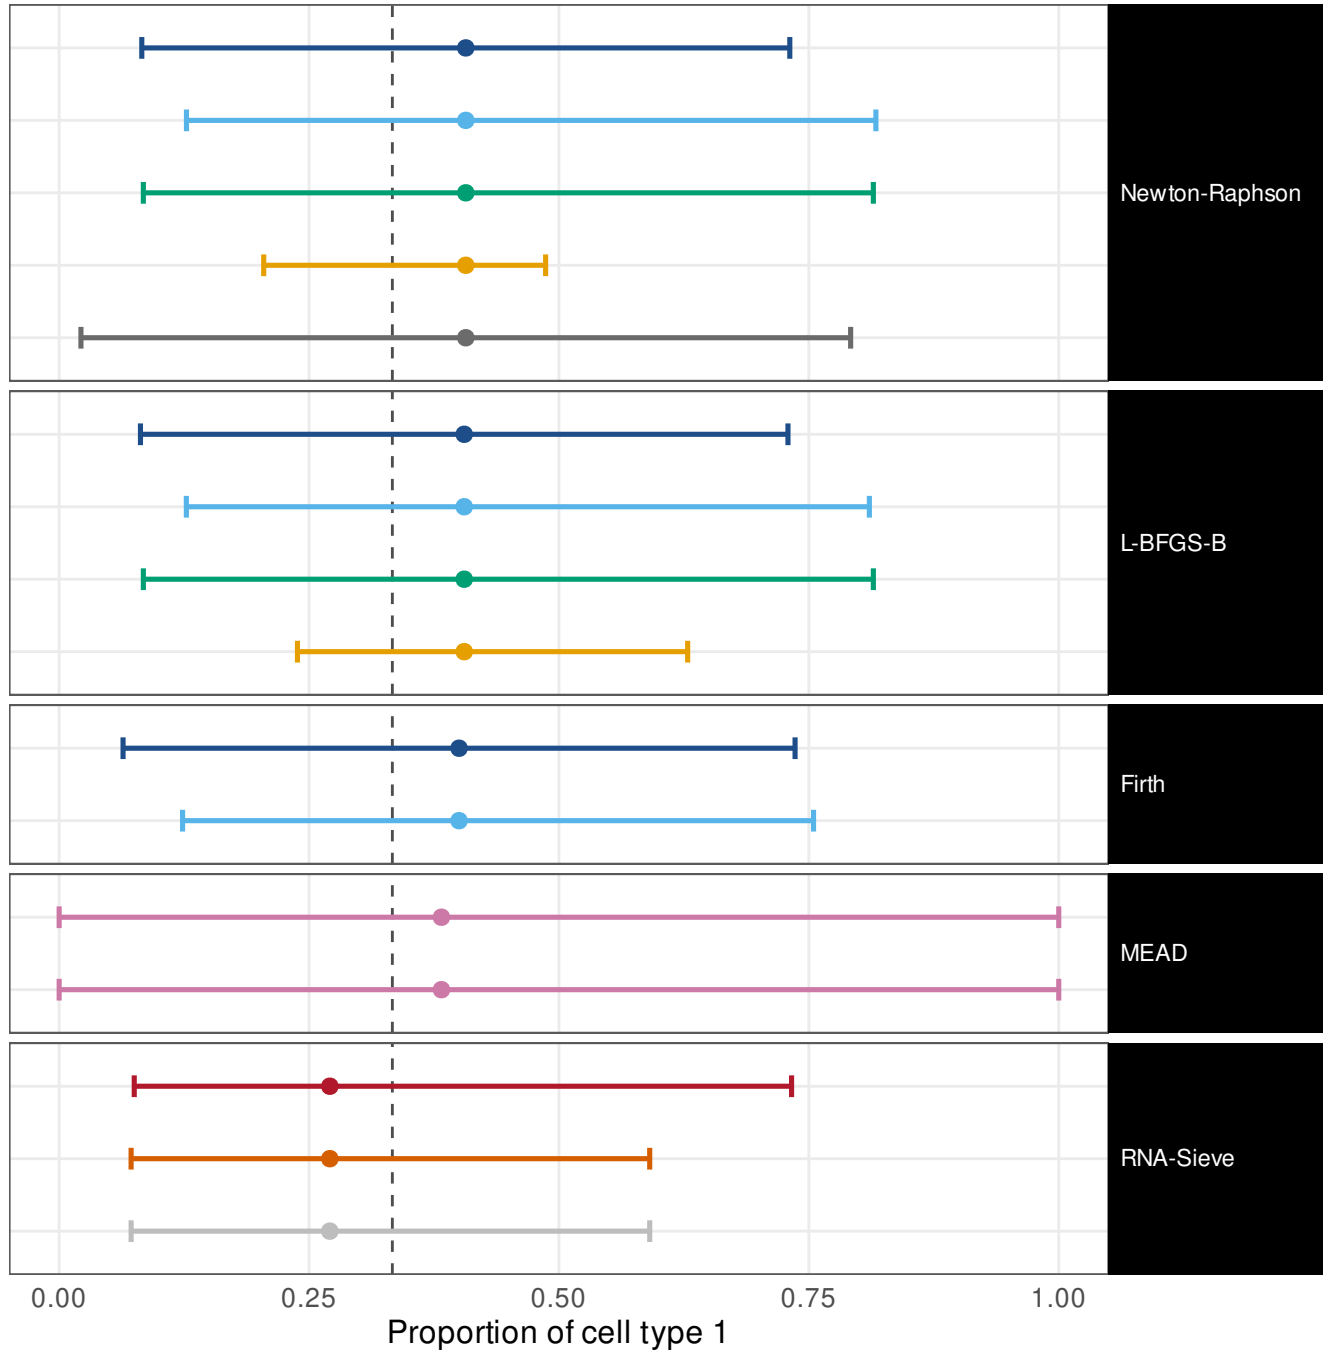

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 SBM / CT2 Scale-free

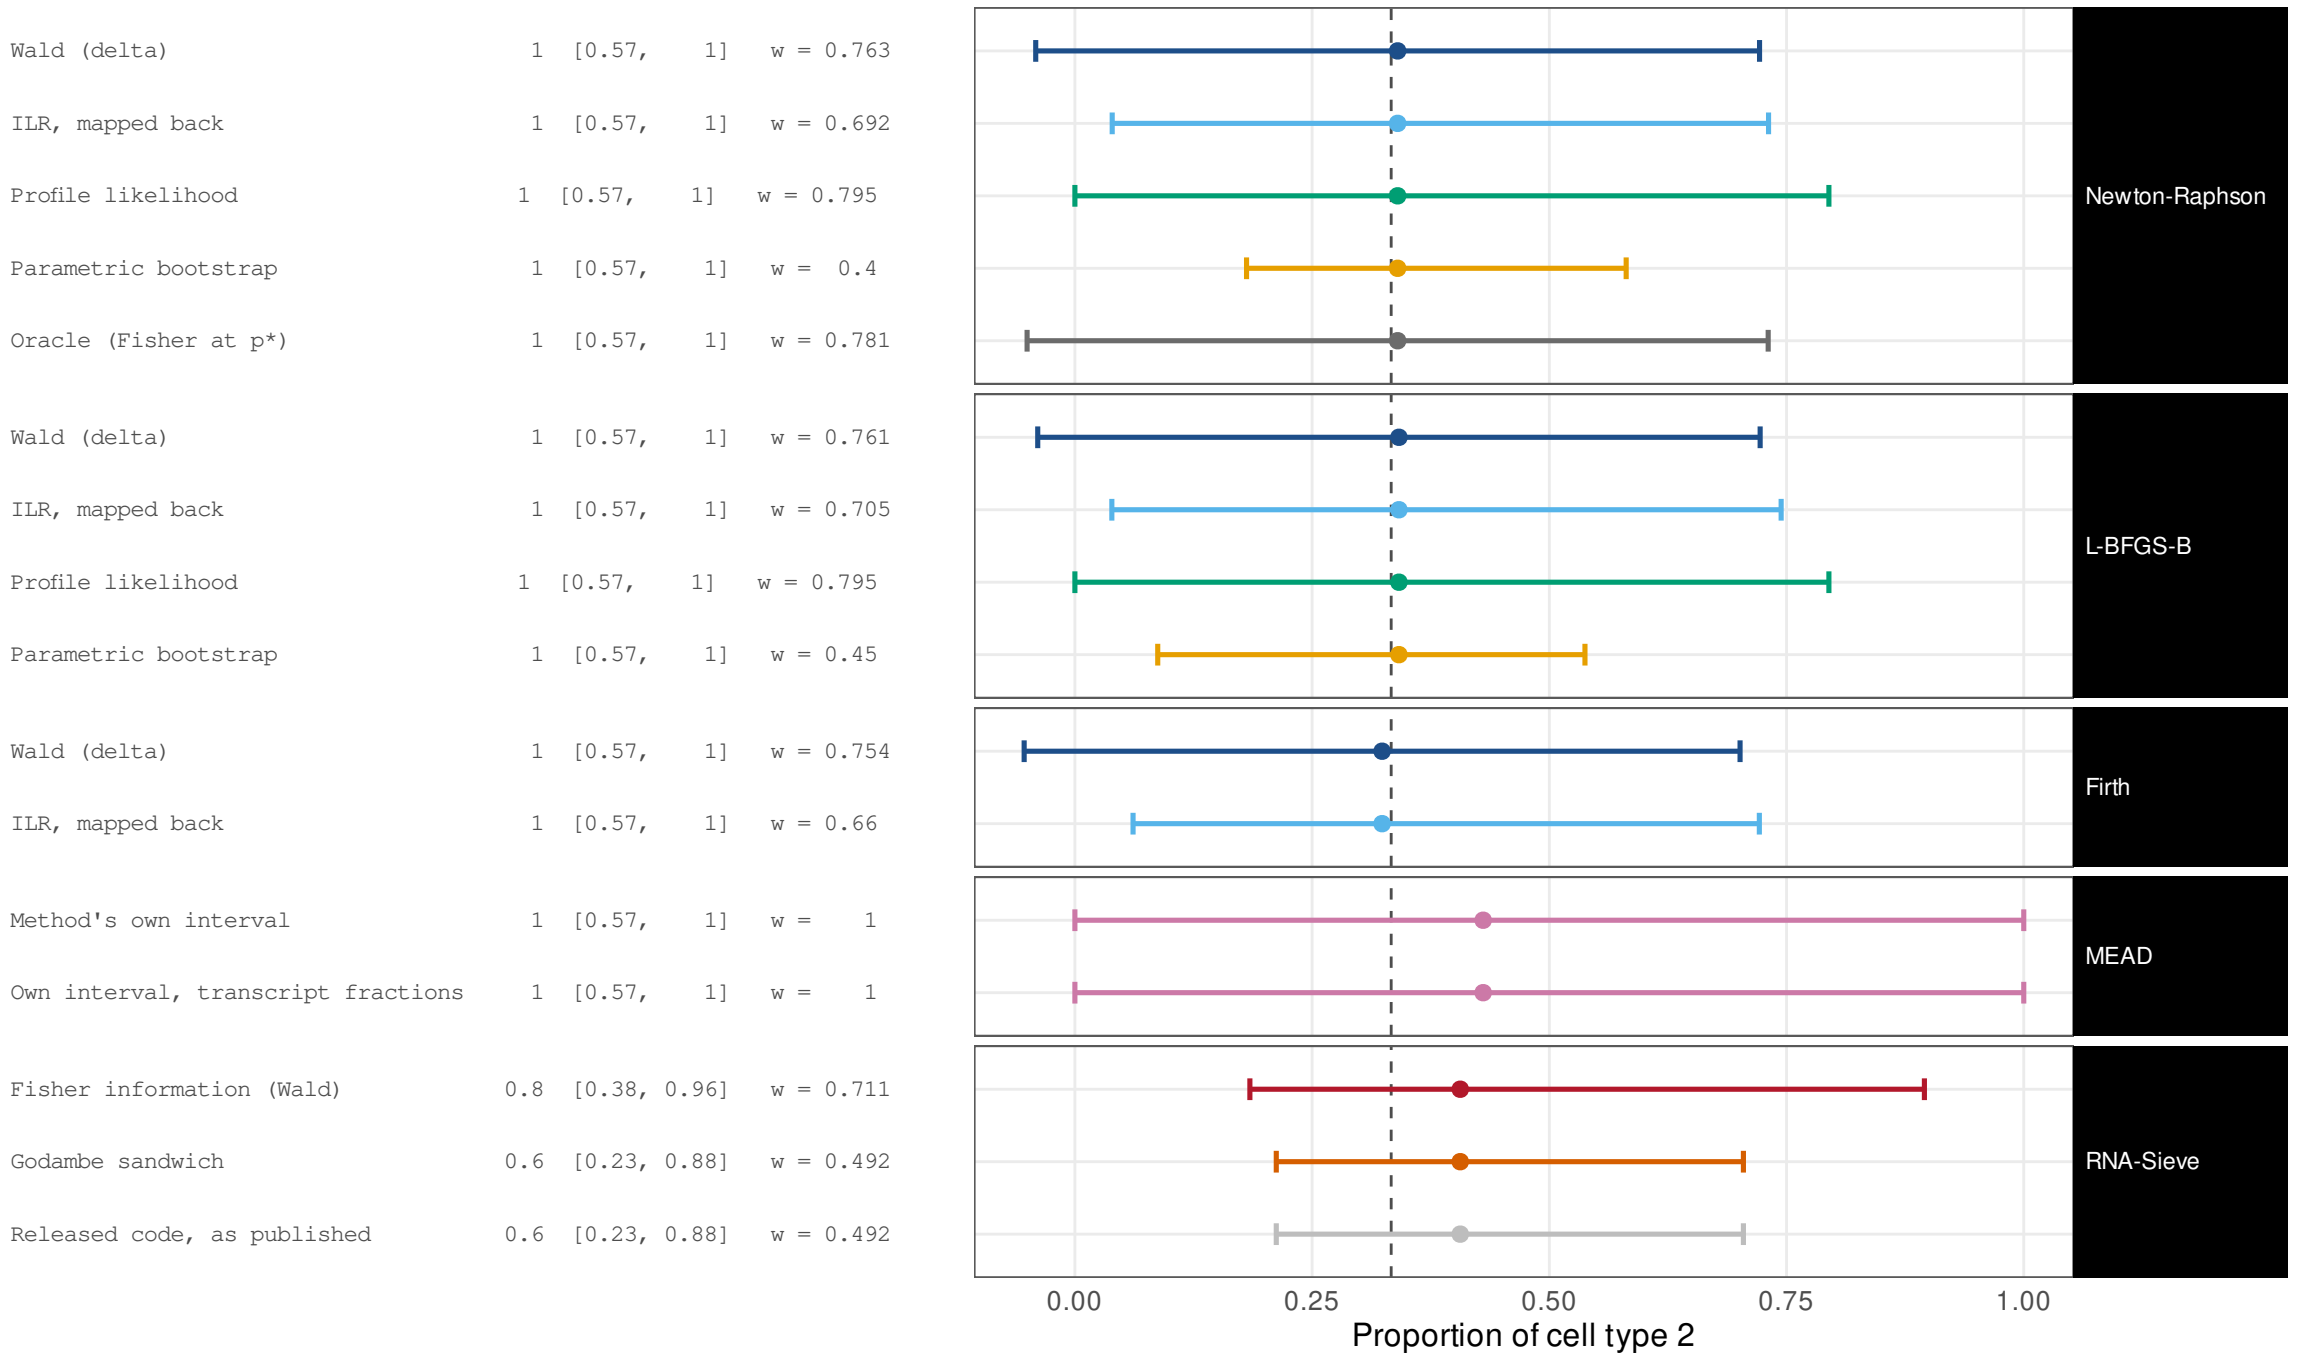


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.555
ILR, mapped back	1	[0.57, 1]	w = 0.576
Profile likelihood	1	[0.57, 1]	w = 0.538
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.218
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.505
Wald (delta)	1	[0.57, 1]	w = 0.555
ILR, mapped back	1	[0.57, 1]	w = 0.577
Profile likelihood	1	[0.57, 1]	w = 0.538
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.334
Wald (delta)	1	[0.57, 1]	w = 0.539
ILR, mapped back	1	[0.57, 1]	w = 0.515
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.83
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.661
Released code, as published	0.8	[0.38, 0.96]	w = 0.661

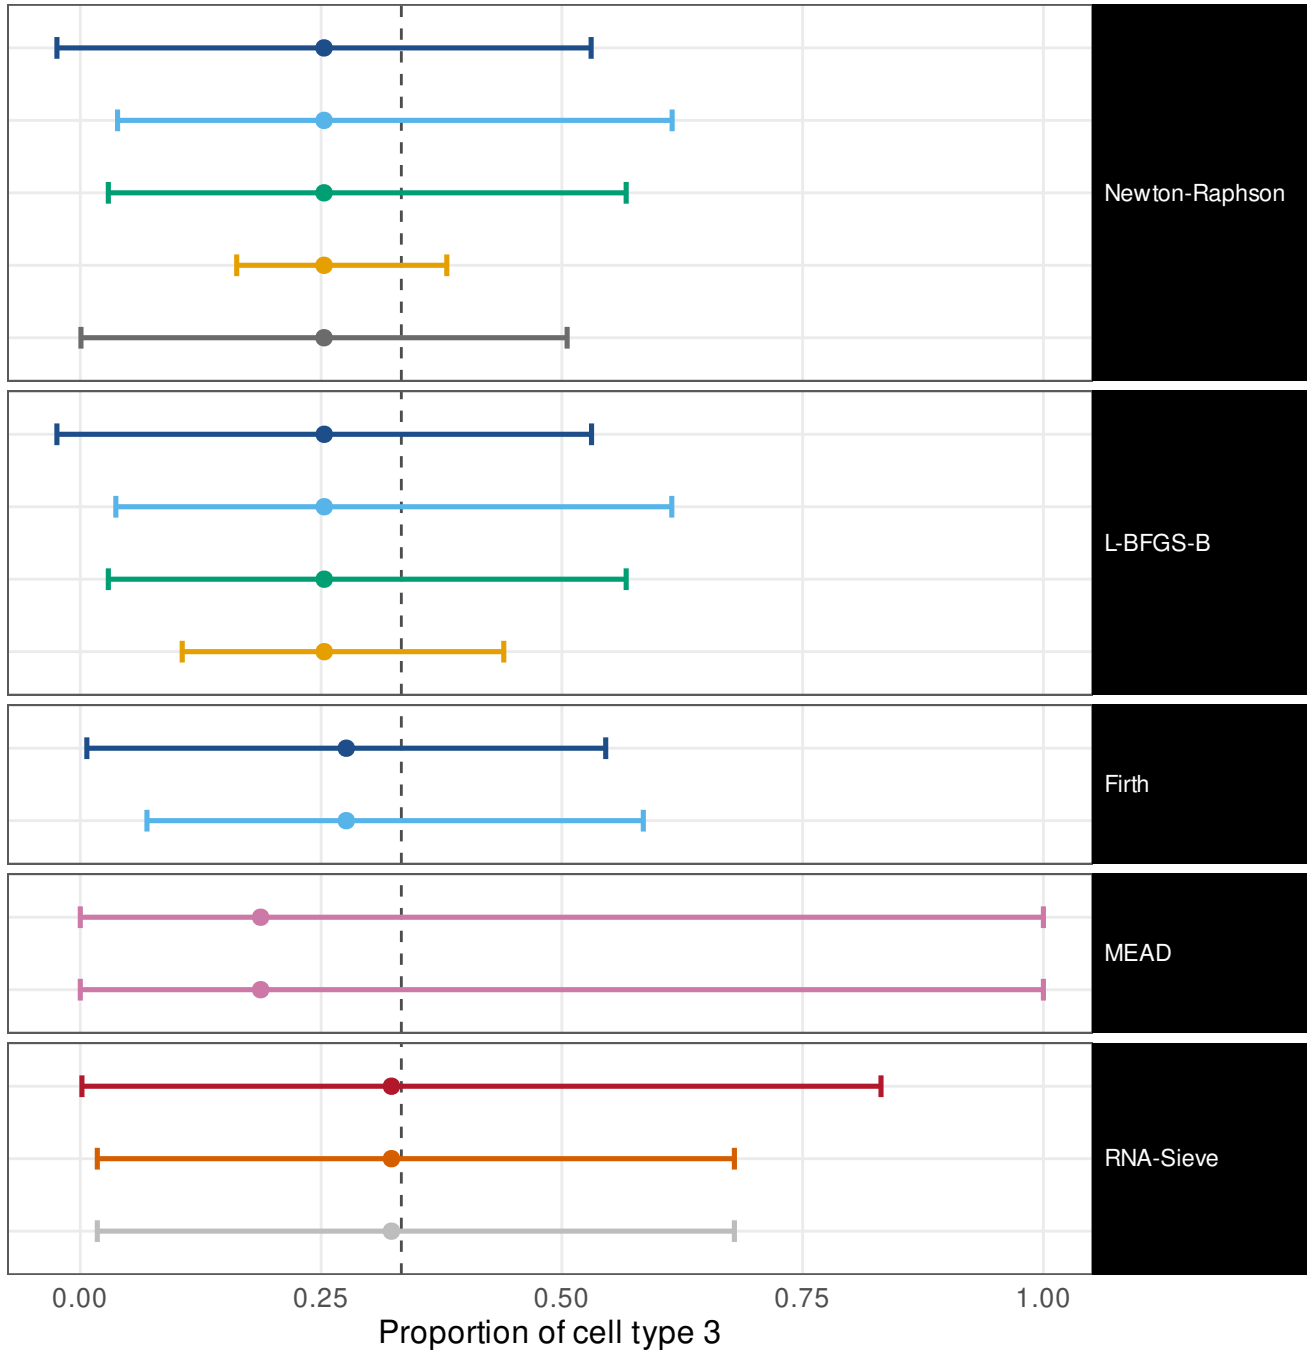


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.766
ILR, mapped back	1	[0.57, 1]	w = 0.717
Profile likelihood	1	[0.57, 1]	w = 0.589
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.216
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.797
Wald (delta)	1	[0.57, 1]	w = 0.765
ILR, mapped back	1	[0.57, 1]	w = 0.708
Profile likelihood	1	[0.57, 1]	w = 0.589
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.352
Wald (delta)	1	[0.57, 1]	w = 0.762
ILR, mapped back	1	[0.57, 1]	w = 0.678
Method's own interval	1	[0.57, 1]	w = 0.711
Own interval, transcript fractions	1	[0.57, 1]	w = 0.711
Fisher information (Wald)	1	[0.57, 1]	w = 0.757
Godambe sandwich	0.2	[0.036, 0.62]	w = 0.368
Released code, as published	0.2	[0.036, 0.62]	w = 0.368

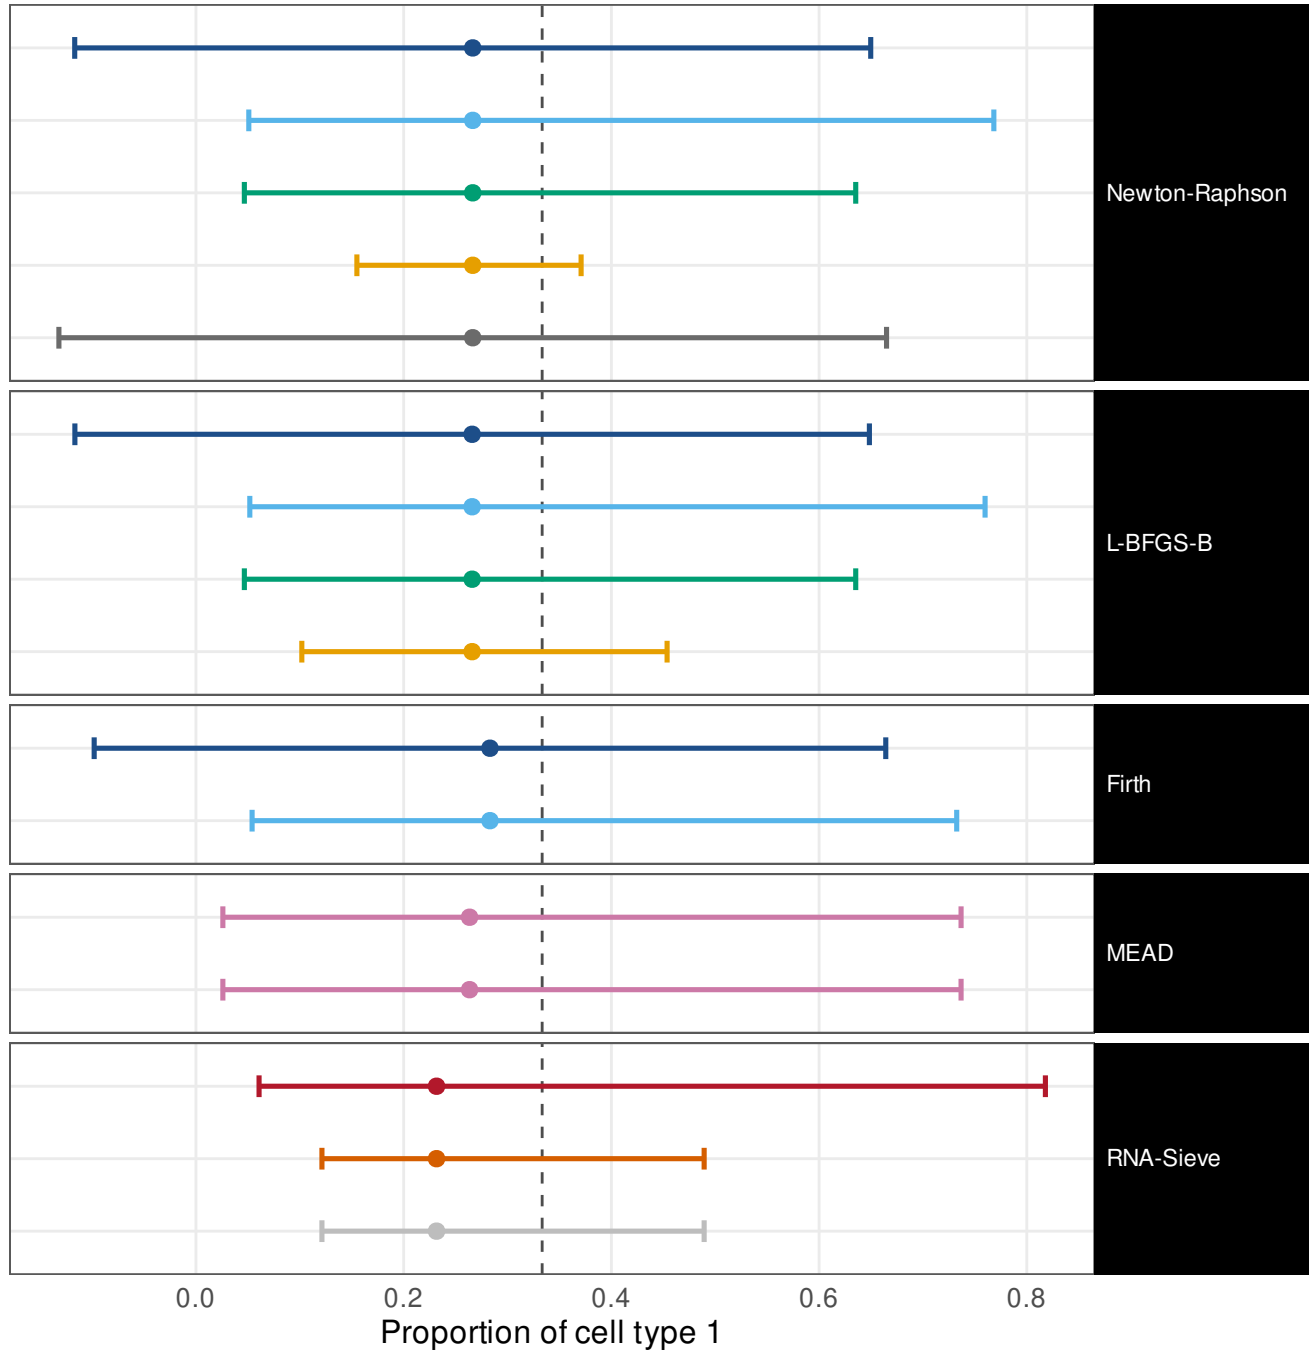


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 Scale-free / CT2 SBM


Wald (delta)	1	[0.57, 1]	w = 0.778
ILR, mapped back	1	[0.57, 1]	w = 0.671
Profile likelihood	1	[0.57, 1]	w = 0.643
Parametric bootstrap	1	[0.57, 1]	w = 0.389
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.794
Wald (delta)	1	[0.57, 1]	w = 0.777
ILR, mapped back	1	[0.57, 1]	w = 0.674
Profile likelihood	1	[0.57, 1]	w = 0.643
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.334
Wald (delta)	1	[0.57, 1]	w = 0.77
ILR, mapped back	1	[0.57, 1]	w = 0.655
Method's own interval	1	[0.57, 1]	w = 0.708
Own interval, transcript fractions	1	[0.57, 1]	w = 0.708
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.709
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.491
Released code, as published	0.6	[0.23, 0.88]	w = 0.491

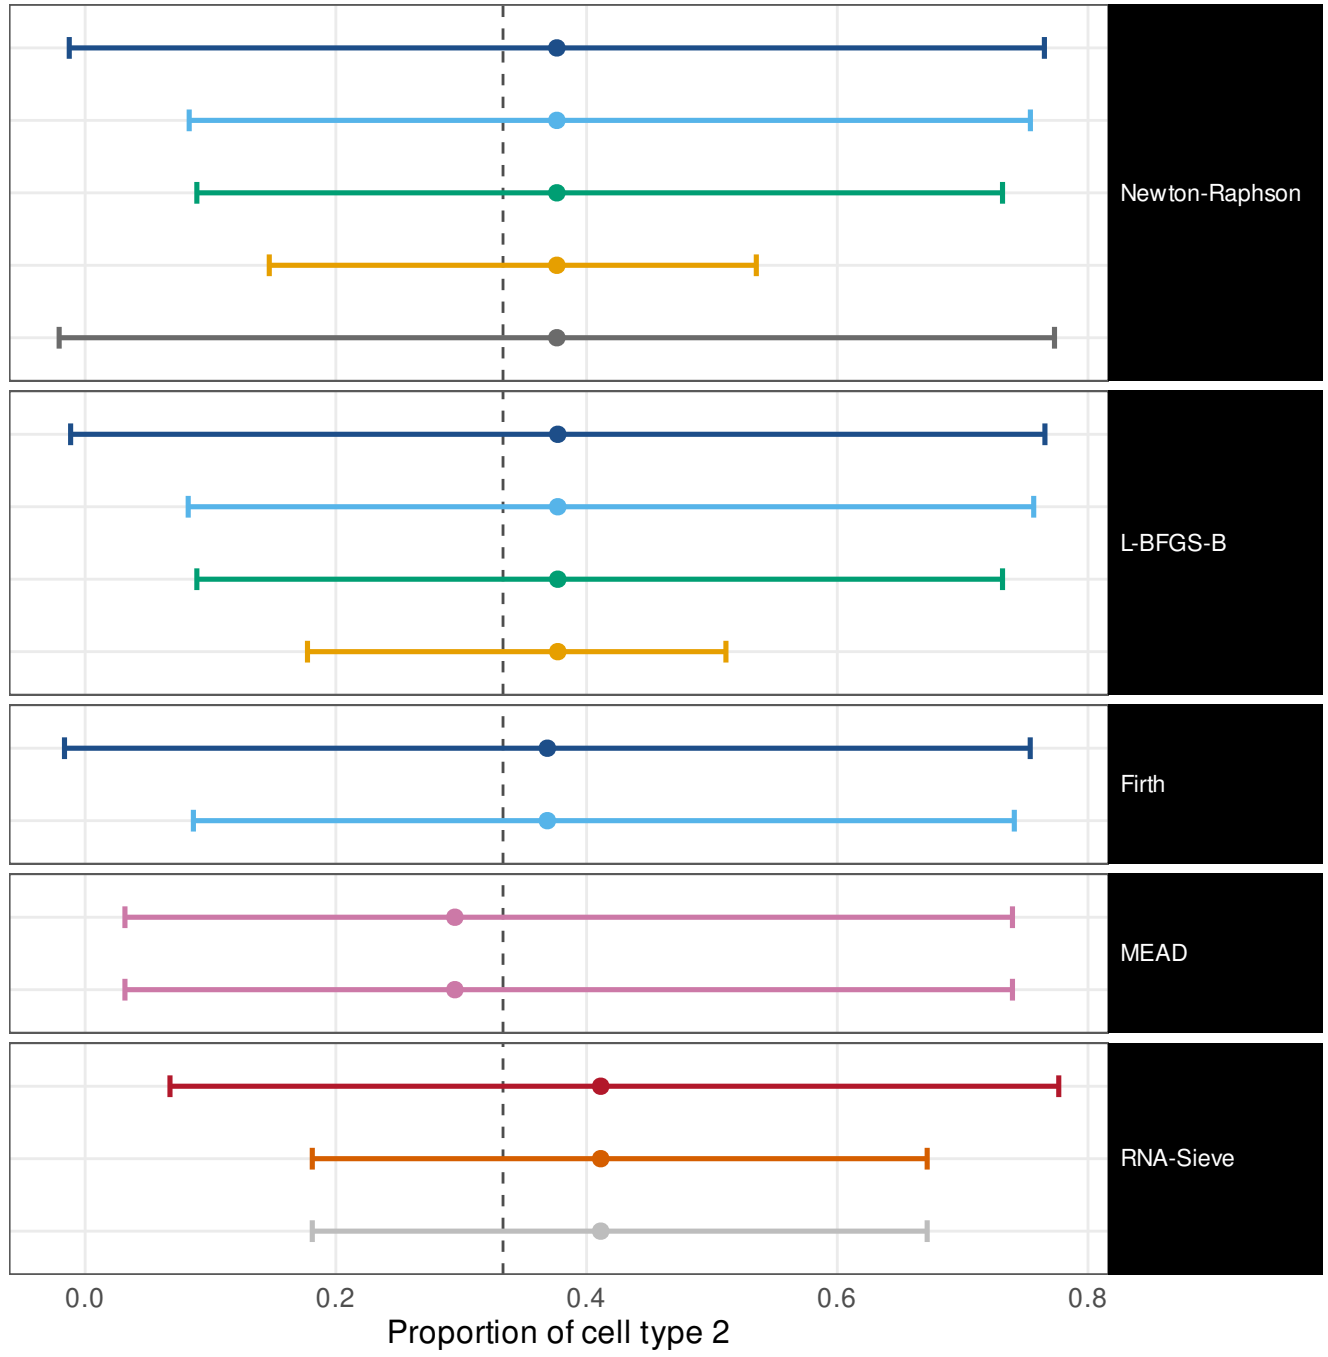

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 Scale-free / CT2 SBM

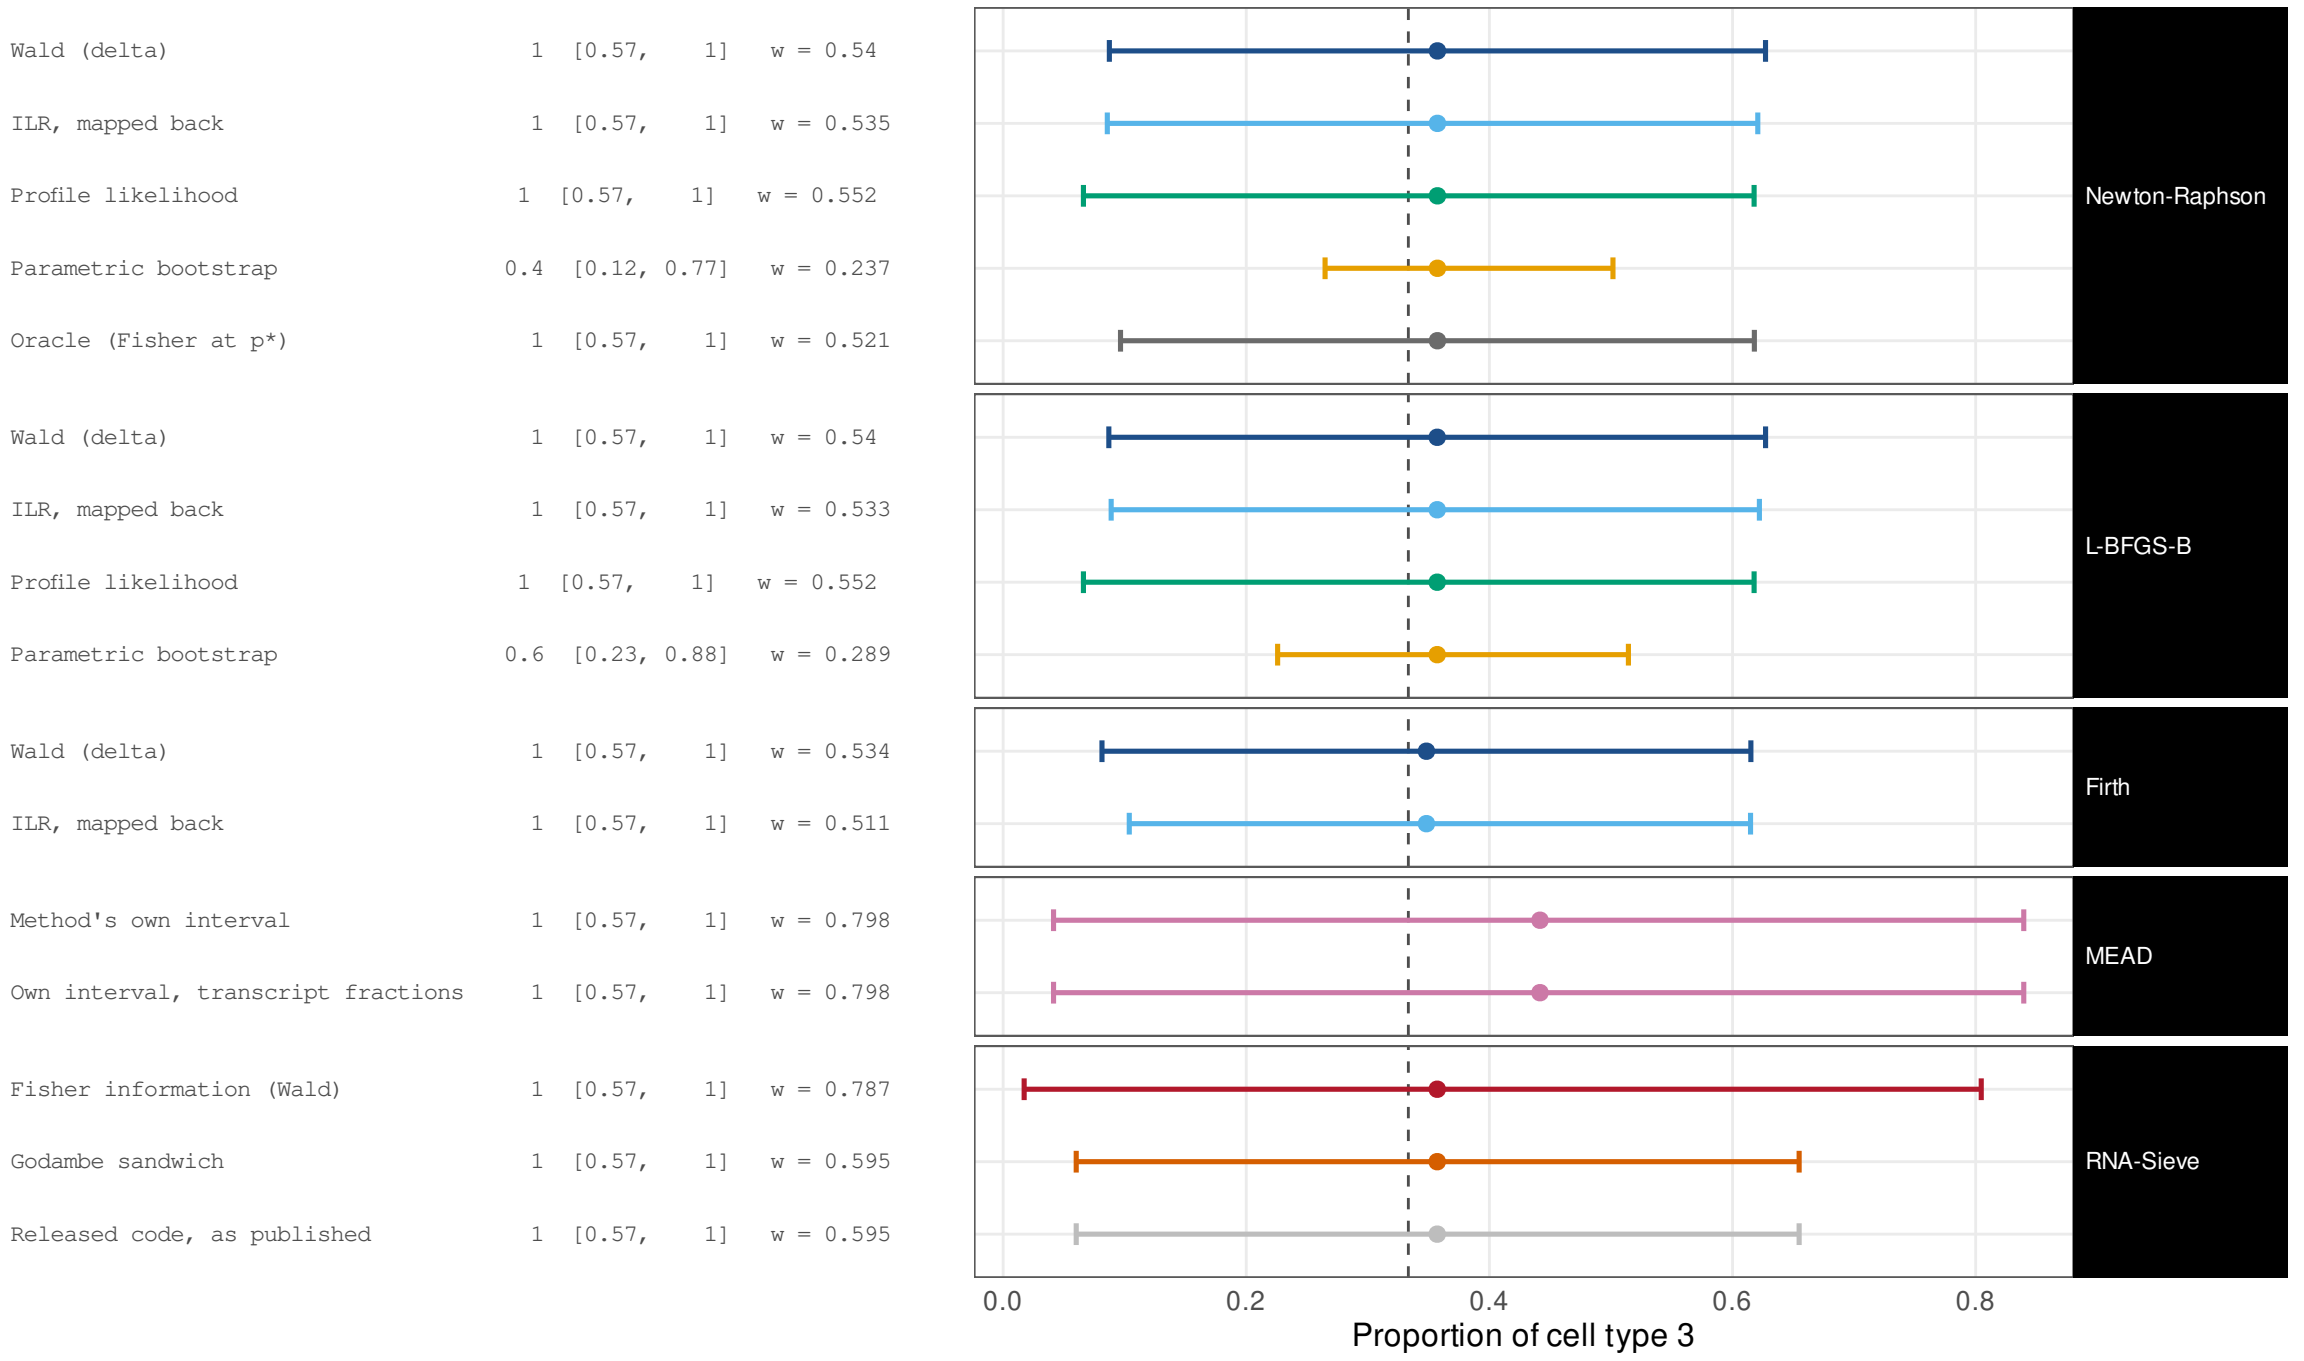


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 SBM / CT2 SBM


Wald (delta)	1	[0.57, 1]	w = 0.706
ILR, mapped back	1	[0.57, 1]	w = 0.681
Profile likelihood	0.8	[0.38, 0.96]	w = 0.608
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.27
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.777
Wald (delta)	1	[0.57, 1]	w = 0.706
ILR, mapped back	1	[0.57, 1]	w = 0.677
Profile likelihood	0.8	[0.38, 0.96]	w = 0.608
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.289
Wald (delta)	1	[0.57, 1]	w = 0.721
ILR, mapped back	1	[0.57, 1]	w = 0.641
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.924
Godambe sandwich	1	[0.57, 1]	w = 0.843
Released code, as published	1	[0.57, 1]	w = 0.843

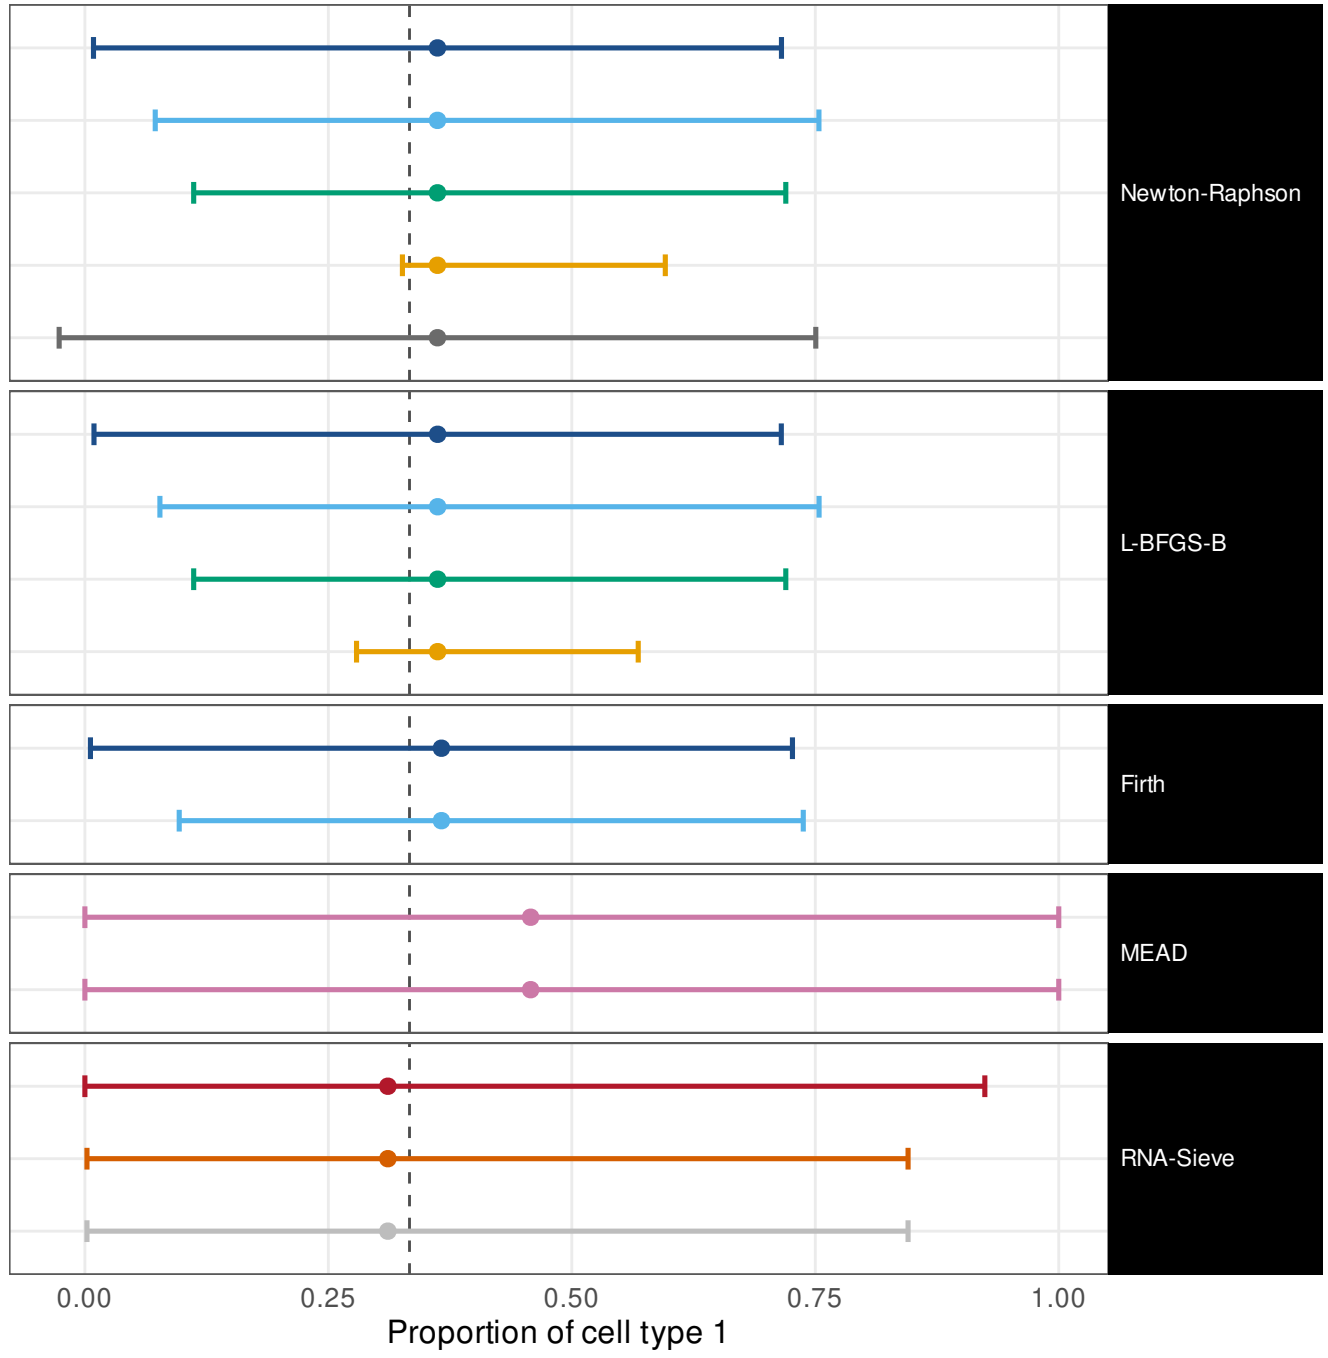

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w


balanced / moderate overlap / CT1 SBM / CT2 SBM

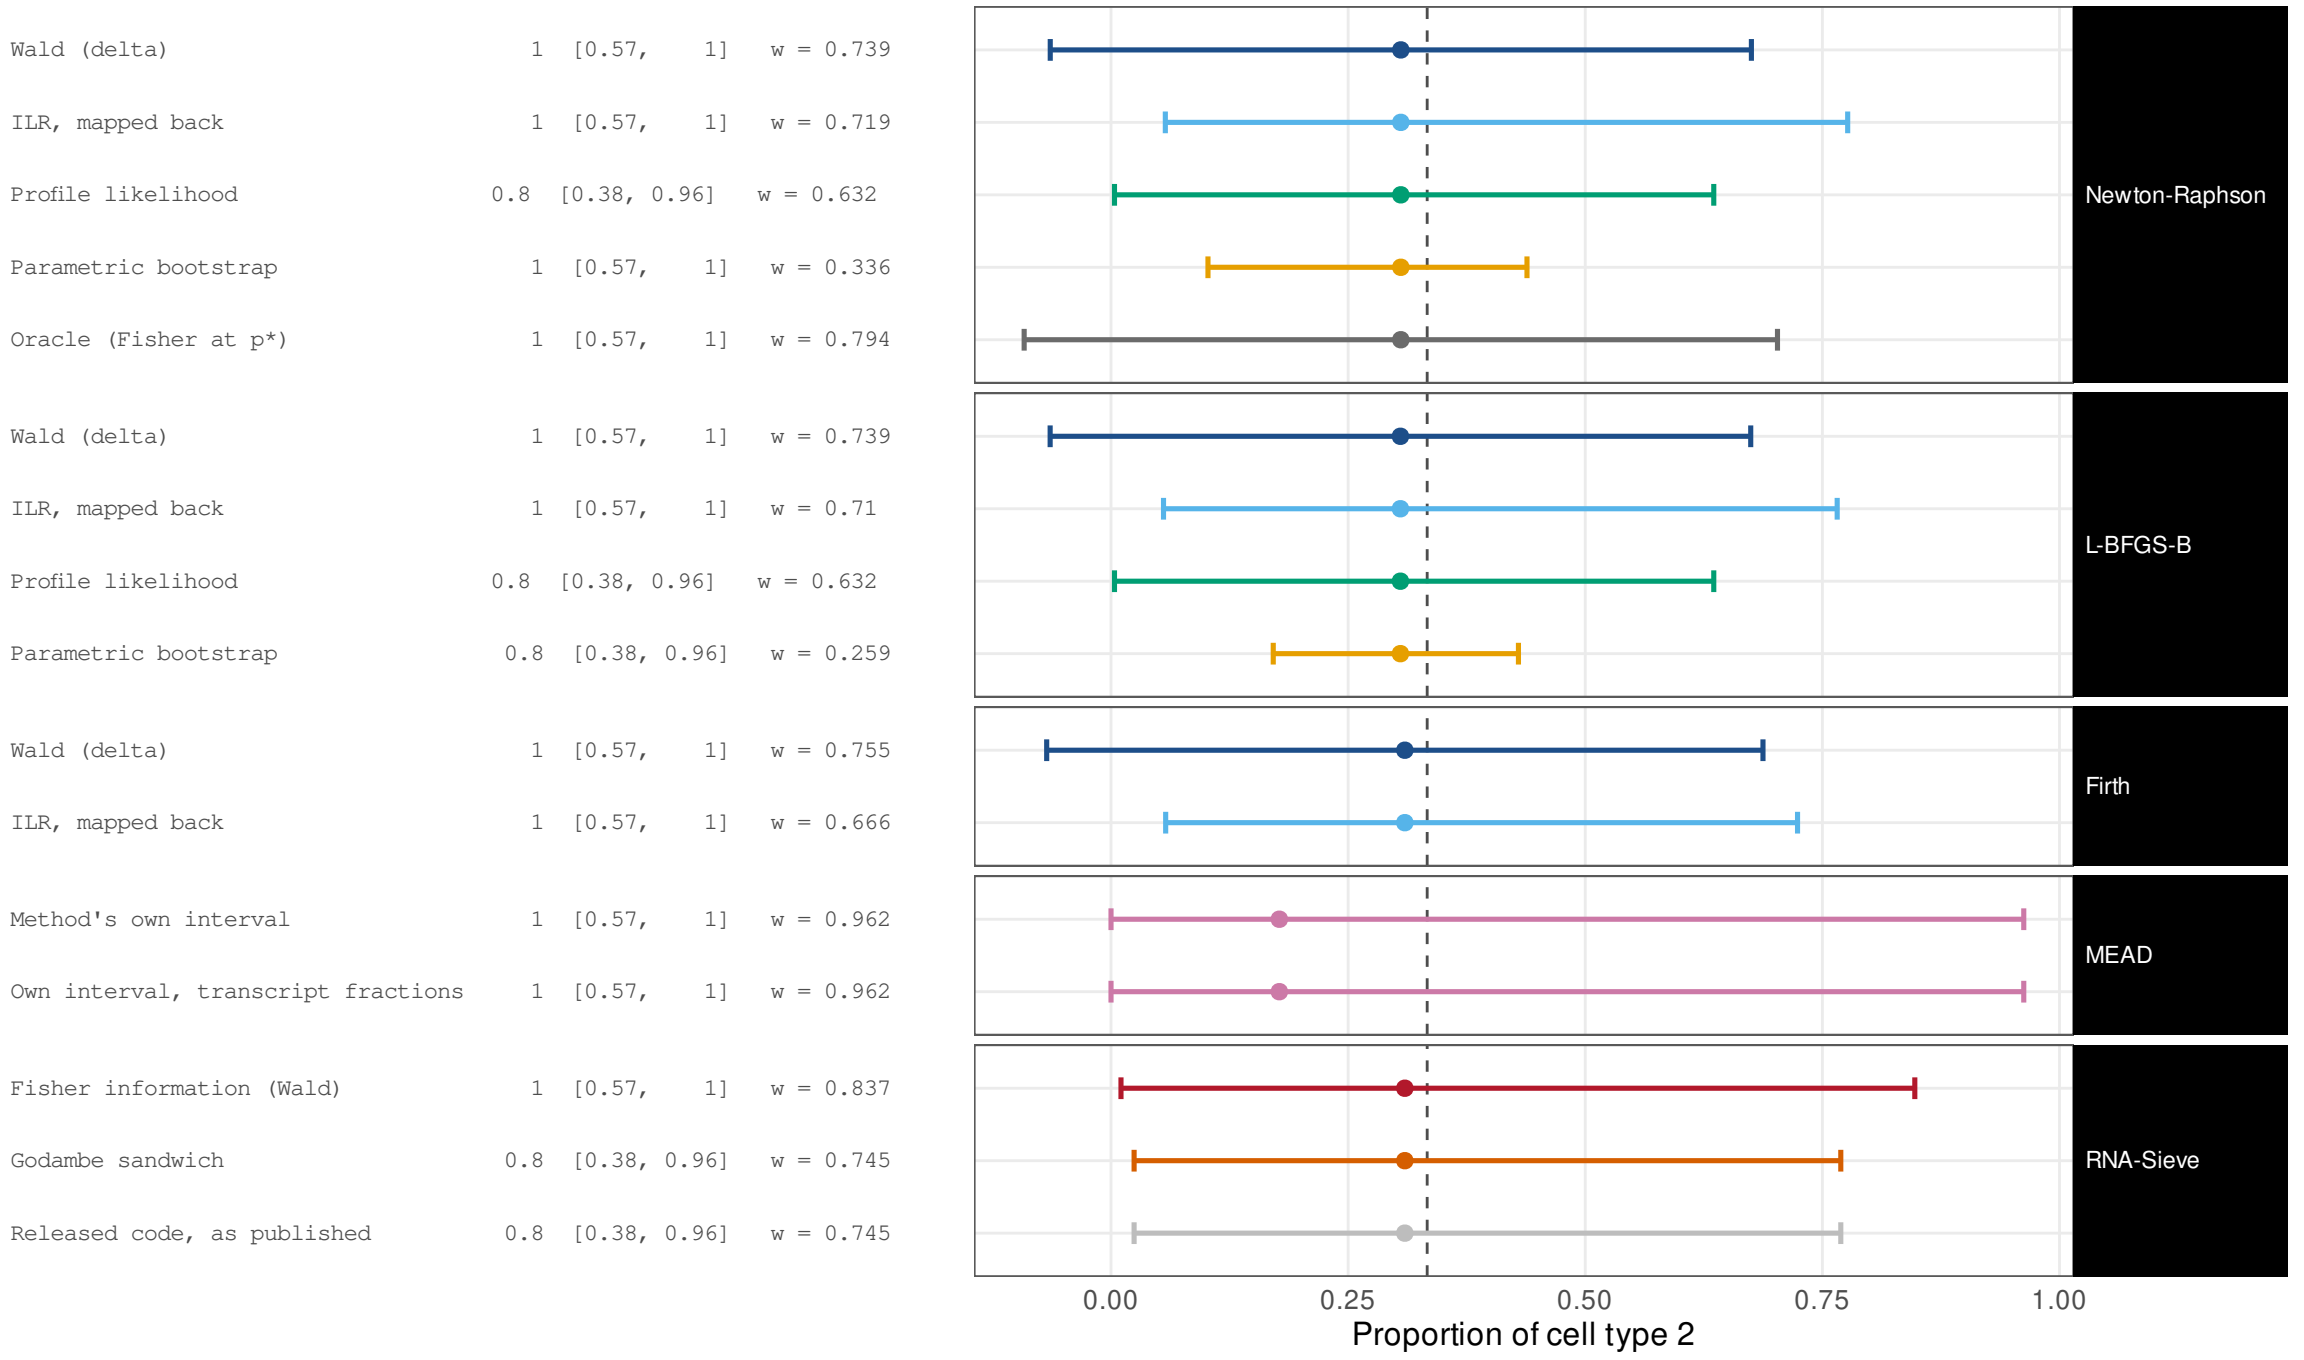

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / moderate overlap / CT1 SBM / CT2 SBM

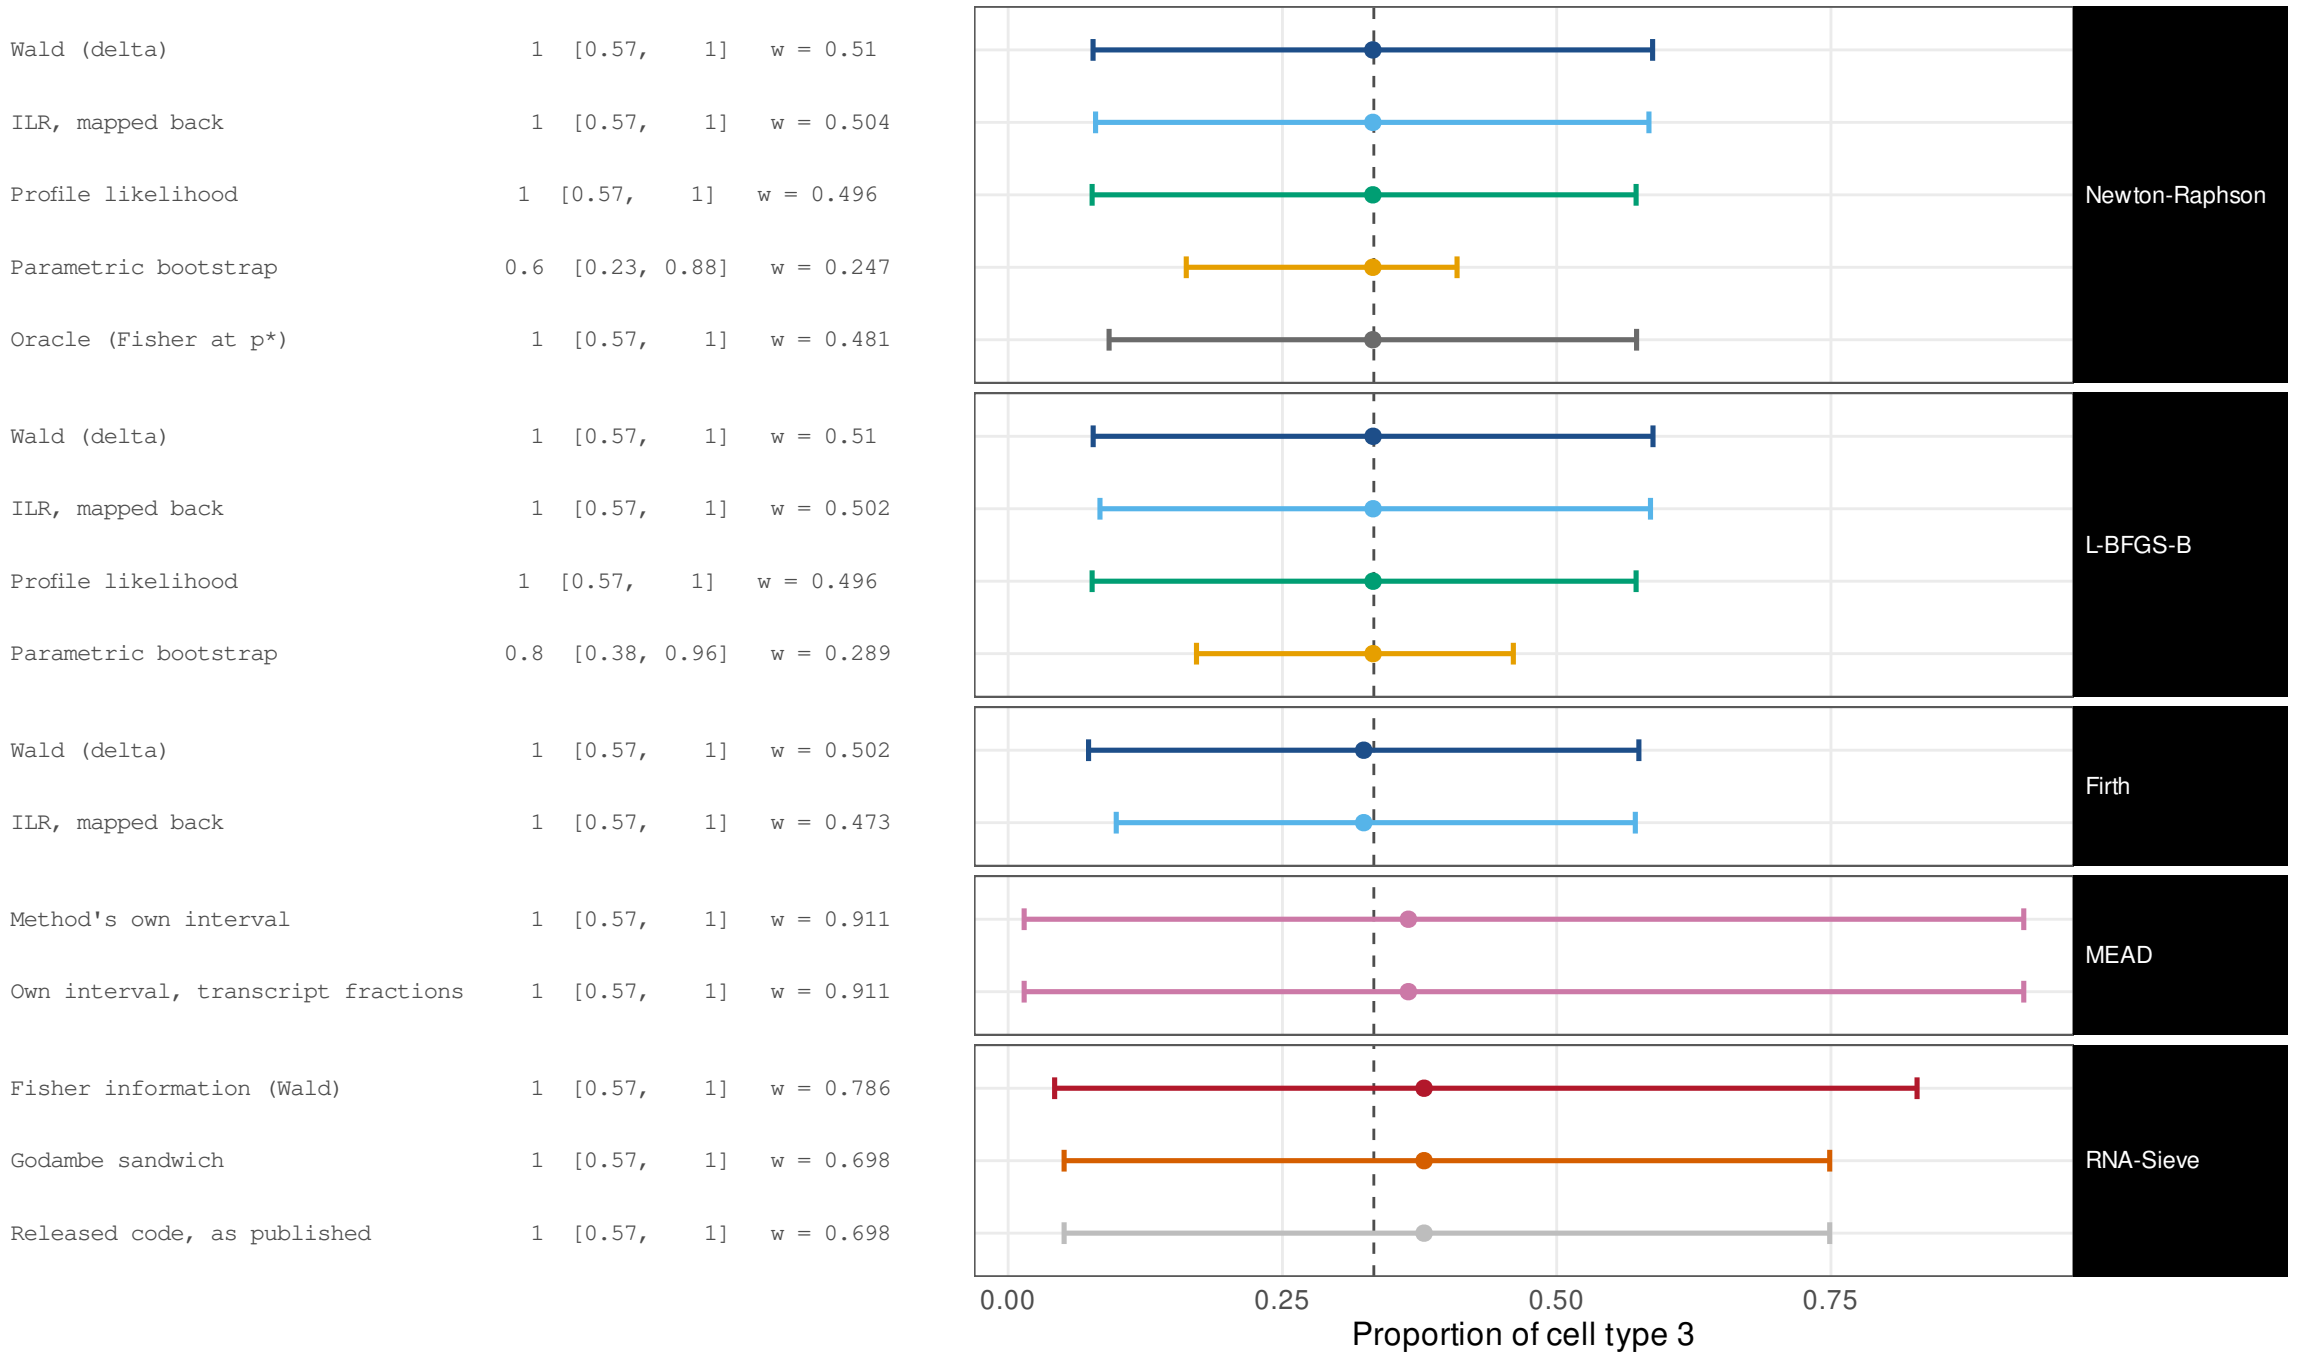


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.968
ILR, mapped back	1	[0.57, 1]	w = 0.751
Profile likelihood	1	[0.57, 1]	w = 0.644
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.335
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.998
Wald (delta)	1	[0.57, 1]	w = 0.968
ILR, mapped back	1	[0.57, 1]	w = 0.746
Profile likelihood	1	[0.57, 1]	w = 0.644
Parametric bootstrap	1	[0.57, 1]	w = 0.383
Wald (delta)	1	[0.57, 1]	w = 0.963
ILR, mapped back	1	[0.57, 1]	w = 0.742
Method's own interval	1	[0.57, 1]	w = 0.961
Own interval, transcript fractions	1	[0.57, 1]	w = 0.961
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.652
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.644
Released code, as published	0.6	[0.23, 0.88]	w = 0.644

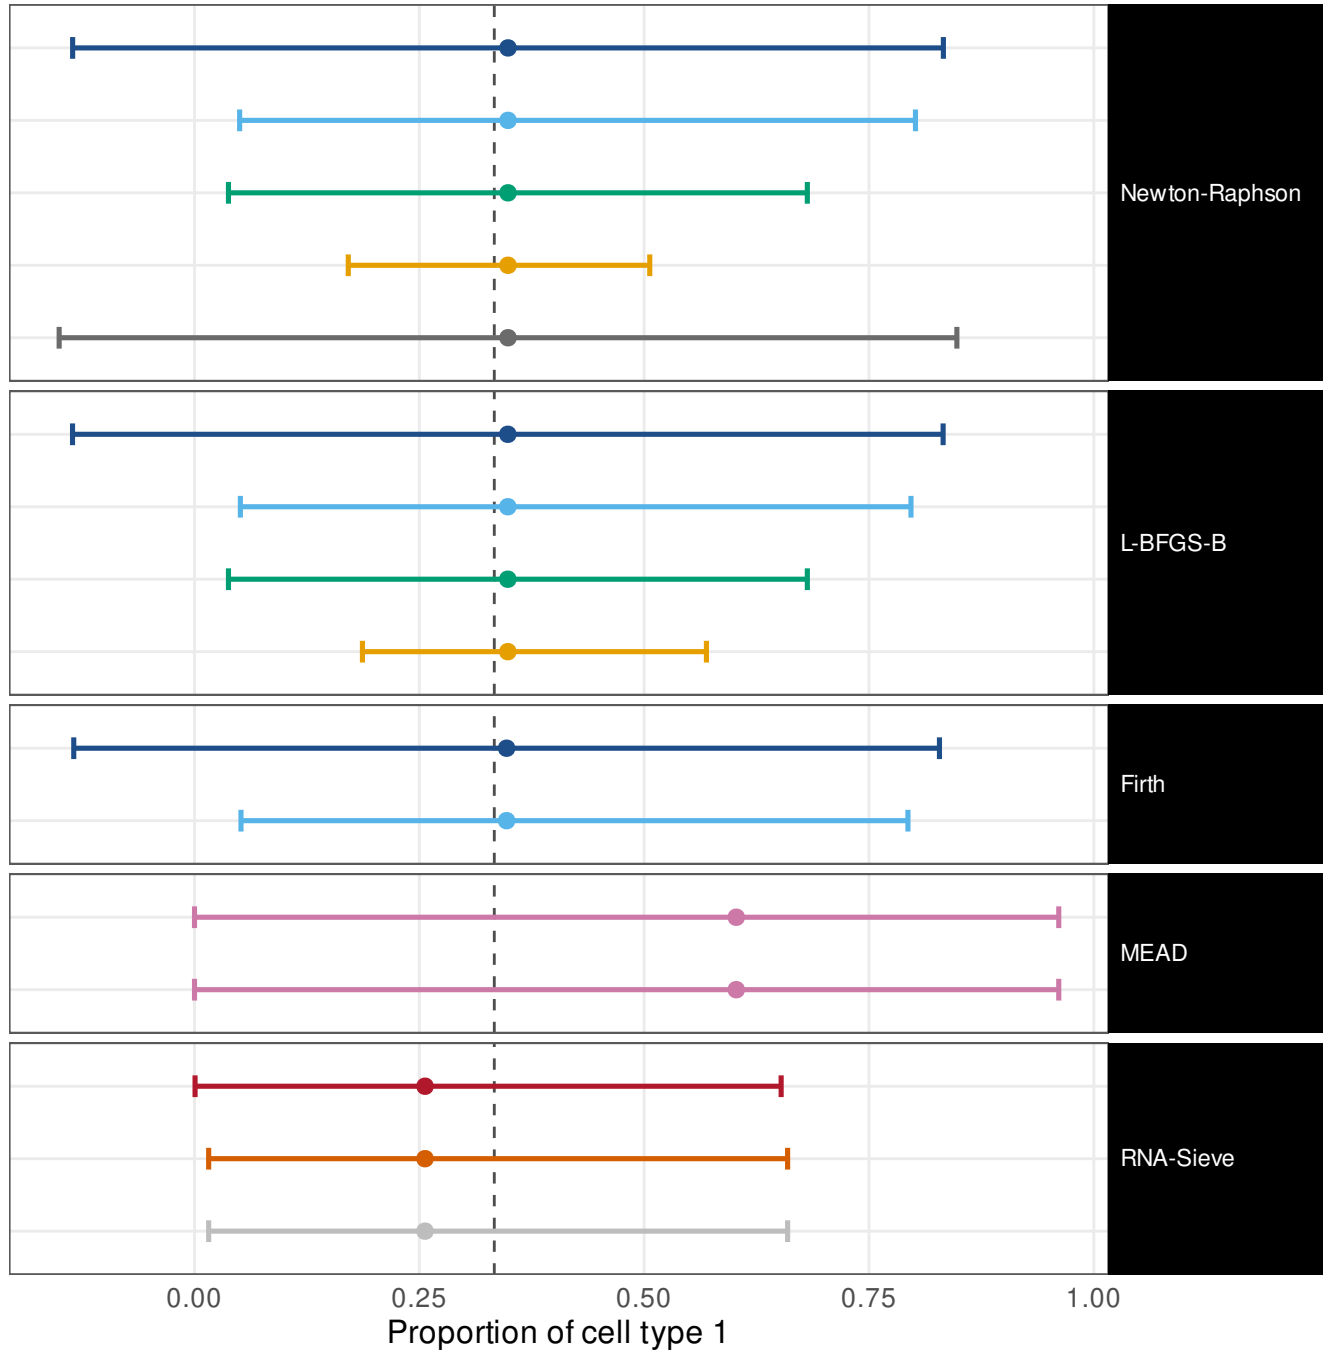


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.966
ILR, mapped back	1	[0.57, 1]	w = 0.748
Profile likelihood	1	[0.57, 1]	w = 0.67
Parametric bootstrap	1	[0.57, 1]	w = 0.378
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.962
Wald (delta)	1	[0.57, 1]	w = 0.966
ILR, mapped back	1	[0.57, 1]	w = 0.752
Profile likelihood	1	[0.57, 1]	w = 0.67
Parametric bootstrap	1	[0.57, 1]	w = 0.346
Wald (delta)	1	[0.57, 1]	w = 0.958
ILR, mapped back	1	[0.57, 1]	w = 0.746
Method's own interval	1	[0.57, 1]	w = 0.98
Own interval, transcript fractions	1	[0.57, 1]	w = 0.98
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.607
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.597
Released code, as published	0.6	[0.23, 0.88]	w = 0.597

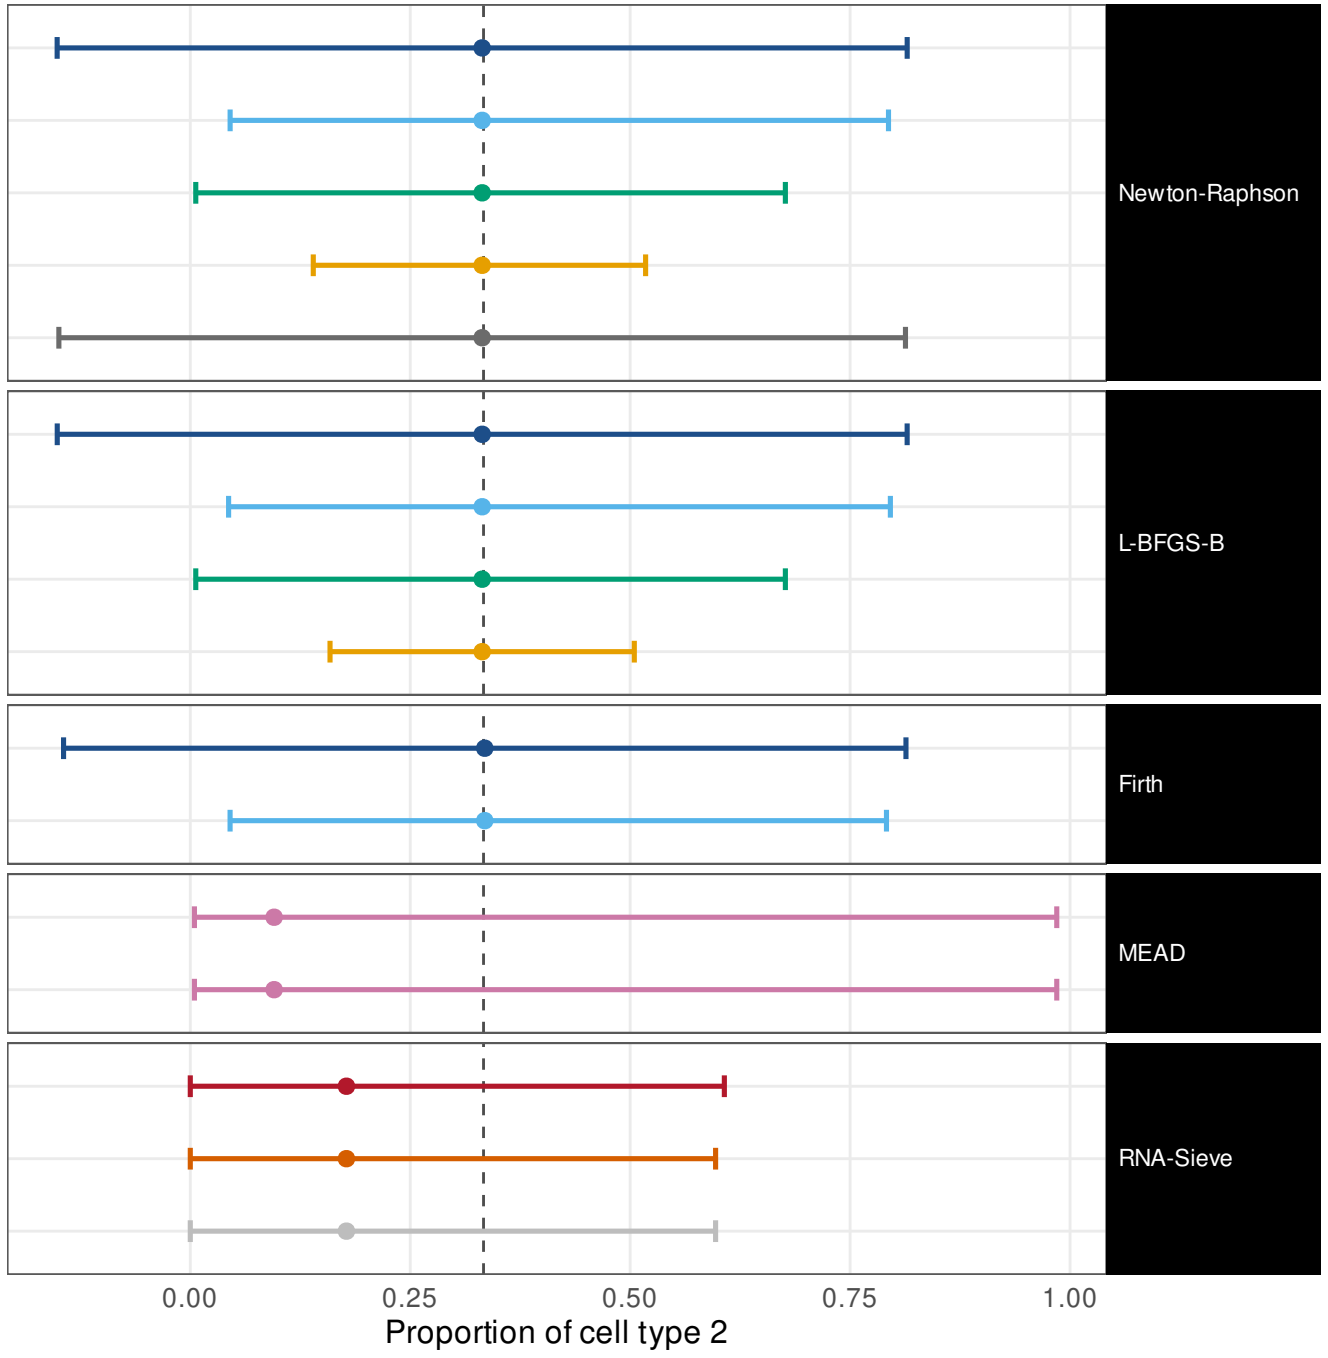


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.787
ILR, mapped back	1	[0.57, 1]	w = 0.668
Profile likelihood	1	[0.57, 1]	w = 0.62
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.289
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.796
Wald (delta)	1	[0.57, 1]	w = 0.787
ILR, mapped back	1	[0.57, 1]	w = 0.671
Profile likelihood	1	[0.57, 1]	w = 0.62
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.318
Wald (delta)	1	[0.57, 1]	w = 0.794
ILR, mapped back	1	[0.57, 1]	w = 0.672
Method's own interval	1	[0.57, 1]	w = 0.948
Own interval, transcript fractions	1	[0.57, 1]	w = 0.948
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.643
Godambe sandwich	0.4	[0.12, 0.77]	w = 0.409
Released code, as published	0.4	[0.12, 0.77]	w = 0.409

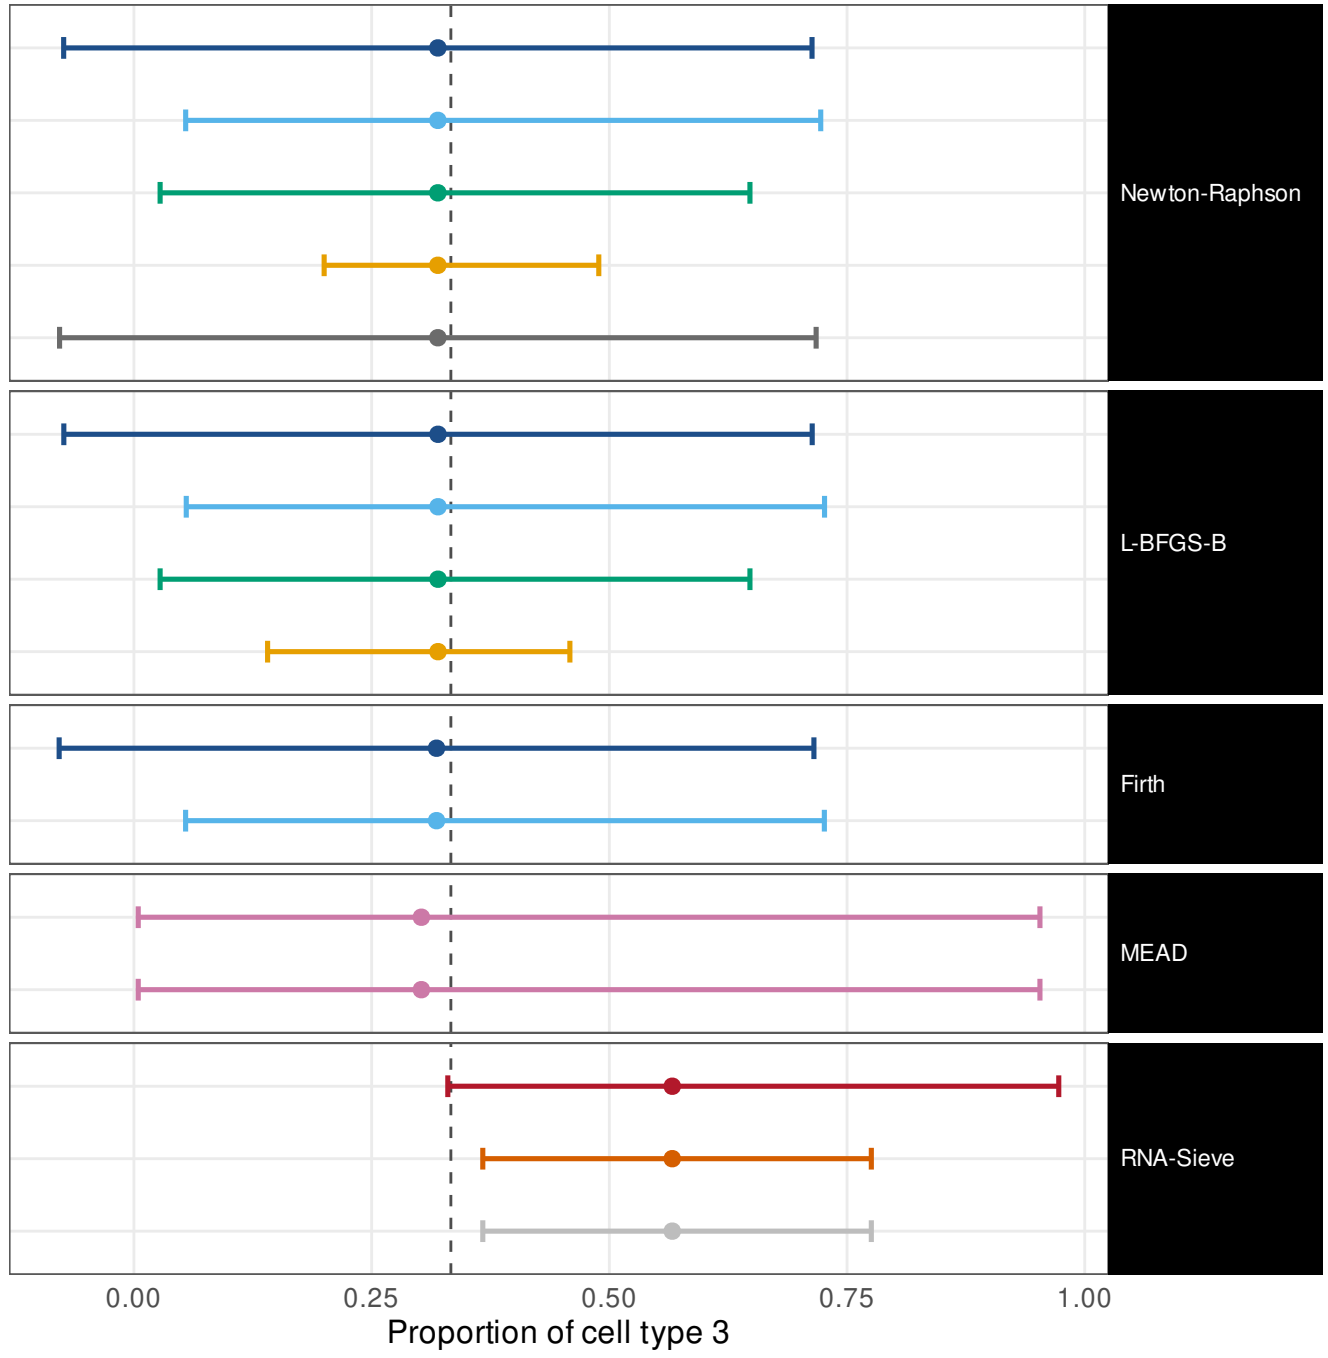


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.966
ILR, mapped back	1	[0.57, 1]	w = 0.801
Profile likelihood	1	[0.57, 1]	w = 0.598
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.381
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.867
Wald (delta)	1	[0.57, 1]	w = 0.965
ILR, mapped back	1	[0.57, 1]	w = 0.81
Profile likelihood	1	[0.57, 1]	w = 0.598
Parametric bootstrap	1	[0.57, 1]	w = 0.275
Wald (delta)	1	[0.57, 1]	w = 0.943
ILR, mapped back	1	[0.57, 1]	w = 0.756
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.827
Godambe sandwich	1	[0.57, 1]	w = 0.631
Released code, as published	1	[0.57, 1]	w = 0.631

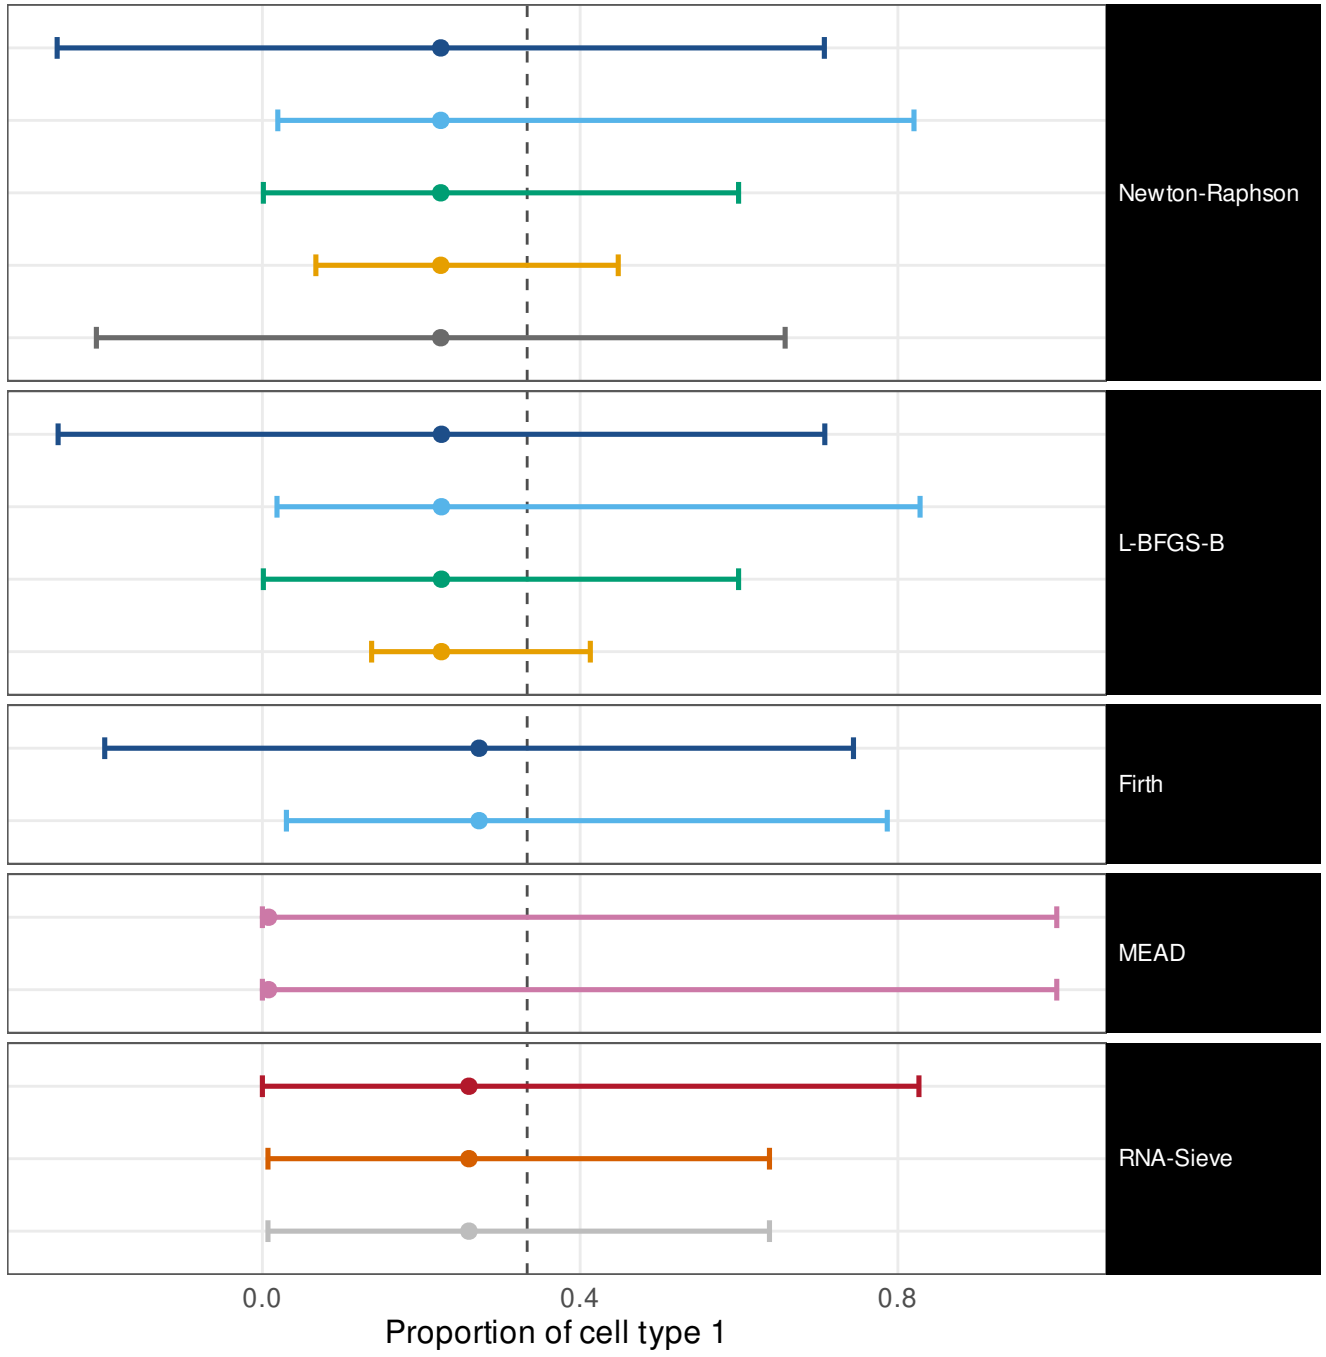


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.923
ILR, mapped back	1	[0.57, 1]	w = 0.743
Profile likelihood	1	[0.57, 1]	w = 0.711
Parametric bootstrap	1	[0.57, 1]	w = 0.371
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.92
Wald (delta)	1	[0.57, 1]	w = 0.923
ILR, mapped back	1	[0.57, 1]	w = 0.751
Profile likelihood	1	[0.57, 1]	w = 0.711
Parametric bootstrap	1	[0.57, 1]	w = 0.366
Wald (delta)	1	[0.57, 1]	w = 0.917
ILR, mapped back	1	[0.57, 1]	w = 0.734
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.902
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.633
Released code, as published	0.8	[0.38, 0.96]	w = 0.633

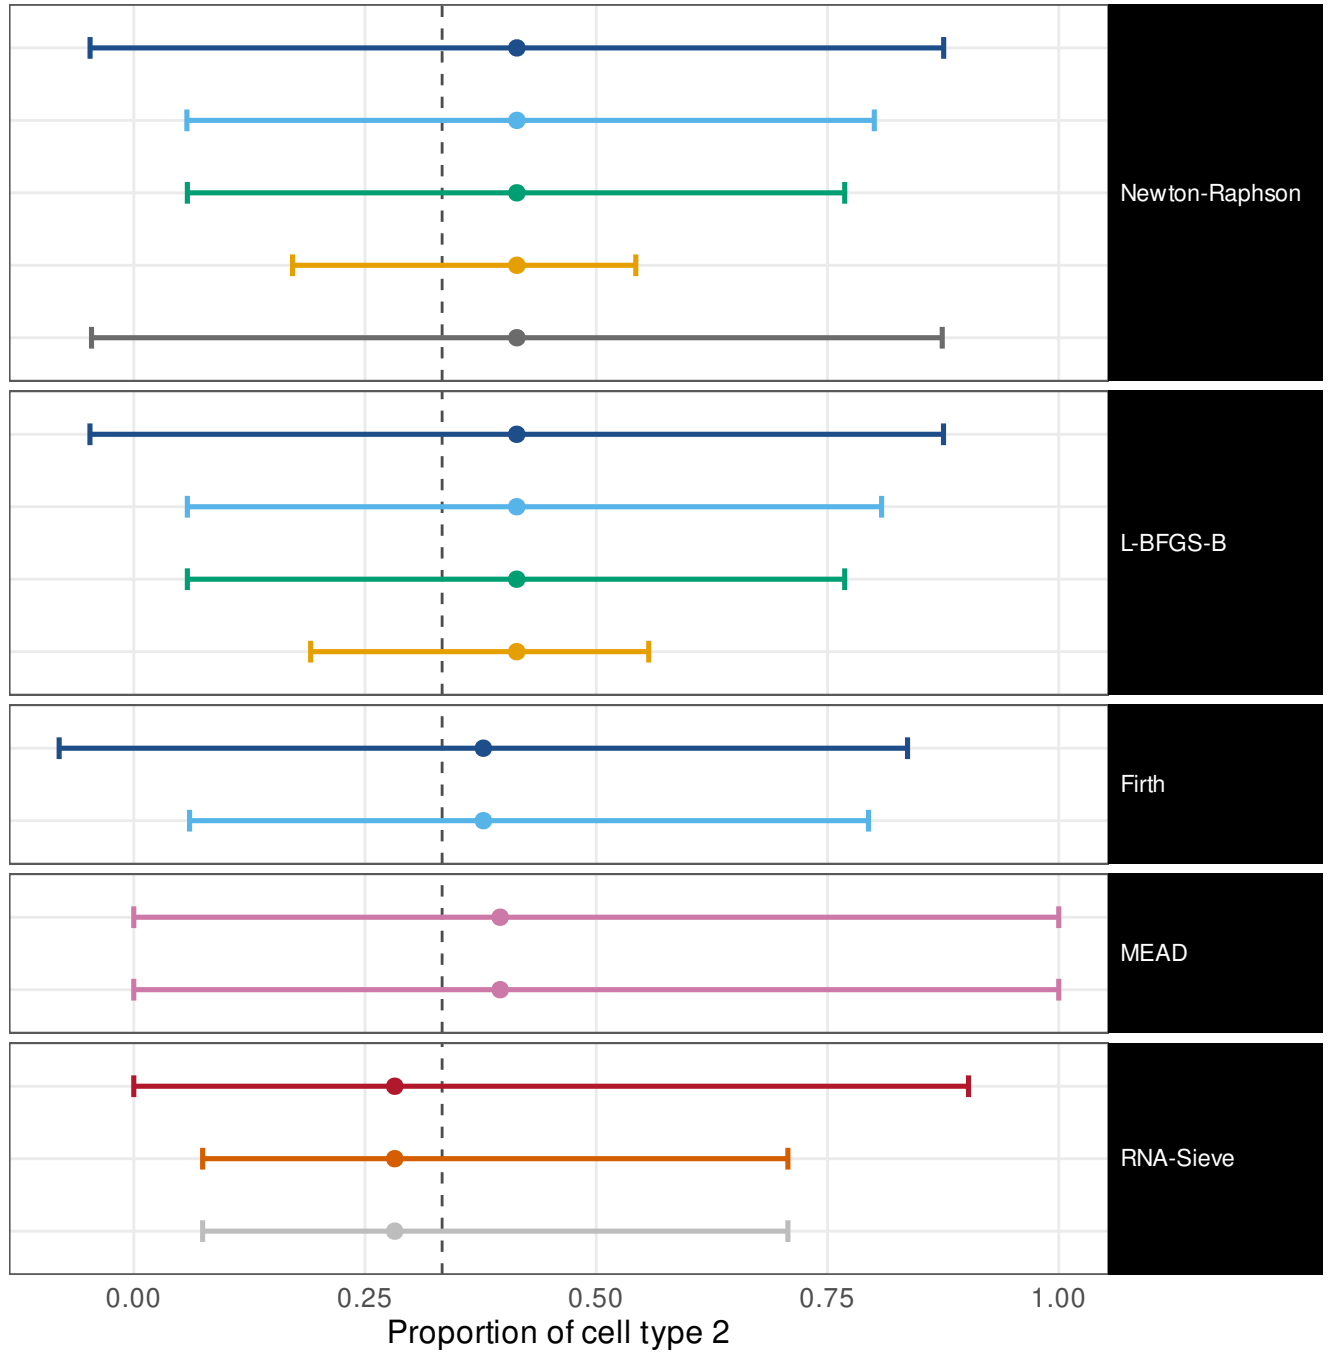


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.824
ILR, mapped back	1	[0.57, 1]	w = 0.696
Profile likelihood	1	[0.57, 1]	w = 0.647
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.292
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.826
Wald (delta)	1	[0.57, 1]	w = 0.823
ILR, mapped back	1	[0.57, 1]	w = 0.696
Profile likelihood	1	[0.57, 1]	w = 0.647
Parametric bootstrap	1	[0.57, 1]	w = 0.34
Wald (delta)	1	[0.57, 1]	w = 0.814
ILR, mapped back	1	[0.57, 1]	w = 0.682
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.878
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.737
Released code, as published	0.8	[0.38, 0.96]	w = 0.737

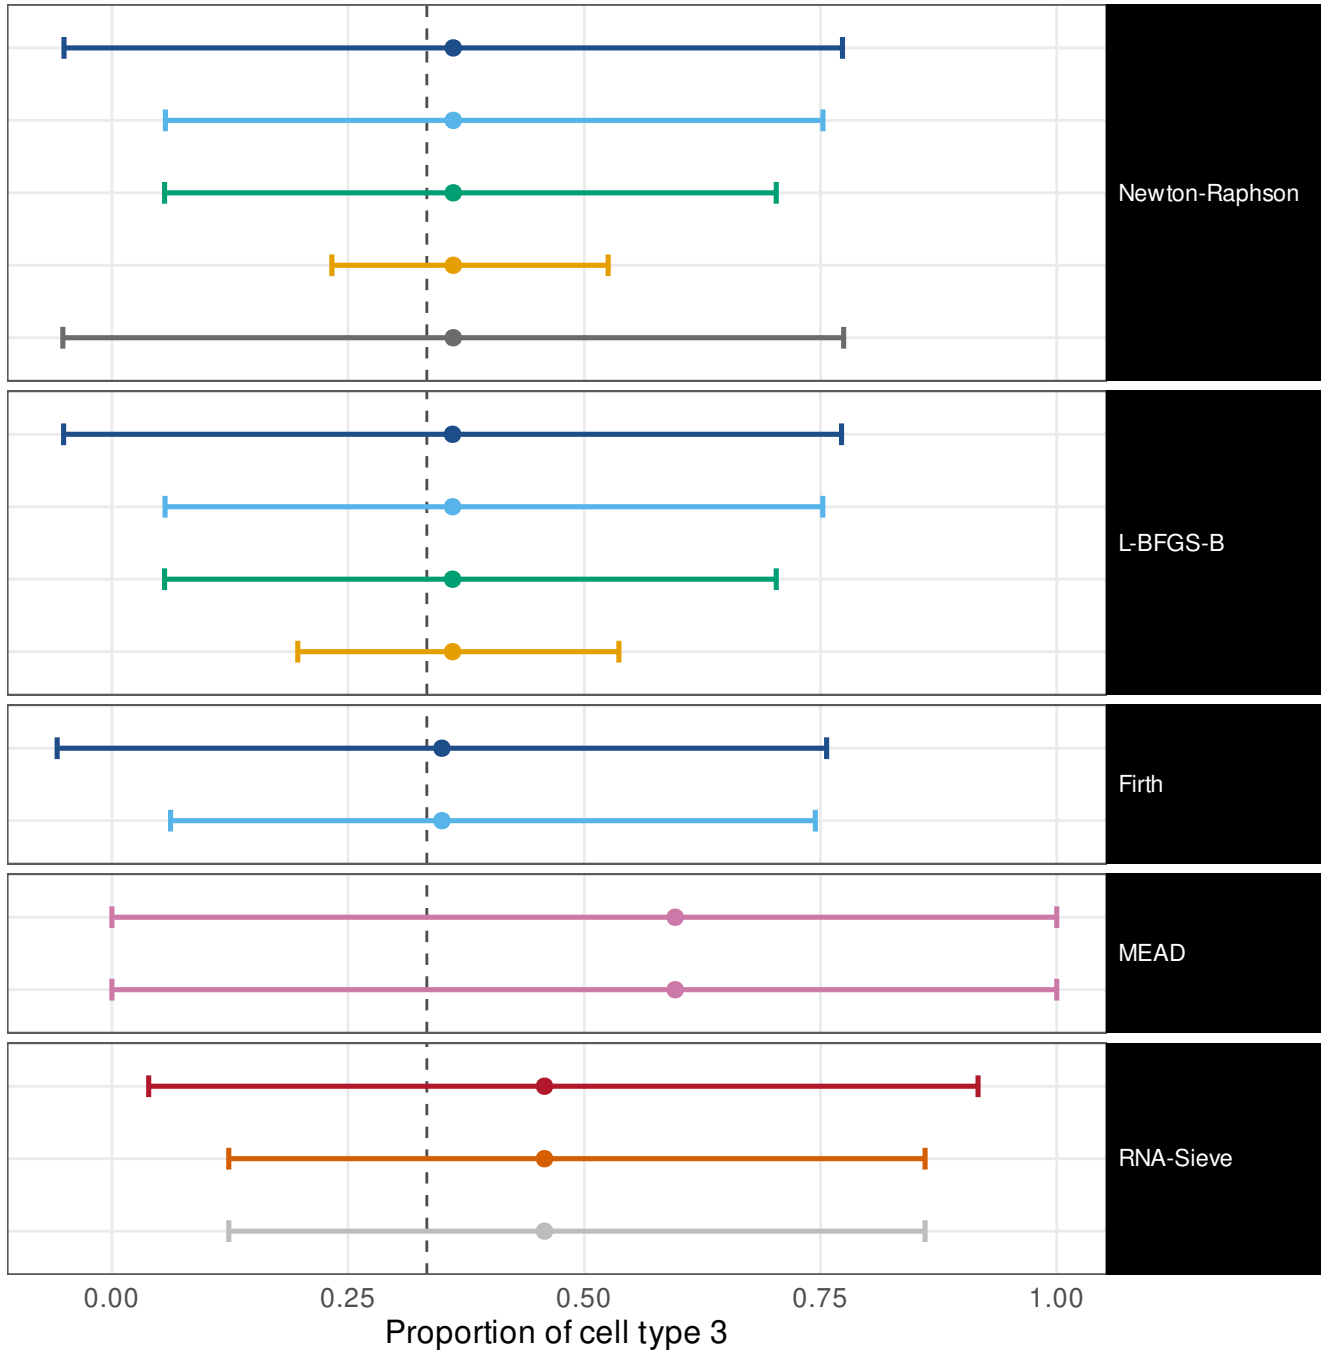


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.934
ILR, mapped back	1	[0.57, 1]	w = 0.791
Profile likelihood	1	[0.57, 1]	w = 0.72
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.417
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.912
Wald (delta)	1	[0.57, 1]	w = 0.933
ILR, mapped back	1	[0.57, 1]	w = 0.793
Profile likelihood	1	[0.57, 1]	w = 0.72
Parametric bootstrap	1	[0.57, 1]	w = 0.432
Wald (delta)	1	[0.57, 1]	w = 0.906
ILR, mapped back	1	[0.57, 1]	w = 0.749
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.4	[0.12, 0.77]	w = 0.376
Godambe sandwich	0.2	[0.036, 0.62]	w = 0.293
Released code, as published	0.2	[0.036, 0.62]	w = 0.293

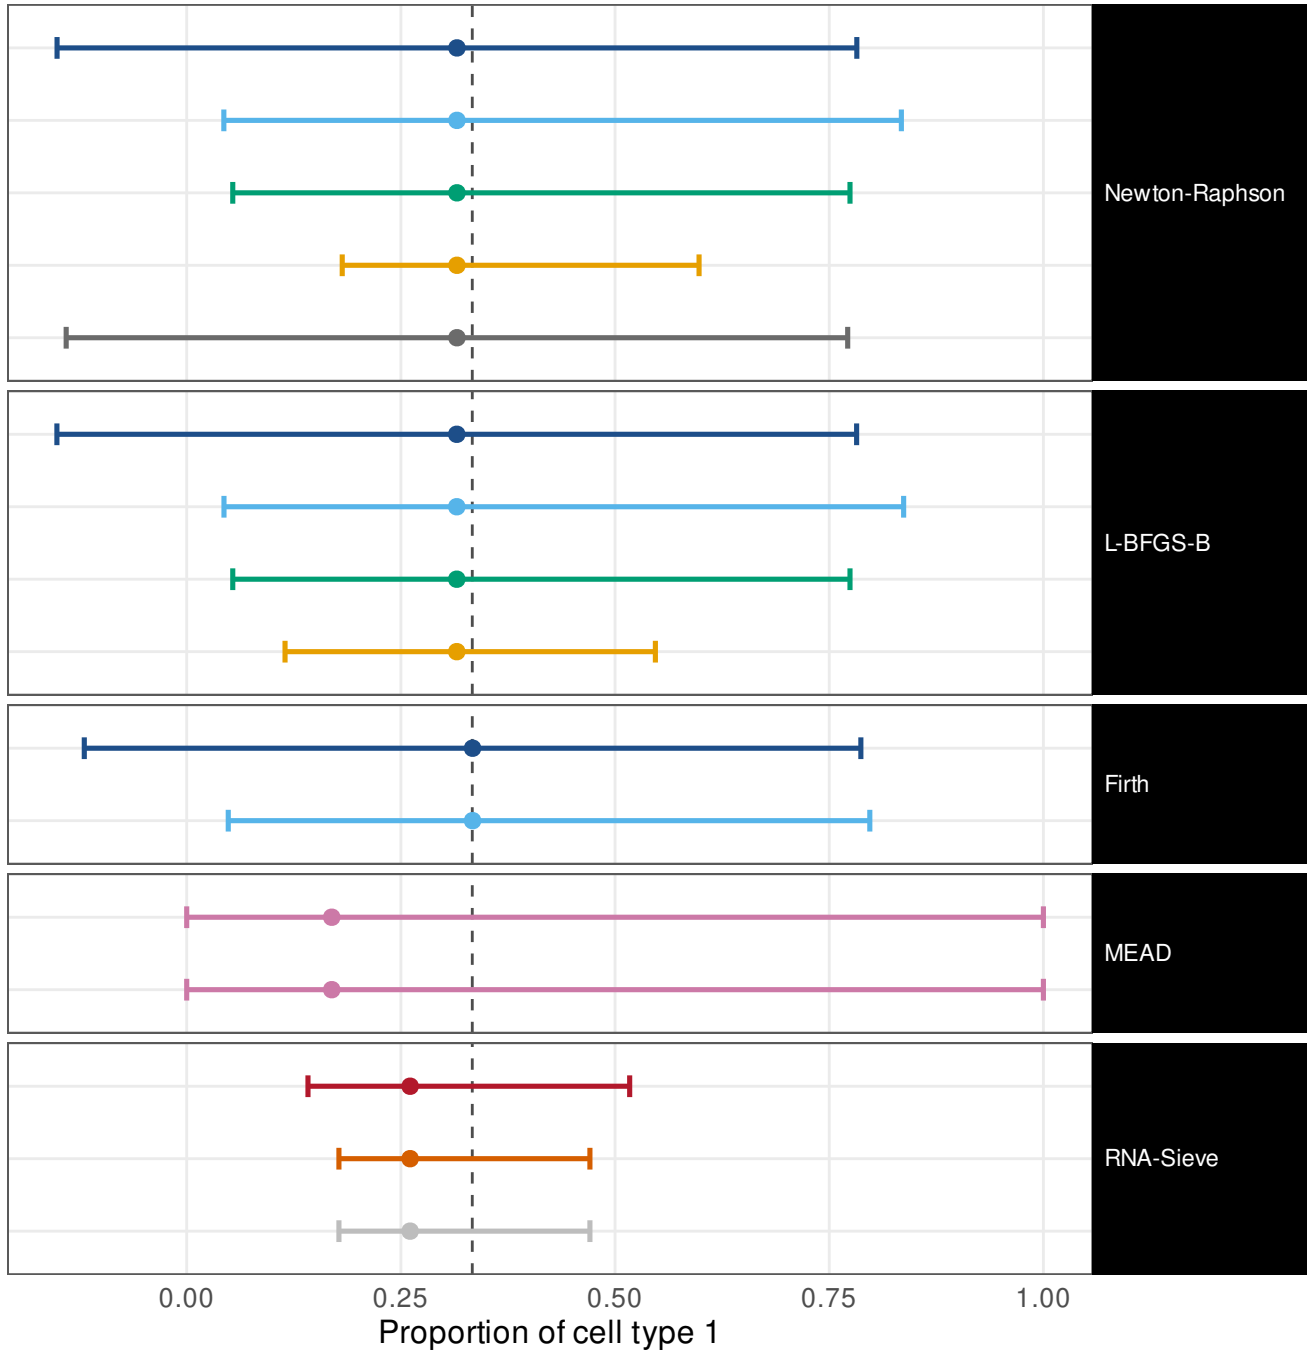


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.977
ILR, mapped back	1	[0.57, 1]	w = 0.795
Profile likelihood	1	[0.57, 1]	w = 0.699
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.258
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.905
Wald (delta)	1	[0.57, 1]	w = 0.977
ILR, mapped back	1	[0.57, 1]	w = 0.795
Profile likelihood	1	[0.57, 1]	w = 0.699
Parametric bootstrap	1	[0.57, 1]	w = 0.426
Wald (delta)	1	[0.57, 1]	w = 0.932
ILR, mapped back	1	[0.57, 1]	w = 0.762
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.581
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.486
Released code, as published	0.6	[0.23, 0.88]	w = 0.486

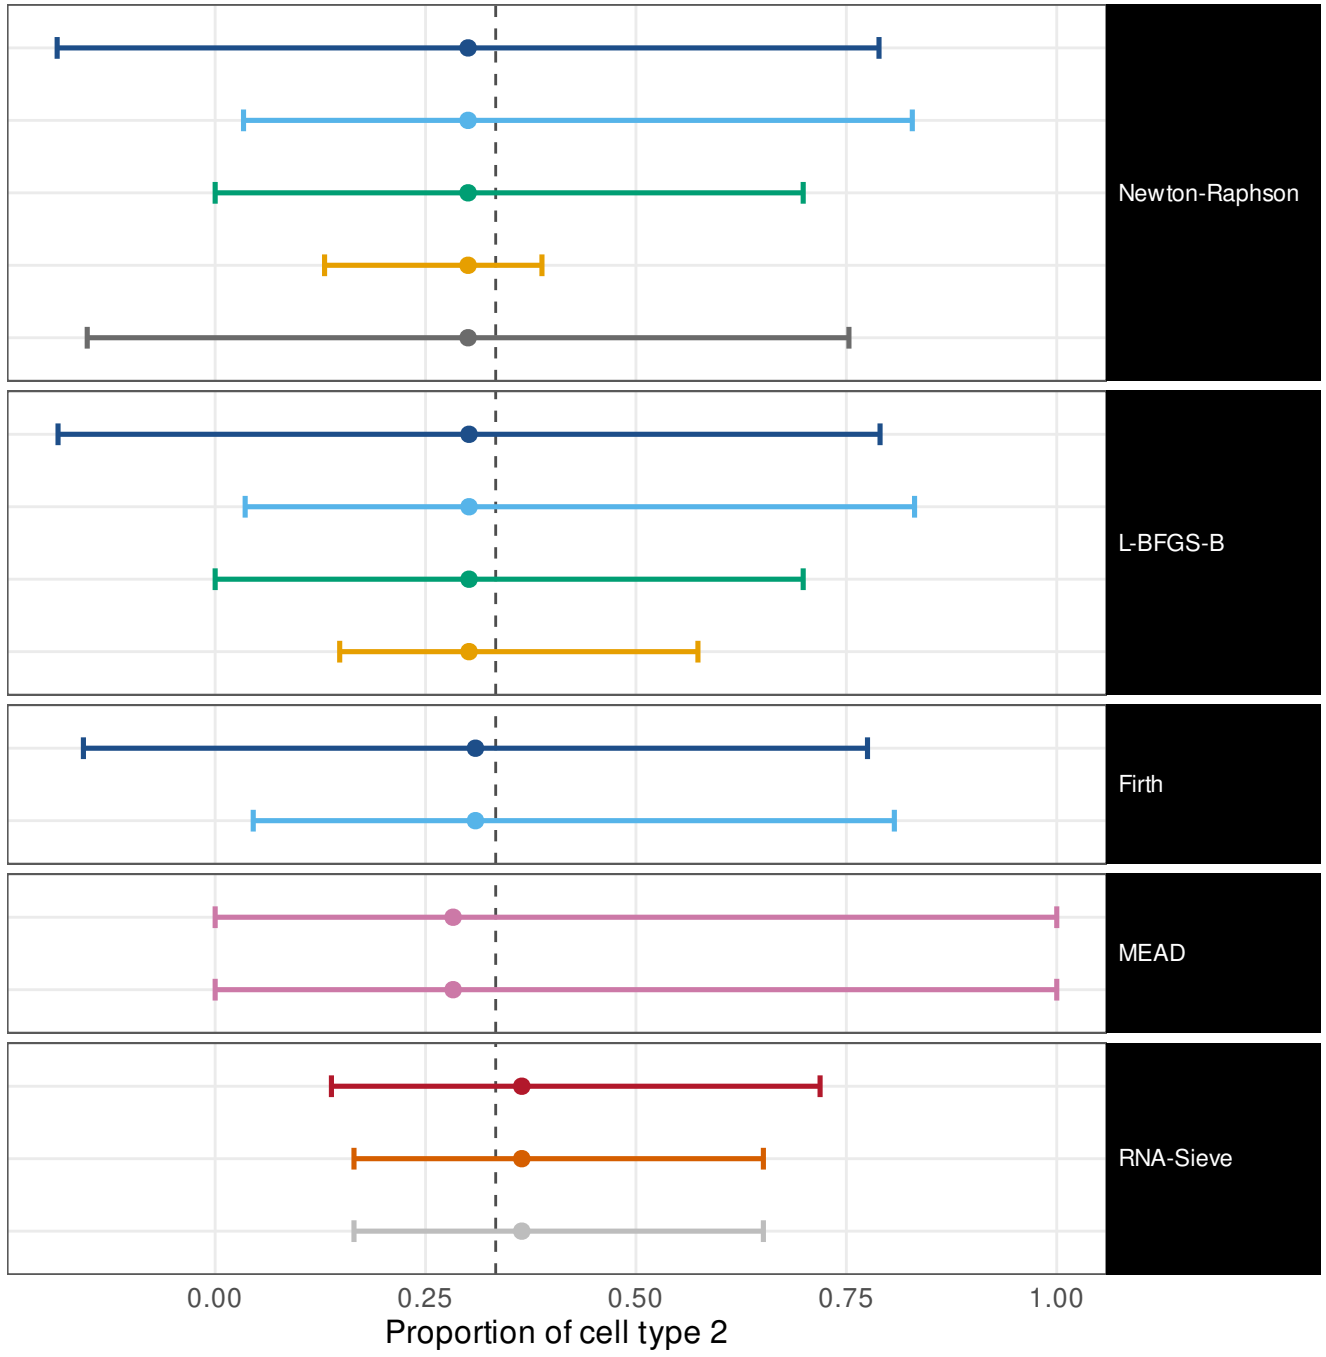


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.8	[0.38, 0.96]	w = 0.79
ILR, mapped back	1	[0.57, 1]	w = 0.745
Profile likelihood	0.8	[0.38, 0.96]	w = 0.686
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.45
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.799
Wald (delta)	0.8	[0.38, 0.96]	w = 0.79
ILR, mapped back	1	[0.57, 1]	w = 0.74
Profile likelihood	0.8	[0.38, 0.96]	w = 0.686
Parametric bootstrap	1	[0.57, 1]	w = 0.402
Wald (delta)	1	[0.57, 1]	w = 0.787
ILR, mapped back	1	[0.57, 1]	w = 0.698
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.687
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.525
Released code, as published	0.6	[0.23, 0.88]	w = 0.525

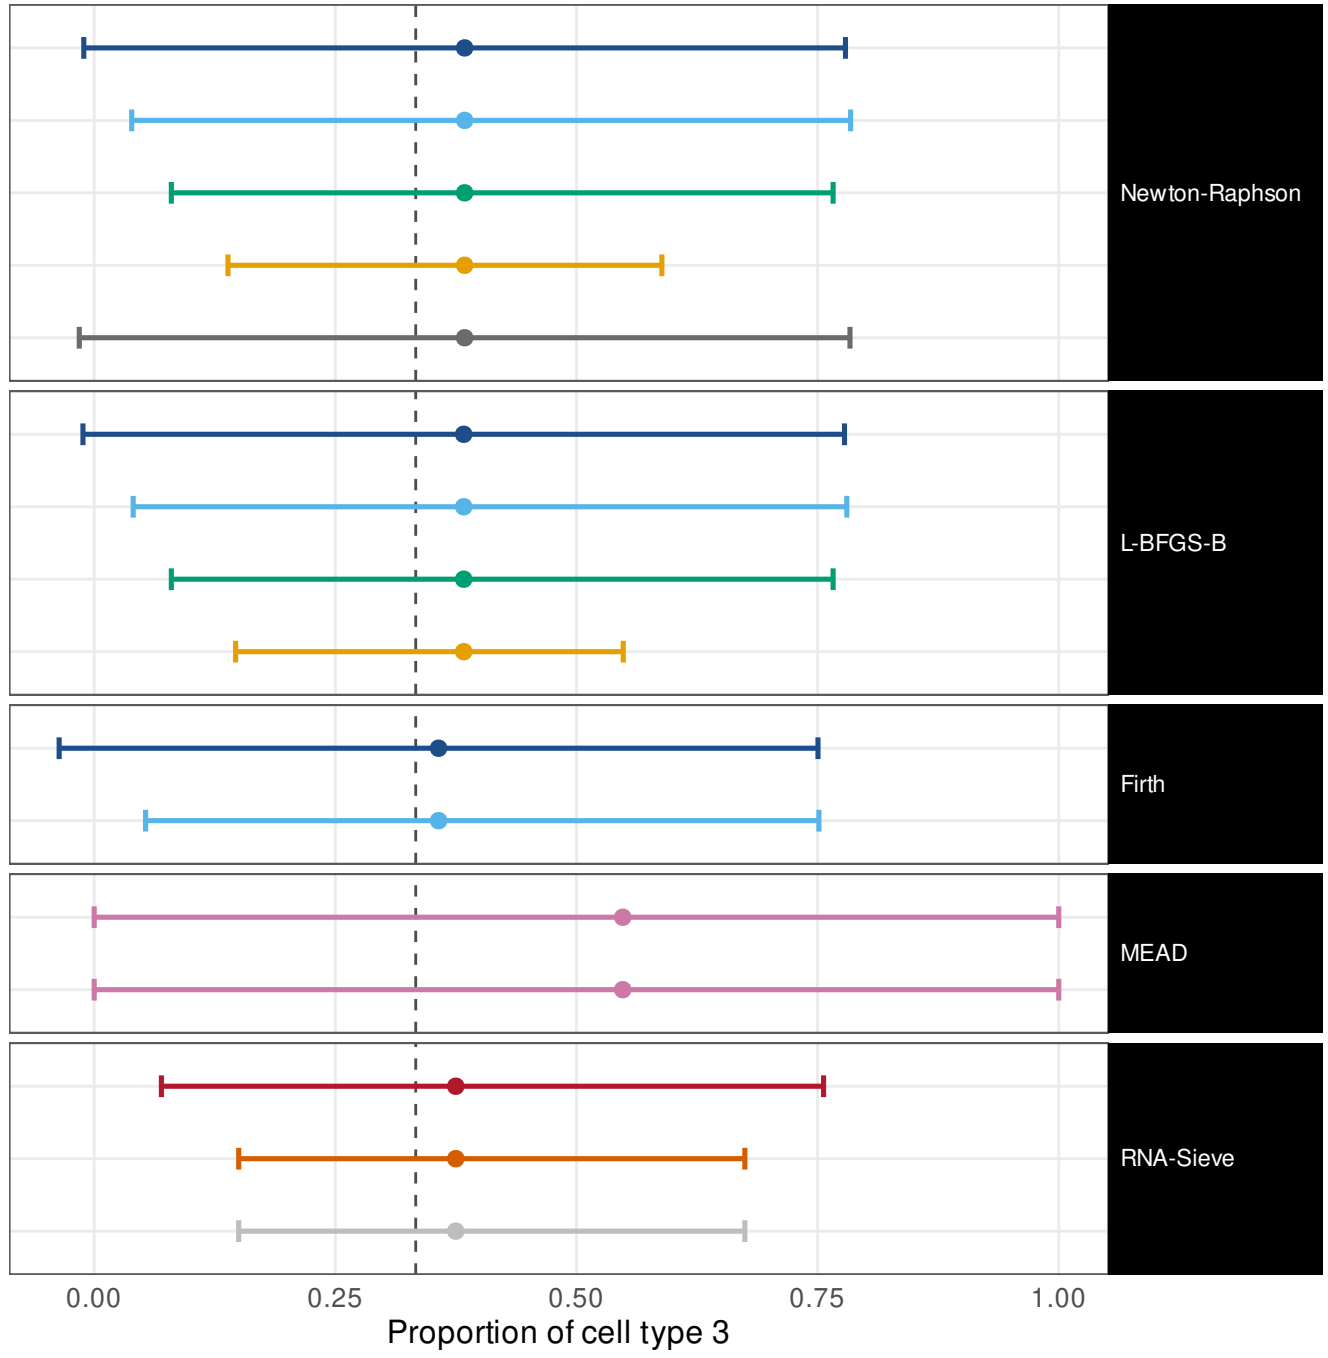


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.937
ILR, mapped back	1	[0.57, 1]	w = 0.786
Profile likelihood	1	[0.57, 1]	w = 0.719
Parametric bootstrap	1	[0.57, 1]	w = 0.372
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.895
Wald (delta)	1	[0.57, 1]	w = 0.934
ILR, mapped back	1	[0.57, 1]	w = 0.787
Profile likelihood	1	[0.57, 1]	w = 0.719
Parametric bootstrap	1	[0.57, 1]	w = 0.406
Wald (delta)	1	[0.57, 1]	w = 0.88
ILR, mapped back	1	[0.57, 1]	w = 0.721
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.516
Godambe sandwich	0.4	[0.12, 0.77]	w = 0.438
Released code, as published	0.4	[0.12, 0.77]	w = 0.438

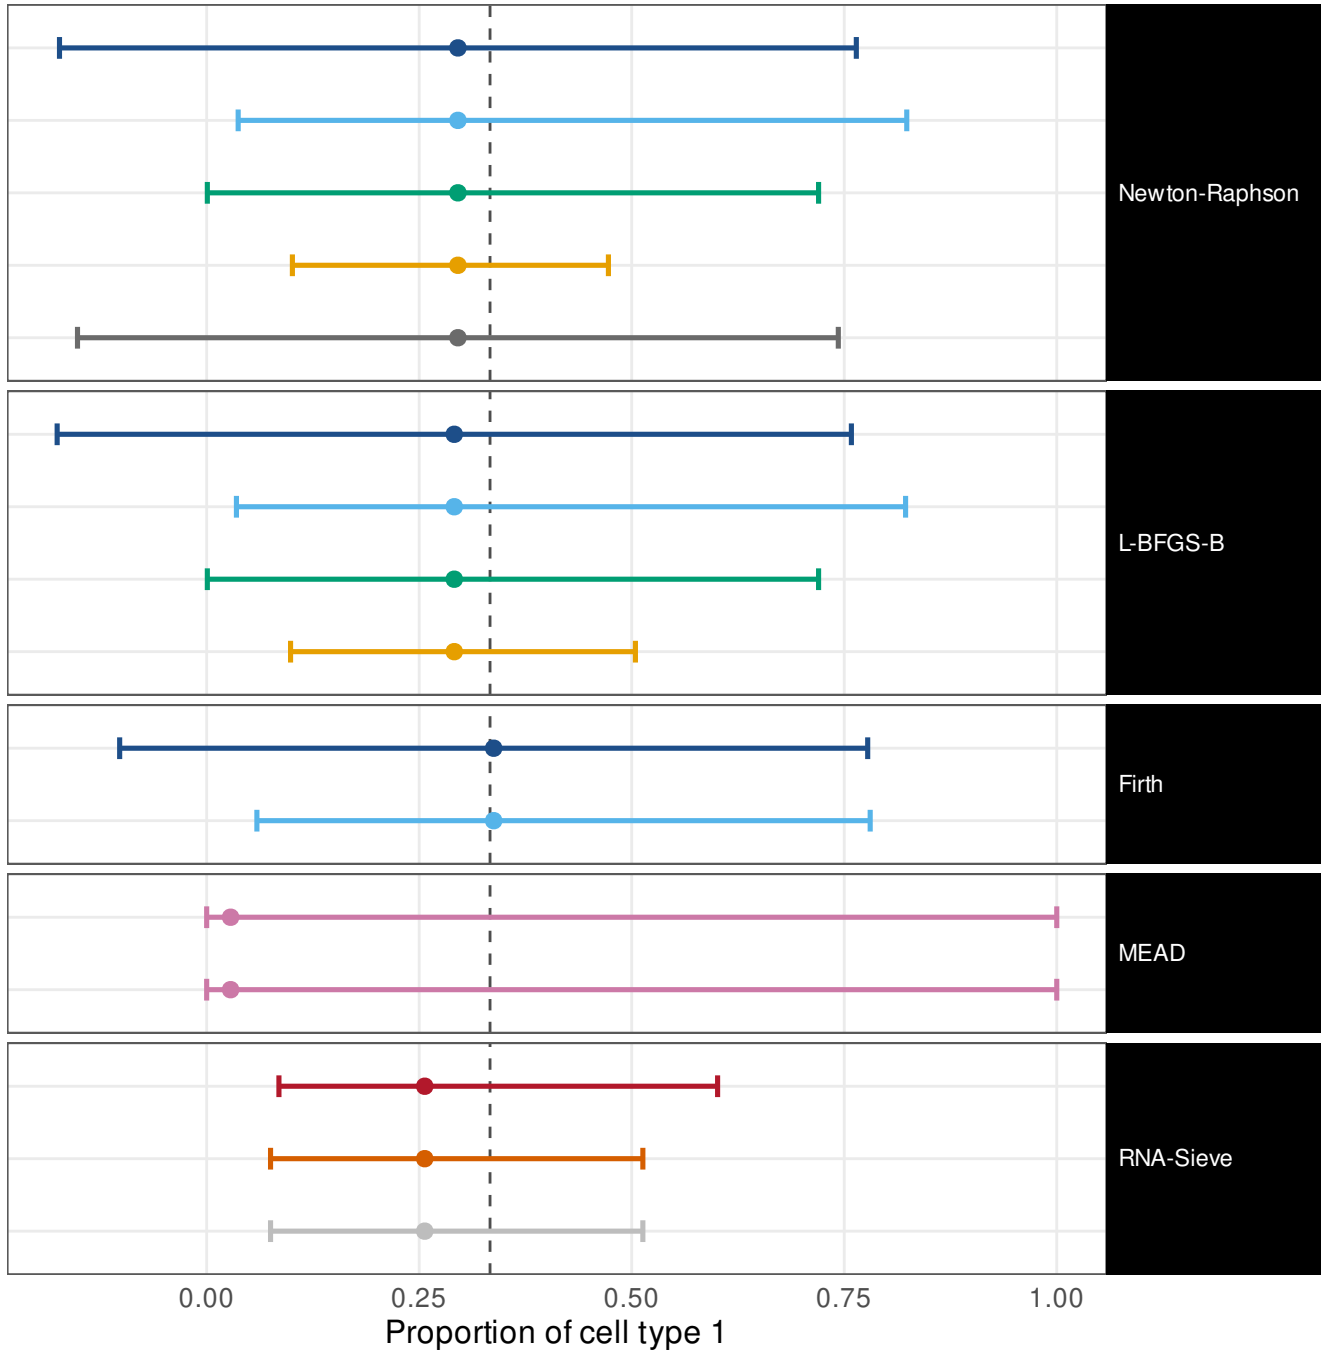

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 SBM / CT2 SBM


```
Wald (delta)                          1  [0.57,    1]   w = 0.854
ILR, mapped back                      1  [0.57,    1]   w = 0.751
Profile likelihood                    1  [0.57,    1]   w = 0.764
Parametric bootstrap                  1  [0.57,    1]   w = 0.377
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.957

Wald (delta)                          1  [0.57,    1]   w = 0.849
ILR, mapped back                      1  [0.57,    1]   w = 0.751
Profile likelihood                    1  [0.57,    1]   w = 0.764
Parametric bootstrap                  1  [0.57,    1]   w = 0.526

Wald (delta)                          1  [0.57,    1]   w = 0.897
ILR, mapped back                      1  [0.57,    1]   w = 0.738

Method's own interval                 1  [0.57,    1]   w =   1
Own interval, transcript fractions    1  [0.57,    1]   w =   1

Fisher information (Wald)           0.6  [0.23, 0.88]   w = 0.584
Godambe sandwich                    0.6  [0.23, 0.88]   w = 0.499
Released code, as published         0.6  [0.23, 0.88]   w = 0.499
```

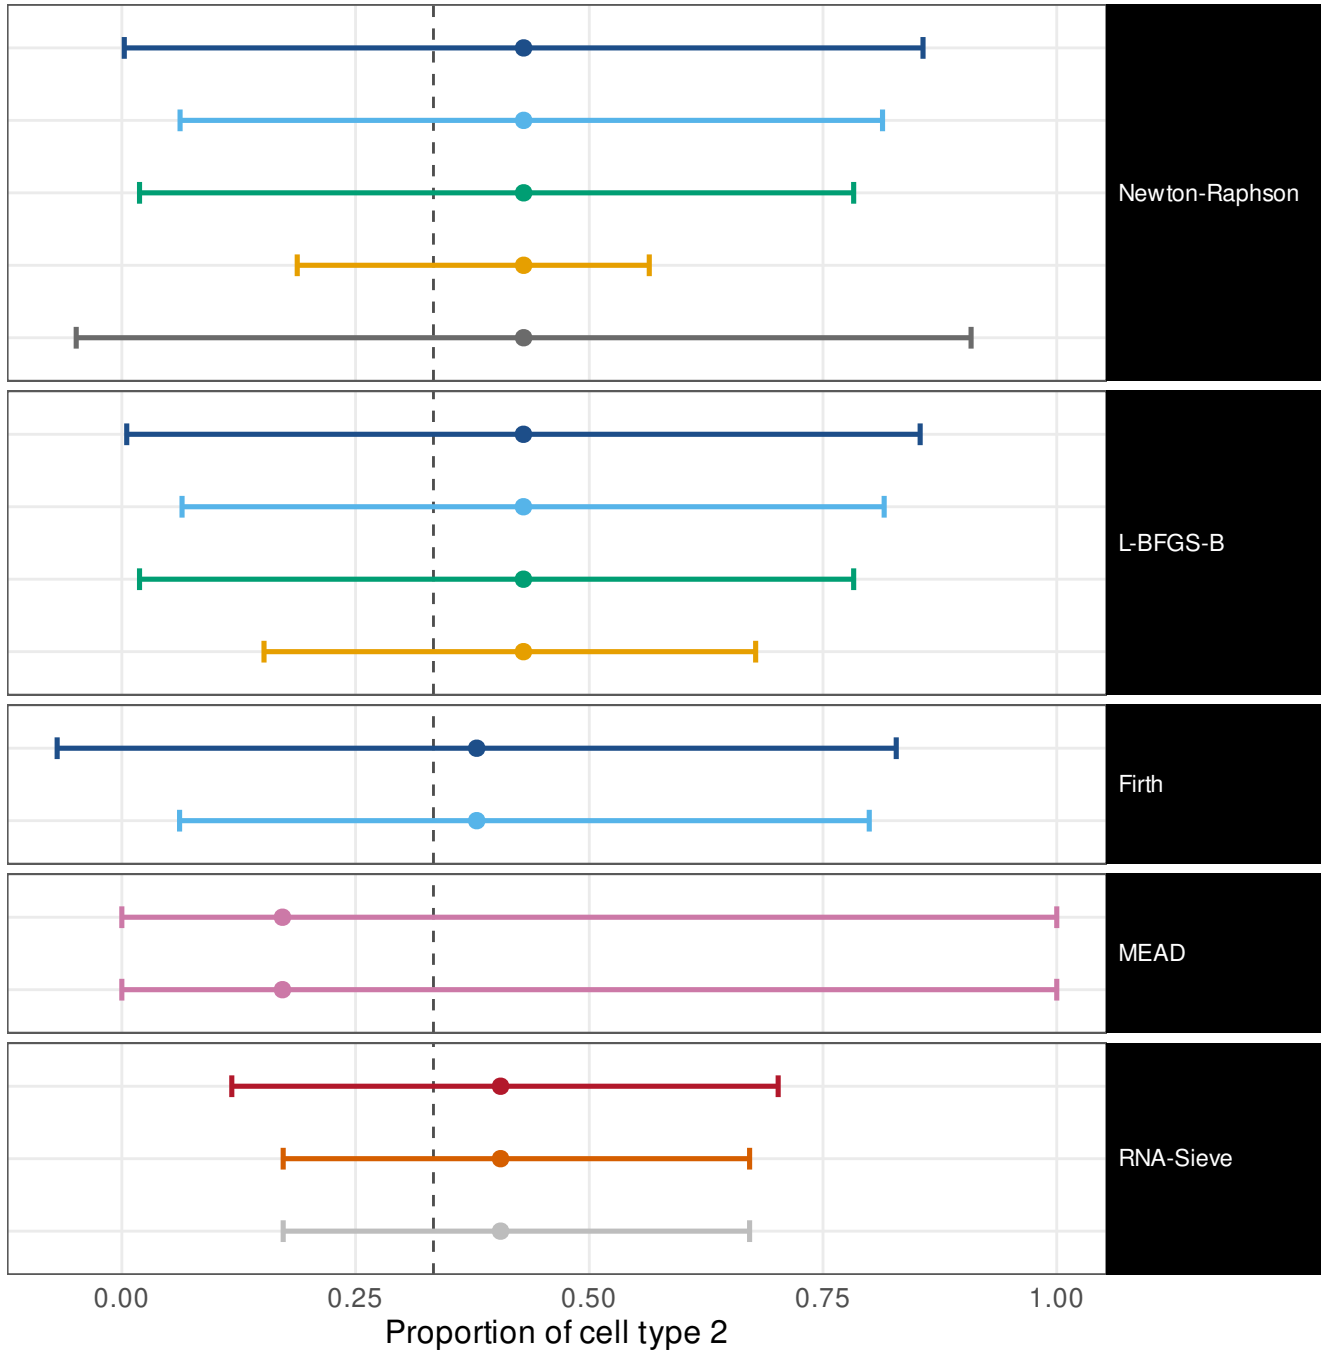


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

balanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.804
ILR, mapped back	1	[0.57, 1]	w = 0.727
Profile likelihood	1	[0.57, 1]	w = 0.679
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.26
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.789
Wald (delta)	1	[0.57, 1]	w = 0.811
ILR, mapped back	1	[0.57, 1]	w = 0.733
Profile likelihood	1	[0.57, 1]	w = 0.679
Parametric bootstrap	1	[0.57, 1]	w = 0.476
Wald (delta)	1	[0.57, 1]	w = 0.782
ILR, mapped back	1	[0.57, 1]	w = 0.675
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.65
Godambe sandwich	0.4	[0.12, 0.77]	w = 0.488
Released code, as published	0.4	[0.12, 0.77]	w = 0.488

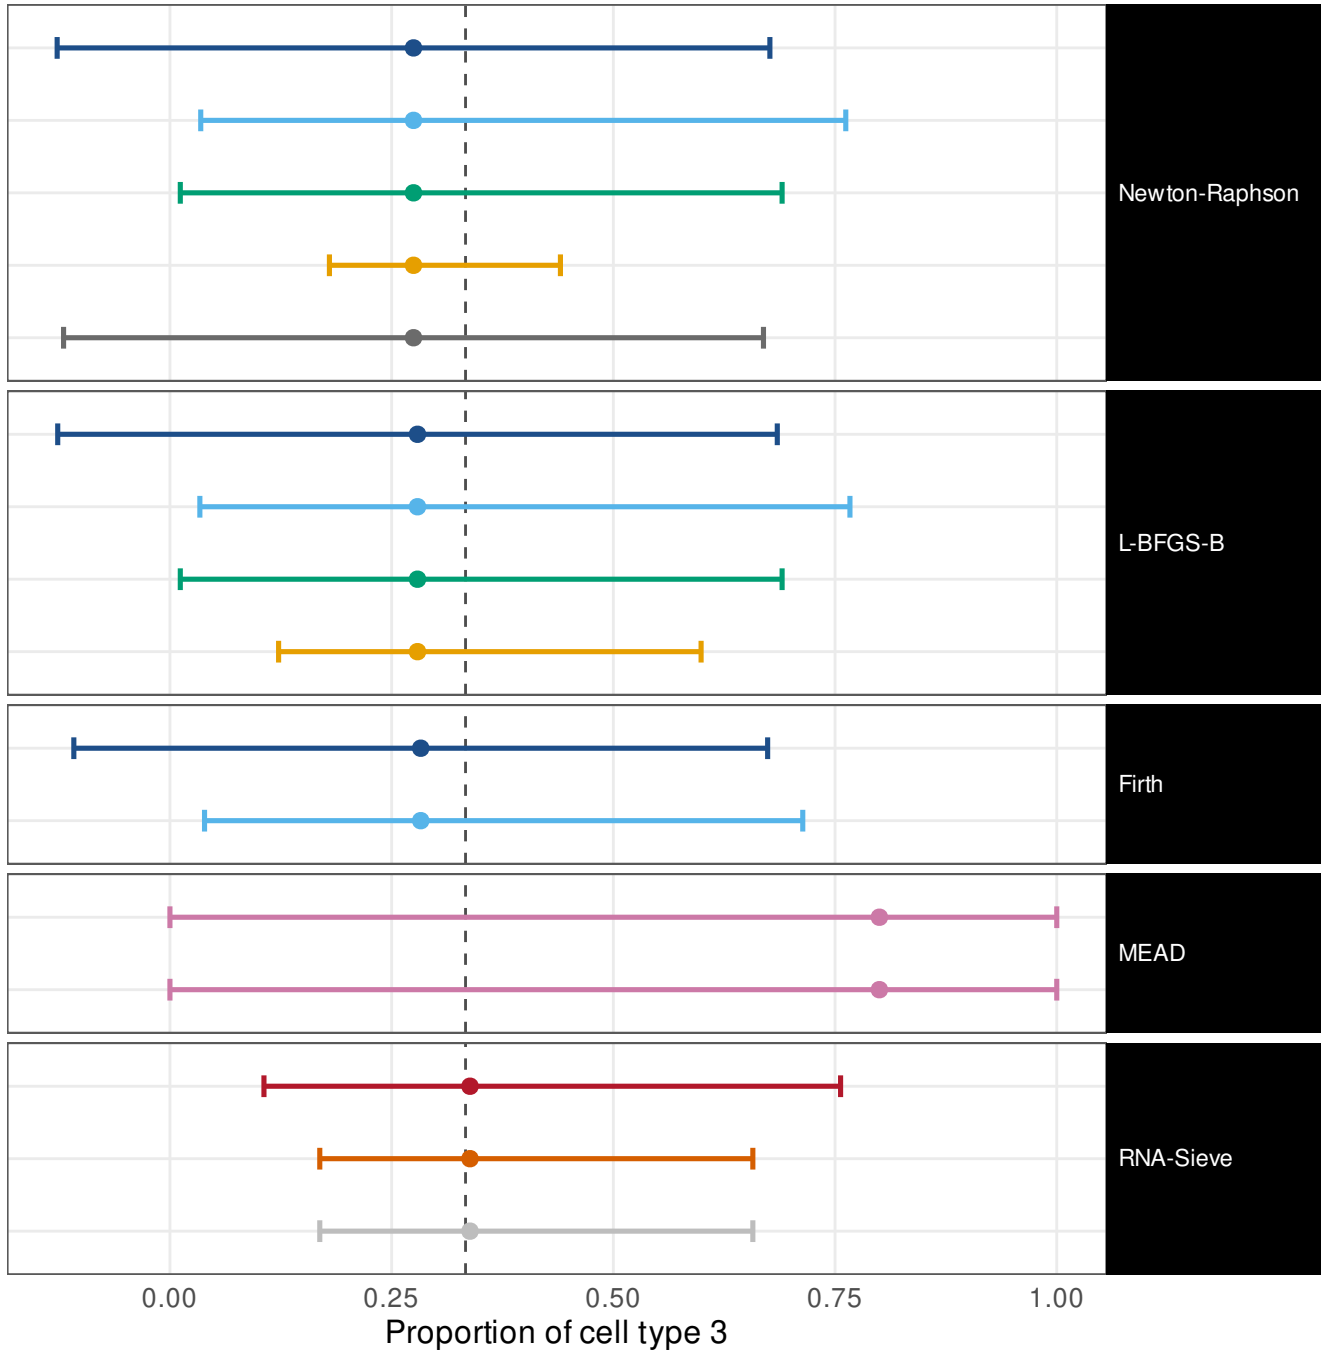


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 0.556
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.768
Profile likelihood	1	[0.57, 1]	w = 0.517
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.286
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.51
Wald (delta)	0.75	[0.3, 0.95]	w = 0.554
ILR, mapped back	0.75	[0.3, 0.95]	w = 0.734
Profile likelihood	1	[0.57, 1]	w = 0.517
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.242
Wald (delta)	0.75	[0.3, 0.95]	w = 0.547
ILR, mapped back	0.5	[0.15, 0.85]	w = 0.543
Method's own interval	1	[0.57, 1]	w = 0.985
Own interval, transcript fractions	1	[0.57, 1]	w = 0.985
Fisher information (Wald)	1	[0.57, 1]	w = 0.962
Godambe sandwich	1	[0.57, 1]	w = 0.841
Released code, as published	1	[0.57, 1]	w = 0.841

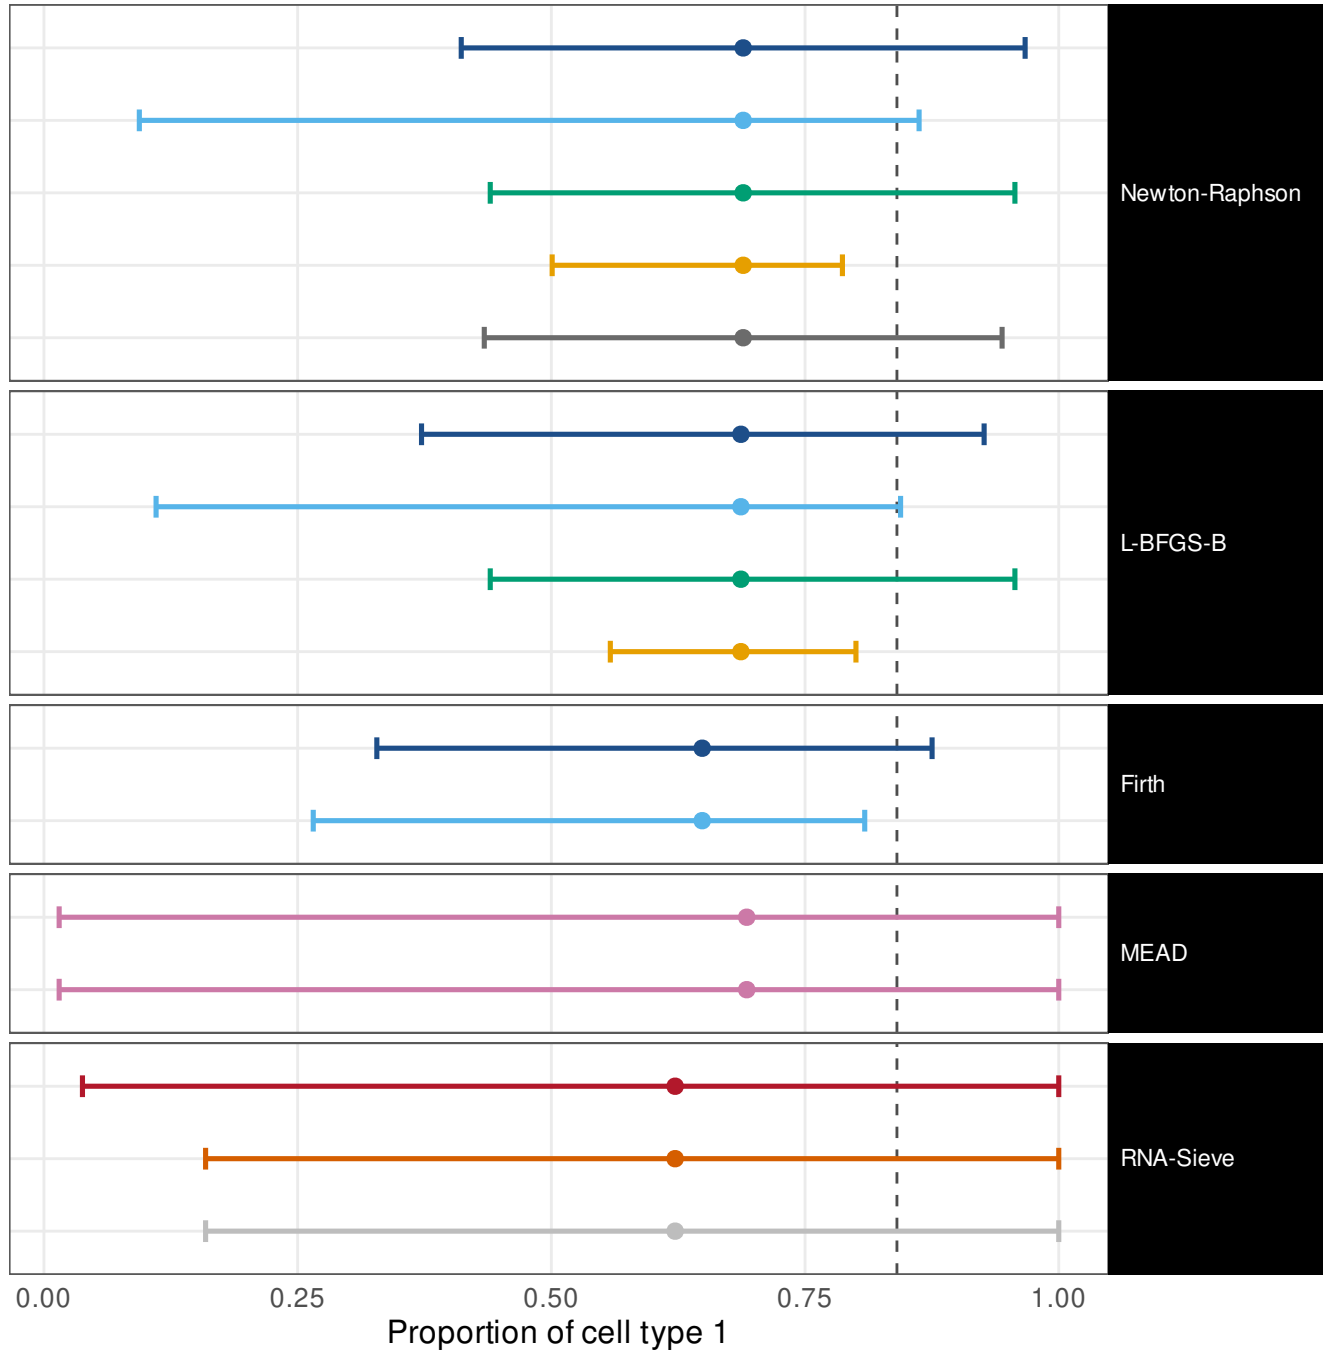


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 Scale-free / CT2 Scale-free


Wald (delta)	0.8 [0.38, 0.96]	w = 0.6
ILR, mapped back	0.8 [0.38, 0.96]	w = 0.675
Profile likelihood	1 [0.57, 1]	w = 0.469
Parametric bootstrap	0.4 [0.12, 0.77]	w = 0.245
Oracle (Fisher at p*)	0.8 [0.38, 0.96]	w = 0.59
Wald (delta)	0.75 [0.3, 0.95]	w = 0.585
ILR, mapped back	0.75 [0.3, 0.95]	w = 0.687
Profile likelihood	1 [0.57, 1]	w = 0.469
Parametric bootstrap	0.6 [0.23, 0.88]	w = 0.257
Wald (delta)	0.75 [0.3, 0.95]	w = 0.573
ILR, mapped back	0.75 [0.3, 0.95]	w = 0.565
Method's own interval	1 [0.57, 1]	w = 0.963
Own interval, transcript fractions	1 [0.57, 1]	w = 0.963
Fisher information (Wald)	1 [0.57, 1]	w = 0.935
Godambe sandwich	1 [0.57, 1]	w = 0.834
Released code, as published	1 [0.57, 1]	w = 0.834

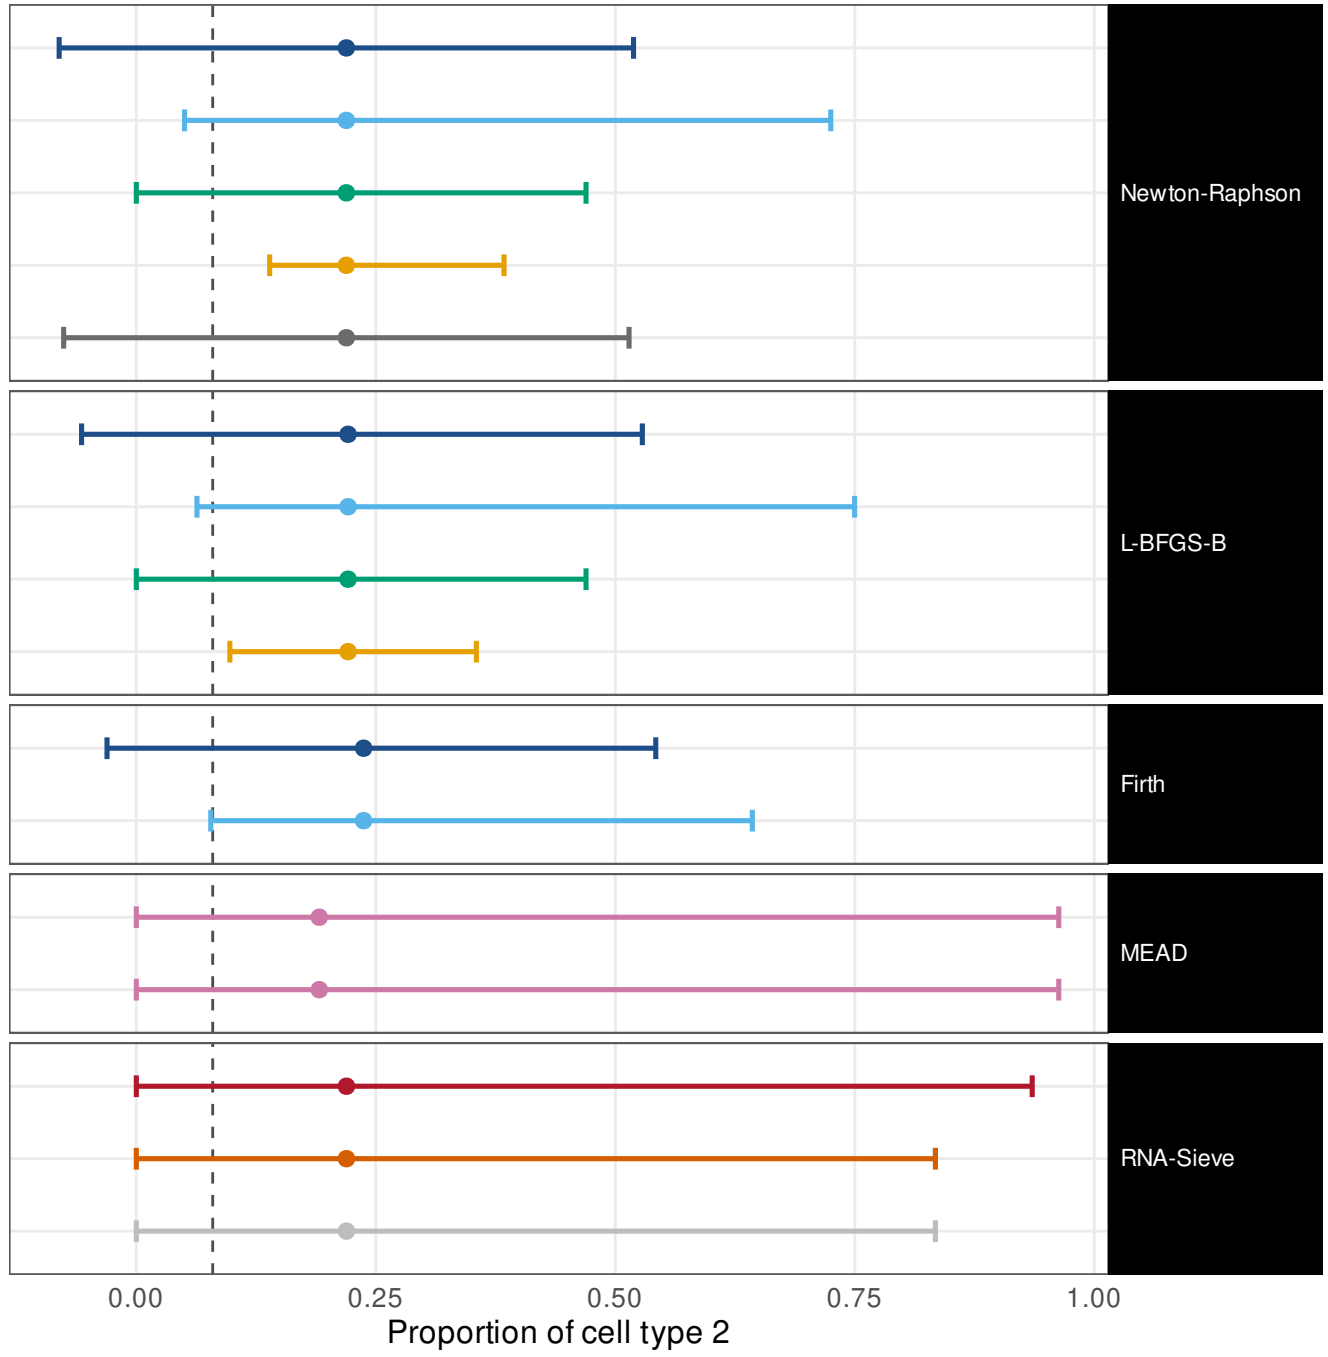

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 Scale-free / CT2 Scale-free

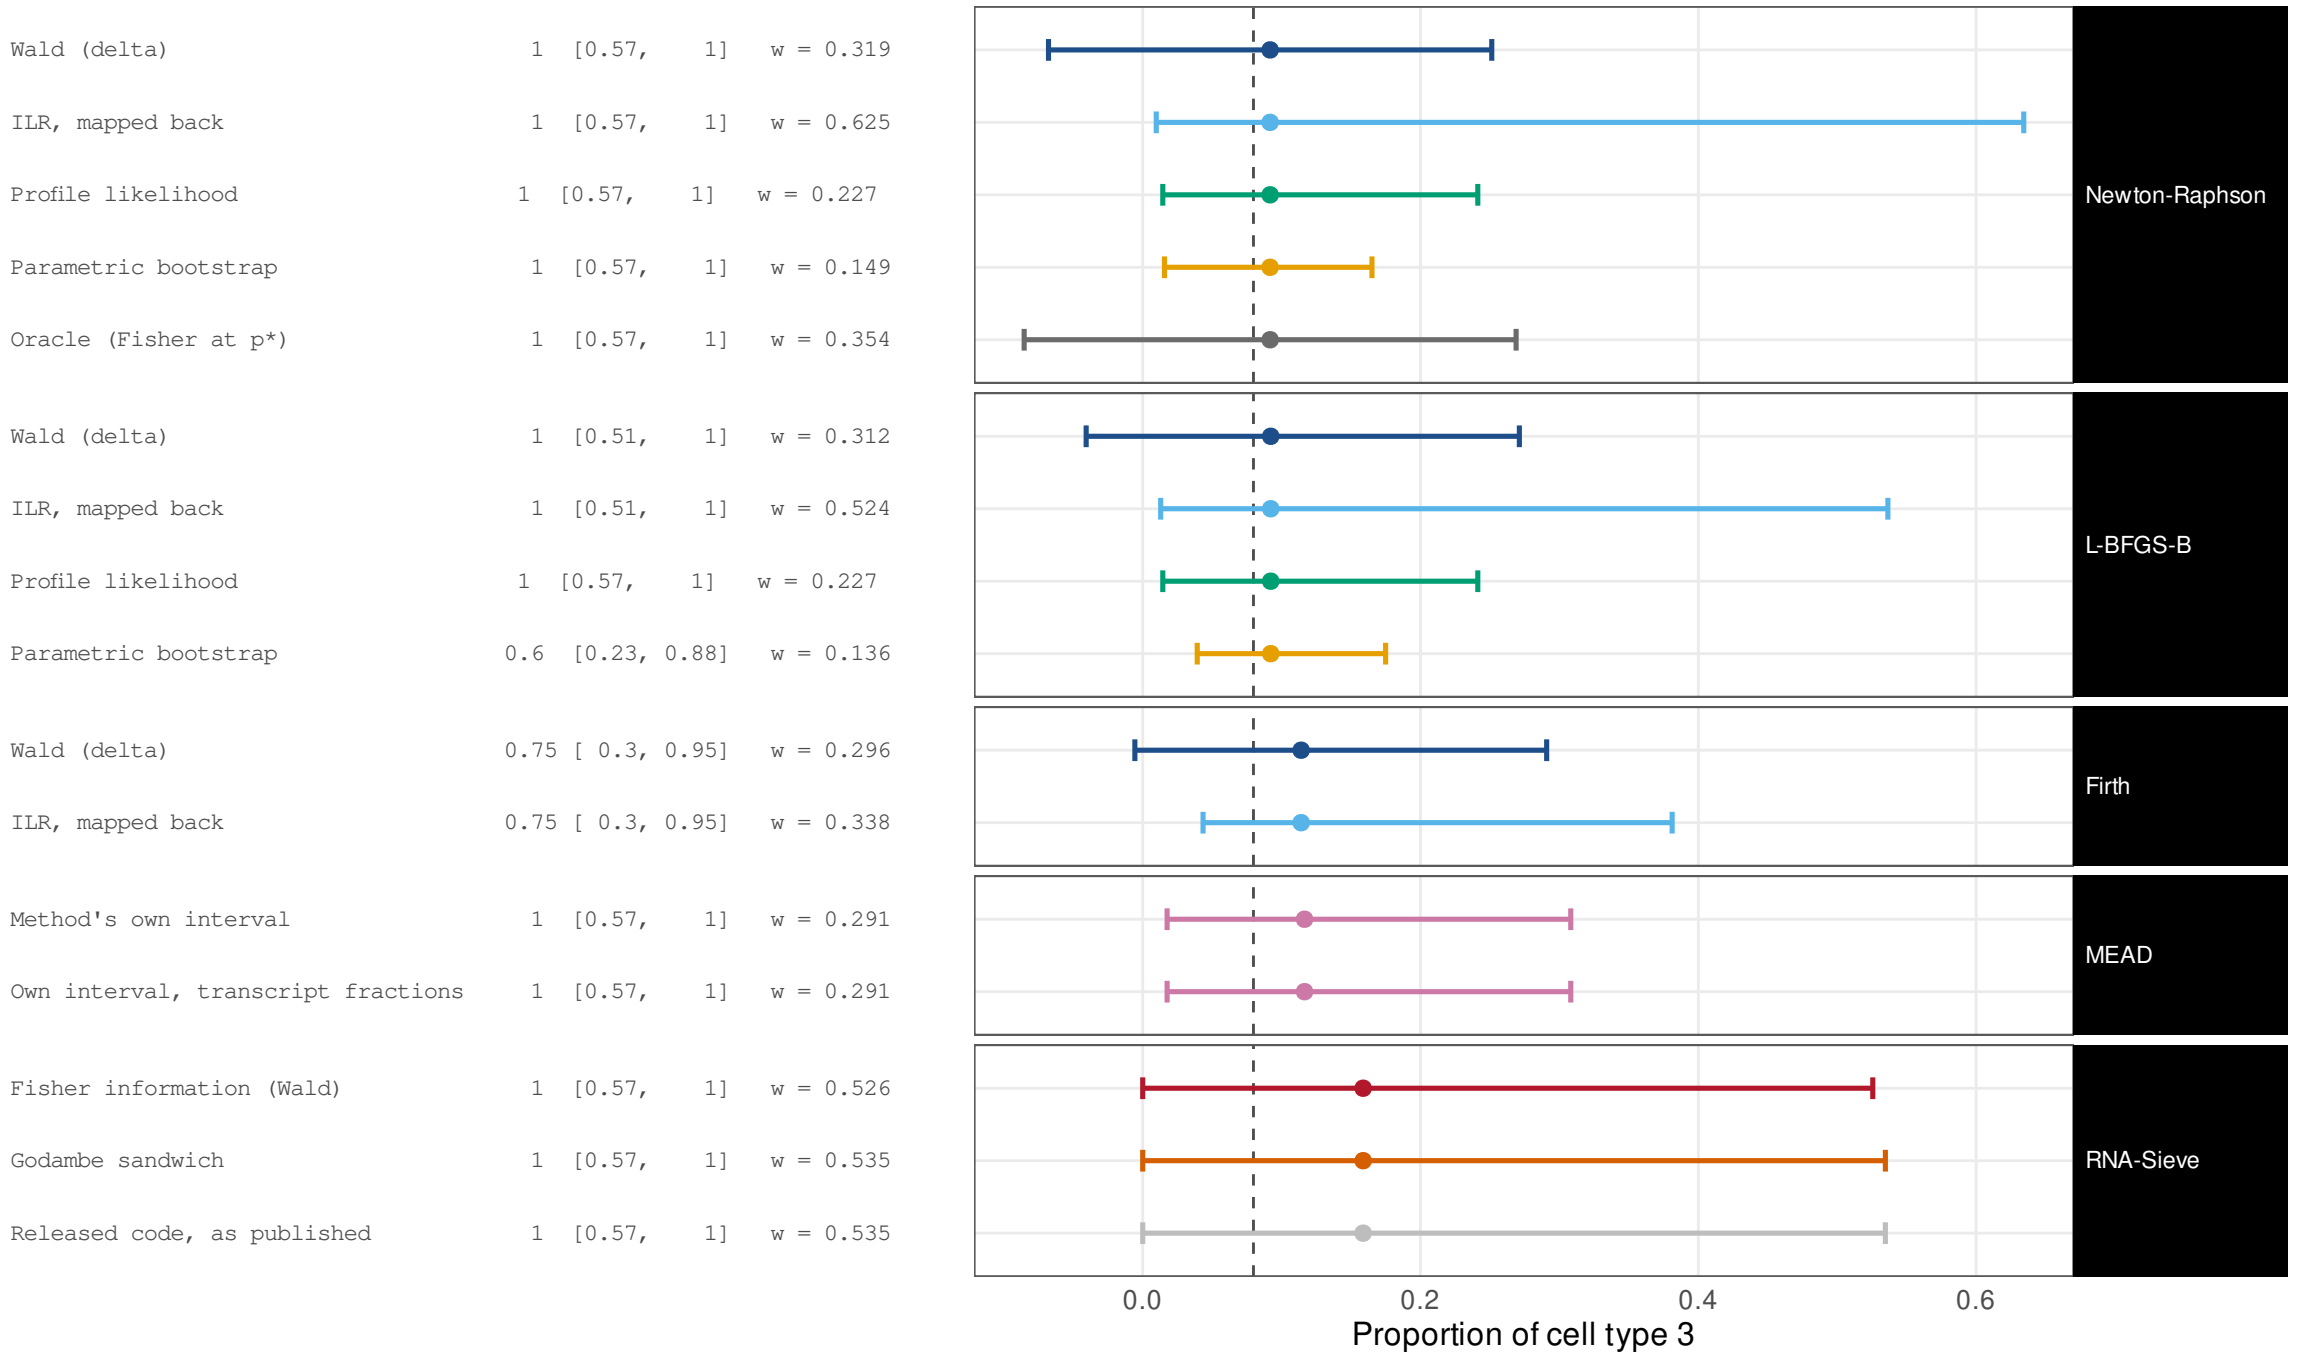


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 0.543
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.688
Profile likelihood	0.8	[0.38, 0.96]	w = 0.444
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.304
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.526
Wald (delta)	0.75	[0.3, 0.95]	w = 0.537
ILR, mapped back	0.75	[0.3, 0.95]	w = 0.616
Profile likelihood	0.8	[0.38, 0.96]	w = 0.444
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.424
Wald (delta)	0.75	[0.3, 0.95]	w = 0.531
ILR, mapped back	0.5	[0.15, 0.85]	w = 0.533
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.817
Godambe sandwich	1	[0.57, 1]	w = 0.729
Released code, as published	1	[0.57, 1]	w = 0.729

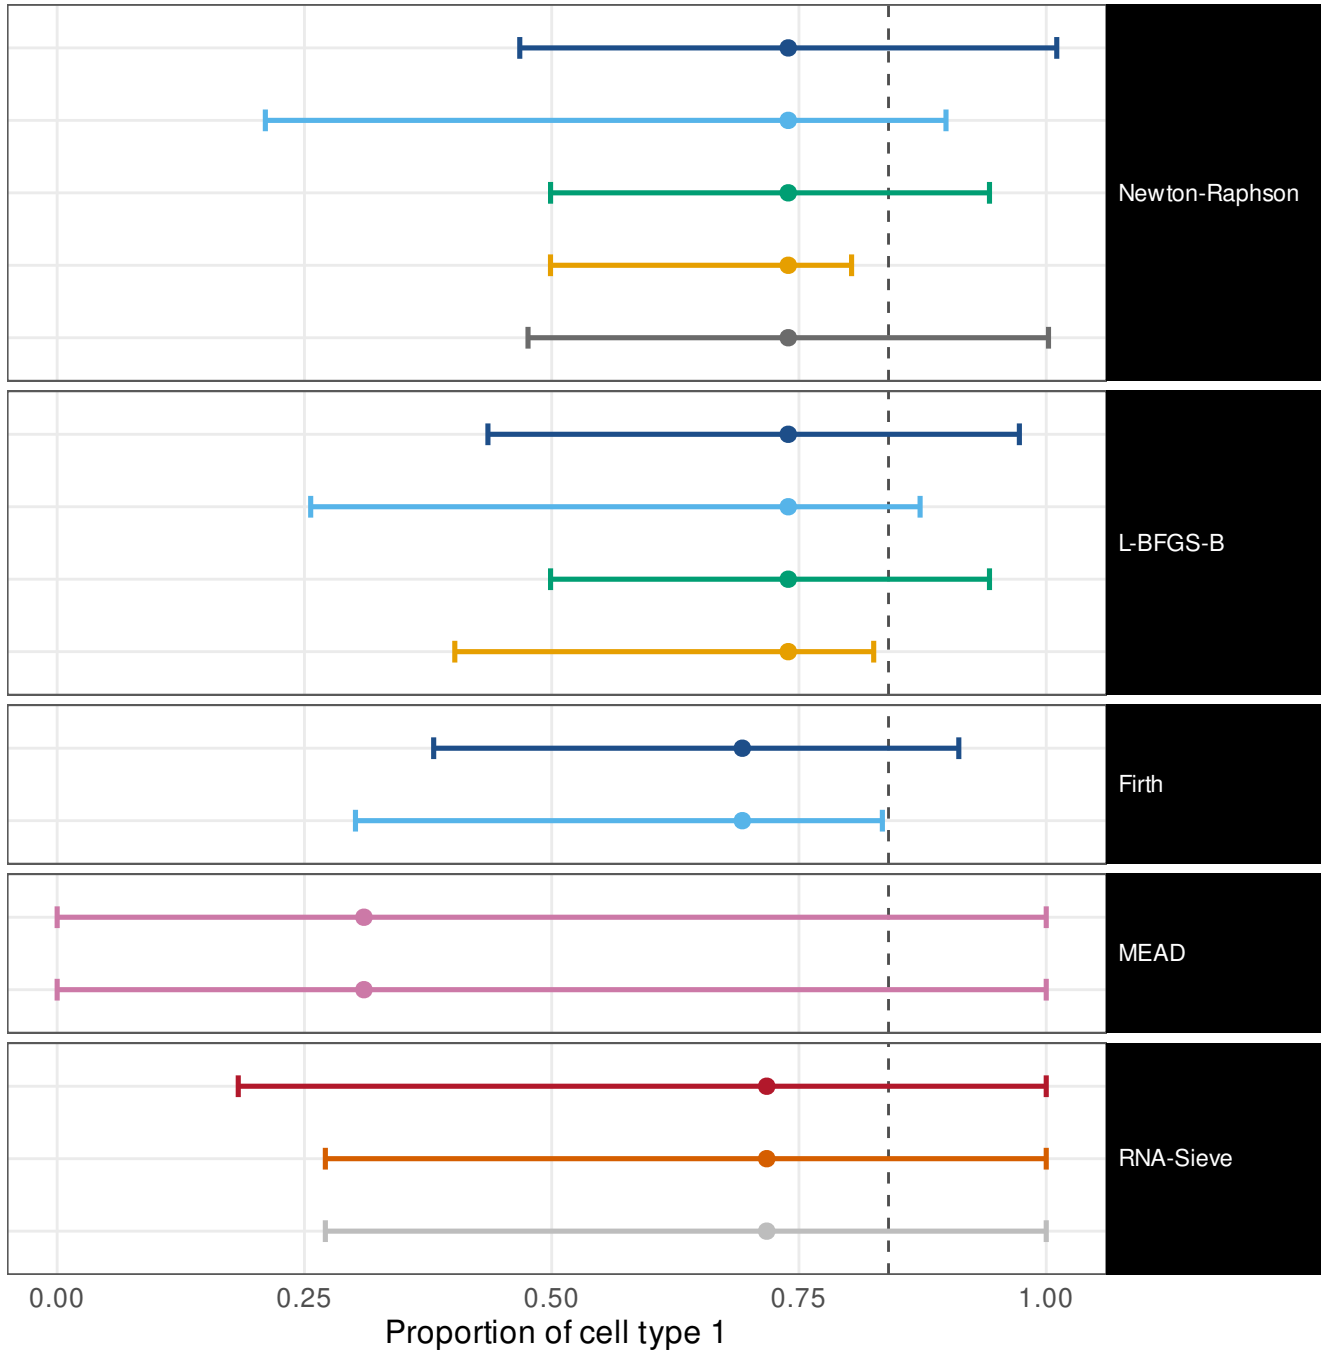


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 SBM / CT2 Scale-free


Wald (delta)	1	[0.57, 1]	w = 0.606
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.626
Profile likelihood	1	[0.57, 1]	w = 0.43
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.317
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.601
Wald (delta)	1	[0.51, 1]	w = 0.592
ILR, mapped back	0.75	[0.3, 0.95]	w = 0.602
Profile likelihood	1	[0.57, 1]	w = 0.43
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.378
Wald (delta)	1	[0.51, 1]	w = 0.573
ILR, mapped back	0.75	[0.3, 0.95]	w = 0.559
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.794
Godambe sandwich	1	[0.57, 1]	w = 0.752
Released code, as published	1	[0.57, 1]	w = 0.752

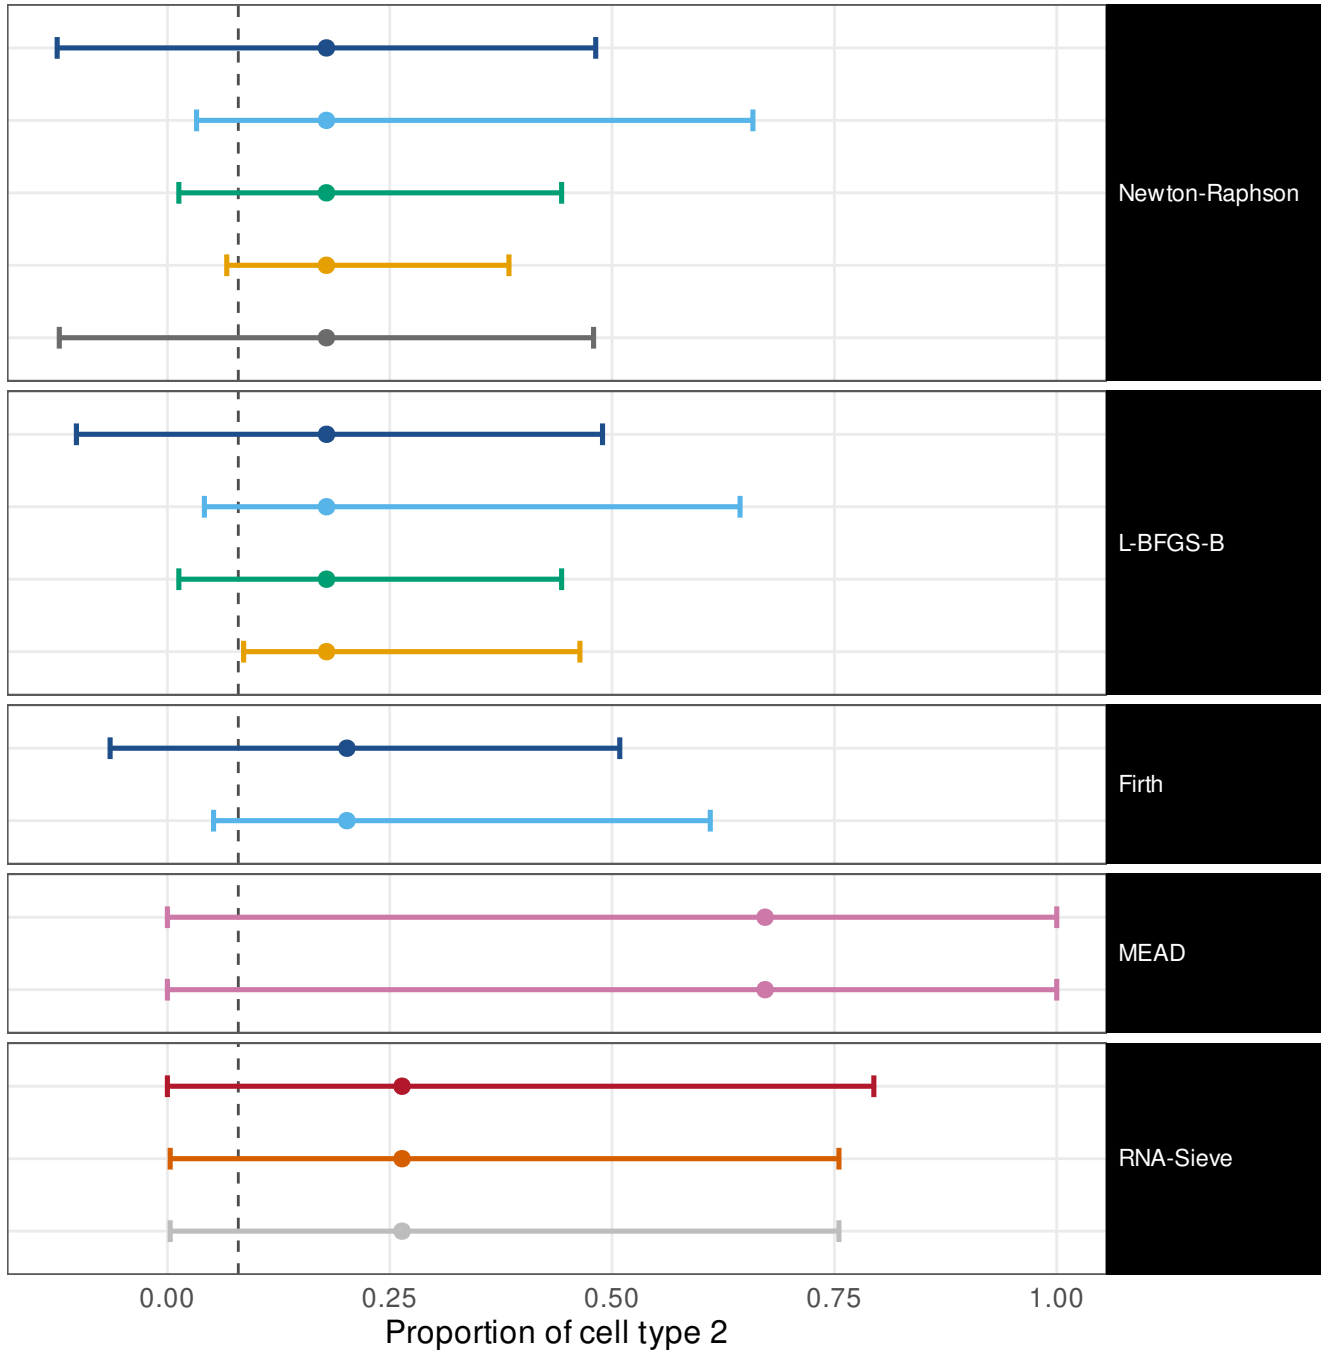

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 SBM / CT2 Scale-free

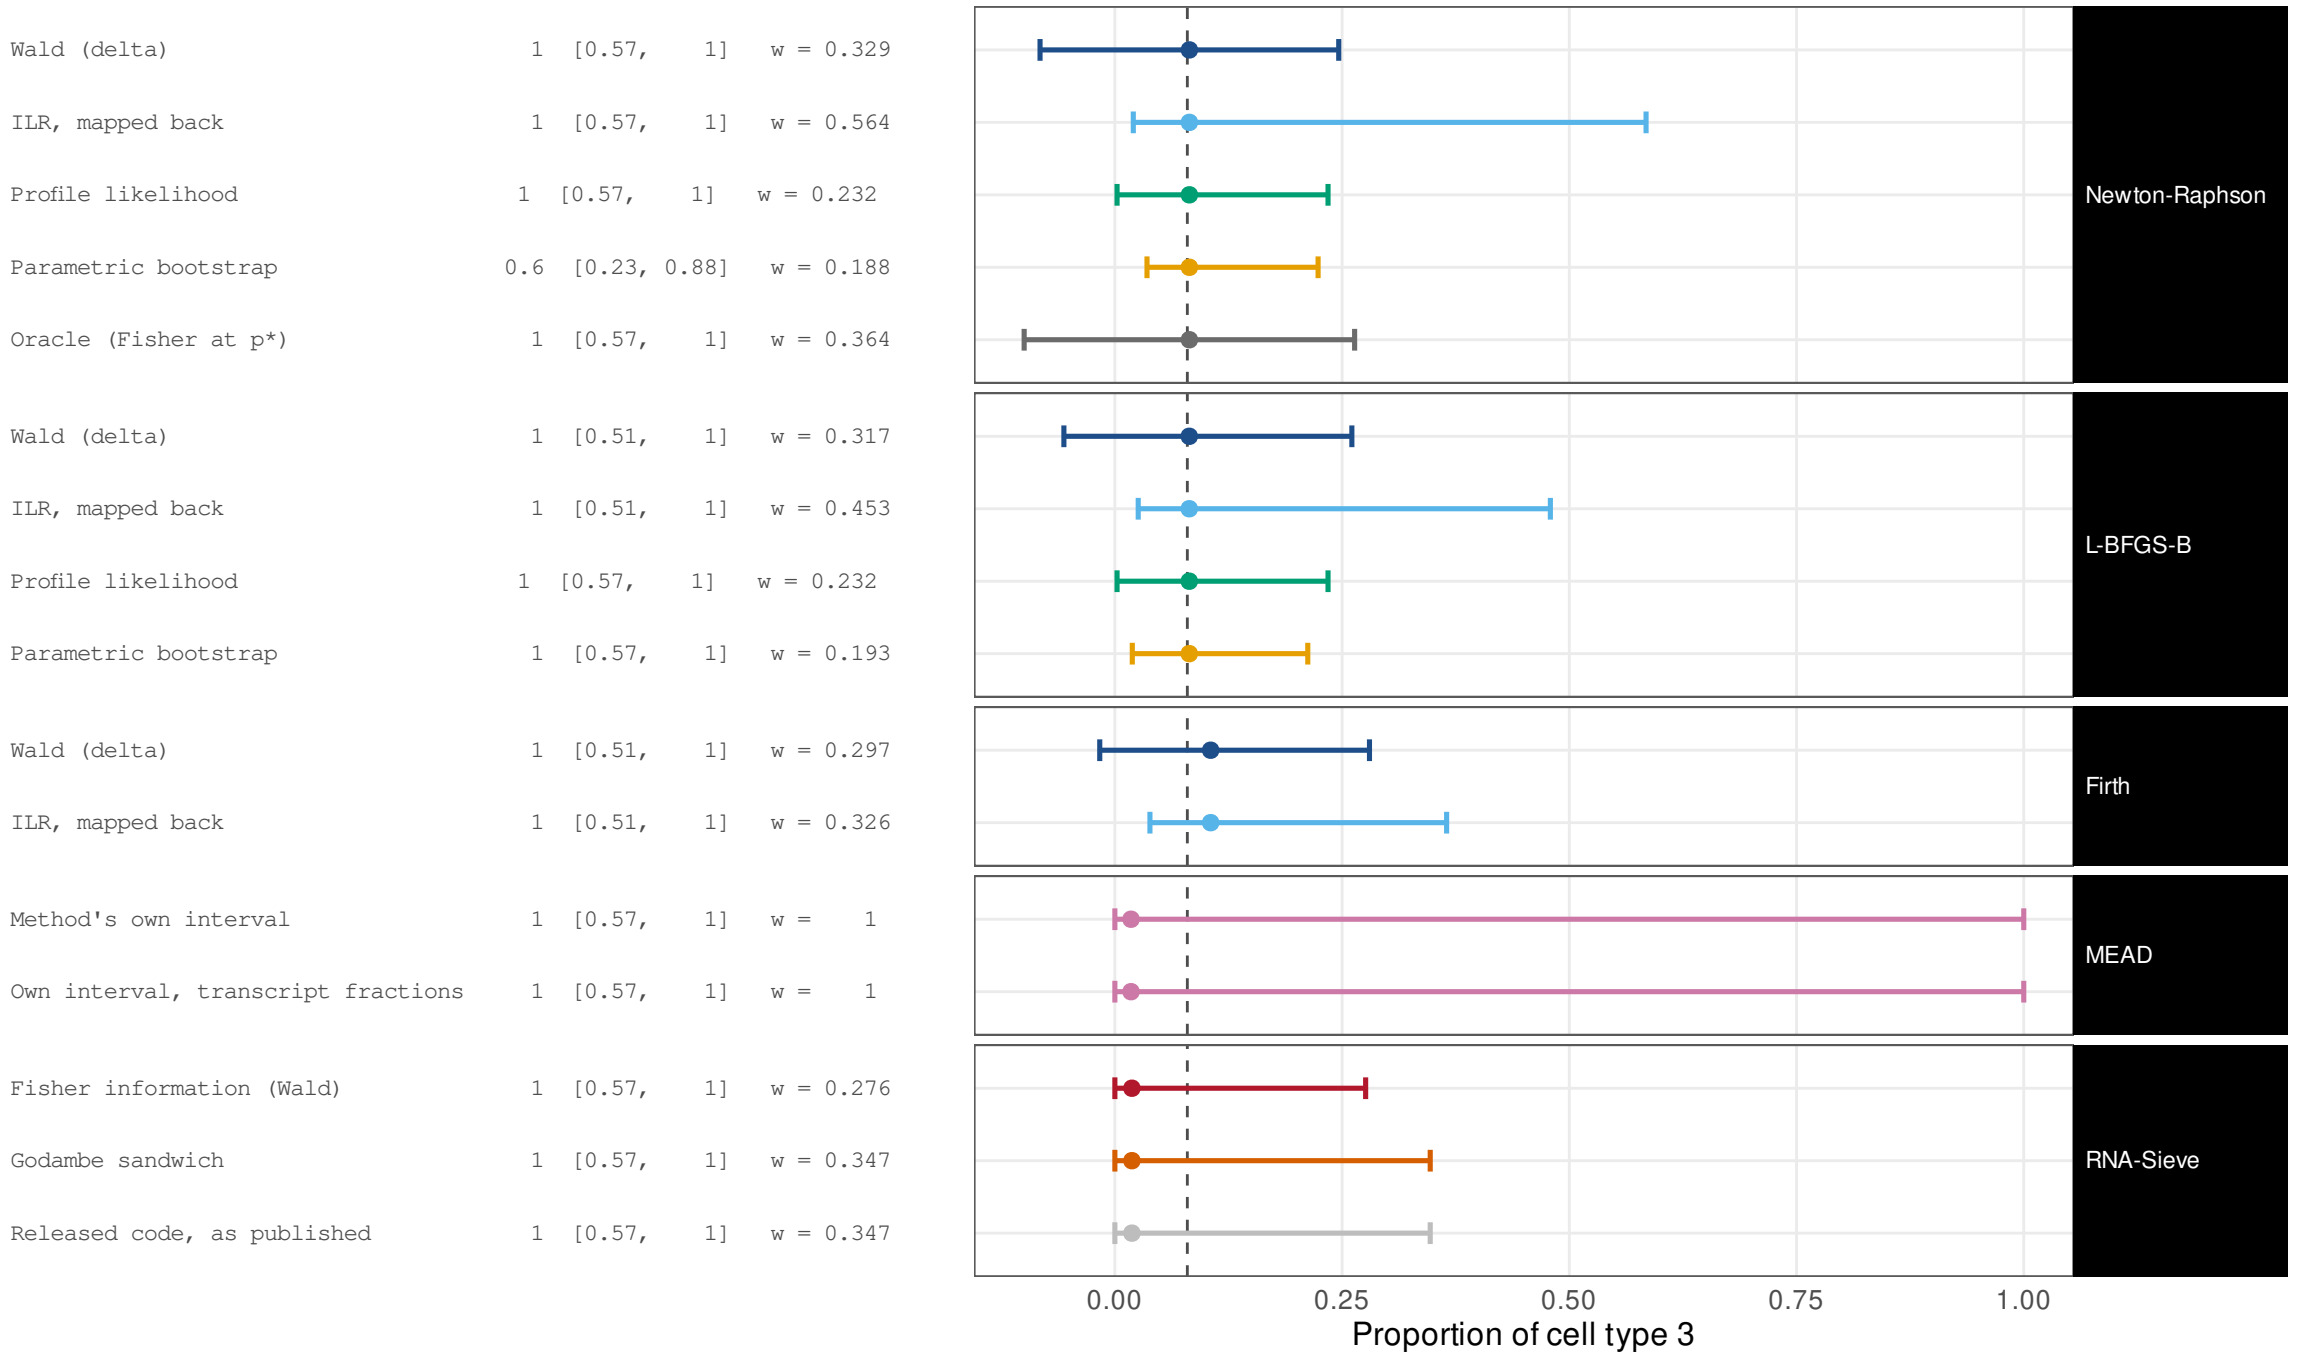


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.527
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.635
Profile likelihood	1	[0.57, 1]	w = 0.48
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.278
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.539
Wald (delta)	1	[0.57, 1]	w = 0.528
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.64
Profile likelihood	1	[0.57, 1]	w = 0.48
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.386
Wald (delta)	1	[0.57, 1]	w = 0.541
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.547
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.633
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.575
Released code, as published	0.6	[0.23, 0.88]	w = 0.575

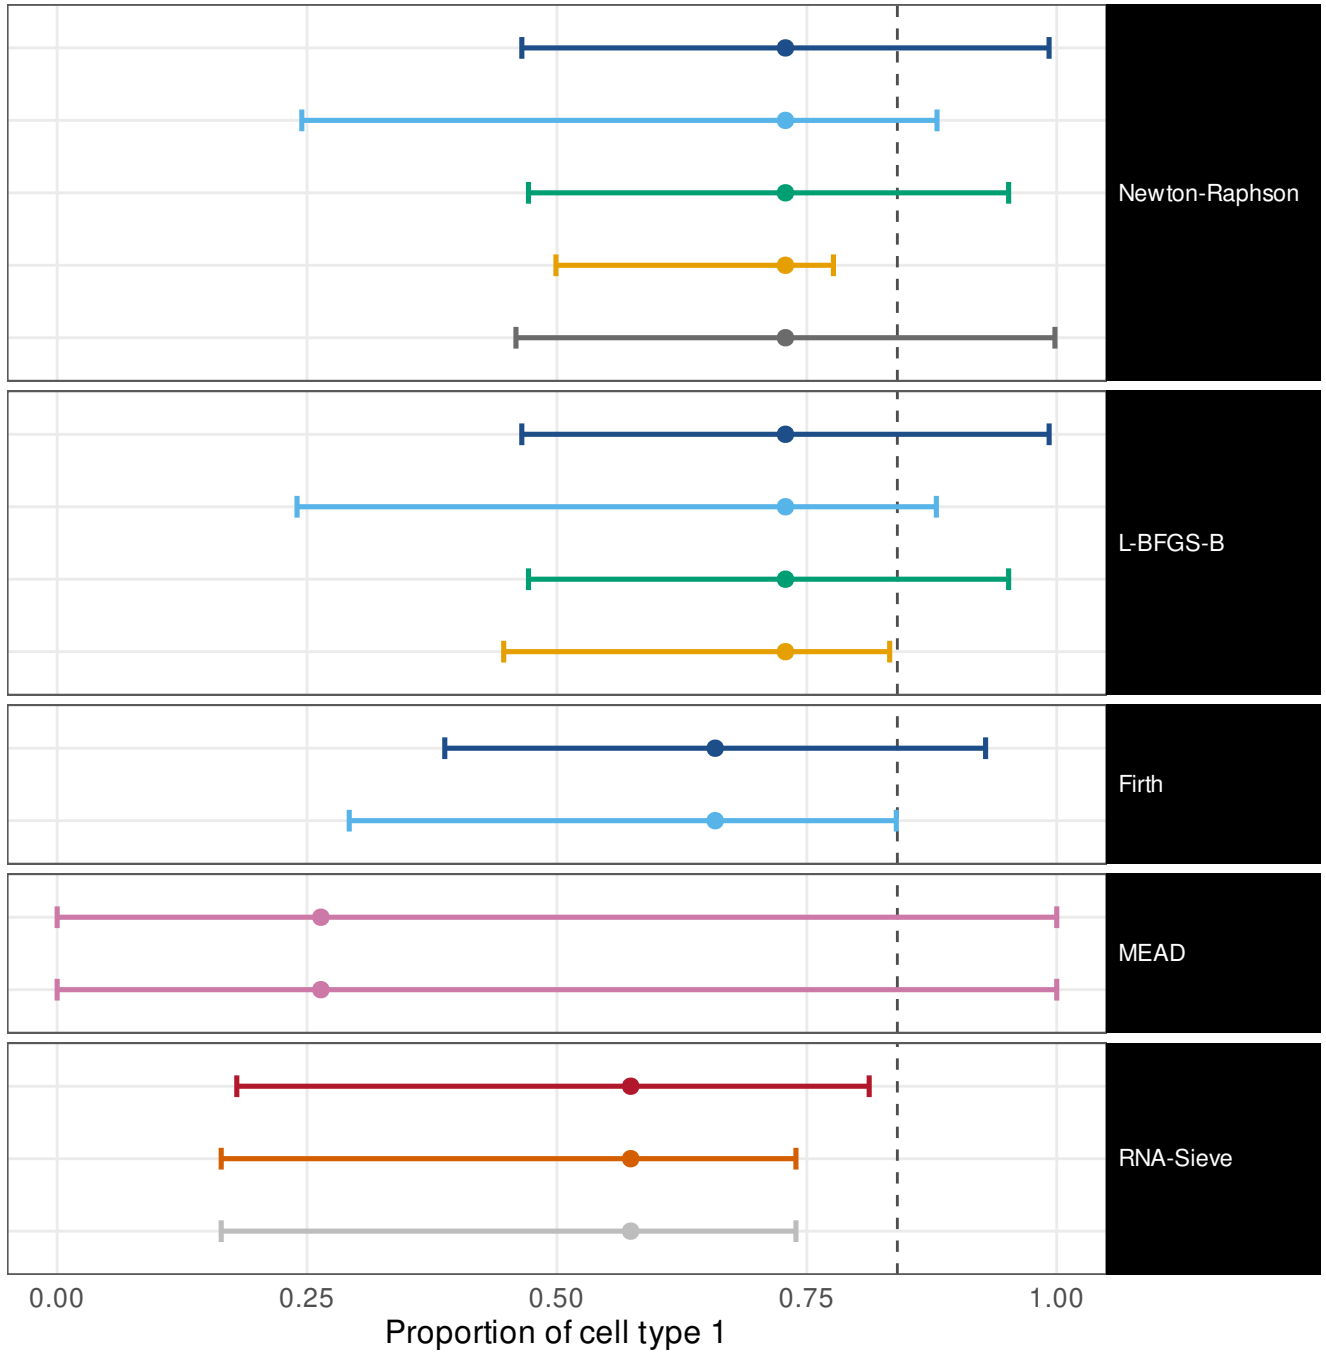


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 Scale-free / CT2 SBM


Wald (delta)	1	[0.57, 1]	w = 0.565
ILR, mapped back	1	[0.57, 1]	w = 0.677
Profile likelihood	1	[0.57, 1]	w = 0.389
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.284
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.602
Wald (delta)	1	[0.57, 1]	w = 0.565
ILR, mapped back	1	[0.57, 1]	w = 0.682
Profile likelihood	1	[0.57, 1]	w = 0.389
Parametric bootstrap	1	[0.57, 1]	w = 0.389
Wald (delta)	1	[0.57, 1]	w = 0.572
ILR, mapped back	1	[0.57, 1]	w = 0.577
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.616
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.576
Released code, as published	0.8	[0.38, 0.96]	w = 0.576

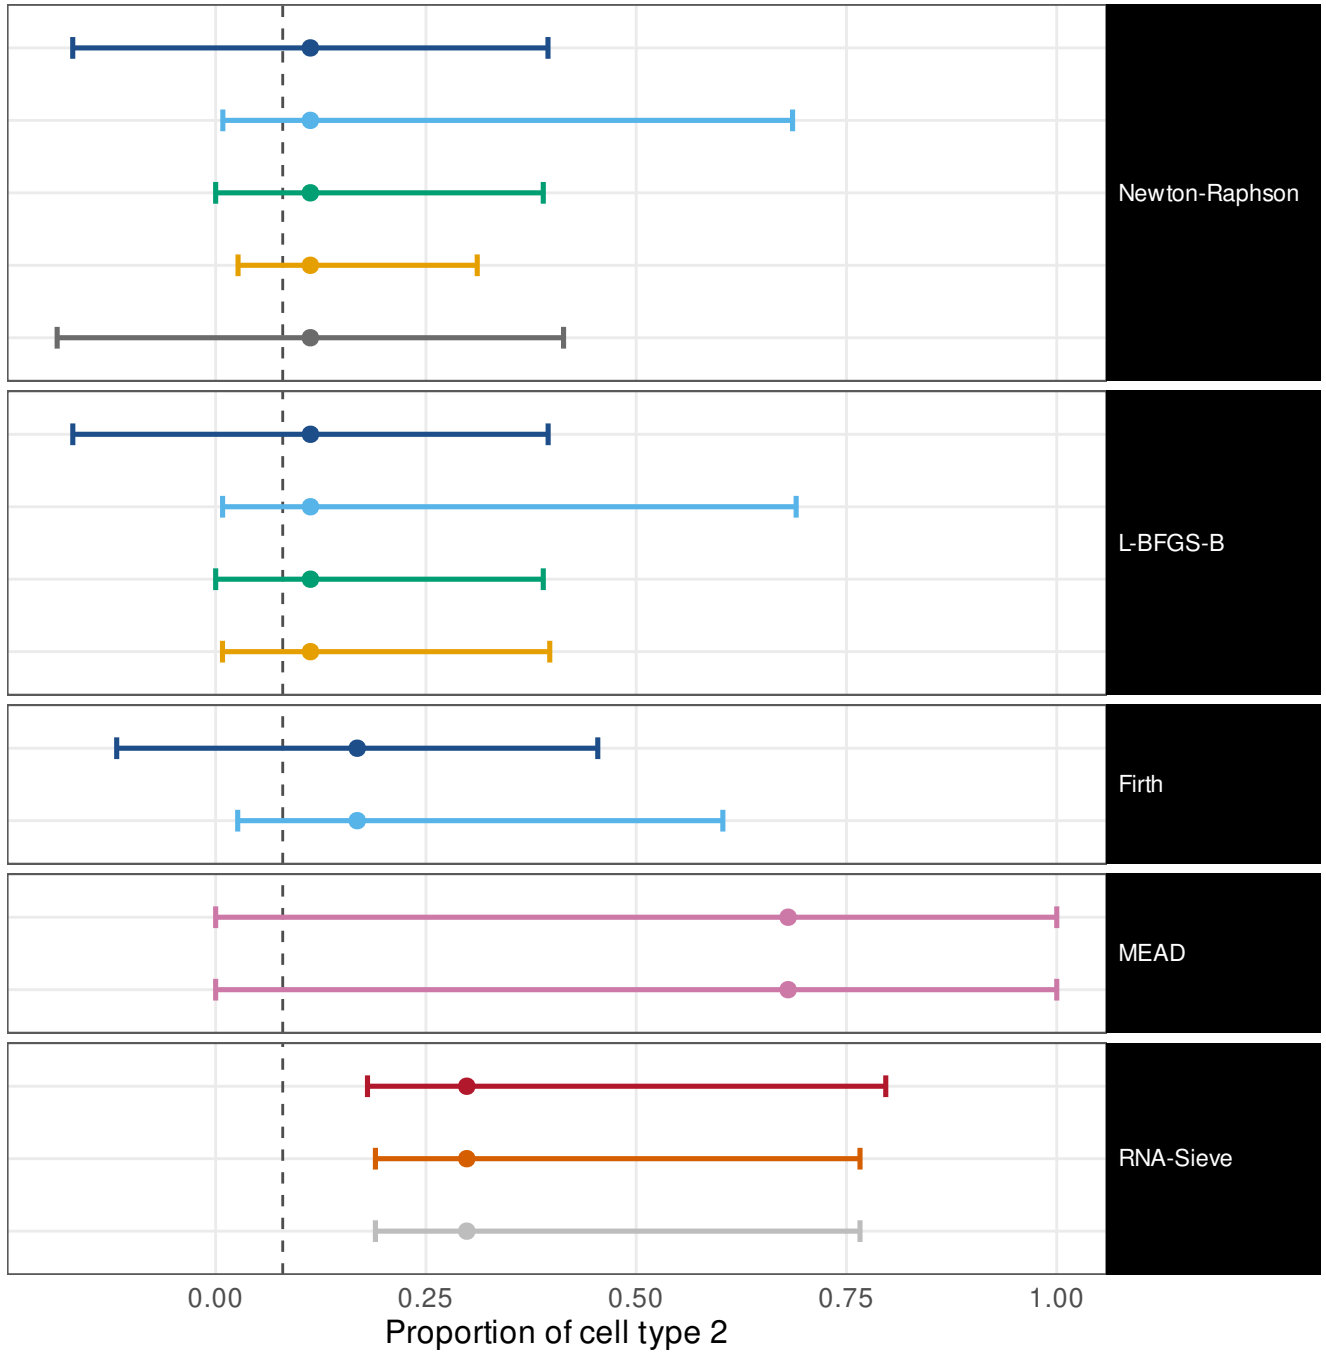

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 Scale-free / CT2 SBM

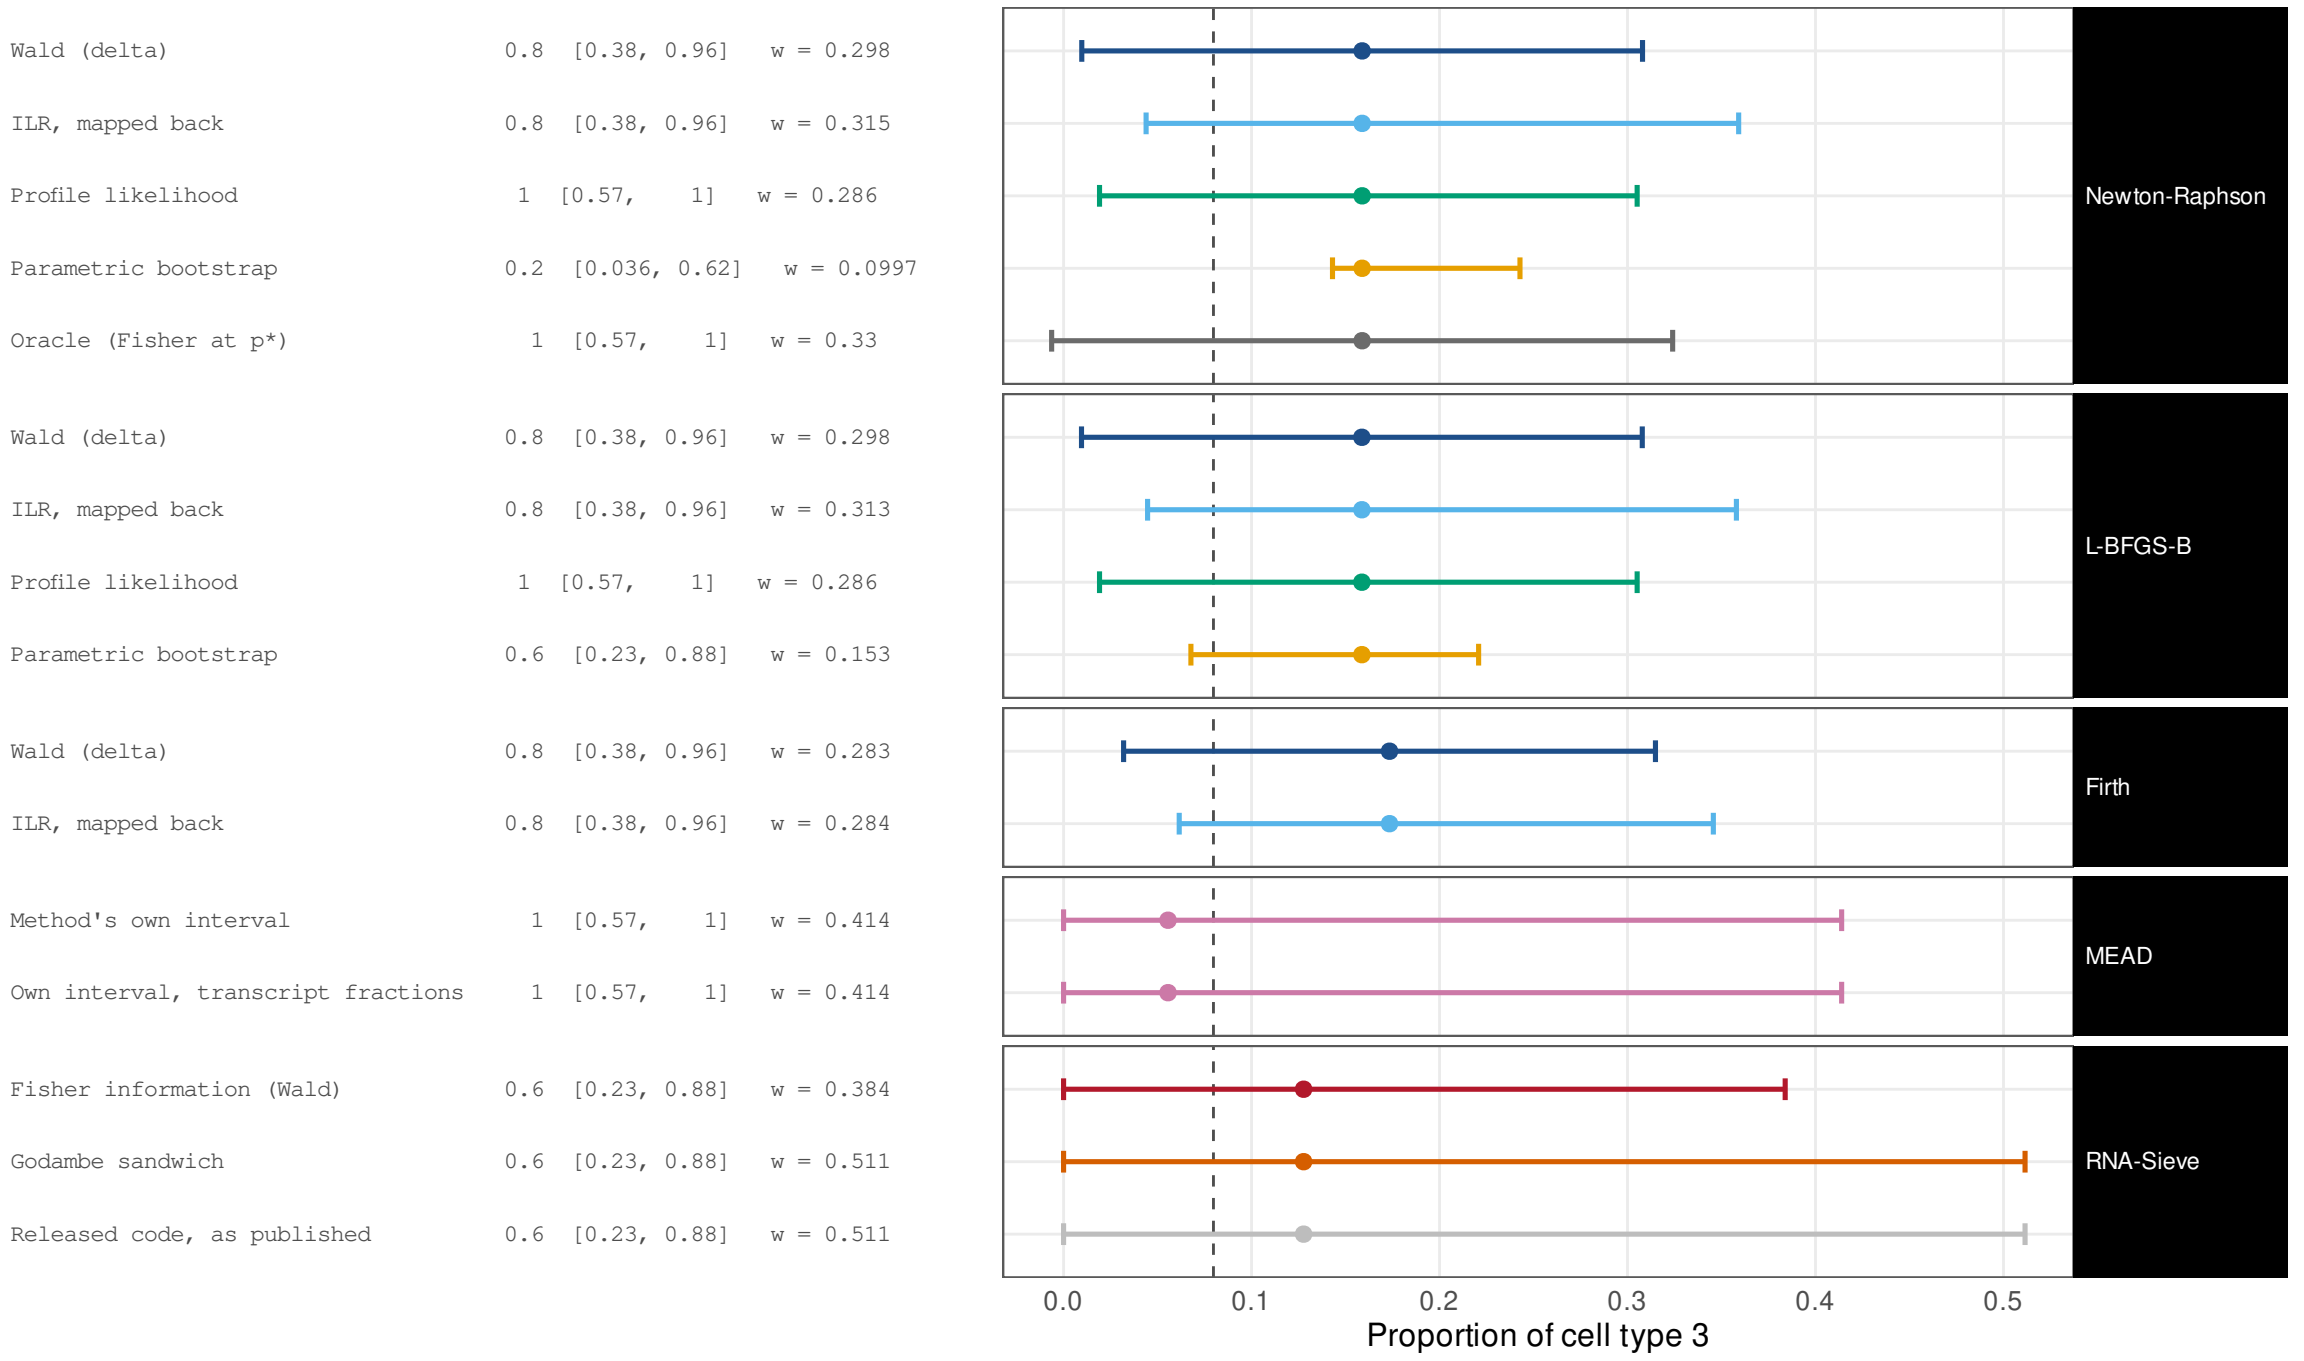


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 SBM / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.541
ILR, mapped back	1	[0.57, 1]	w = 0.873
Profile likelihood	1	[0.57, 1]	w = 0.359
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.285
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.519
Wald (delta)	1	[0.21, 1]	w = 0.553
ILR, mapped back	1	[0.21, 1]	w = 0.53
Profile likelihood	1	[0.57, 1]	w = 0.359
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.28
Wald (delta)	1	[0.21, 1]	w = 0.536
ILR, mapped back	0	[0, 0.79]	w = 0.508
Method's own interval	1	[0.57, 1]	w = 0.975
Own interval, transcript fractions	1	[0.57, 1]	w = 0.975
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.751
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.773
Released code, as published	0.6	[0.23, 0.88]	w = 0.773

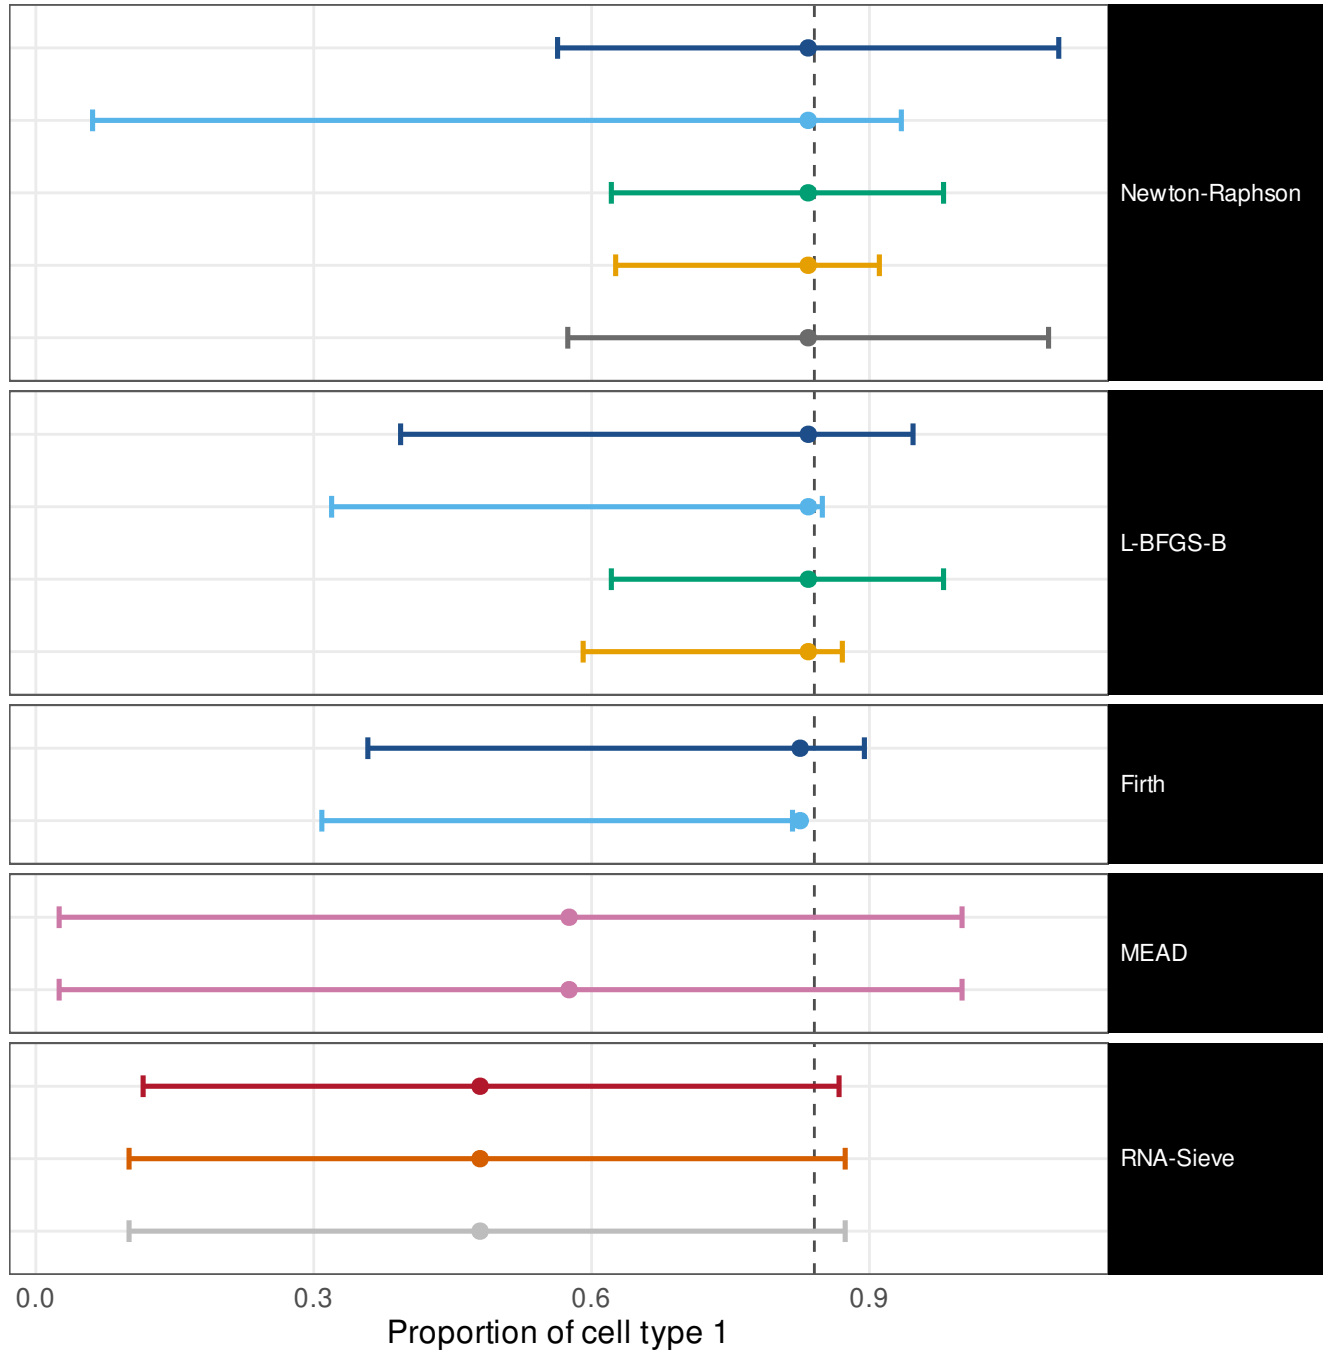


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 SBM / CT2 SBM


Wald (delta)	1	[0.57, 1]	w = 0.633
ILR, mapped back	1	[0.57, 1]	w = 0.838
Profile likelihood	1	[0.57, 1]	w = 0.329
Parametric bootstrap	1	[0.57, 1]	w = 0.28
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.611
Wald (delta)	1	[0.21, 1]	w = 0.63
ILR, mapped back	1	[0.21, 1]	w = 0.565
Profile likelihood	1	[0.57, 1]	w = 0.329
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.309
Wald (delta)	1	[0.21, 1]	w = 0.6
ILR, mapped back	1	[0.21, 1]	w = 0.553
Method's own interval	1	[0.57, 1]	w = 0.98
Own interval, transcript fractions	1	[0.57, 1]	w = 0.98
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.807
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.768
Released code, as published	0.6	[0.23, 0.88]	w = 0.768

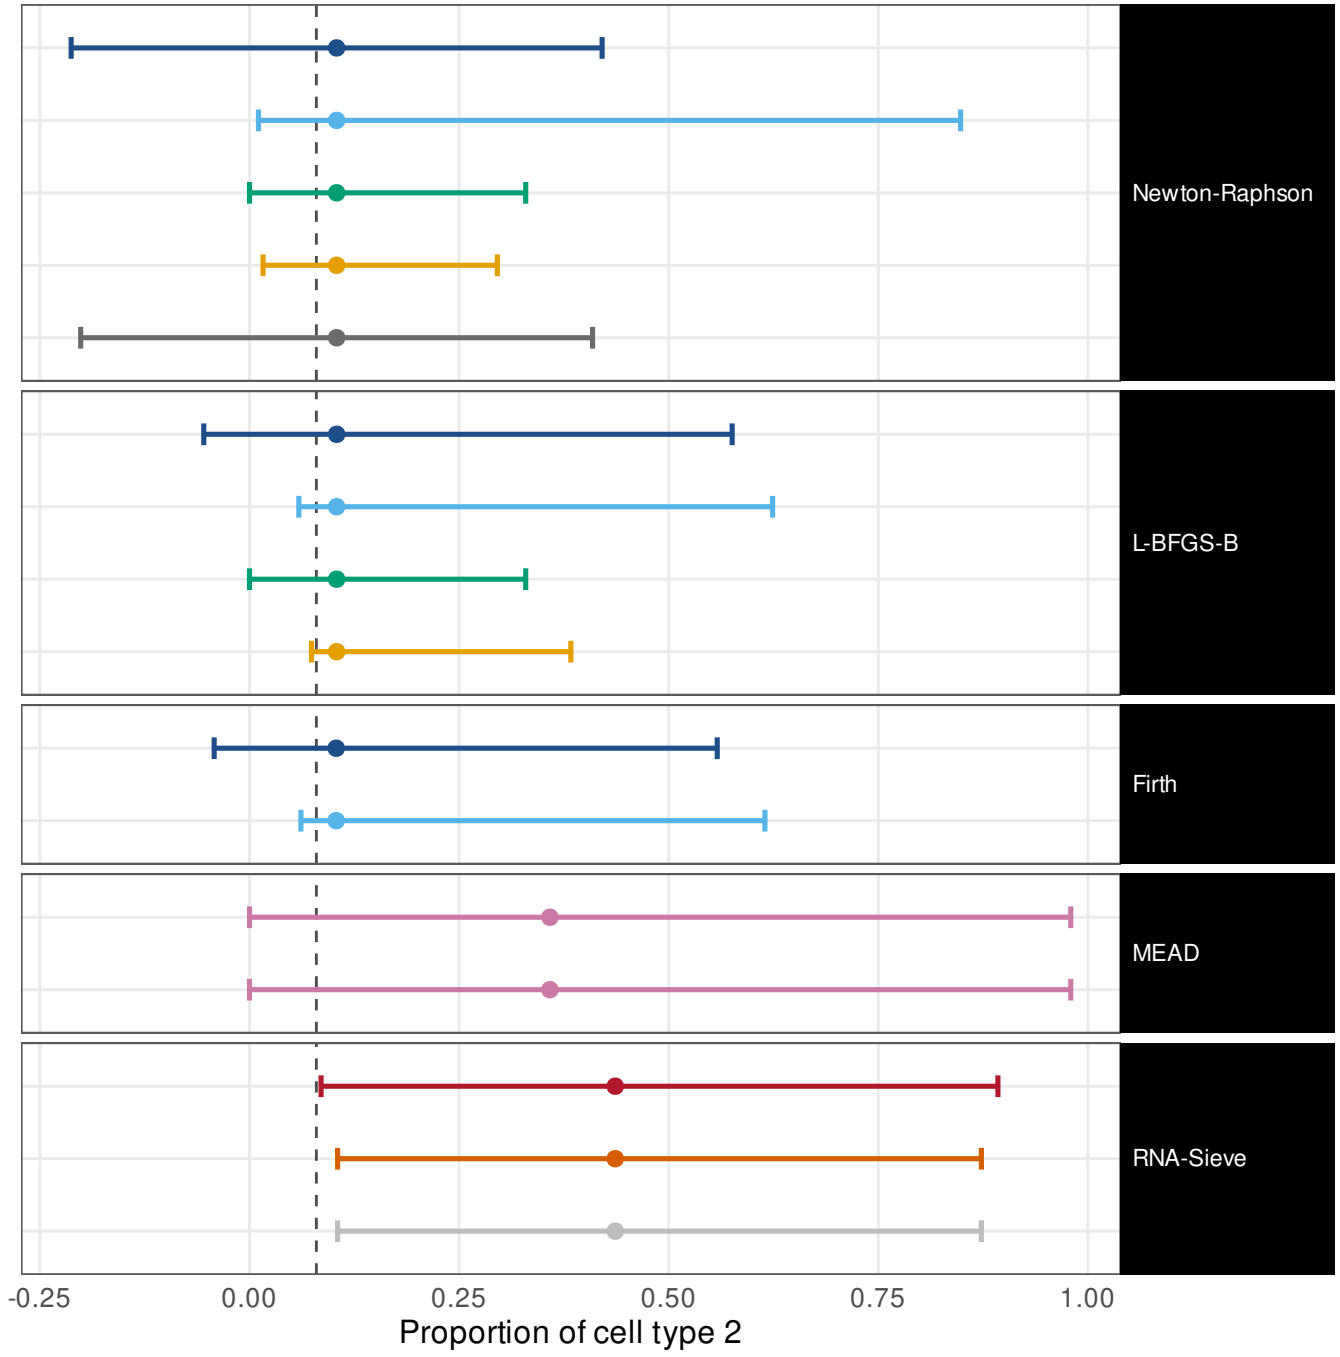

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / low overlap / CT1 SBM / CT2 SBM

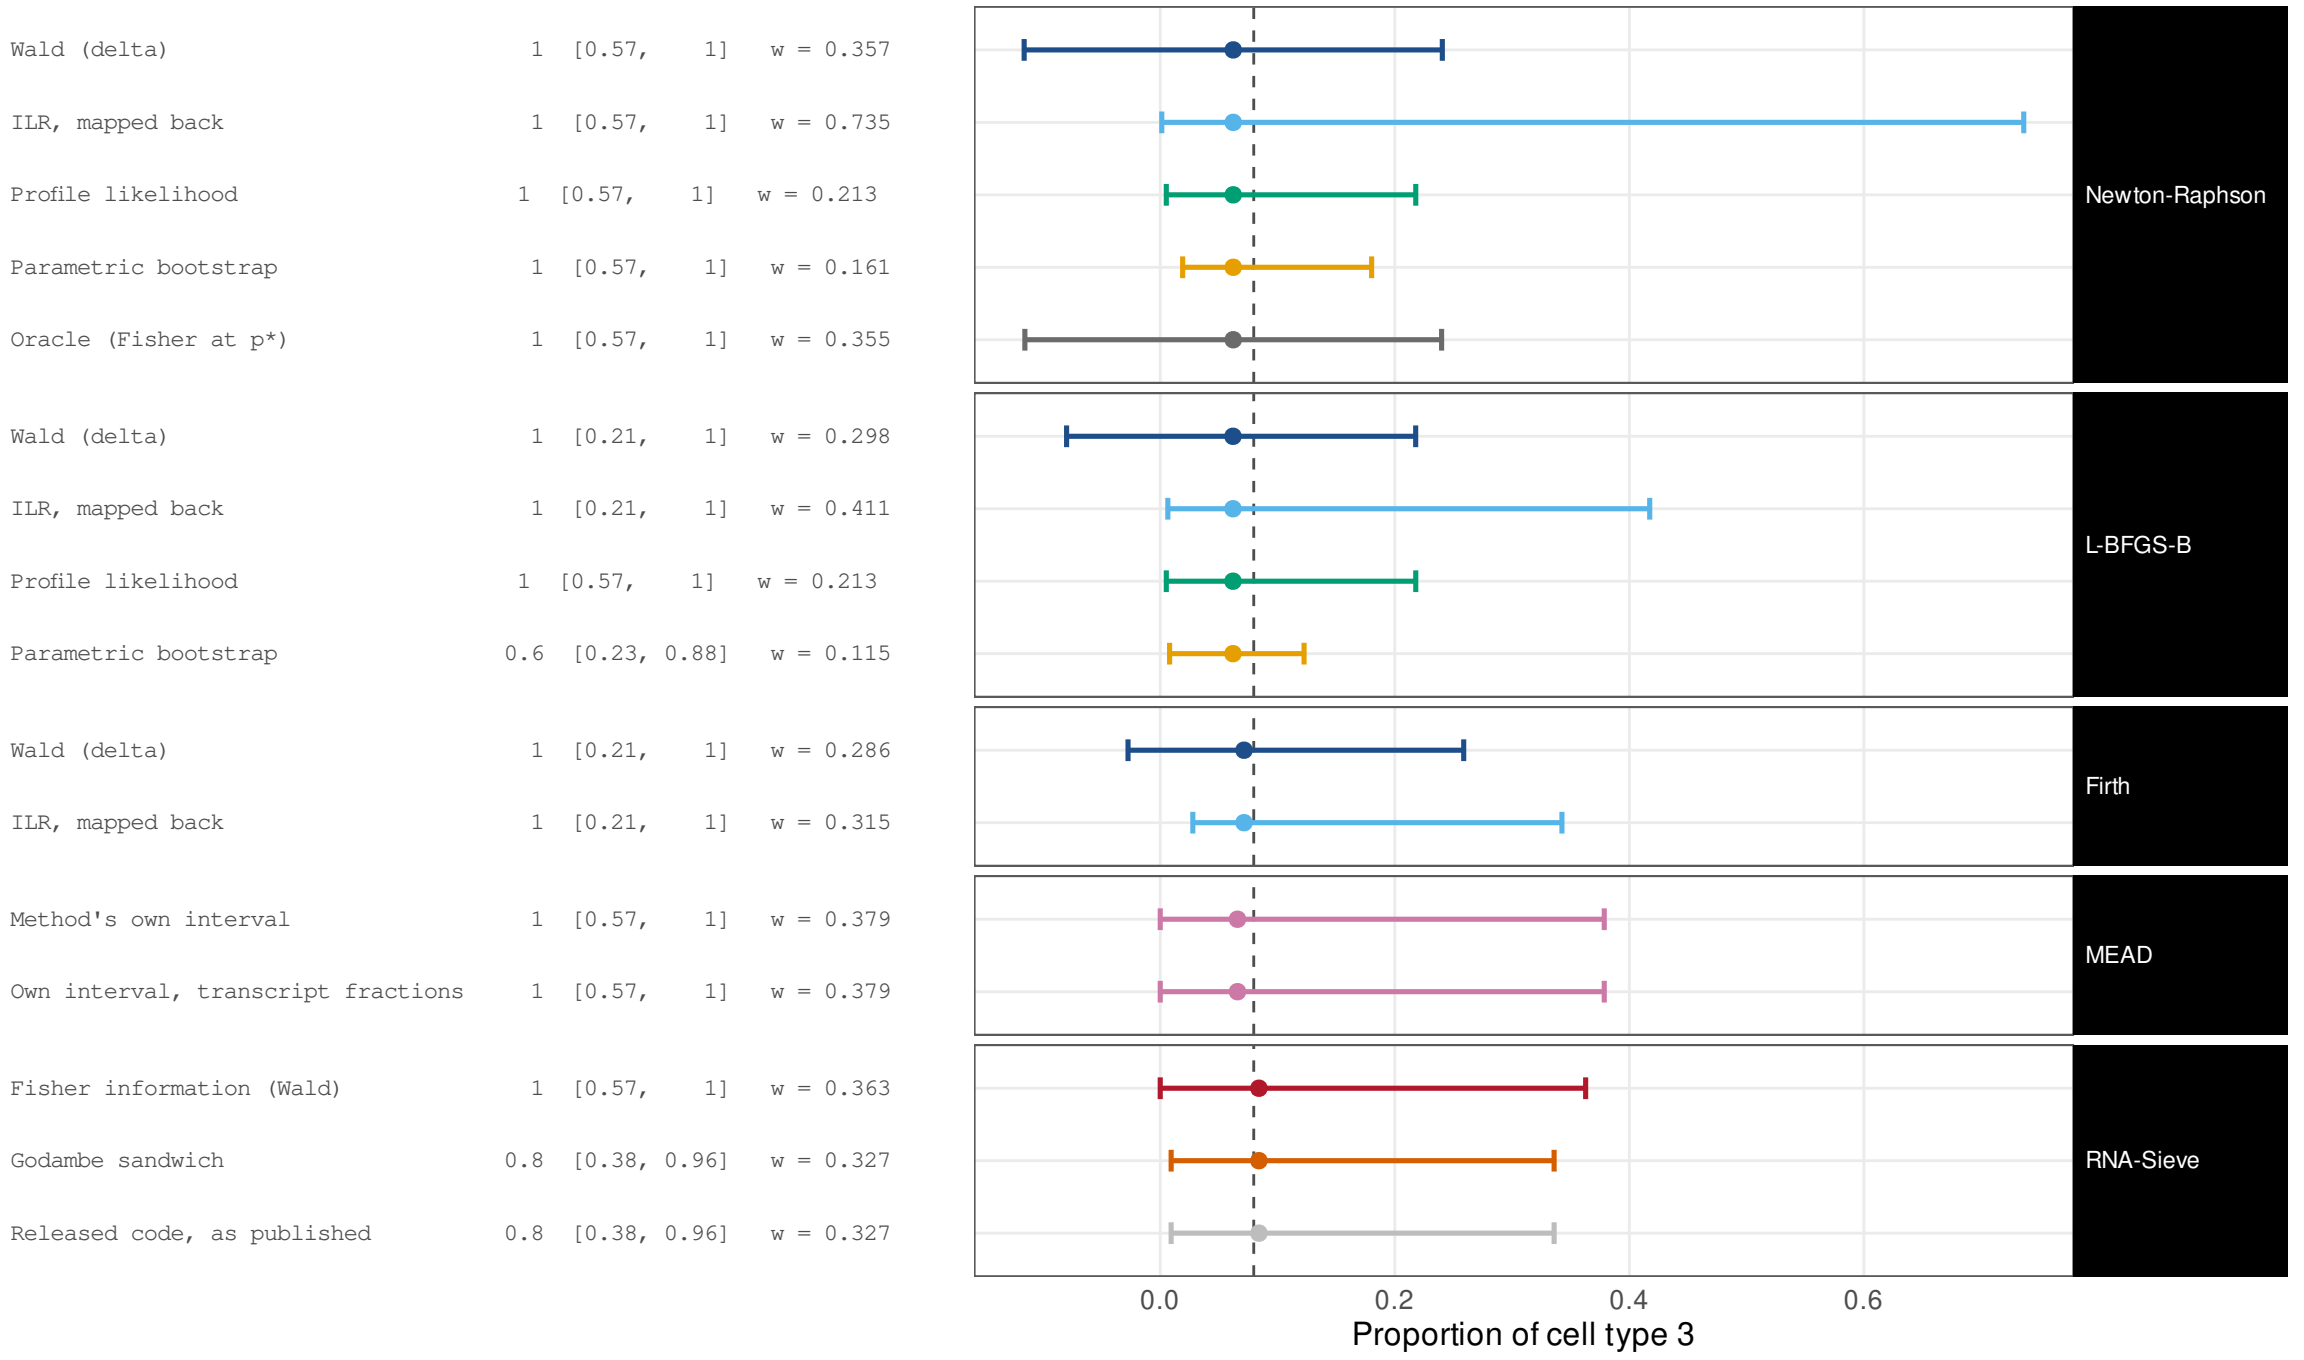


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.569
ILR, mapped back	1	[0.57, 1]	w = 0.912
Profile likelihood	1	[0.57, 1]	w = 0.443
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.342
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.575
Profile likelihood	1	[0.57, 1]	w = 0.443
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.706
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.769
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.759
Released code, as published	0.8	[0.38, 0.96]	w = 0.759

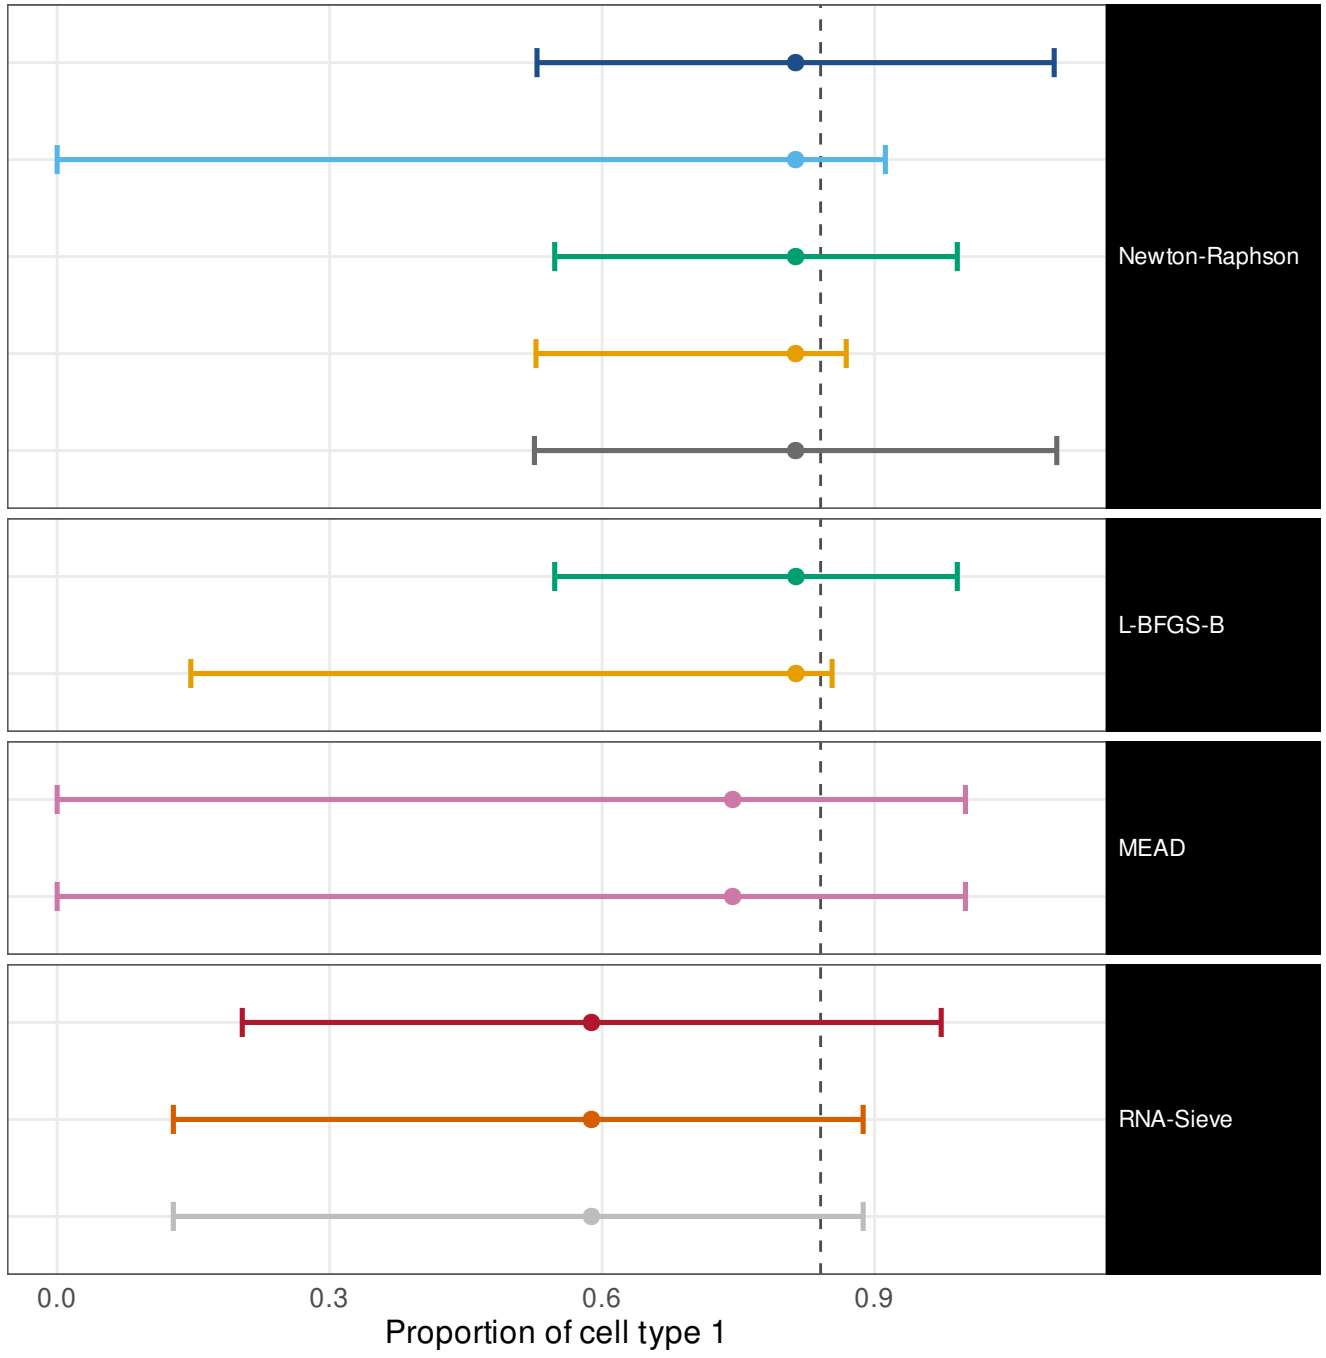


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.735
ILR, mapped back	1	[0.57, 1]	w = 1
Profile likelihood	1	[0.57, 1]	w = 0.256
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.3
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.879
Profile likelihood	1	[0.57, 1]	w = 0.256
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.596
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.808
Godambe sandwich	1	[0.57, 1]	w = 0.866
Released code, as published	1	[0.57, 1]	w = 0.866

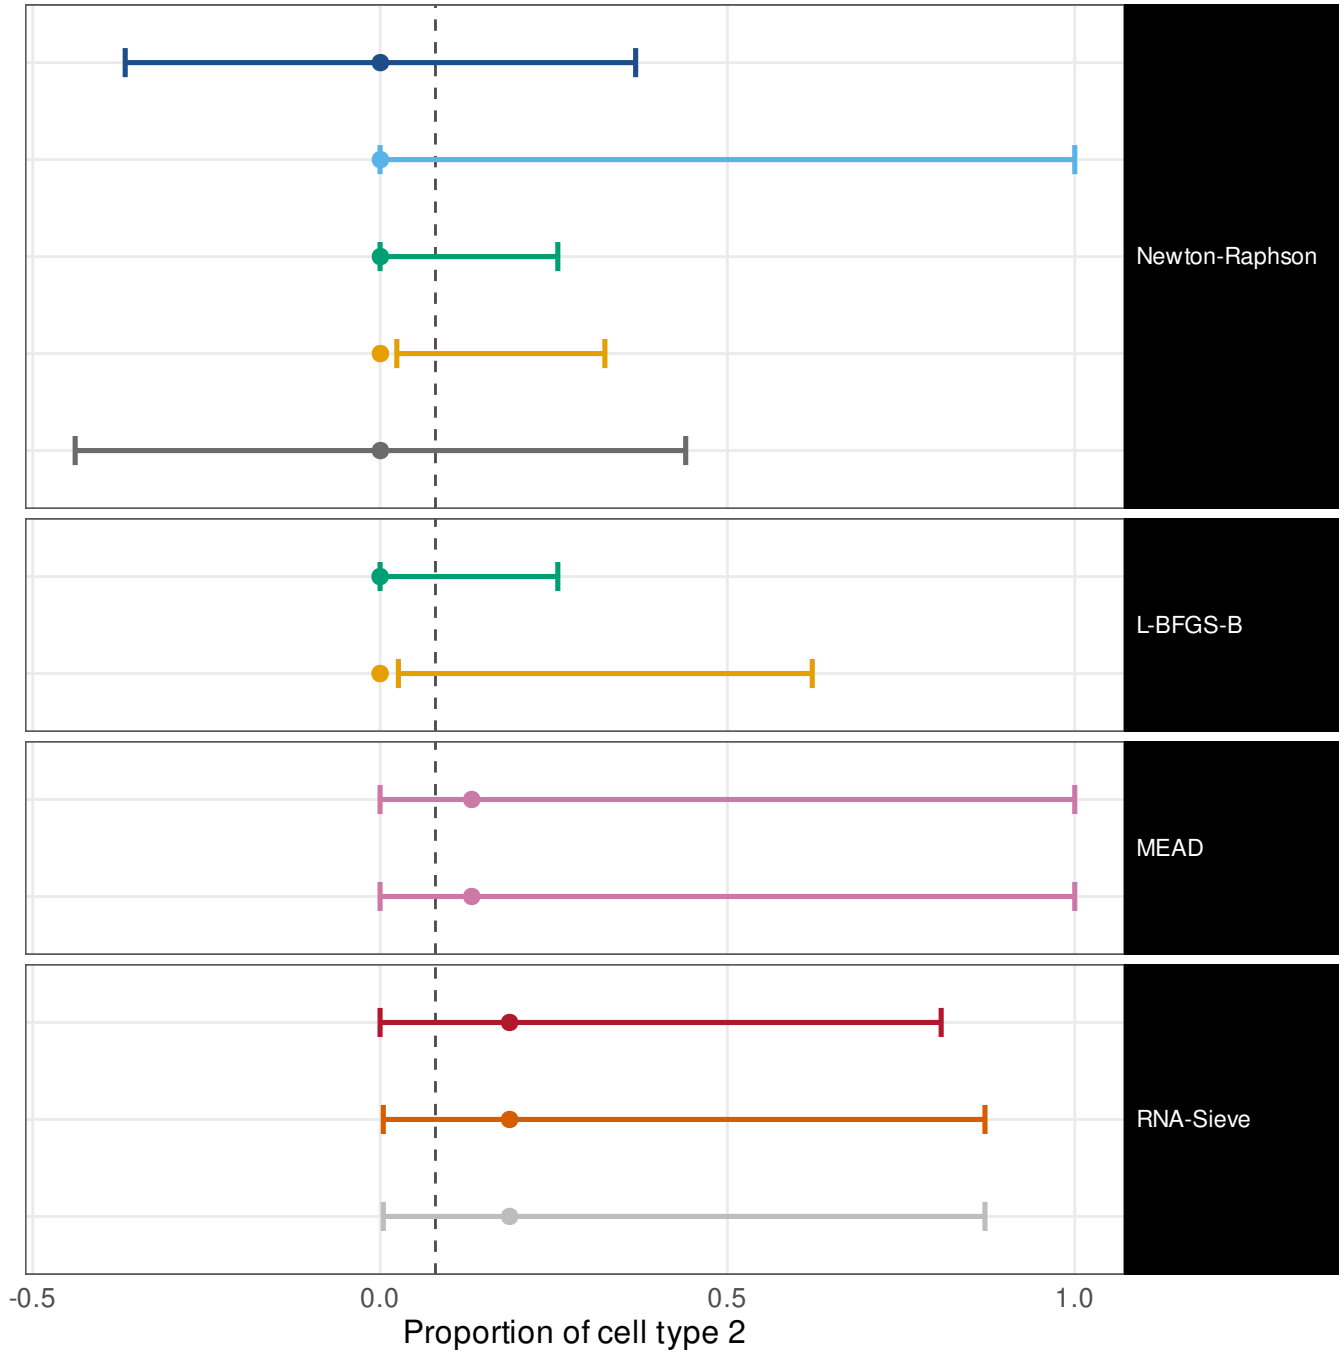


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.695
ILR, mapped back	1	[0.57, 1]	w = 0.693
Profile likelihood	1	[0.57, 1]	w = 0.435
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.29
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.702
Profile likelihood	1	[0.57, 1]	w = 0.435
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.319
Method's own interval	1	[0.57, 1]	w = 0.789
Own interval, transcript fractions	1	[0.57, 1]	w = 0.789
Fisher information (Wald)	1	[0.57, 1]	w = 0.617
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.456
Released code, as published	0.8	[0.38, 0.96]	w = 0.456

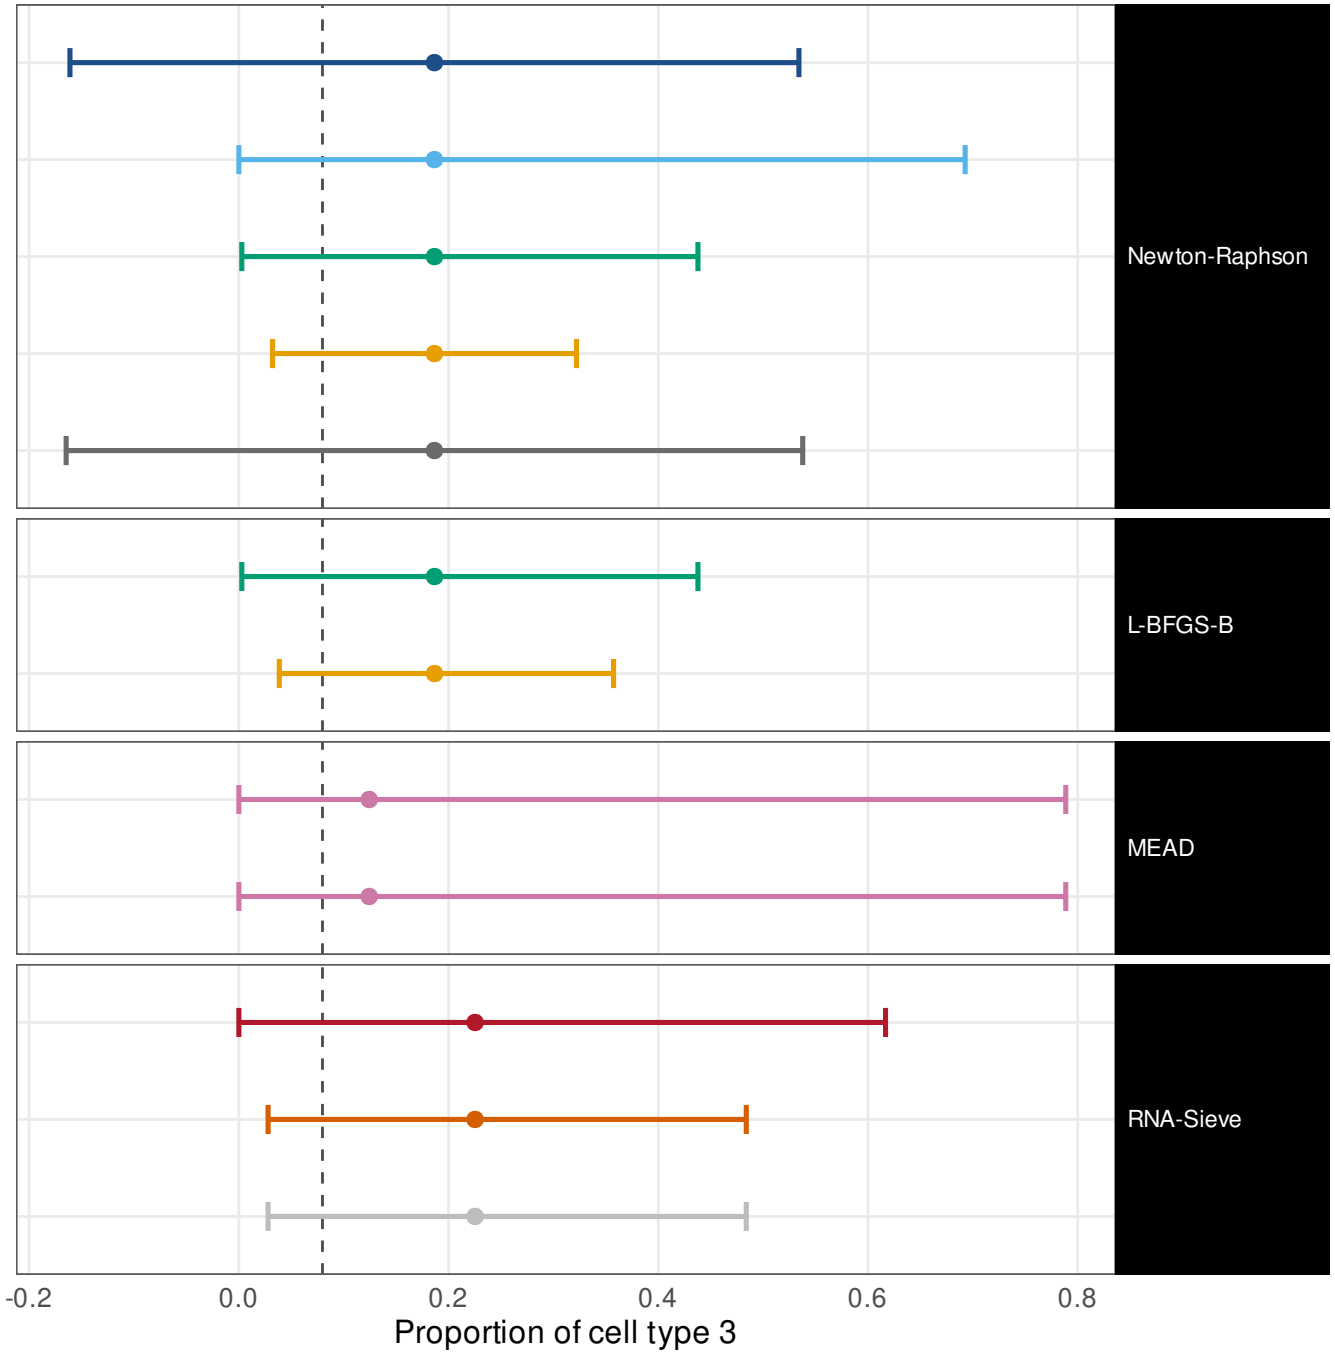


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 0.692
ILR, mapped back	1	[0.57, 1]	w = 0.949
Profile likelihood	1	[0.57, 1]	w = 0.671
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.739
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.574
Wald (delta)	1	[0.21, 1]	w = 0.568
ILR, mapped back	1	[0.21, 1]	w = 0.742
Profile likelihood	1	[0.57, 1]	w = 0.671
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.427
Wald (delta)	1	[0.21, 1]	w = 0.579
ILR, mapped back	0	[0, 0.79]	w = 0.631
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.832
Godambe sandwich	0.2	[0.036, 0.62]	w = 0.564
Released code, as published	0.2	[0.036, 0.62]	w = 0.564

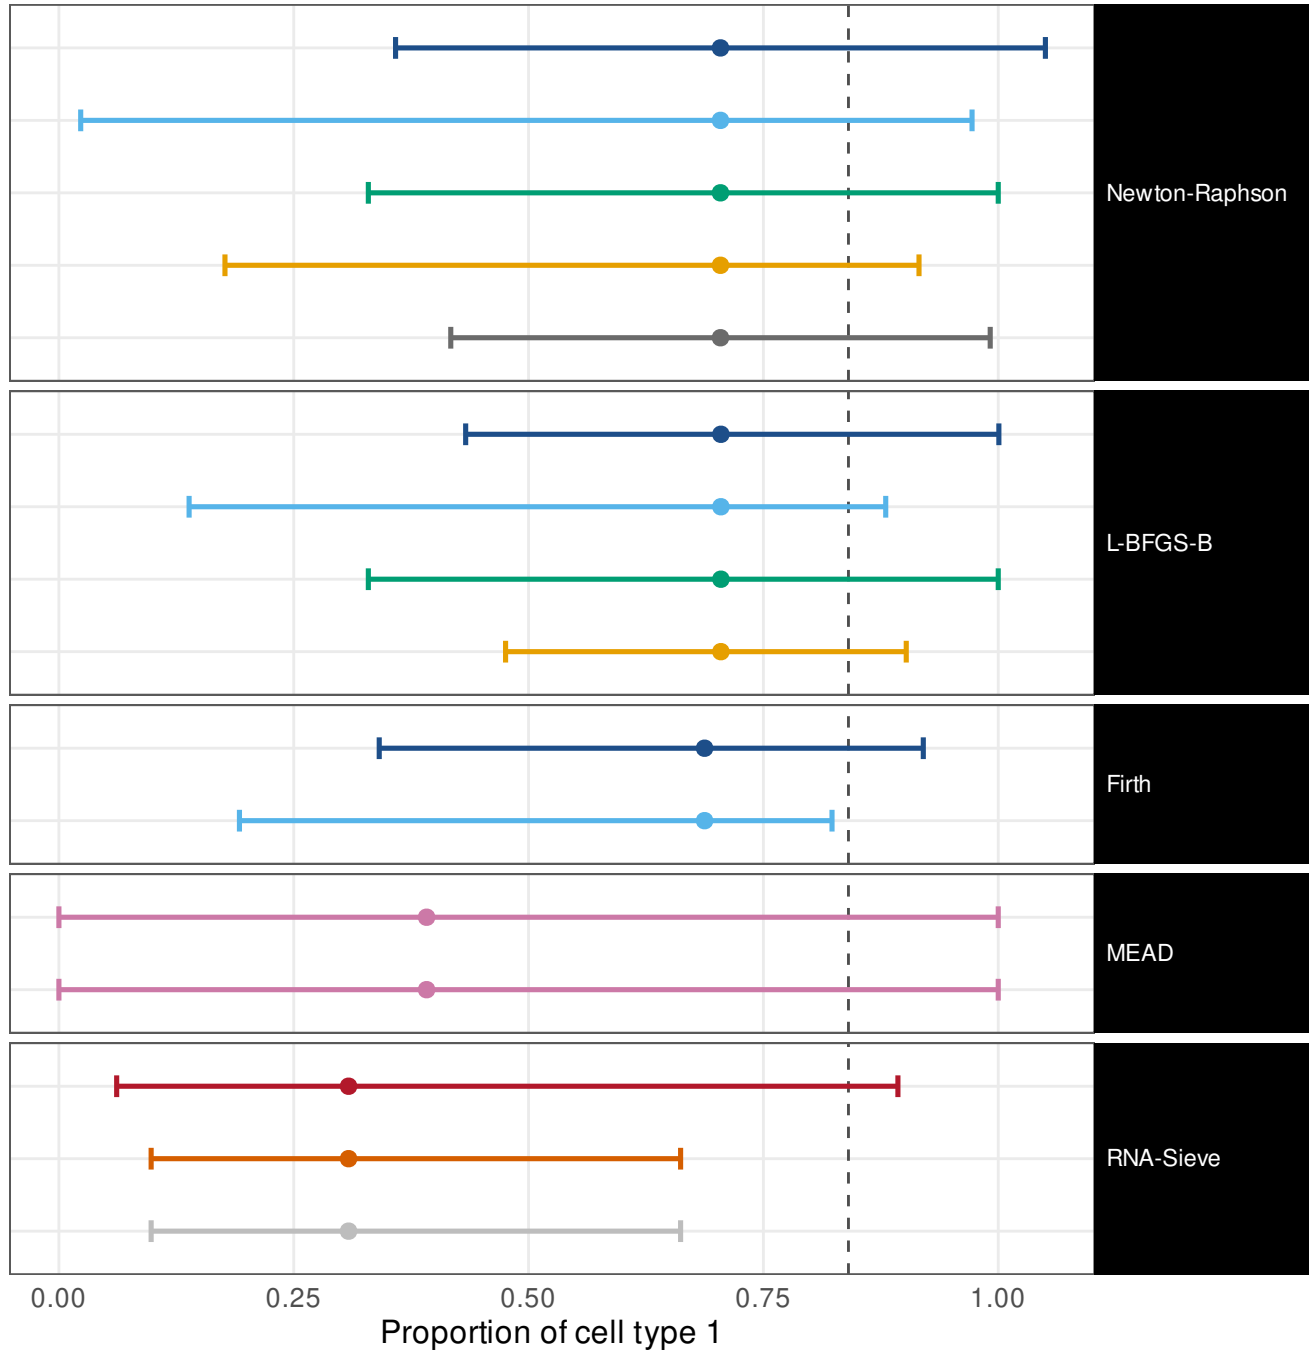


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 0.967
ILR, mapped back	1	[0.57, 1]	w = 0.968
Profile likelihood	1	[0.57, 1]	w = 0.649
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.613
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 1
Wald (delta)	1	[0.21, 1]	w = 0.875
ILR, mapped back	1	[0.21, 1]	w = 0.819
Profile likelihood	1	[0.57, 1]	w = 0.649
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.435
Wald (delta)	1	[0.21, 1]	w = 0.804
ILR, mapped back	1	[0.21, 1]	w = 0.759
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.795
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.5
Released code, as published	0.6	[0.23, 0.88]	w = 0.5

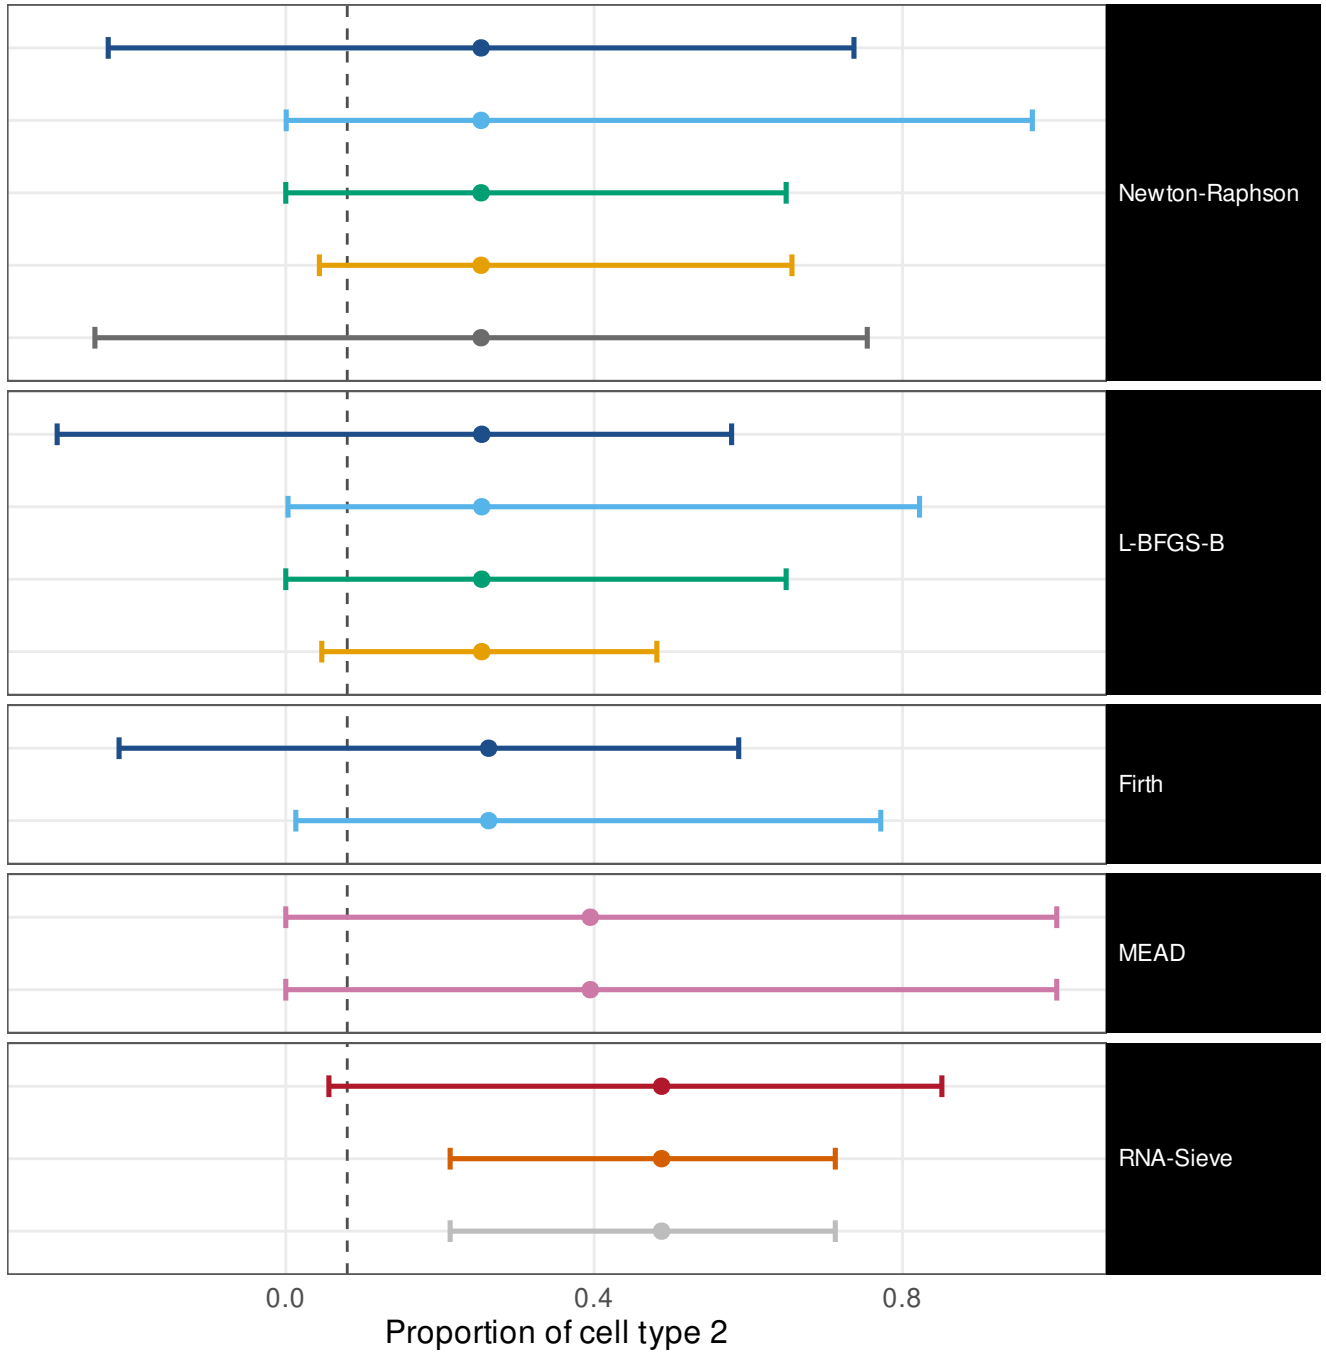


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.906
ILR, mapped back	1	[0.57, 1]	w = 0.941
Profile likelihood	1	[0.57, 1]	w = 0.301
Parametric bootstrap	1	[0.57, 1]	w = 0.453
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.859
Wald (delta)	1	[0.21, 1]	w = 0.729
ILR, mapped back	1	[0.21, 1]	w = 0.719
Profile likelihood	1	[0.57, 1]	w = 0.301
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.139
Wald (delta)	1	[0.21, 1]	w = 0.647
ILR, mapped back	1	[0.21, 1]	w = 0.616
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.733
Godambe sandwich	1	[0.57, 1]	w = 0.462
Released code, as published	1	[0.57, 1]	w = 0.462

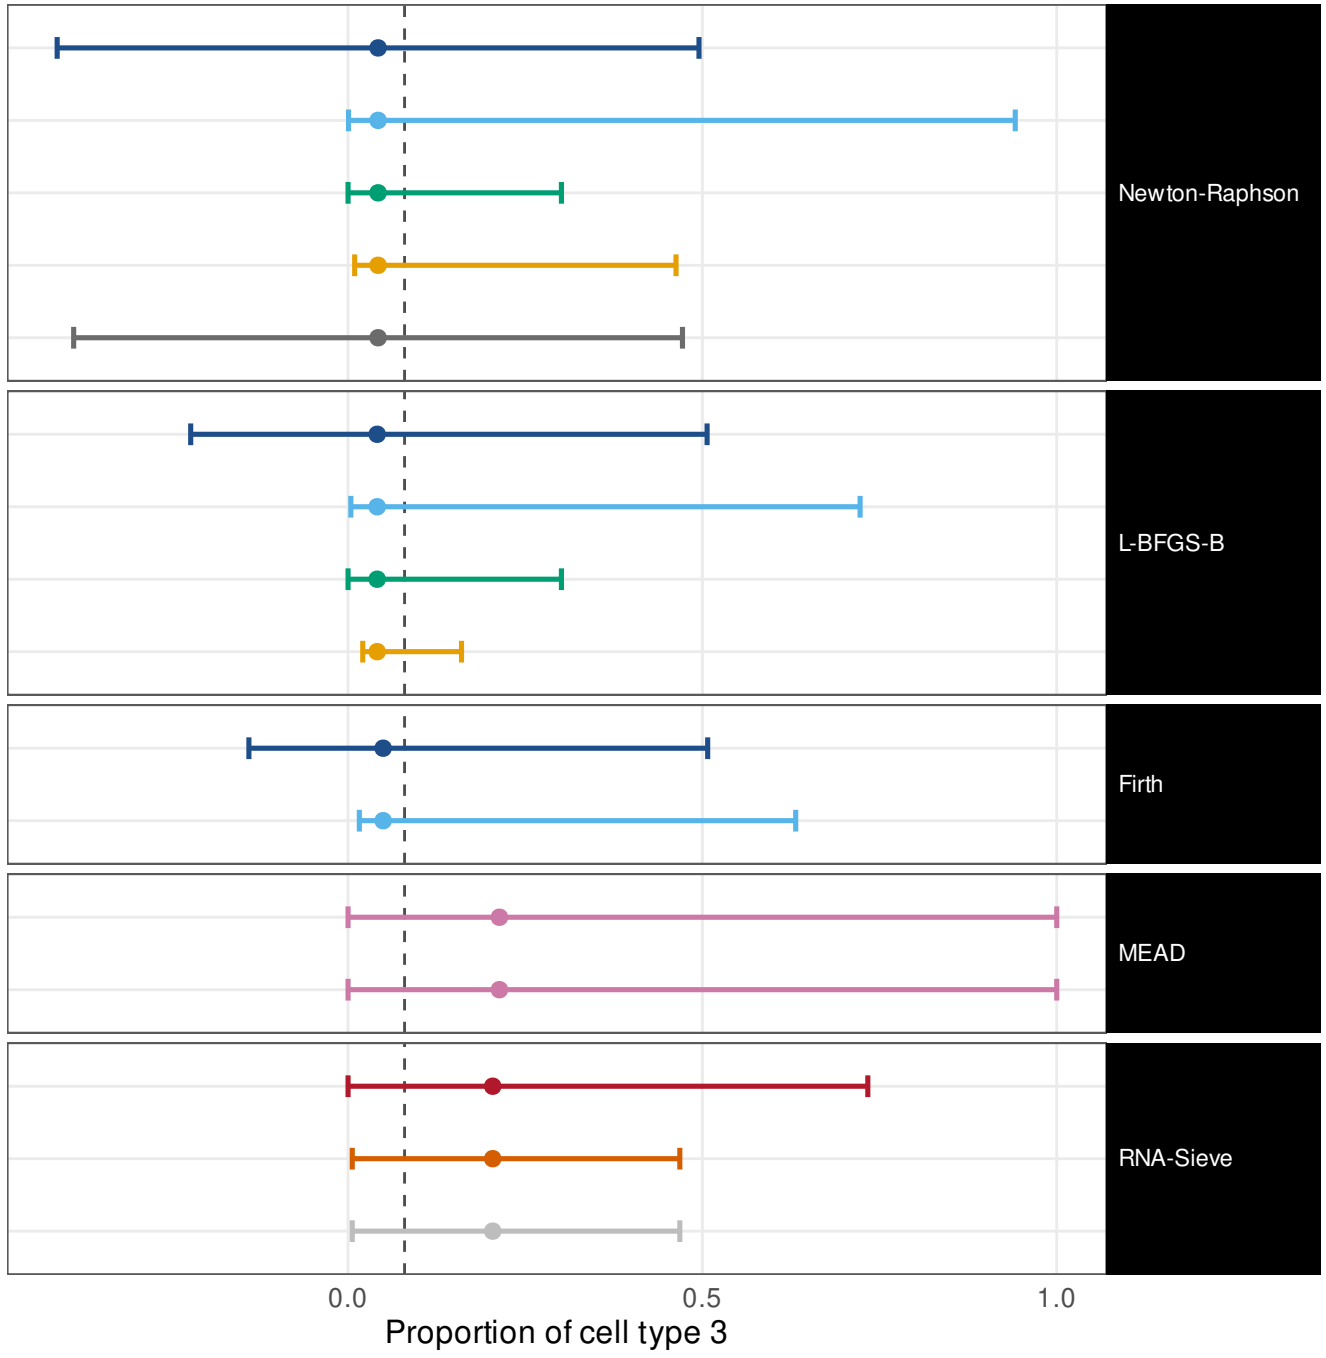


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.4	[0.12, 0.77]	w = 0.741
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.84
Profile likelihood	0.6	[0.23, 0.88]	w = 0.715
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.555
Oracle (Fisher at p*)	0.4	[0.12, 0.77]	w = 0.598
Wald (delta)	0	[0, 0.66]	w = 0.793
ILR, mapped back	0	[0, 0.66]	w = 0.673
Profile likelihood	0.6	[0.23, 0.88]	w = 0.715
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.328
Wald (delta)	0	[0, 0.66]	w = 0.789
ILR, mapped back	0	[0, 0.66]	w = 0.67
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.9
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.794
Released code, as published	0.6	[0.23, 0.88]	w = 0.794

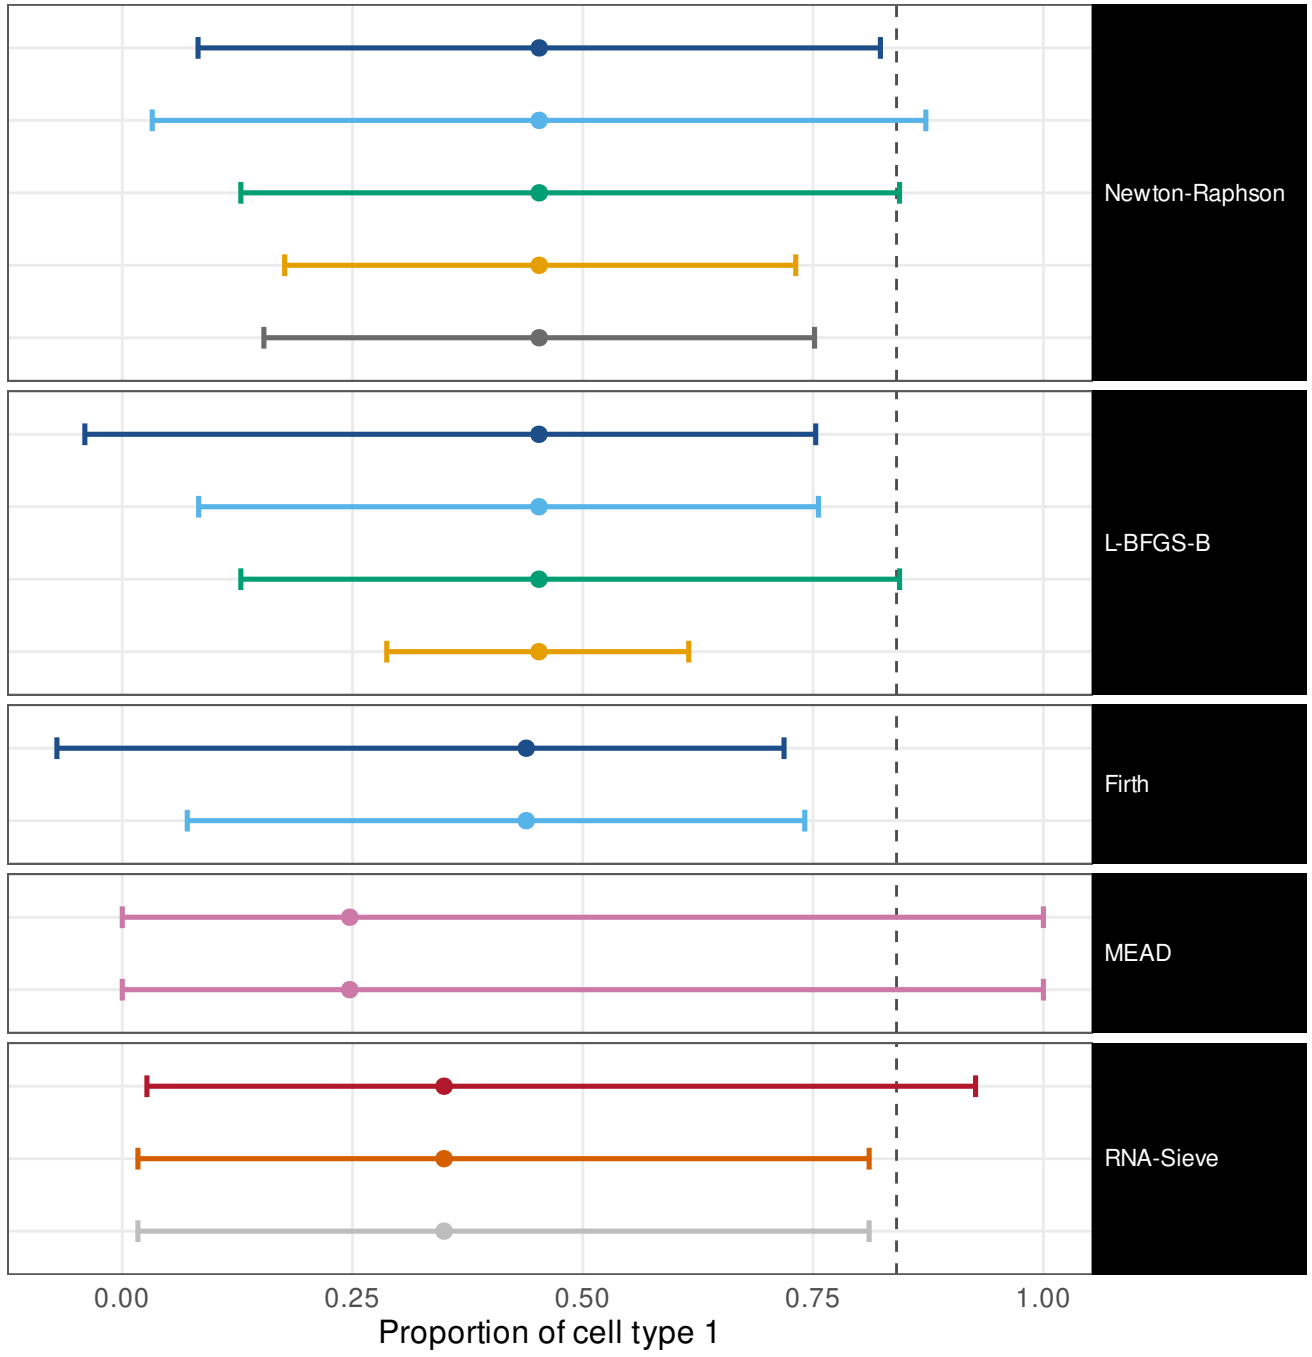


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.8	[0.38, 0.96]	w = 0.846
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.751
Profile likelihood	0.8	[0.38, 0.96]	w = 0.739
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.469
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.931
Wald (delta)	1	[0.34, 1]	w = 0.765
ILR, mapped back	0	[0, 0.66]	w = 0.633
Profile likelihood	0.8	[0.38, 0.96]	w = 0.739
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.431
Wald (delta)	1	[0.34, 1]	w = 0.752
ILR, mapped back	0	[0, 0.66]	w = 0.628
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.4	[0.12, 0.77]	w = 0.87
Godambe sandwich	0.4	[0.12, 0.77]	w = 0.683
Released code, as published	0.4	[0.12, 0.77]	w = 0.683

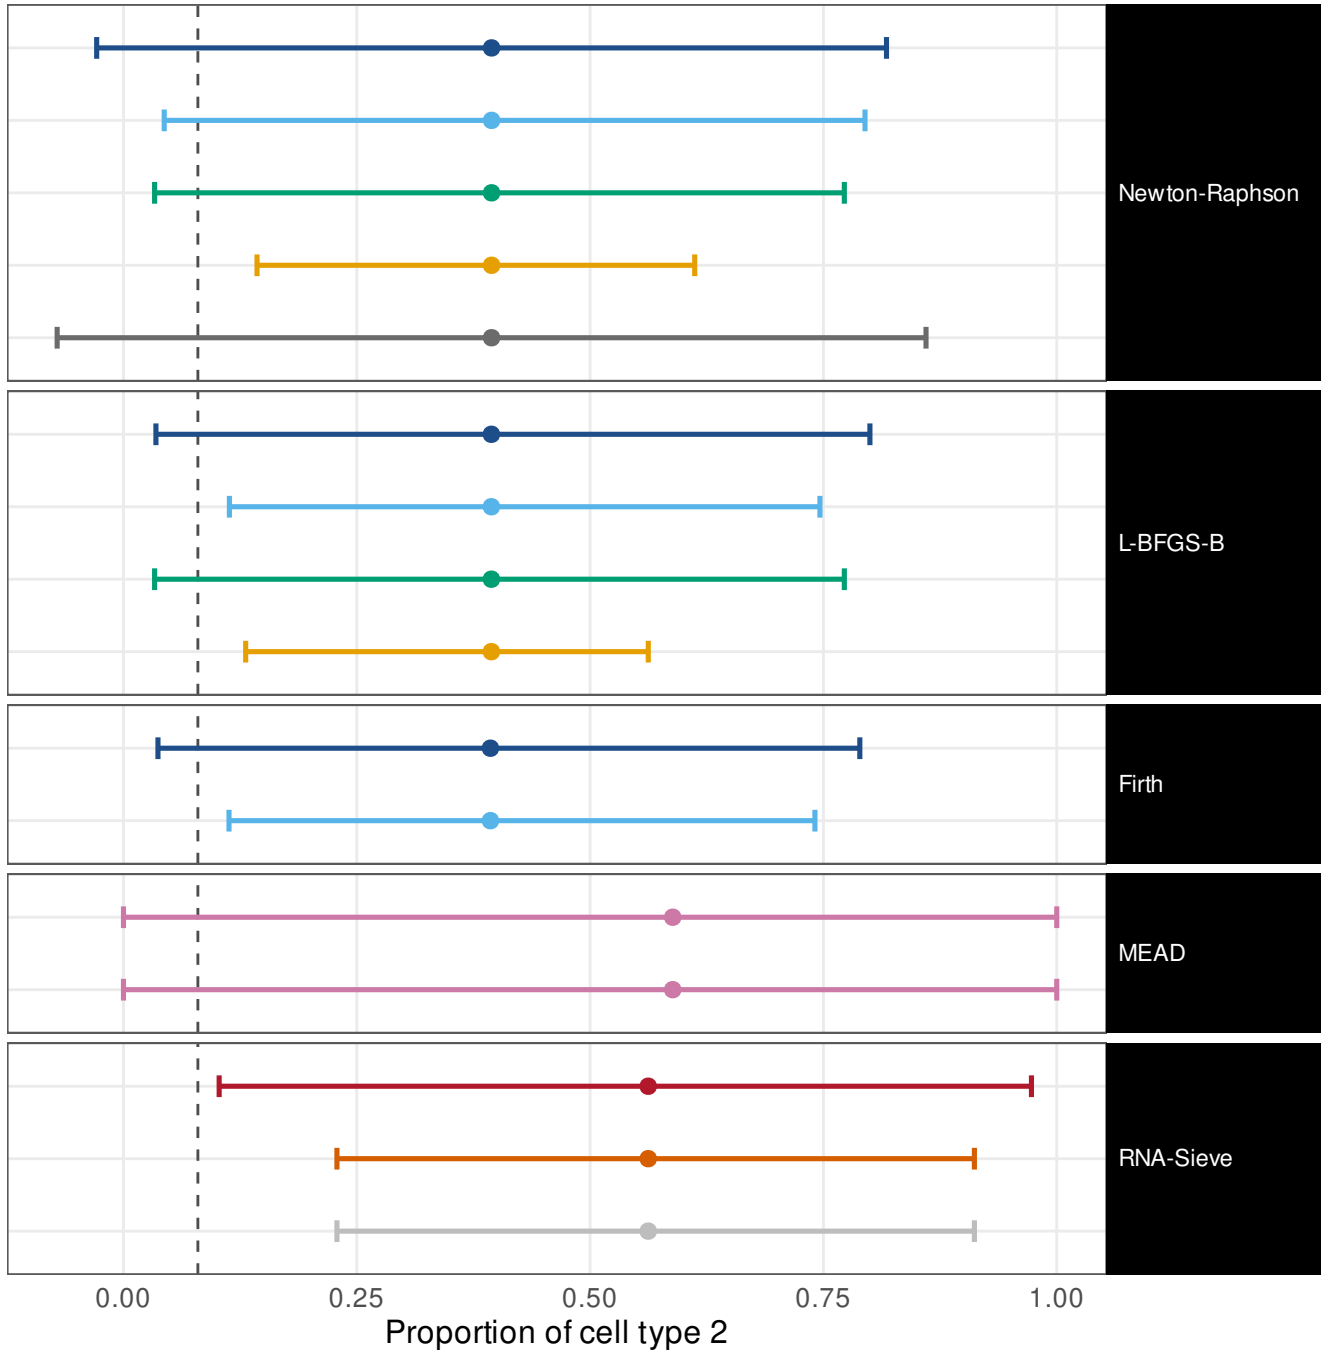


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.61
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.73
Profile likelihood	1	[0.57, 1]	w = 0.398
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.229
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.749
Wald (delta)	1	[0.34, 1]	w = 0.531
ILR, mapped back	0.5	[0.095, 0.91]	w = 0.516
Profile likelihood	1	[0.57, 1]	w = 0.398
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.222
Wald (delta)	1	[0.34, 1]	w = 0.535
ILR, mapped back	0.5	[0.095, 0.91]	w = 0.482
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.683
Godambe sandwich	1	[0.57, 1]	w = 0.516
Released code, as published	1	[0.57, 1]	w = 0.516

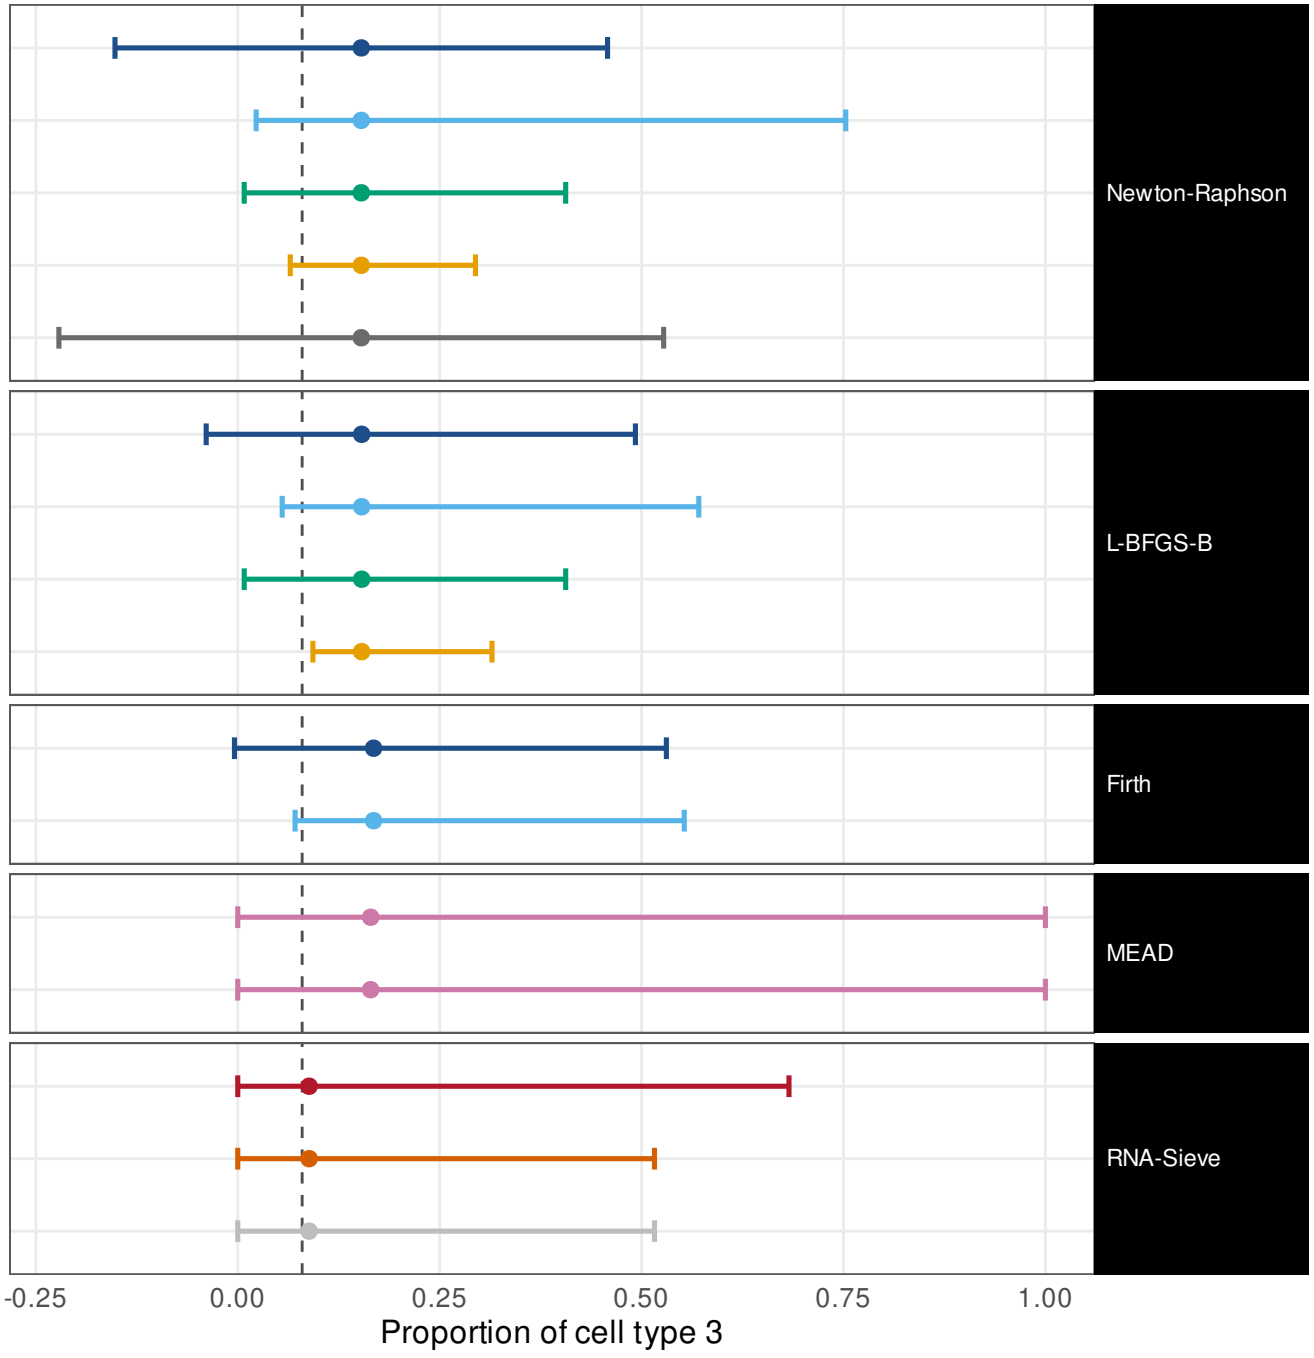


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 SBM / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.57
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.82
Profile likelihood	1	[0.57, 1]	w = 0.671
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.298
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.569
Wald (delta)	1	[0.34, 1]	w = 0.585
ILR, mapped back	0.5	[0.095, 0.91]	w = 0.697
Profile likelihood	1	[0.57, 1]	w = 0.671
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.578
Wald (delta)	1	[0.34, 1]	w = 0.591
ILR, mapped back	0.5	[0.095, 0.91]	w = 0.609
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.751
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.679
Released code, as published	0.8	[0.38, 0.96]	w = 0.679

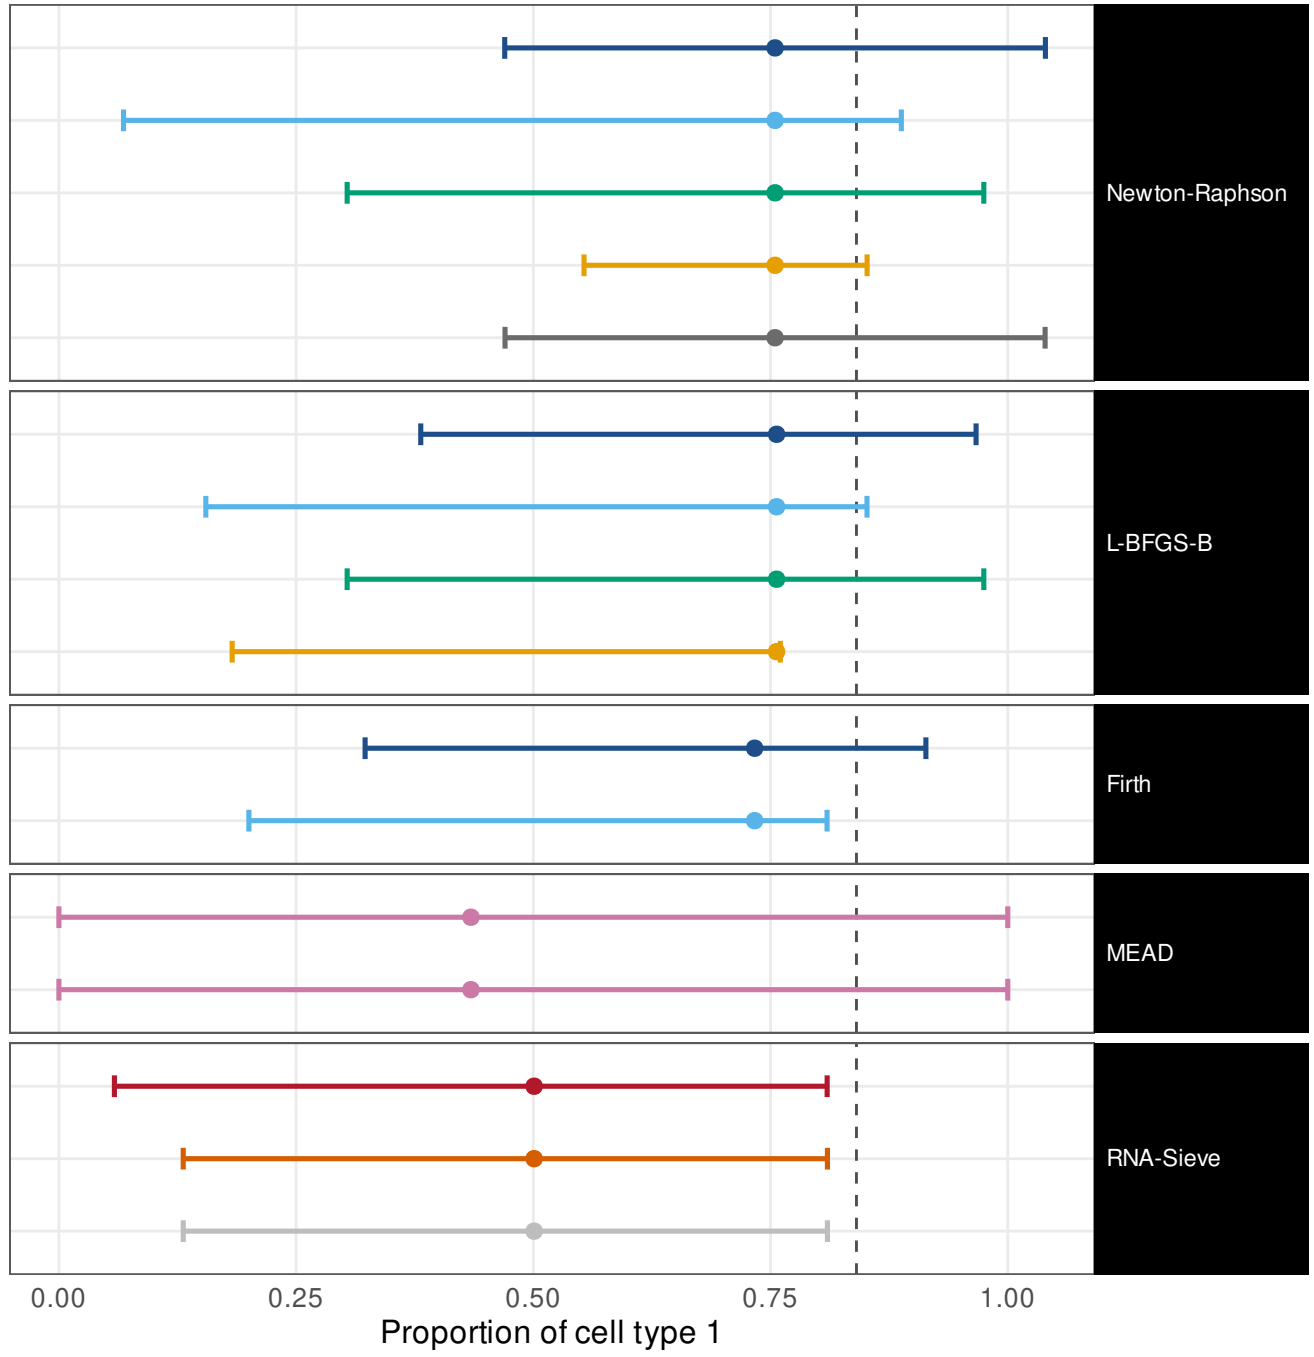


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 SBM / CT2 SBM


Wald (delta)	1	[0.57, 1]	w = 0.796
ILR, mapped back	1	[0.57, 1]	w = 0.903
Profile likelihood	1	[0.57, 1]	w = 0.632
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.261
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.915
Wald (delta)	1	[0.34, 1]	w = 0.828
ILR, mapped back	1	[0.34, 1]	w = 0.771
Profile likelihood	1	[0.57, 1]	w = 0.632
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.548
Wald (delta)	1	[0.34, 1]	w = 0.791
ILR, mapped back	1	[0.34, 1]	w = 0.71
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.823
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.531
Released code, as published	0.8	[0.38, 0.96]	w = 0.531

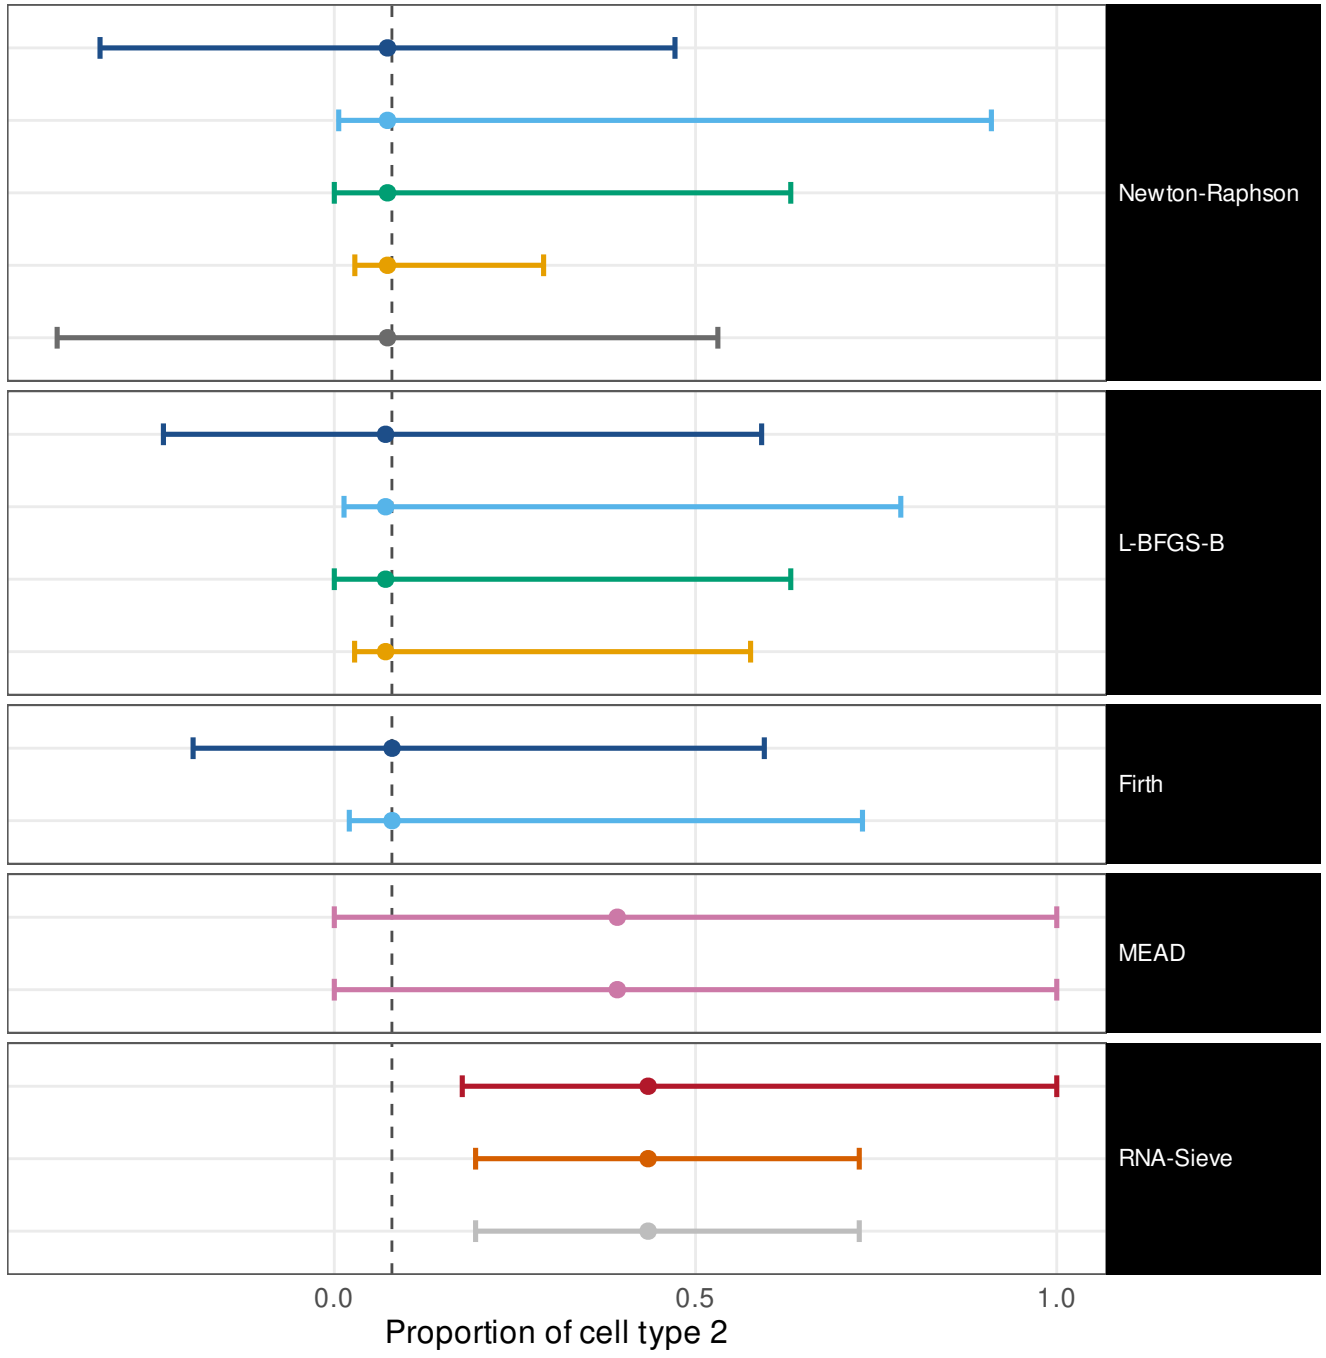

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / moderate overlap / CT1 SBM / CT2 SBM

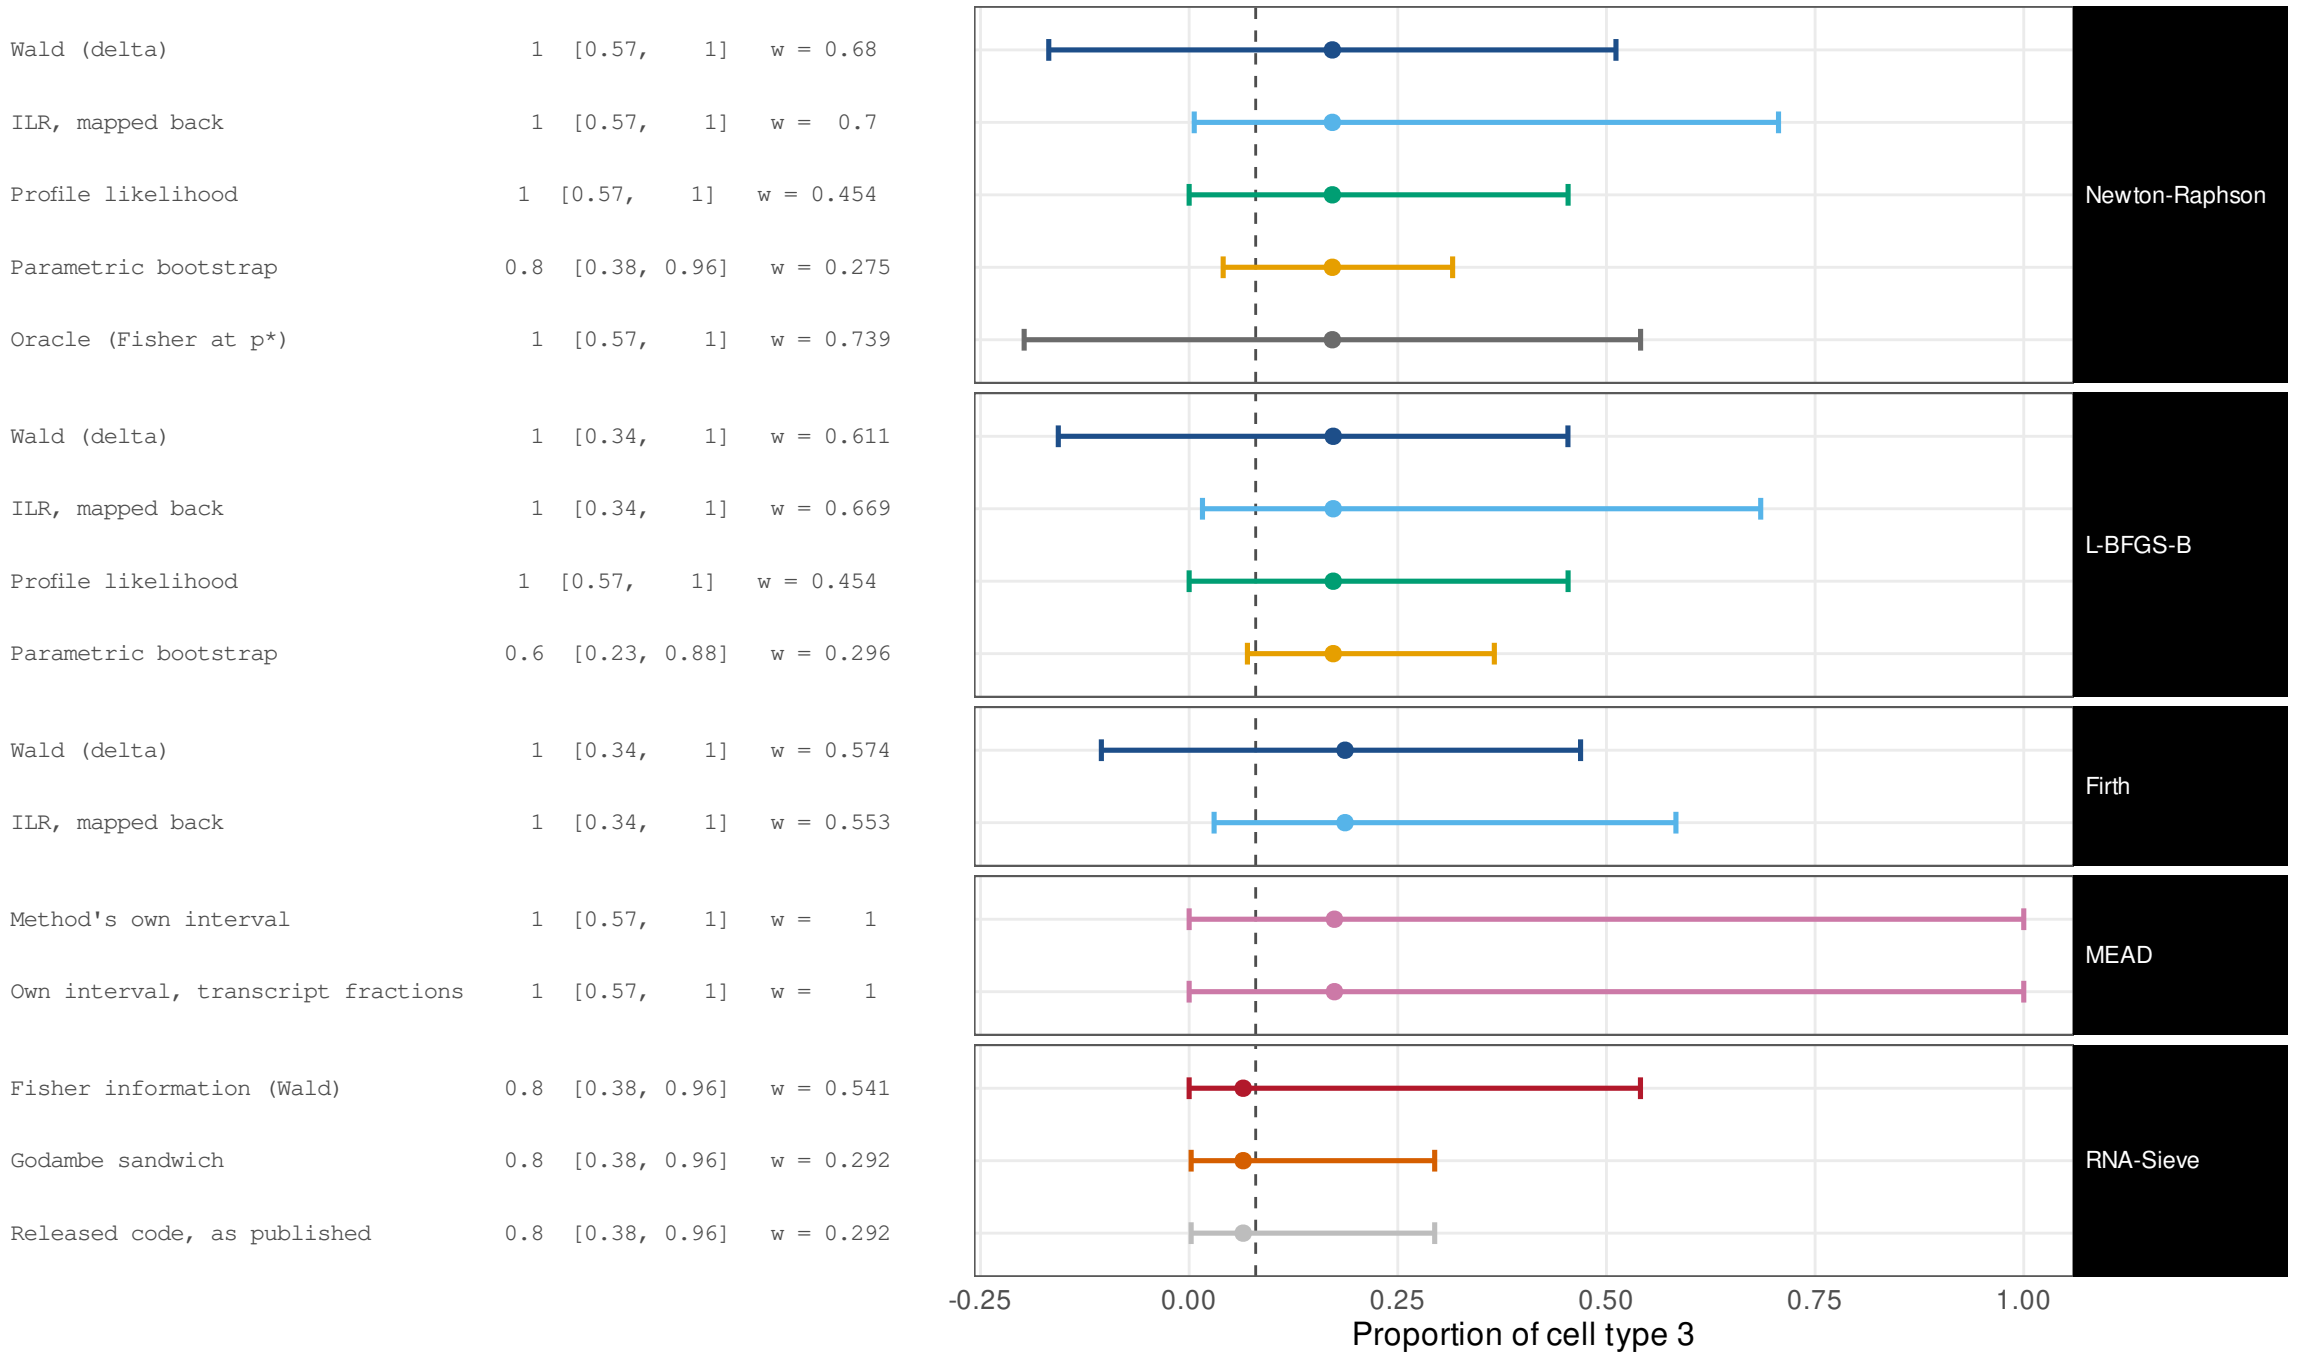


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 0.795
ILR, mapped back	1	[0.57, 1]	w = 0.929
Profile likelihood	1	[0.57, 1]	w = 0.891
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.516
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.597
Wald (delta)	1	[0.34, 1]	w = 0.75
ILR, mapped back	0.5	[0.095, 0.91]	w = 0.875
Profile likelihood	1	[0.57, 1]	w = 0.891
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.608
Wald (delta)	1	[0.34, 1]	w = 0.74
ILR, mapped back	0.5	[0.095, 0.91]	w = 0.764
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.99
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.84
Released code, as published	0.8	[0.38, 0.96]	w = 0.84

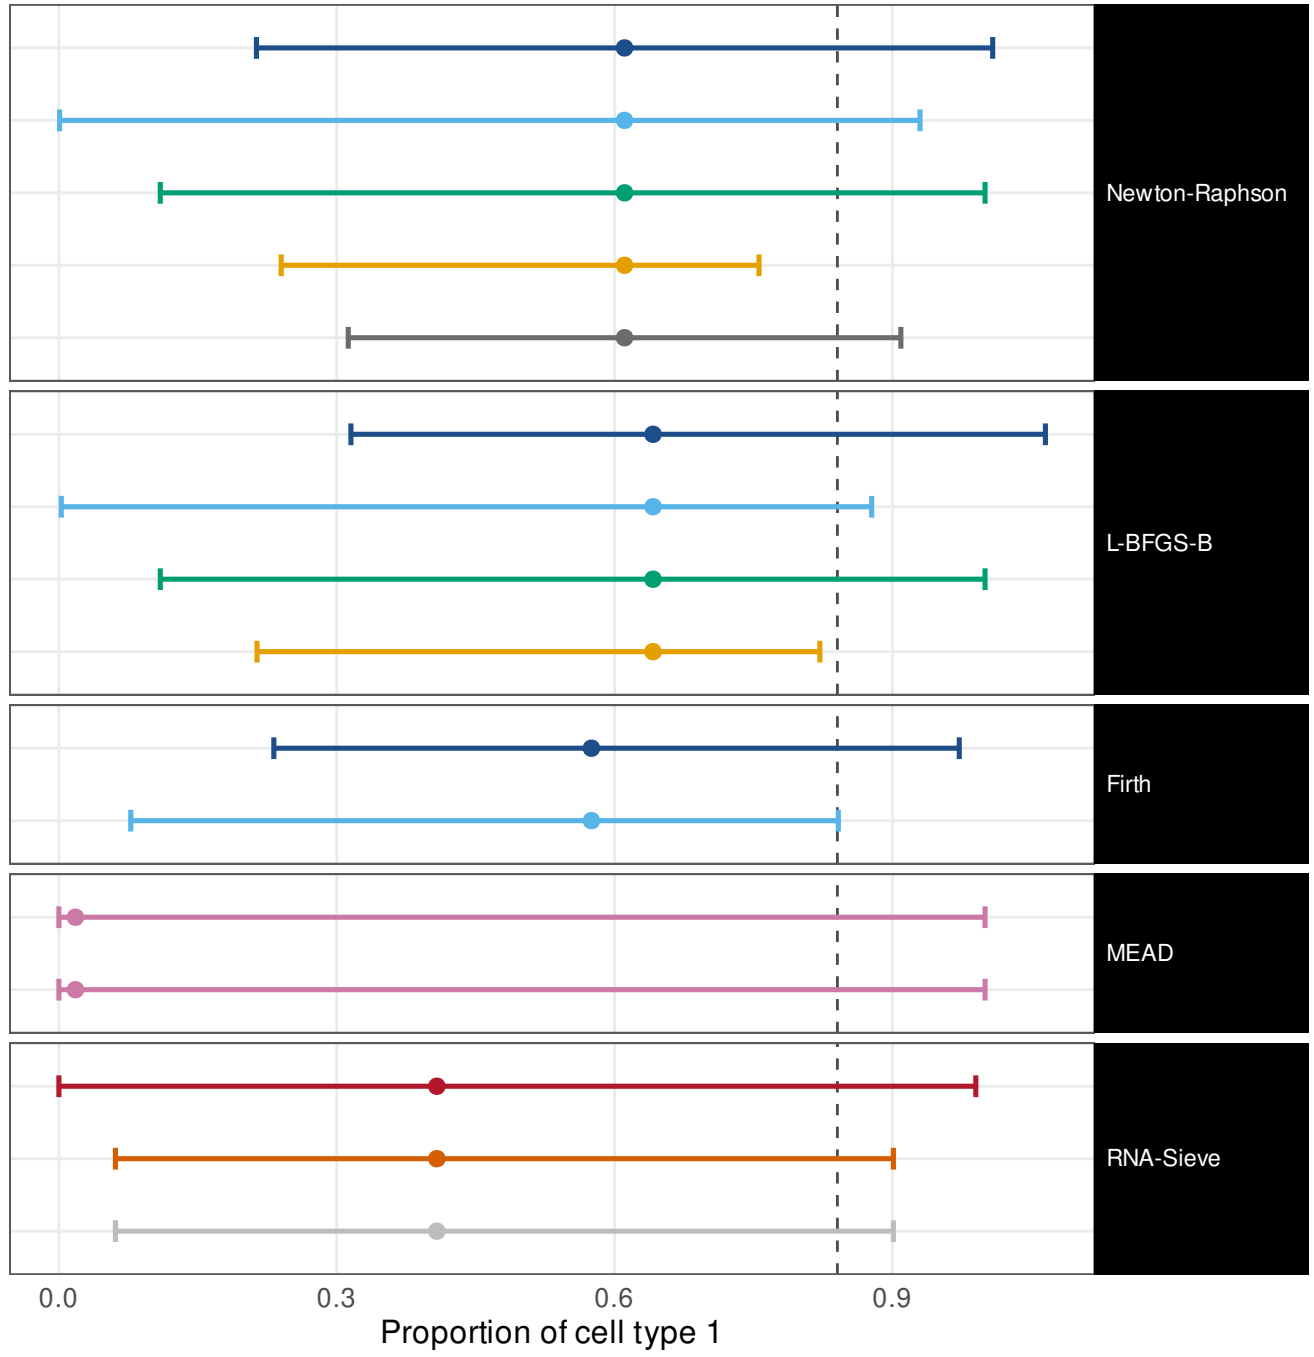


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 1.28
ILR, mapped back	1	[0.57, 1]	w = 0.914
Profile likelihood	1	[0.57, 1]	w = 0.728
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.361
Oracle (Fisher at p*)	1	[0.57, 1]	w = 1.58
Wald (delta)	1	[0.34, 1]	w = 1.29
ILR, mapped back	1	[0.34, 1]	w = 0.913
Profile likelihood	1	[0.57, 1]	w = 0.728
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.61
Wald (delta)	1	[0.34, 1]	w = 1.12
ILR, mapped back	1	[0.34, 1]	w = 0.854
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 1
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.718
Released code, as published	0.8	[0.38, 0.96]	w = 0.718

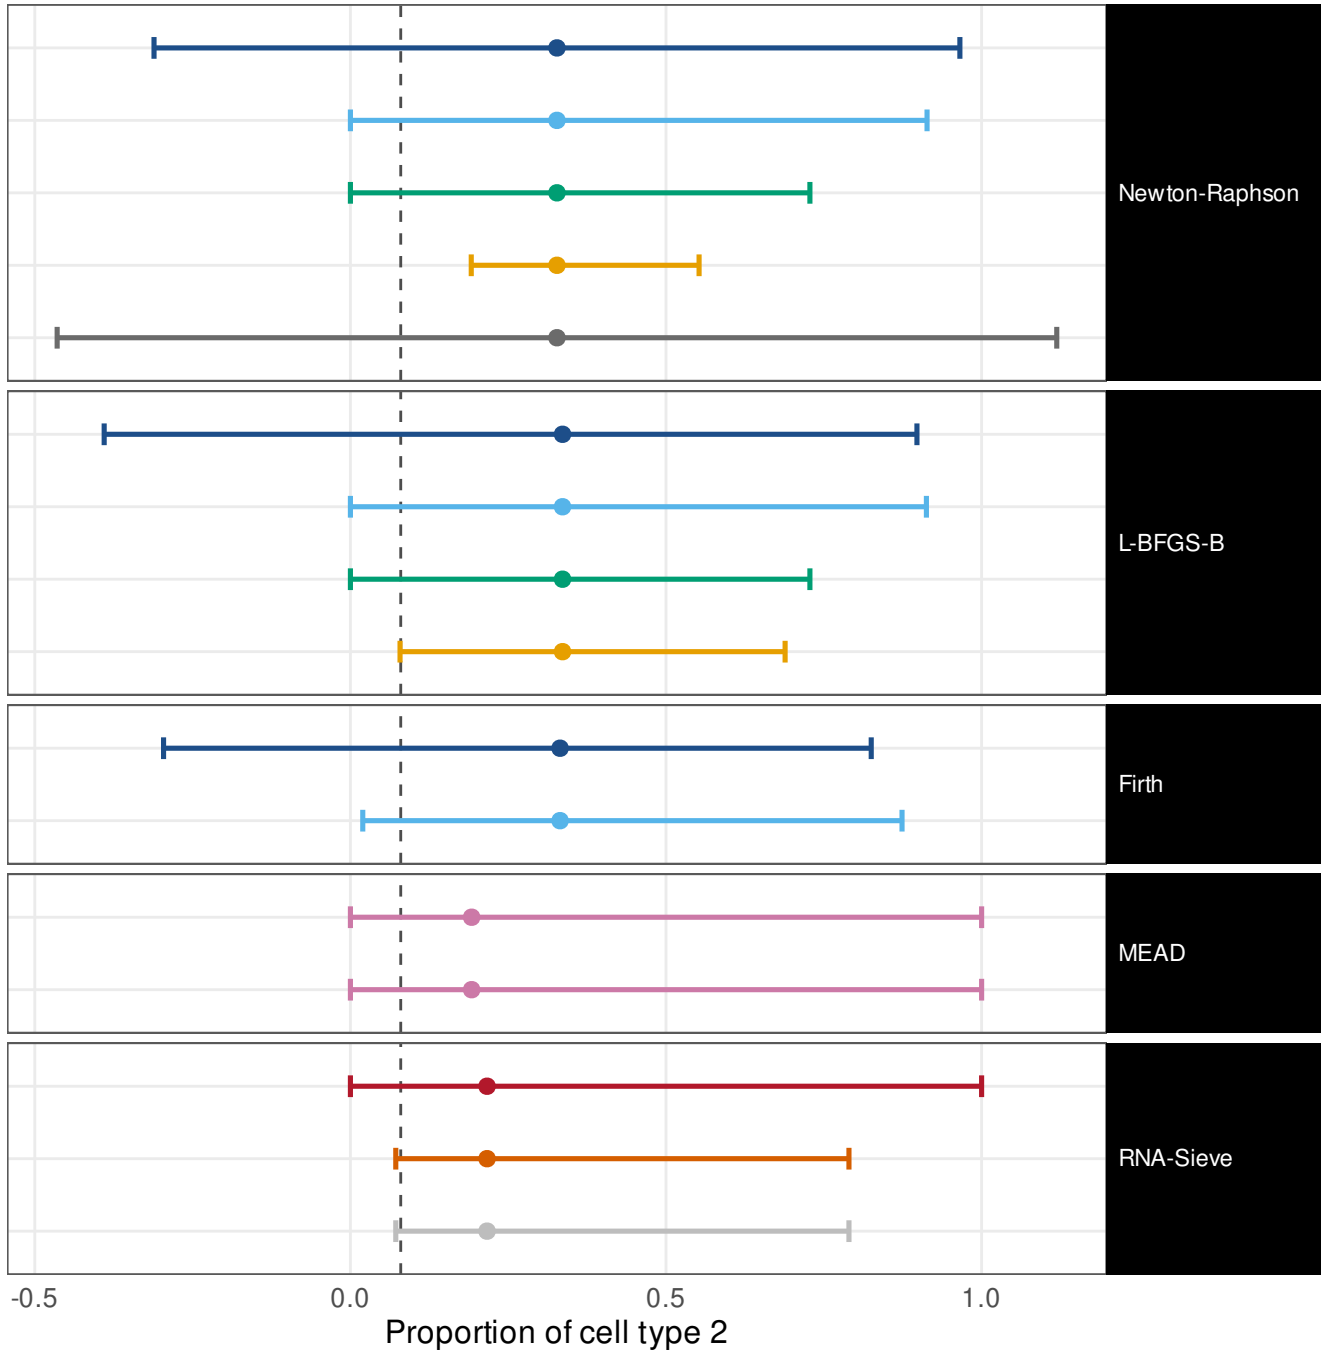


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 1.16
ILR, mapped back	1	[0.57, 1]	w = 0.976
Profile likelihood	1	[0.57, 1]	w = 0.687
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.293
Oracle (Fisher at p*)	1	[0.57, 1]	w = 1.49
Wald (delta)	1	[0.34, 1]	w = 0.984
ILR, mapped back	1	[0.34, 1]	w = 0.993
Profile likelihood	1	[0.57, 1]	w = 0.687
Parametric bootstrap	1	[0.57, 1]	w = 0.241
Wald (delta)	1	[0.34, 1]	w = 0.91
ILR, mapped back	1	[0.34, 1]	w = 0.821
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.769
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.478
Released code, as published	0.6	[0.23, 0.88]	w = 0.478

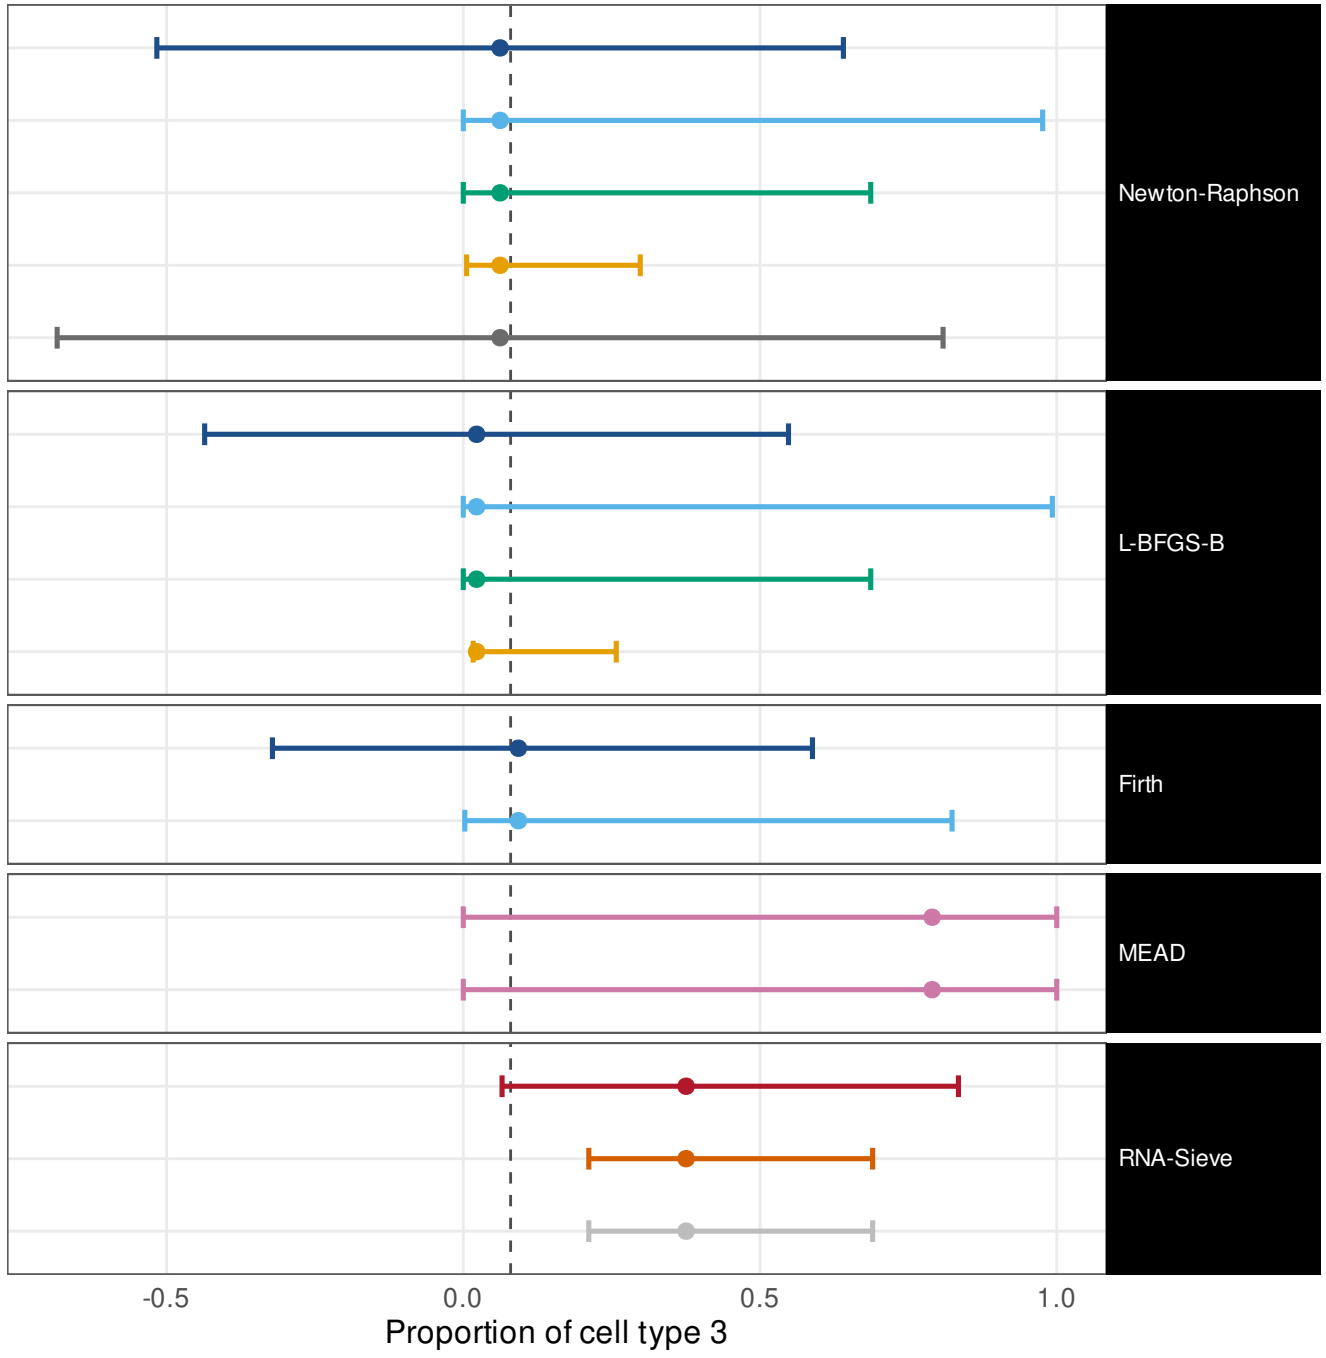


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 0.802
ILR, mapped back	0.2	[0.036, 0.62]	w = 0.752
Profile likelihood	0.6	[0.23, 0.88]	w = 0.817
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.336
Oracle (Fisher at p*)	0.2	[0.036, 0.62]	w = 0.584
Wald (delta)	0.67	[0.21, 0.94]	w = 0.772
ILR, mapped back	0	[0, 0.56]	w = 0.668
Profile likelihood	0.6	[0.23, 0.88]	w = 0.817
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.38
Wald (delta)	0	[0, 0.56]	w = 0.734
ILR, mapped back	0	[0, 0.56]	w = 0.645
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.4	[0.12, 0.77]	w = 0.625
Godambe sandwich	0.2	[0.036, 0.62]	w = 0.393
Released code, as published	0.2	[0.036, 0.62]	w = 0.393

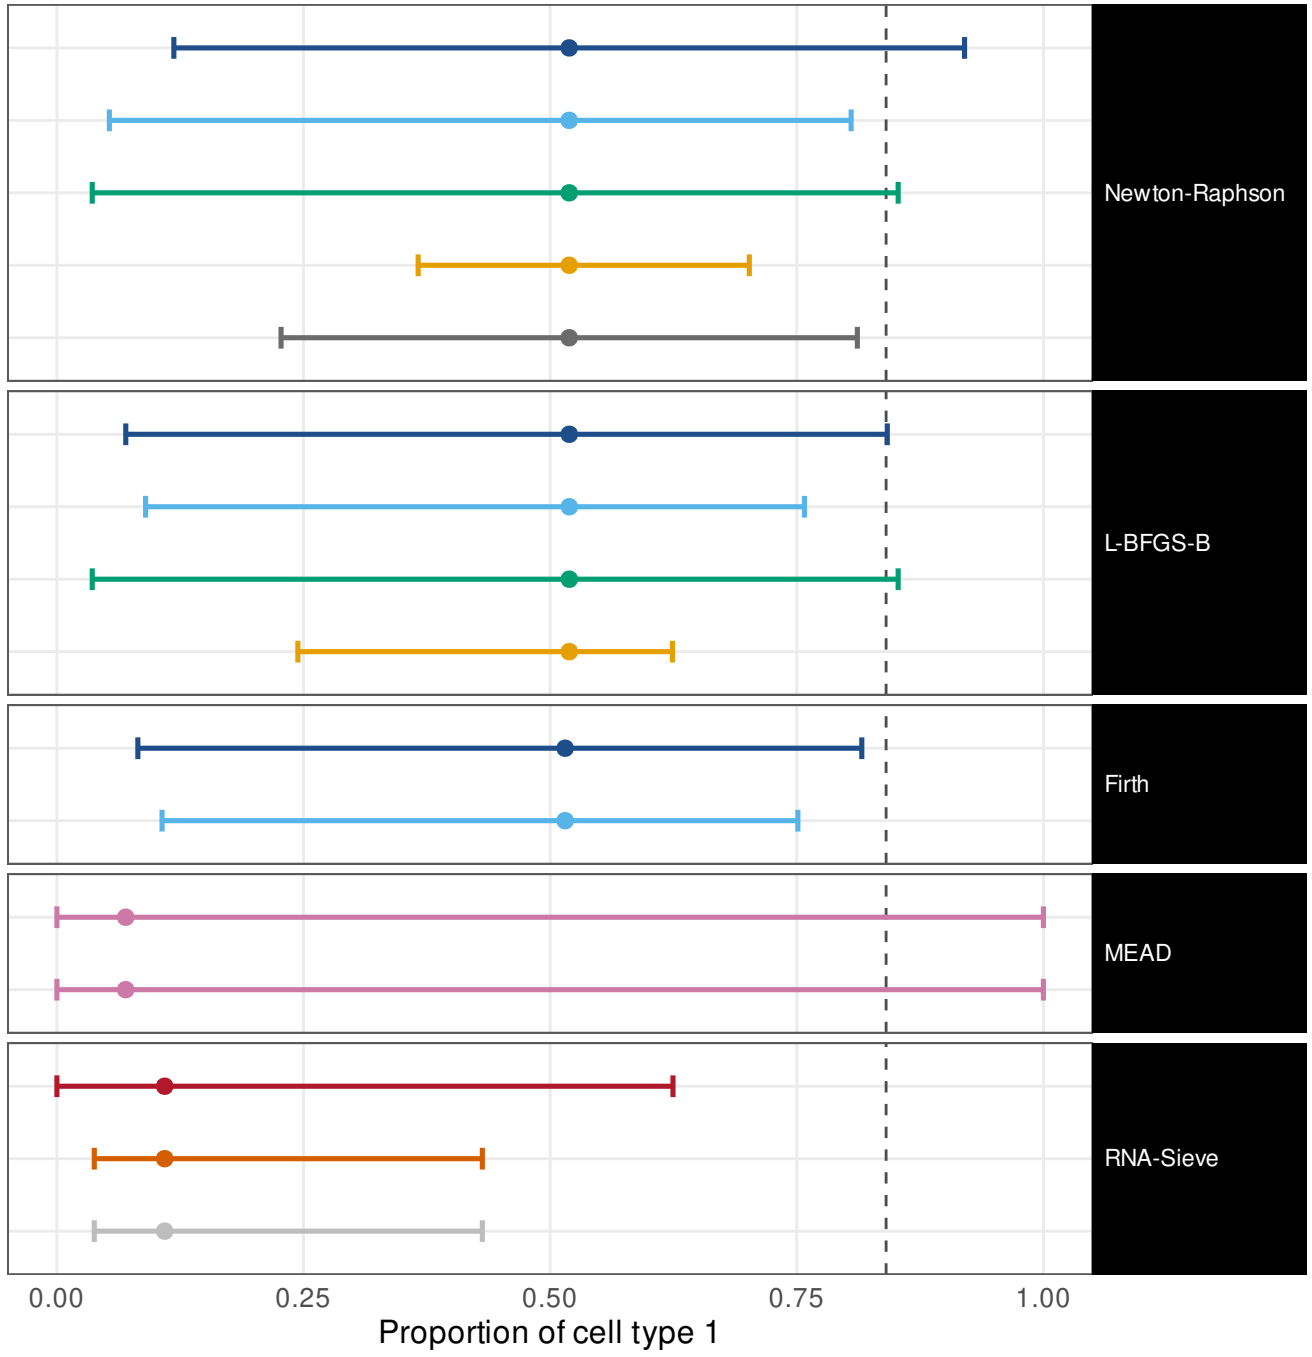


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 1.03
ILR, mapped back	1	[0.57, 1]	w = 0.871
Profile likelihood	1	[0.57, 1]	w = 0.626
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.297
Oracle (Fisher at p*)	1	[0.57, 1]	w = 2.04
Wald (delta)	1	[0.44, 1]	w = 0.876
ILR, mapped back	1	[0.44, 1]	w = 0.784
Profile likelihood	1	[0.57, 1]	w = 0.626
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.392
Wald (delta)	1	[0.44, 1]	w = 0.921
ILR, mapped back	1	[0.44, 1]	w = 0.753
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.673
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.426
Released code, as published	0.6	[0.23, 0.88]	w = 0.426

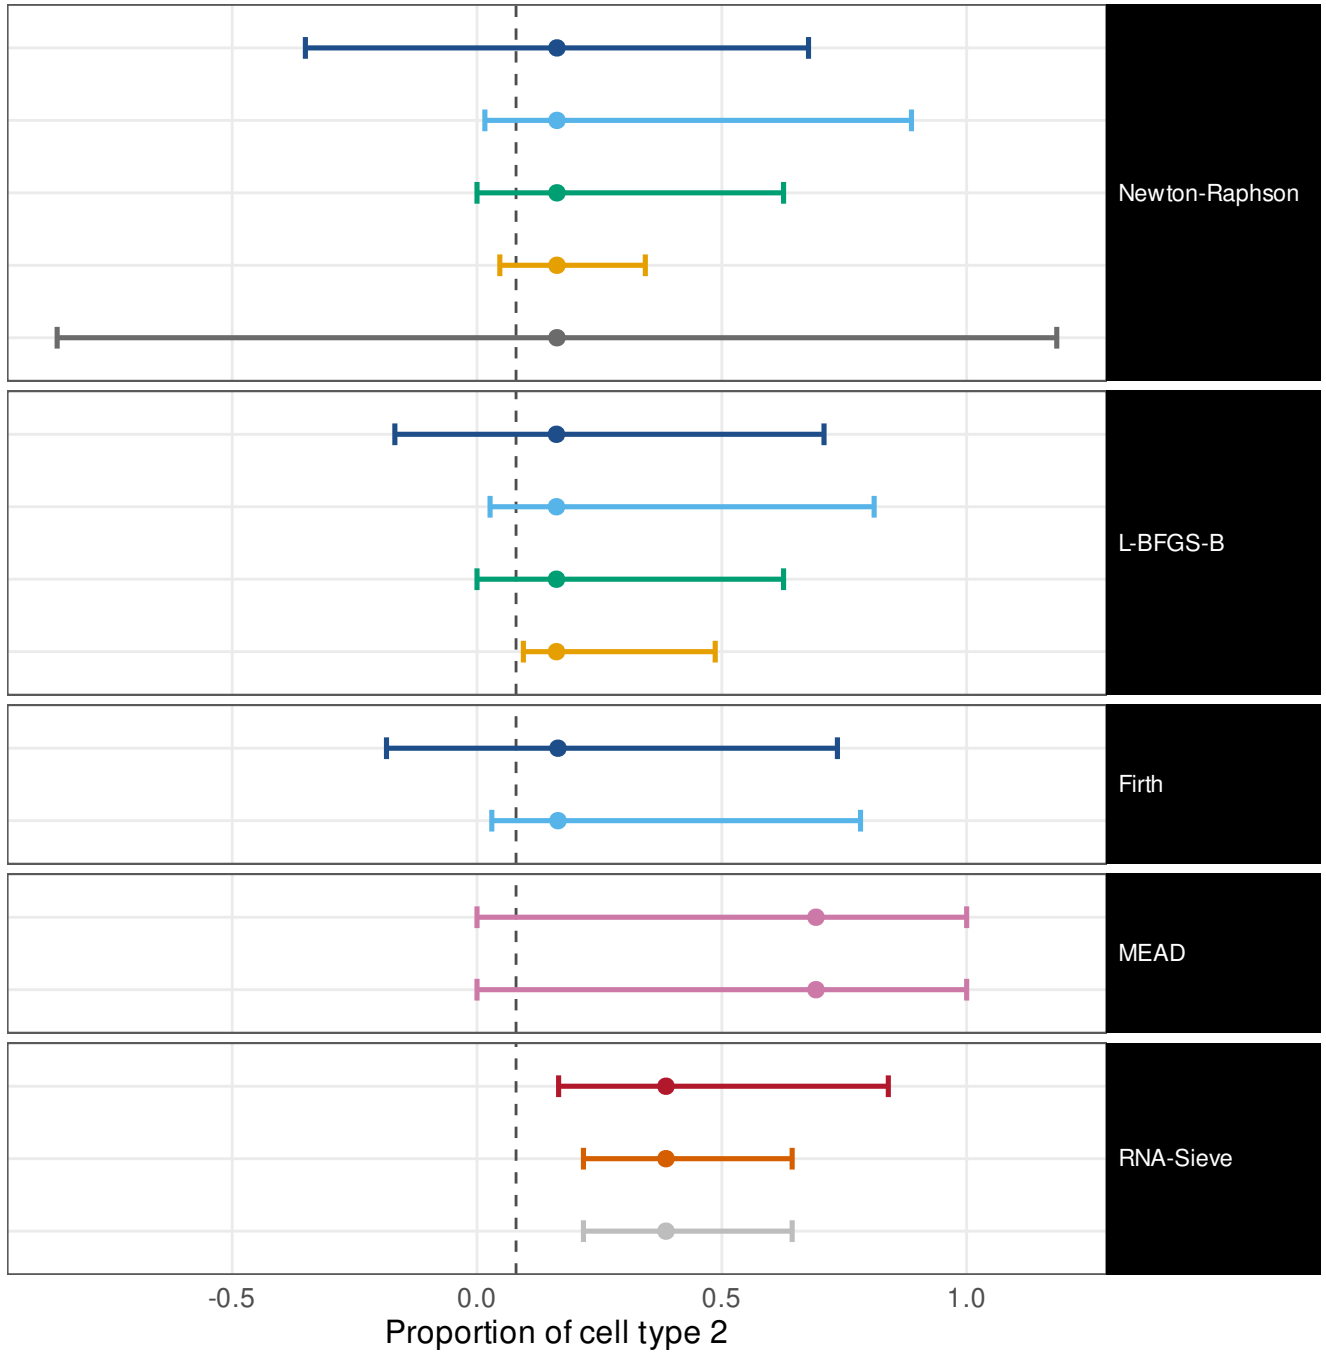


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 1.08
ILR, mapped back	1	[0.57, 1]	w = 0.826
Profile likelihood	0.8	[0.38, 0.96]	w = 0.844
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.349
Oracle (Fisher at p*)	1	[0.57, 1]	w = 1.98
Wald (delta)	1	[0.44, 1]	w = 0.838
ILR, mapped back	1	[0.44, 1]	w = 0.752
Profile likelihood	0.8	[0.38, 0.96]	w = 0.844
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.408
Wald (delta)	1	[0.44, 1]	w = 0.869
ILR, mapped back	1	[0.44, 1]	w = 0.714
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.834
Godambe sandwich	0.2	[0.036, 0.62]	w = 0.486
Released code, as published	0.2	[0.036, 0.62]	w = 0.486

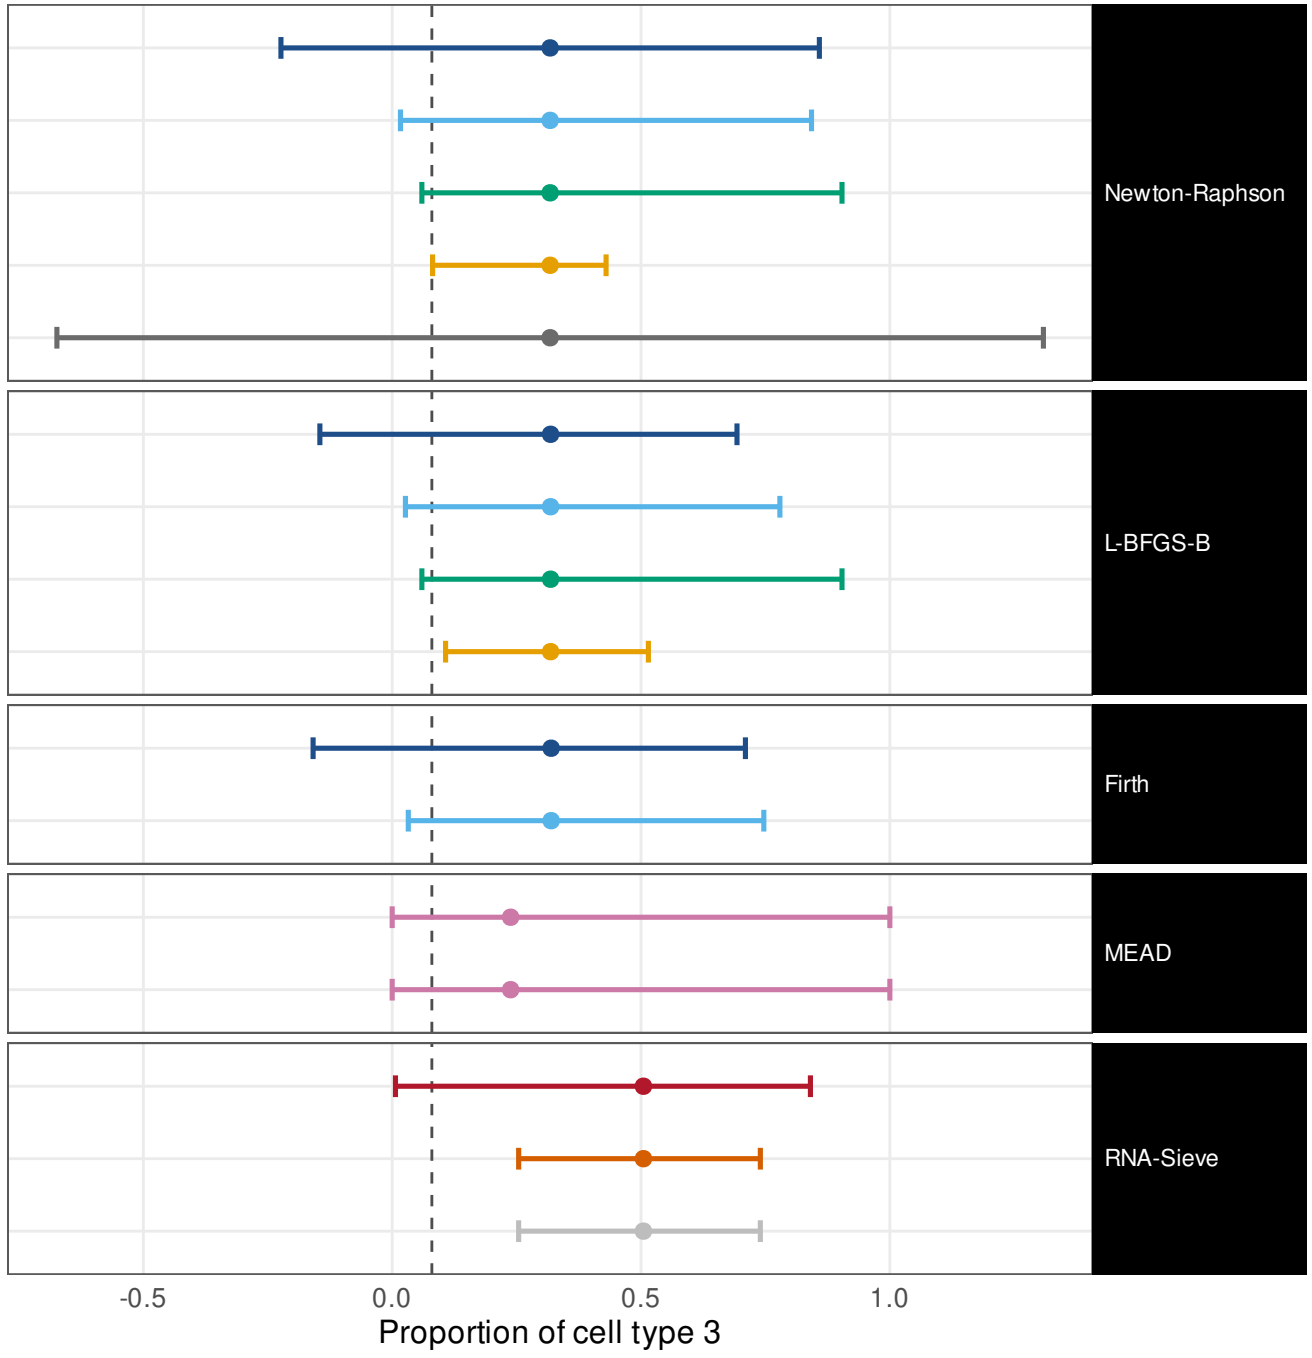


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.69
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.925
Profile likelihood	1	[0.57, 1]	w = 0.719
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.521
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.611
Wald (delta)	1	[0.34, 1]	w = 0.7
ILR, mapped back	0.5	[0.095, 0.91]	w = 0.883
Profile likelihood	1	[0.57, 1]	w = 0.719
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.643
Wald (delta)	1	[0.34, 1]	w = 0.7
ILR, mapped back	0.5	[0.095, 0.91]	w = 0.794
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.673
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.564
Released code, as published	0.8	[0.38, 0.96]	w = 0.564

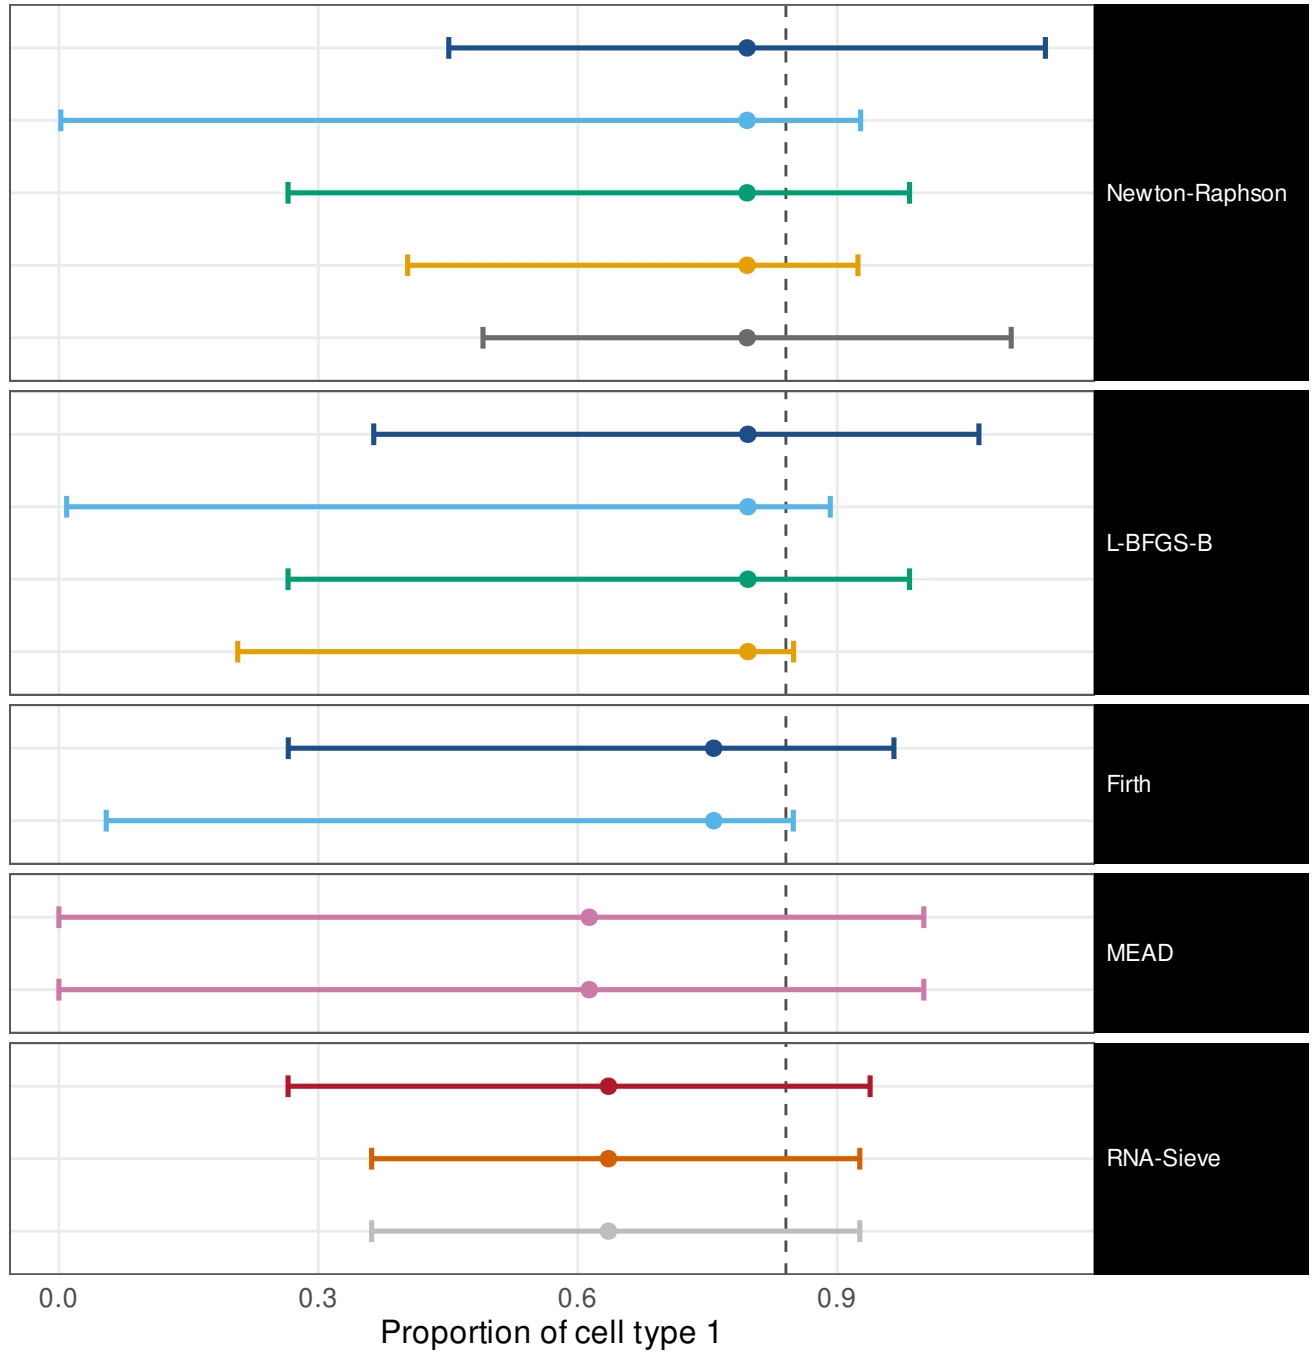


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 1.4
ILR, mapped back	1	[0.57, 1]	w = 0.988
Profile likelihood	1	[0.57, 1]	w = 0.537
Parametric bootstrap	1	[0.57, 1]	w = 0.502
Oracle (Fisher at p*)	1	[0.57, 1]	w = 1.62
Wald (delta)	1	[0.34, 1]	w = 1.24
ILR, mapped back	1	[0.34, 1]	w = 0.986
Profile likelihood	1	[0.57, 1]	w = 0.537
Parametric bootstrap	1	[0.57, 1]	w = 0.641
Wald (delta)	1	[0.34, 1]	w = 1.03
ILR, mapped back	1	[0.34, 1]	w = 0.887
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.45
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.338
Released code, as published	0.6	[0.23, 0.88]	w = 0.338

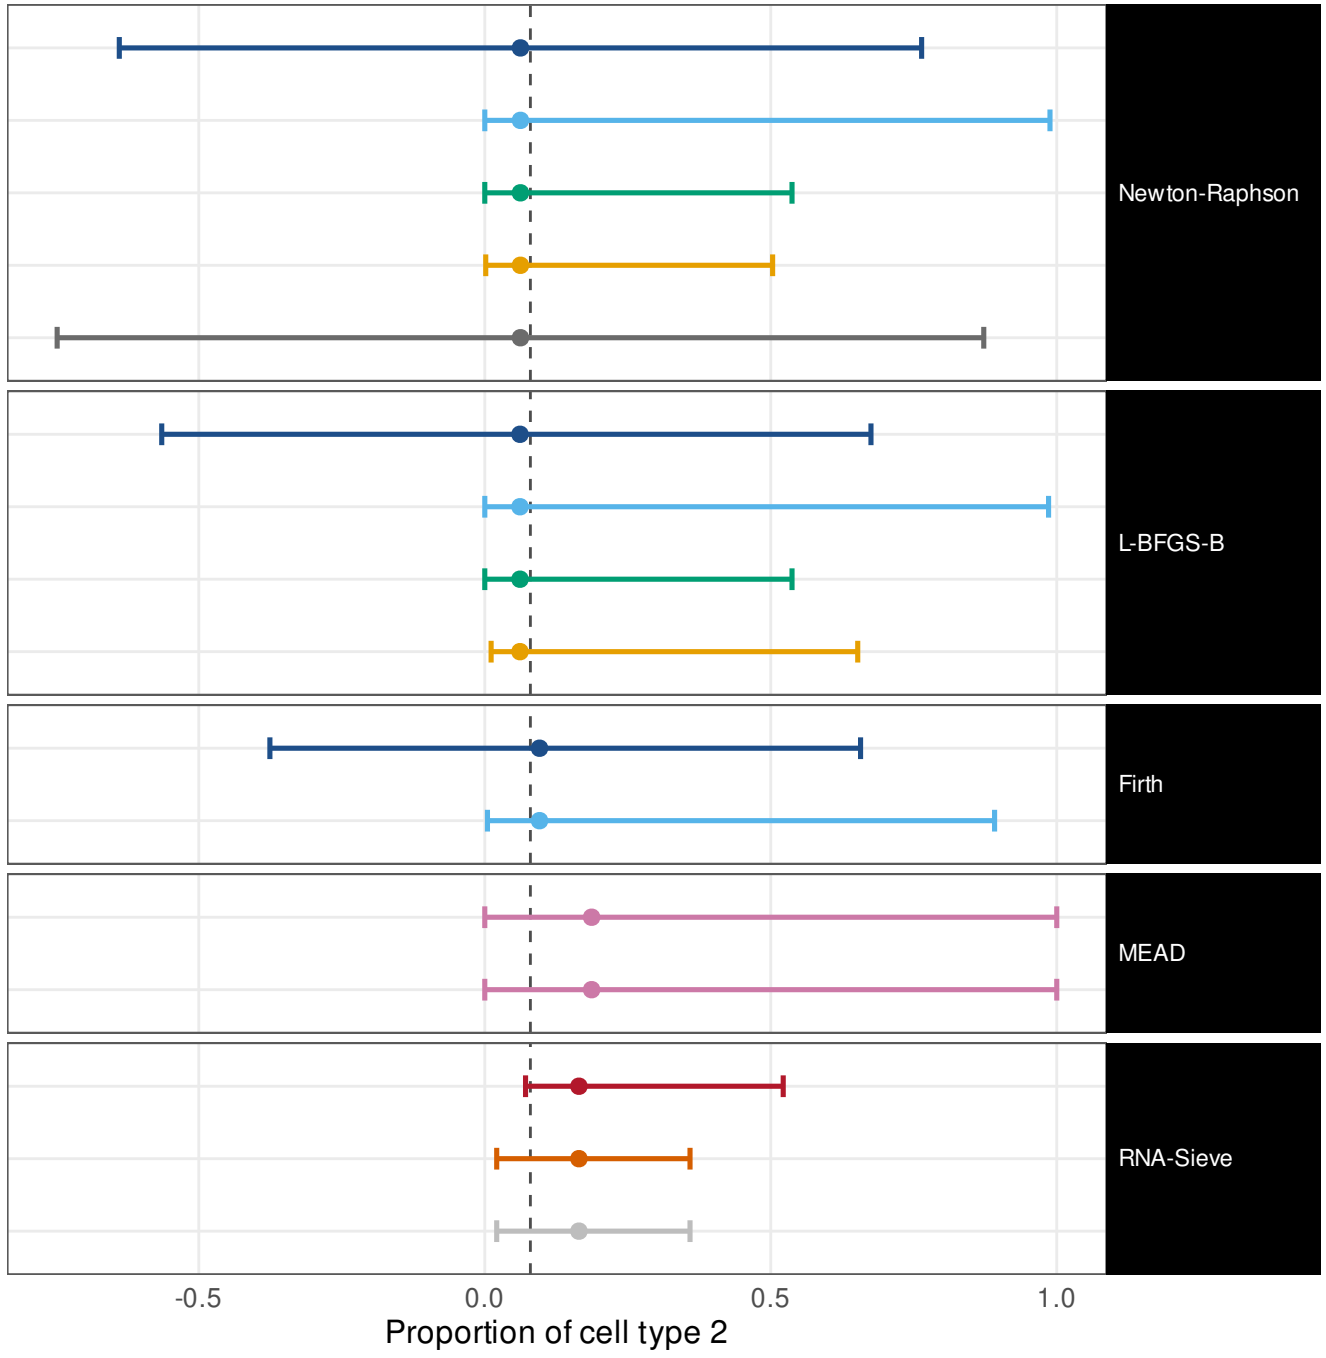


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 1.36
ILR, mapped back	1	[0.57, 1]	w = 0.914
Profile likelihood	1	[0.57, 1]	w = 0.641
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.246
Oracle (Fisher at p*)	1	[0.57, 1]	w = 1.53
Wald (delta)	1	[0.34, 1]	w = 1.28
ILR, mapped back	1	[0.34, 1]	w = 0.879
Profile likelihood	1	[0.57, 1]	w = 0.641
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.158
Wald (delta)	1	[0.34, 1]	w = 1
ILR, mapped back	1	[0.34, 1]	w = 0.814
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.602
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.412
Released code, as published	0.8	[0.38, 0.96]	w = 0.412

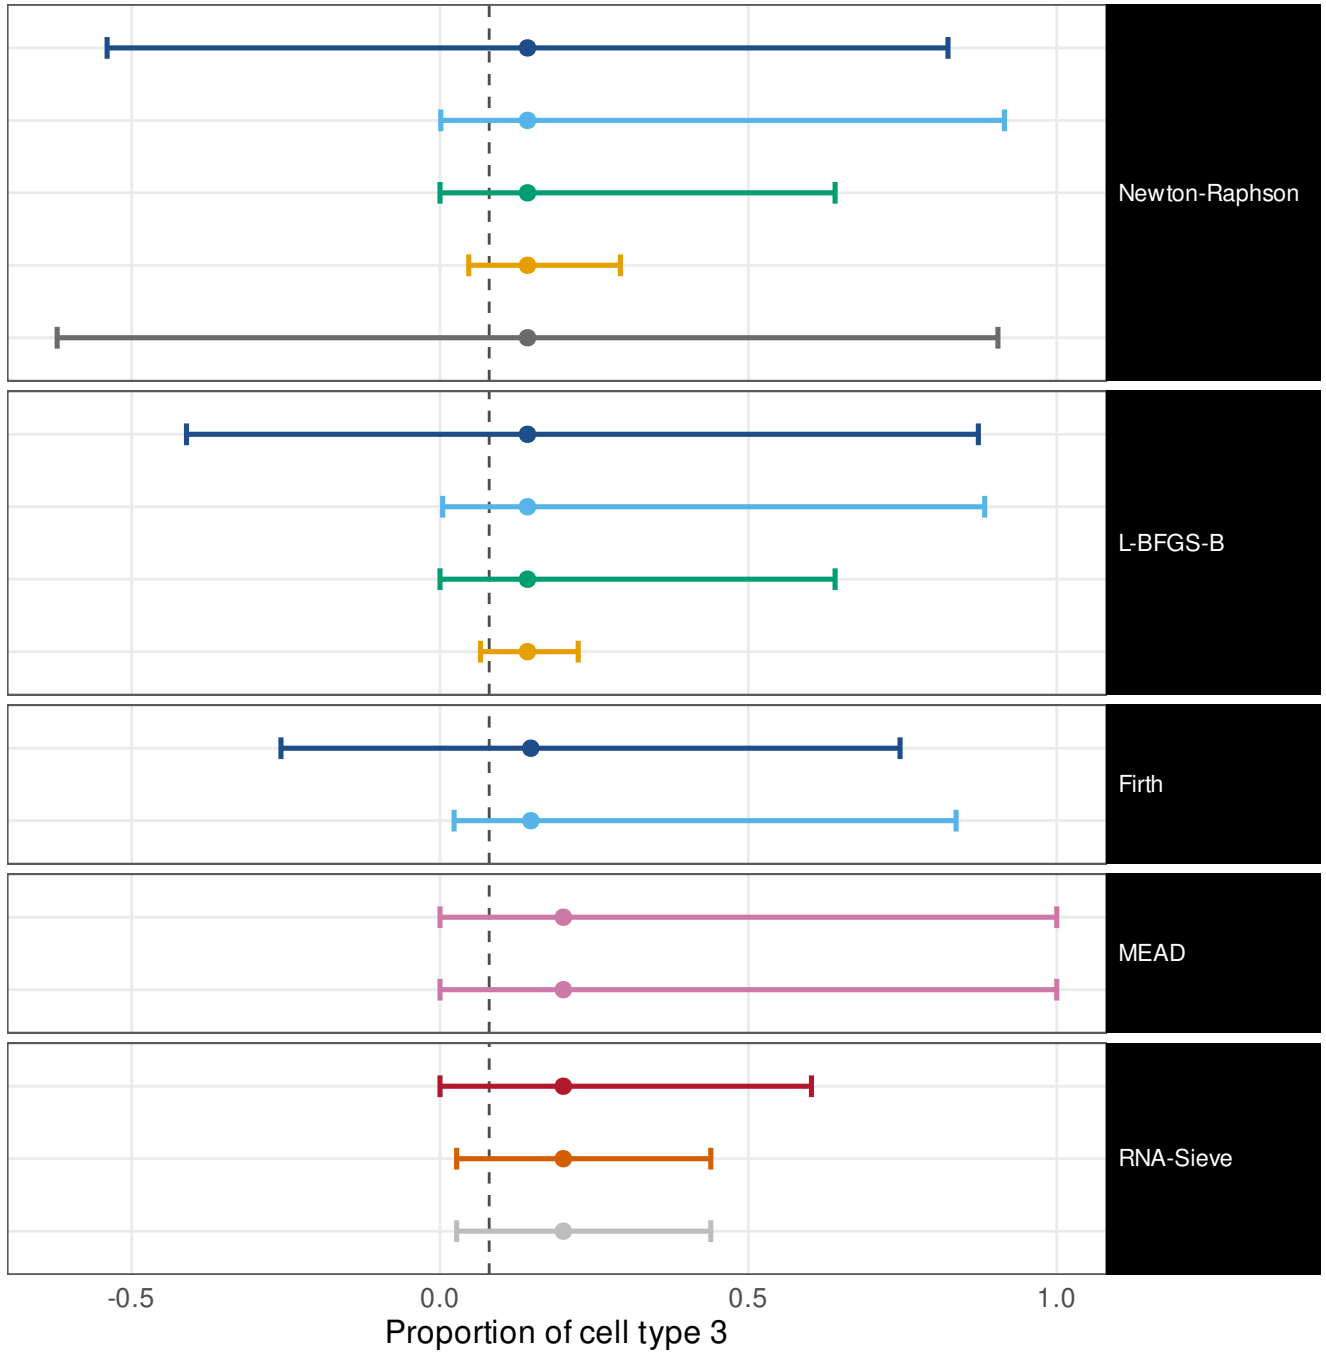

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 SBM / CT2 SBM


```
Wald (delta)                          1  [0.57,    1]   w = 0.645
ILR, mapped back                    0.8  [0.38, 0.96]   w = 0.929
Profile likelihood                    1  [0.57,    1]   w = 0.773
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.456
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.584

Wald (delta)                          1  [0.34,    1]   w = 0.647
ILR, mapped back                      1  [0.34,    1]   w = 0.899
Profile likelihood                    1  [0.57,    1]   w = 0.773
Parametric bootstrap                0.4  [0.12, 0.77]   w = 0.517

Wald (delta)                          1  [0.21,    1]   w = 0.605
ILR, mapped back                      1  [0.21,    1]   w = 0.807

Method's own interval                 1  [0.57,    1]   w =    1
Own interval, transcript fractions    1  [0.57,    1]   w =    1

Fisher information (Wald)           0.4  [0.12, 0.77]   w = 0.606
Godambe sandwich                    0.2  [0.036, 0.62]   w = 0.466
Released code, as published         0.2  [0.036, 0.62]   w = 0.466
```

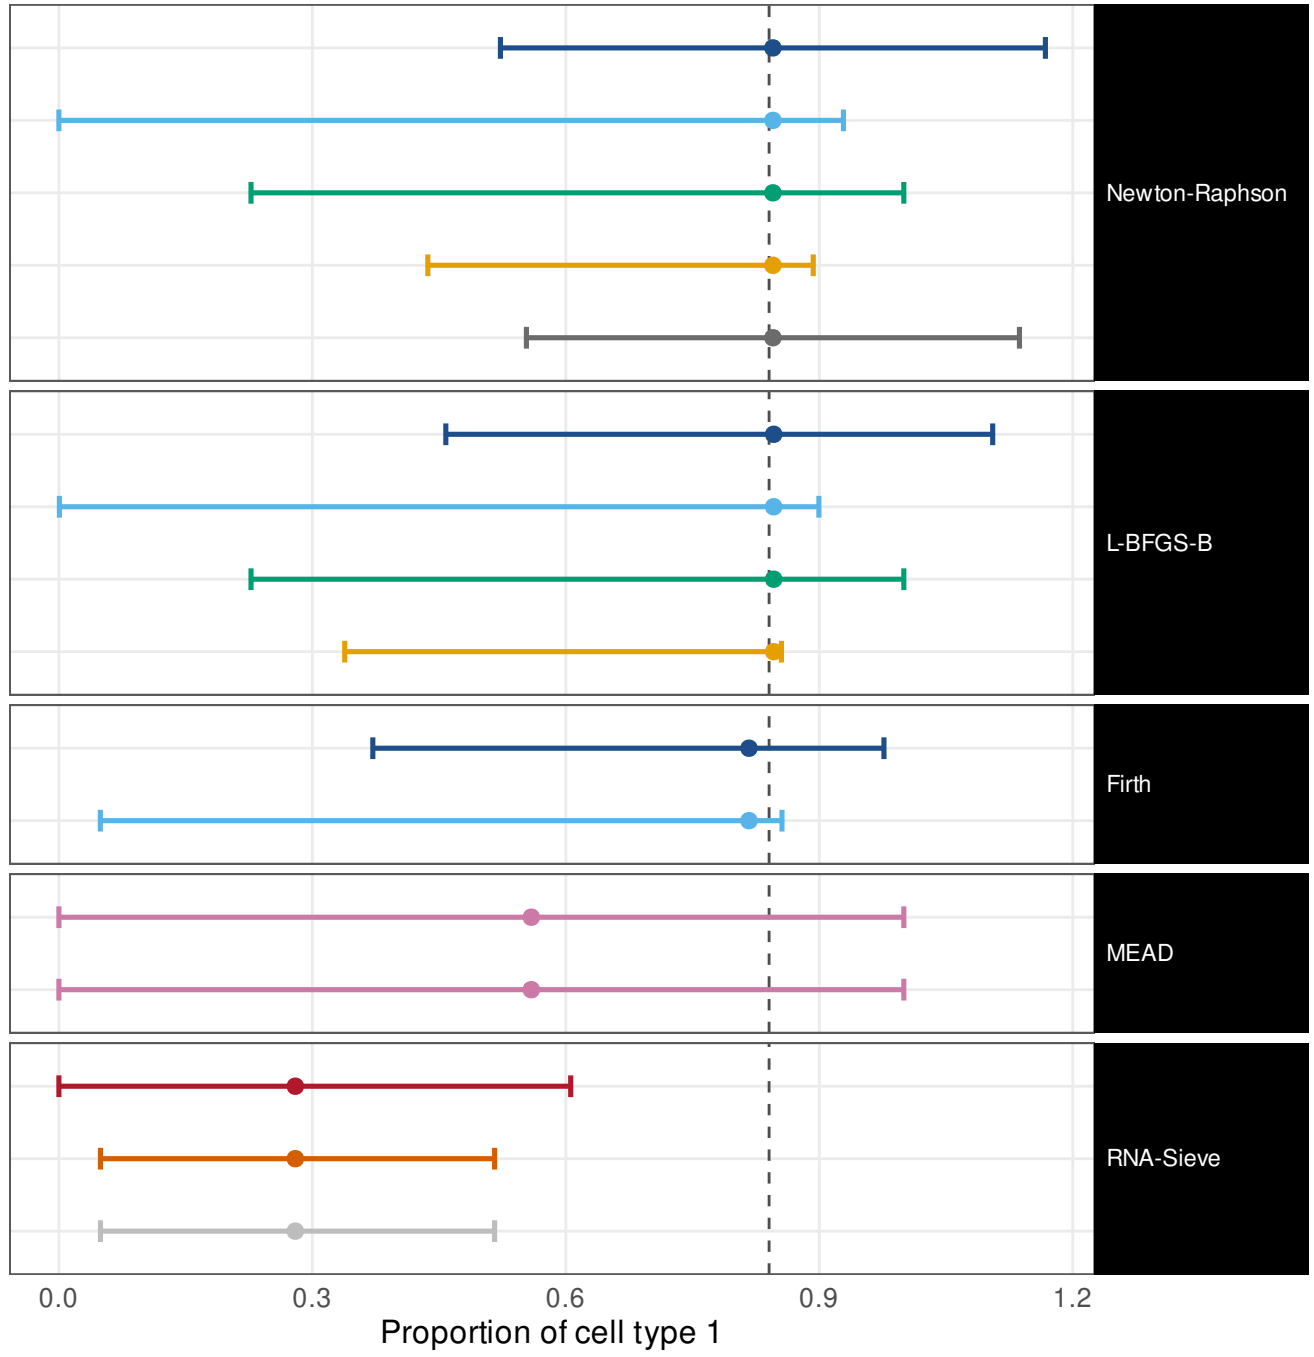


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 1.59
ILR, mapped back	1	[0.57, 1]	w = 0.993
Profile likelihood	1	[0.57, 1]	w = 0.716
Parametric bootstrap	1	[0.57, 1]	w = 0.422
Oracle (Fisher at p*)	1	[0.57, 1]	w = 1.72
Wald (delta)	1	[0.34, 1]	w = 1.62
ILR, mapped back	1	[0.34, 1]	w = 0.969
Profile likelihood	1	[0.57, 1]	w = 0.716
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.385
Wald (delta)	1	[0.21, 1]	w = 1.31
ILR, mapped back	1	[0.21, 1]	w = 0.925
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.524
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.4
Released code, as published	0.6	[0.23, 0.88]	w = 0.4

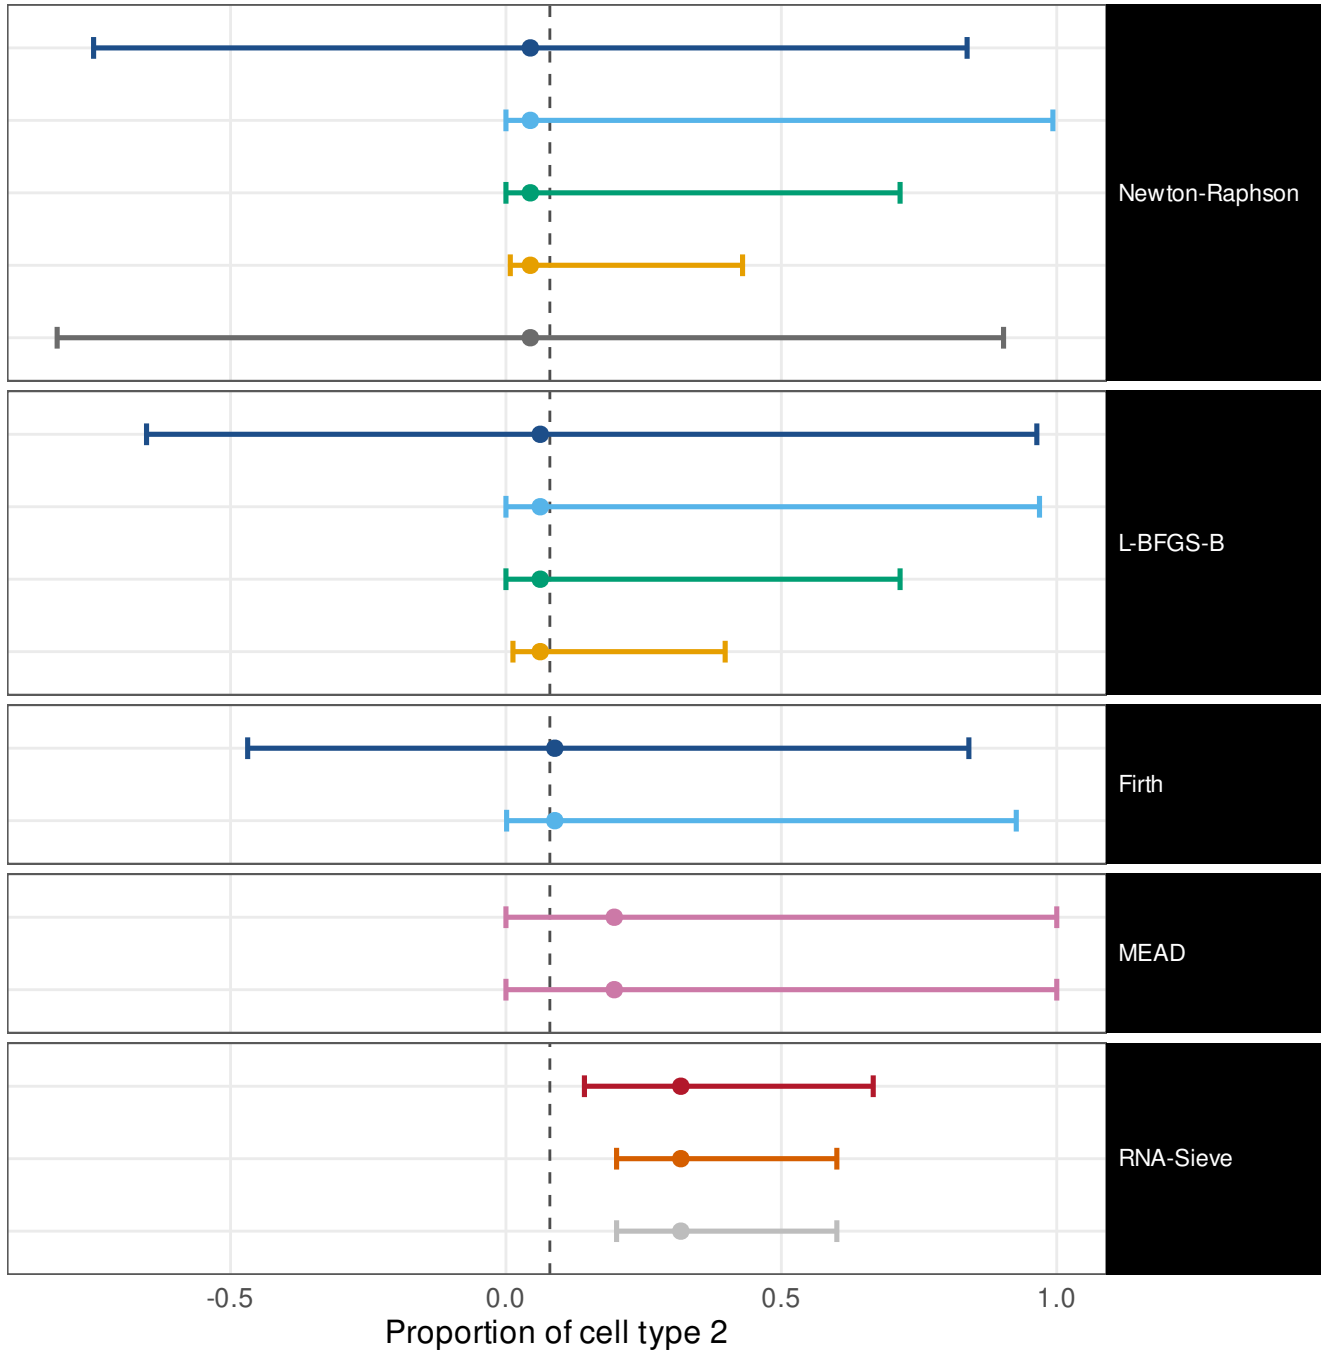


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

moderately unbalanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 1.57
ILR, mapped back	1	[0.57, 1]	w = 0.946
Profile likelihood	1	[0.57, 1]	w = 0.562
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.336
Oracle (Fisher at p*)	1	[0.57, 1]	w = 1.64
Wald (delta)	1	[0.34, 1]	w = 1.37
ILR, mapped back	1	[0.34, 1]	w = 0.997
Profile likelihood	1	[0.57, 1]	w = 0.562
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.361
Wald (delta)	1	[0.21, 1]	w = 1.15
ILR, mapped back	1	[0.21, 1]	w = 0.903
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.52
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.393
Released code, as published	0.6	[0.23, 0.88]	w = 0.393

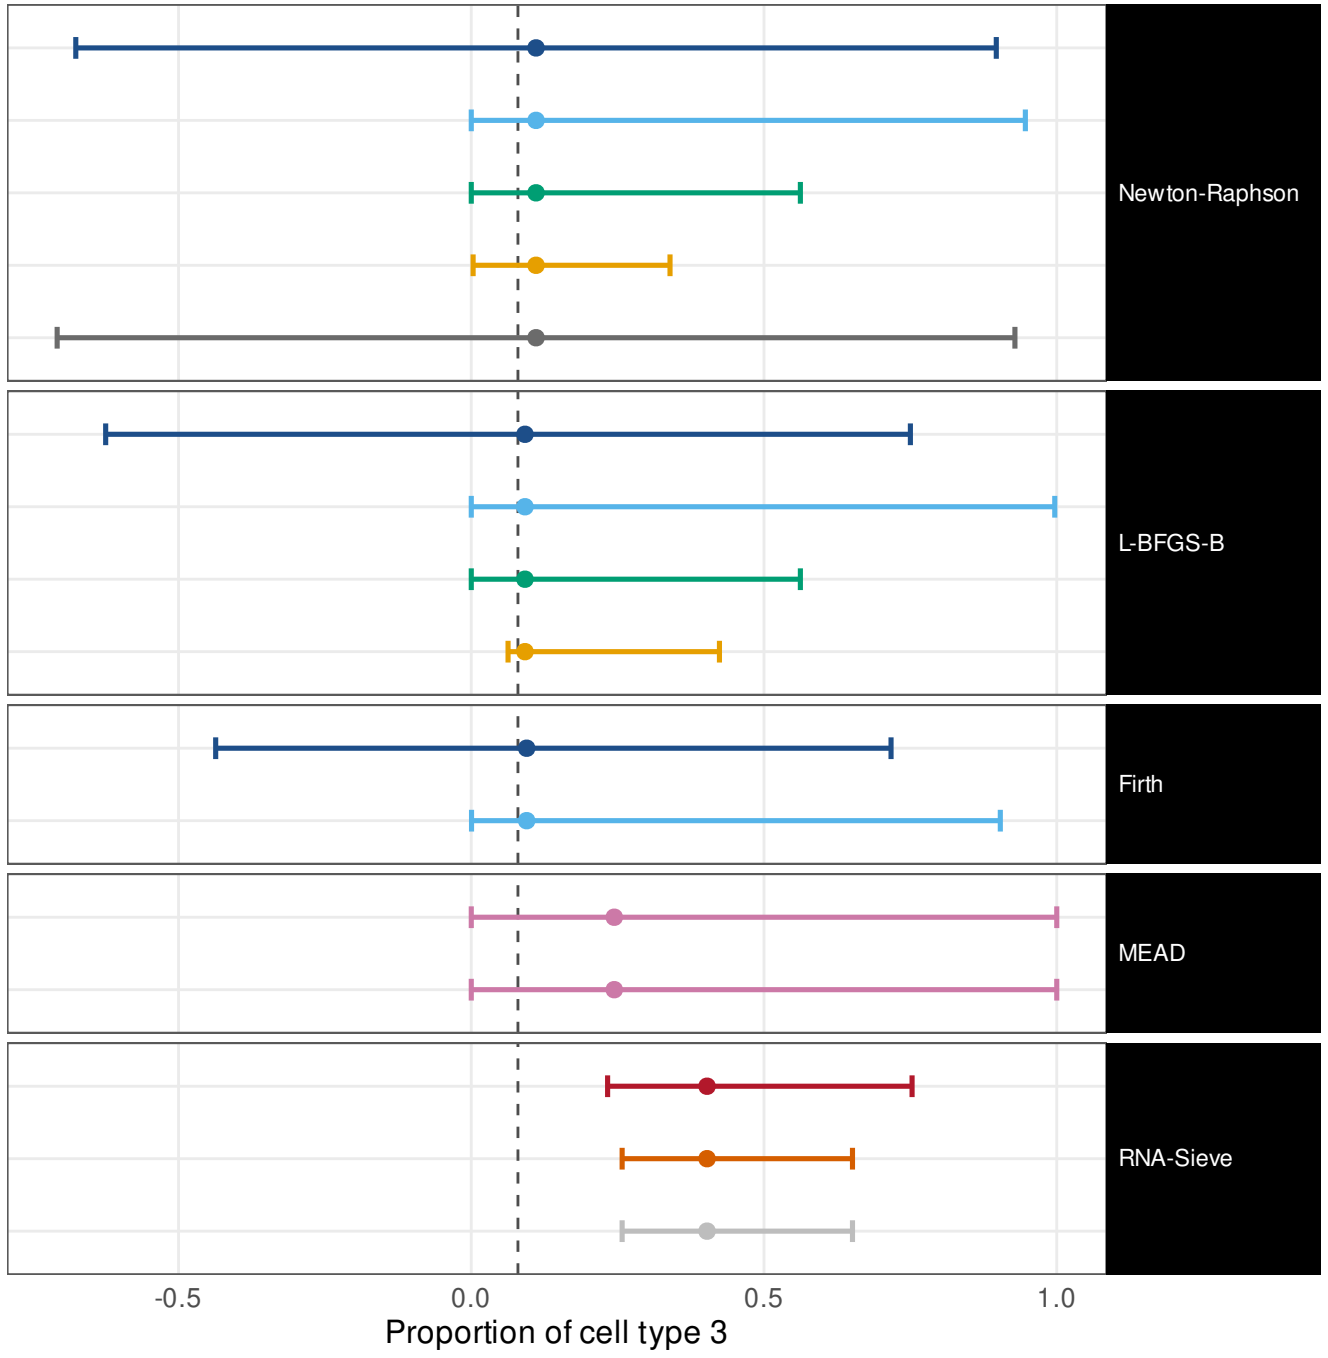


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 0.551
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.956
Profile likelihood	0.8	[0.38, 0.96]	w = 0.72
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.452
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.537
Wald (delta)	0.5	[0.095, 0.91]	w = 0.572
ILR, mapped back	0.5	[0.095, 0.91]	w = 0.909
Profile likelihood	0.8	[0.38, 0.96]	w = 0.72
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.427
Wald (delta)	0.5	[0.095, 0.91]	w = 0.544
ILR, mapped back	0	[0, 0.66]	w = 0.598
Method's own interval	0.8	[0.38, 0.96]	w = 0.935
Own interval, transcript fractions	0.8	[0.38, 0.96]	w = 0.935
Fisher information (Wald)	0.4	[0.12, 0.77]	w = 0.82
Godambe sandwich	0.2	[0.036, 0.62]	w = 0.72
Released code, as published	0.2	[0.036, 0.62]	w = 0.72

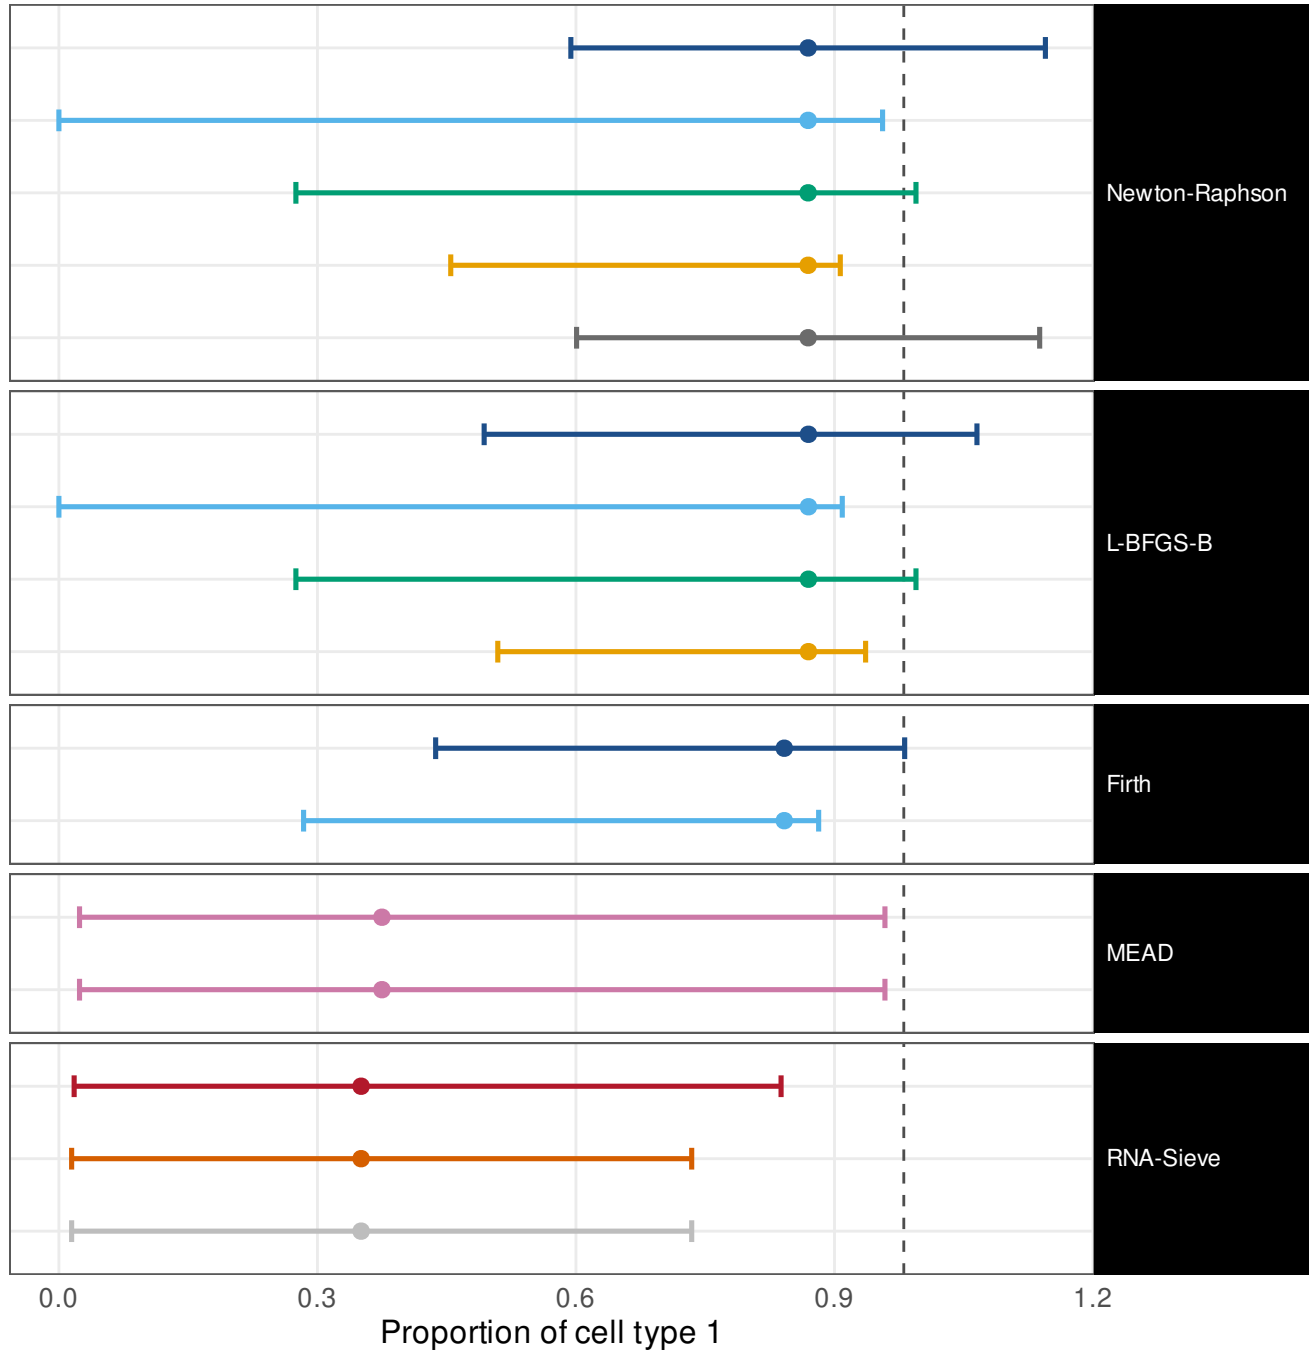


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 0.633
ILR, mapped back	1	[0.57, 1]	w = 0.868
Profile likelihood	1	[0.57, 1]	w = 0.715
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.45
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.645
Wald (delta)	0.5	[0.095, 0.91]	w = 0.631
ILR, mapped back	1	[0.34, 1]	w = 0.841
Profile likelihood	1	[0.57, 1]	w = 0.715
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.345
Wald (delta)	1	[0.34, 1]	w = 0.597
ILR, mapped back	0.5	[0.095, 0.91]	w = 0.62
Method's own interval	0.4	[0.12, 0.77]	w = 0.931
Own interval, transcript fractions	0.4	[0.12, 0.77]	w = 0.931
Fisher information (Wald)	0.4	[0.12, 0.77]	w = 0.869
Godambe sandwich	0.2	[0.036, 0.62]	w = 0.711
Released code, as published	0.2	[0.036, 0.62]	w = 0.711

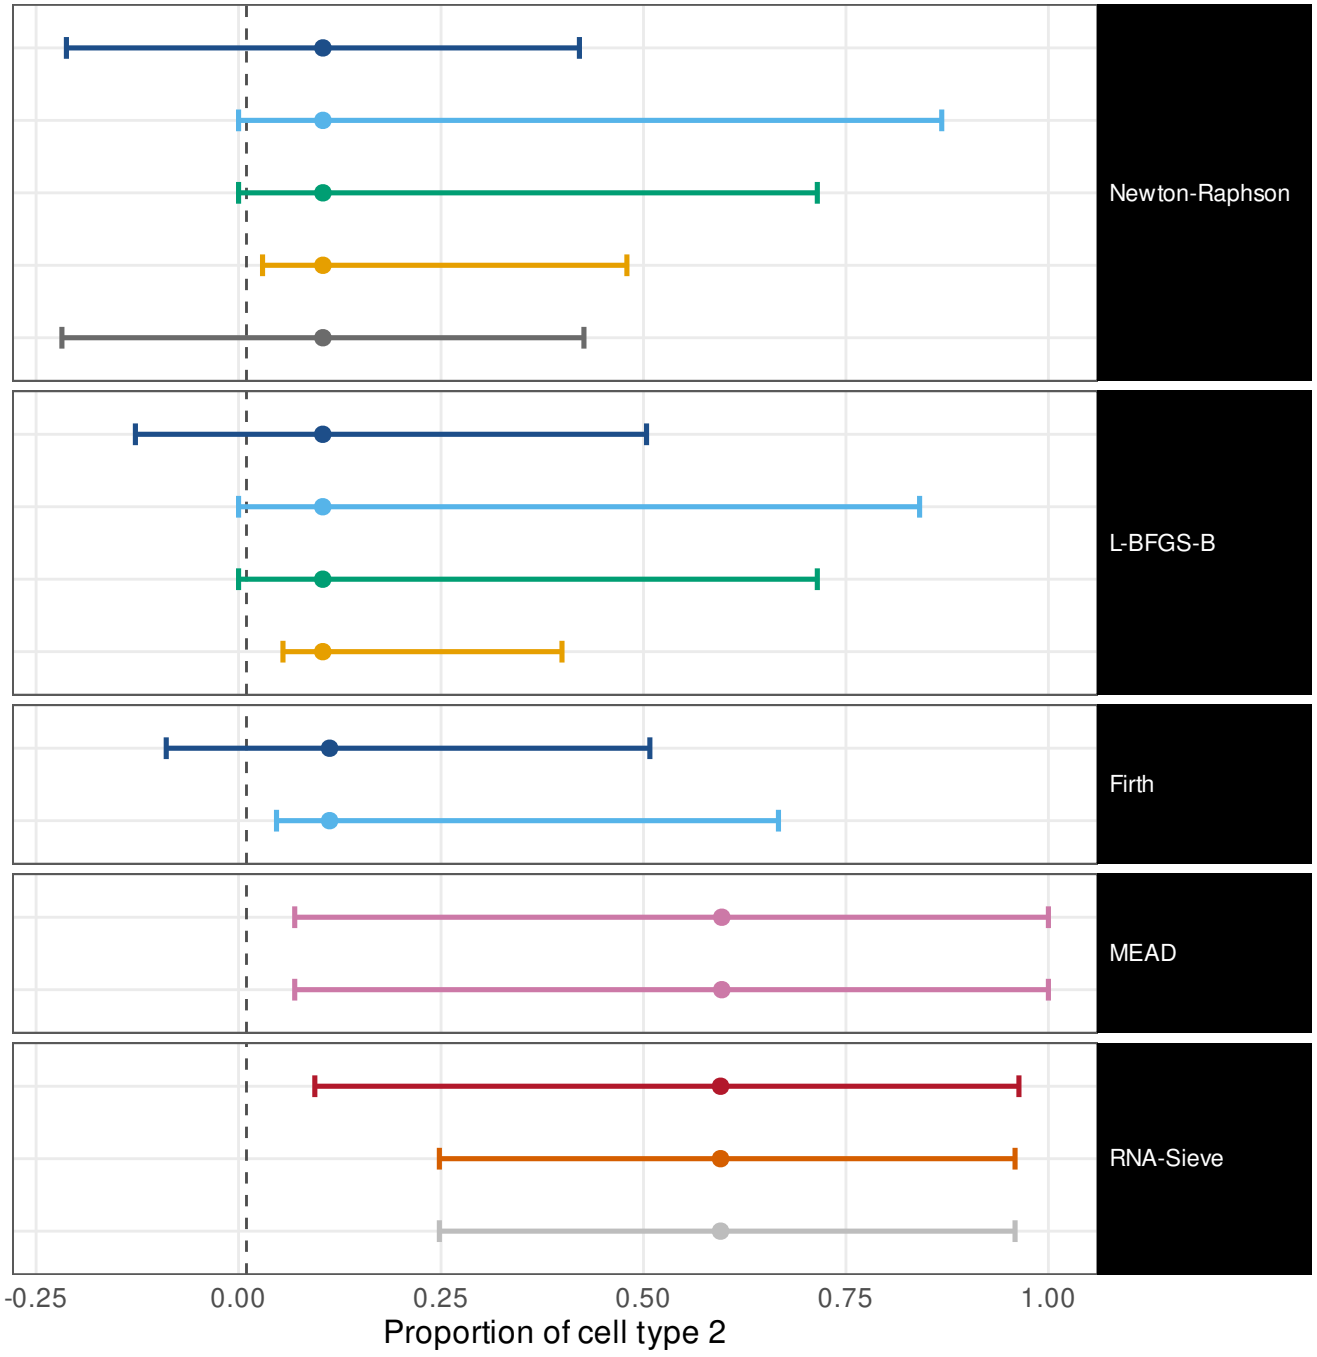


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.369
ILR, mapped back	1	[0.57, 1]	w = 0.837
Profile likelihood	1	[0.57, 1]	w = 0.171
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.139
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.408
Wald (delta)	1	[0.34, 1]	w = 0.341
ILR, mapped back	1	[0.34, 1]	w = 0.828
Profile likelihood	1	[0.57, 1]	w = 0.171
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.176
Wald (delta)	1	[0.34, 1]	w = 0.314
ILR, mapped back	1	[0.34, 1]	w = 0.388
Method's own interval	1	[0.57, 1]	w = 0.351
Own interval, transcript fractions	1	[0.57, 1]	w = 0.351
Fisher information (Wald)	1	[0.57, 1]	w = 0.315
Godambe sandwich	1	[0.57, 1]	w = 0.184
Released code, as published	1	[0.57, 1]	w = 0.184

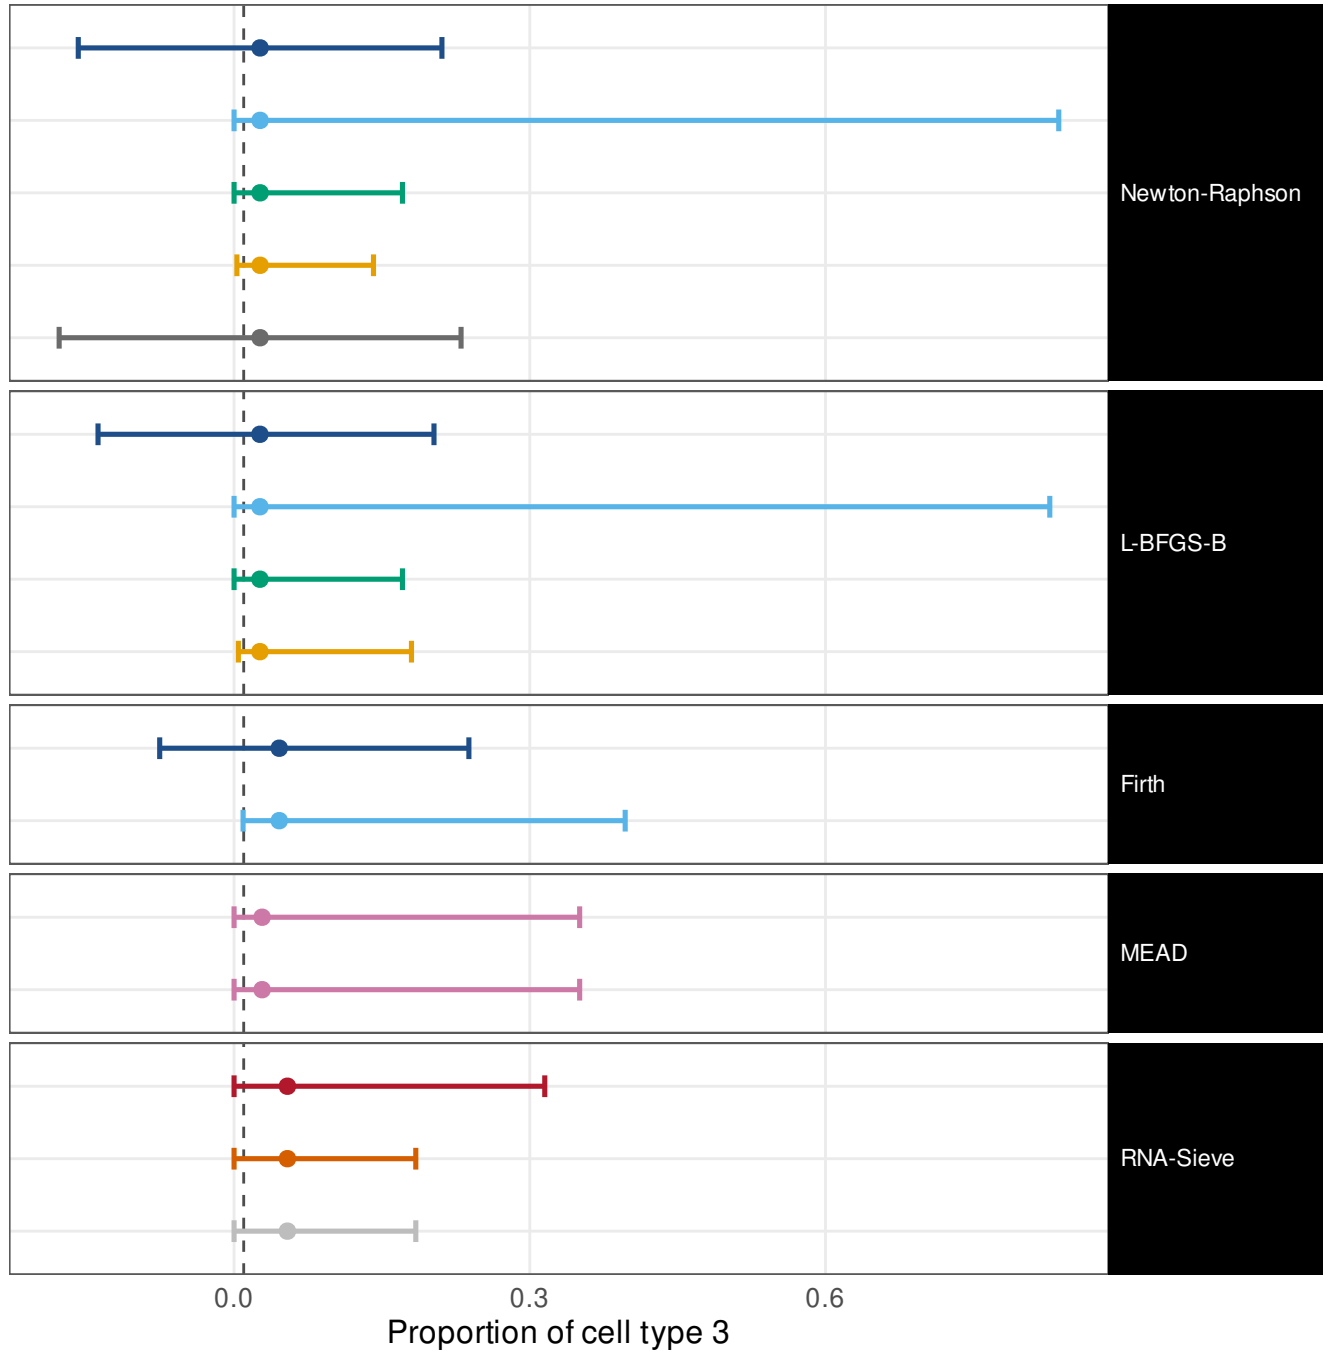


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.556
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.945
Profile likelihood	1	[0.57, 1]	w = 0.253
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.422
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.561
Wald (delta)	1	[0.21, 1]	w = 0.513
ILR, mapped back	0	[0, 0.79]	w = 0.731
Profile likelihood	1	[0.57, 1]	w = 0.253
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.164
Wald (delta)	0	[0, 0.79]	w = 0.513
ILR, mapped back	0	[0, 0.79]	w = 0.543
Method's own interval	0.8	[0.38, 0.96]	w = 0.936
Own interval, transcript fractions	0.8	[0.38, 0.96]	w = 0.936
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.715
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.557
Released code, as published	0.6	[0.23, 0.88]	w = 0.557

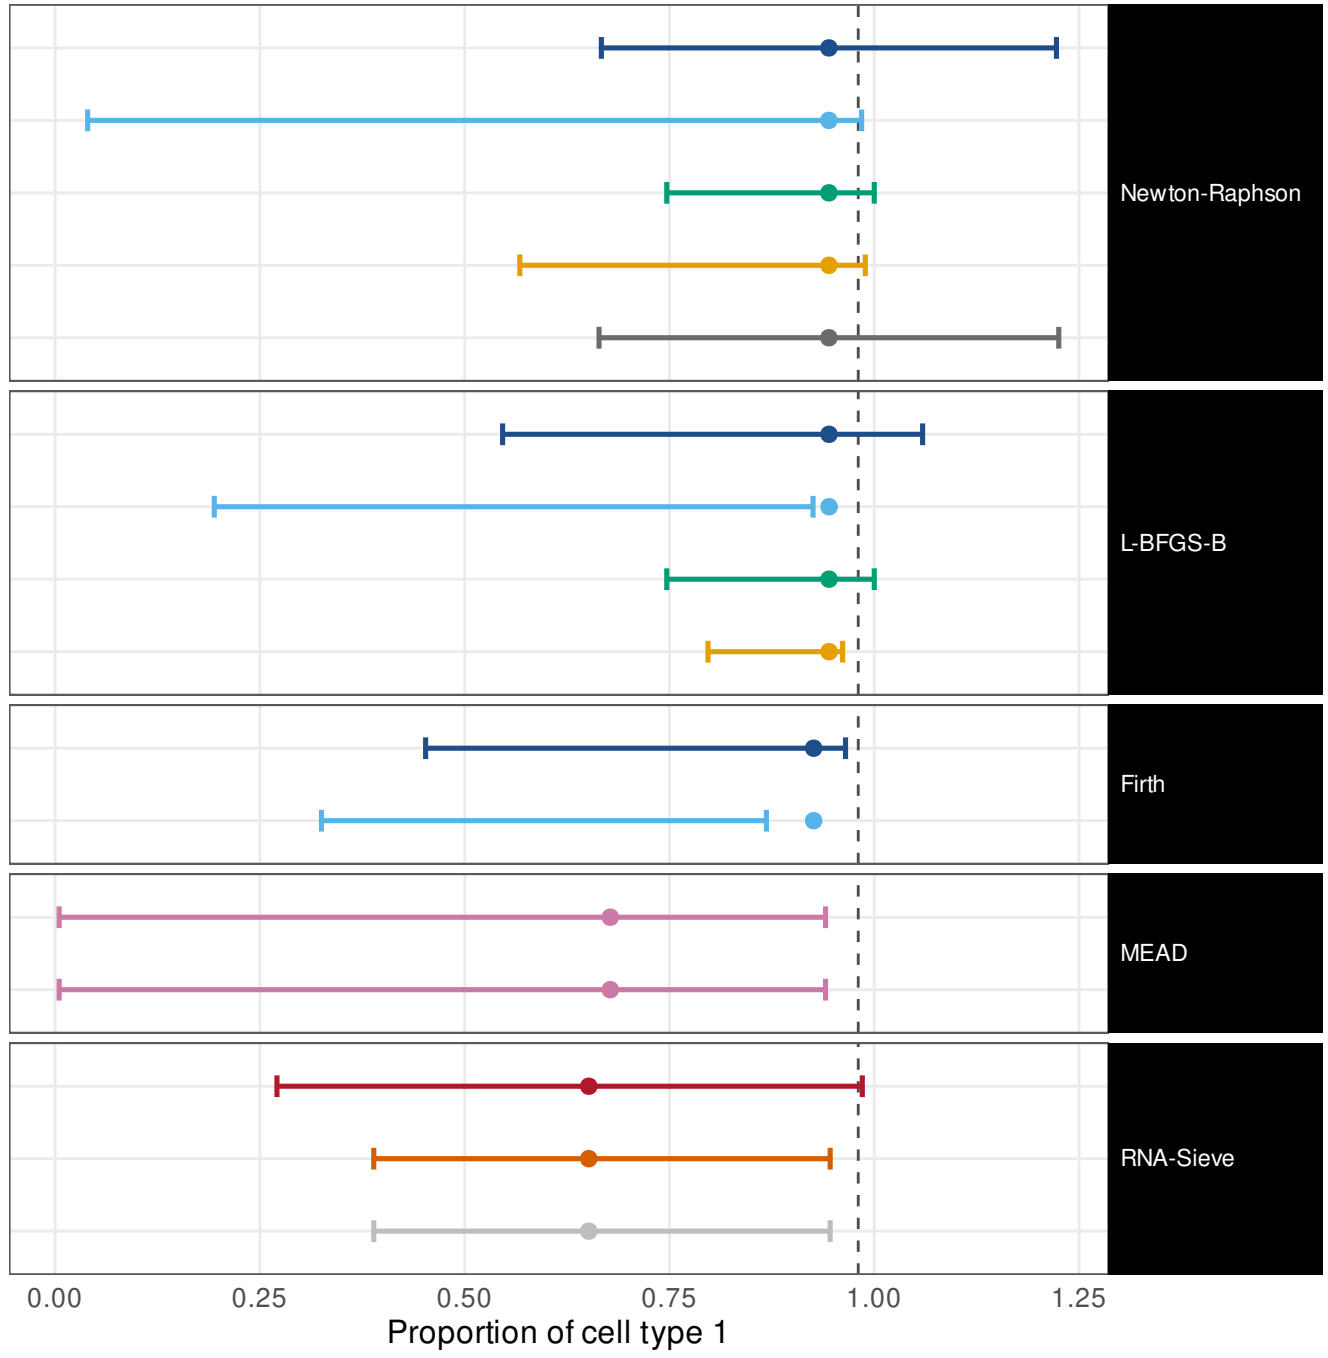


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.651
ILR, mapped back	1	[0.57, 1]	w = 0.931
Profile likelihood	1	[0.57, 1]	w = 0.24
Parametric bootstrap	1	[0.57, 1]	w = 0.38
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.662
Wald (delta)	1	[0.21, 1]	w = 0.575
ILR, mapped back	1	[0.21, 1]	w = 0.791
Profile likelihood	1	[0.57, 1]	w = 0.24
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.156
Wald (delta)	1	[0.21, 1]	w = 0.562
ILR, mapped back	0	[0, 0.79]	w = 0.579
Method's own interval	1	[0.57, 1]	w = 0.993
Own interval, transcript fractions	1	[0.57, 1]	w = 0.993
Fisher information (Wald)	1	[0.57, 1]	w = 0.645
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.594
Released code, as published	0.8	[0.38, 0.96]	w = 0.594

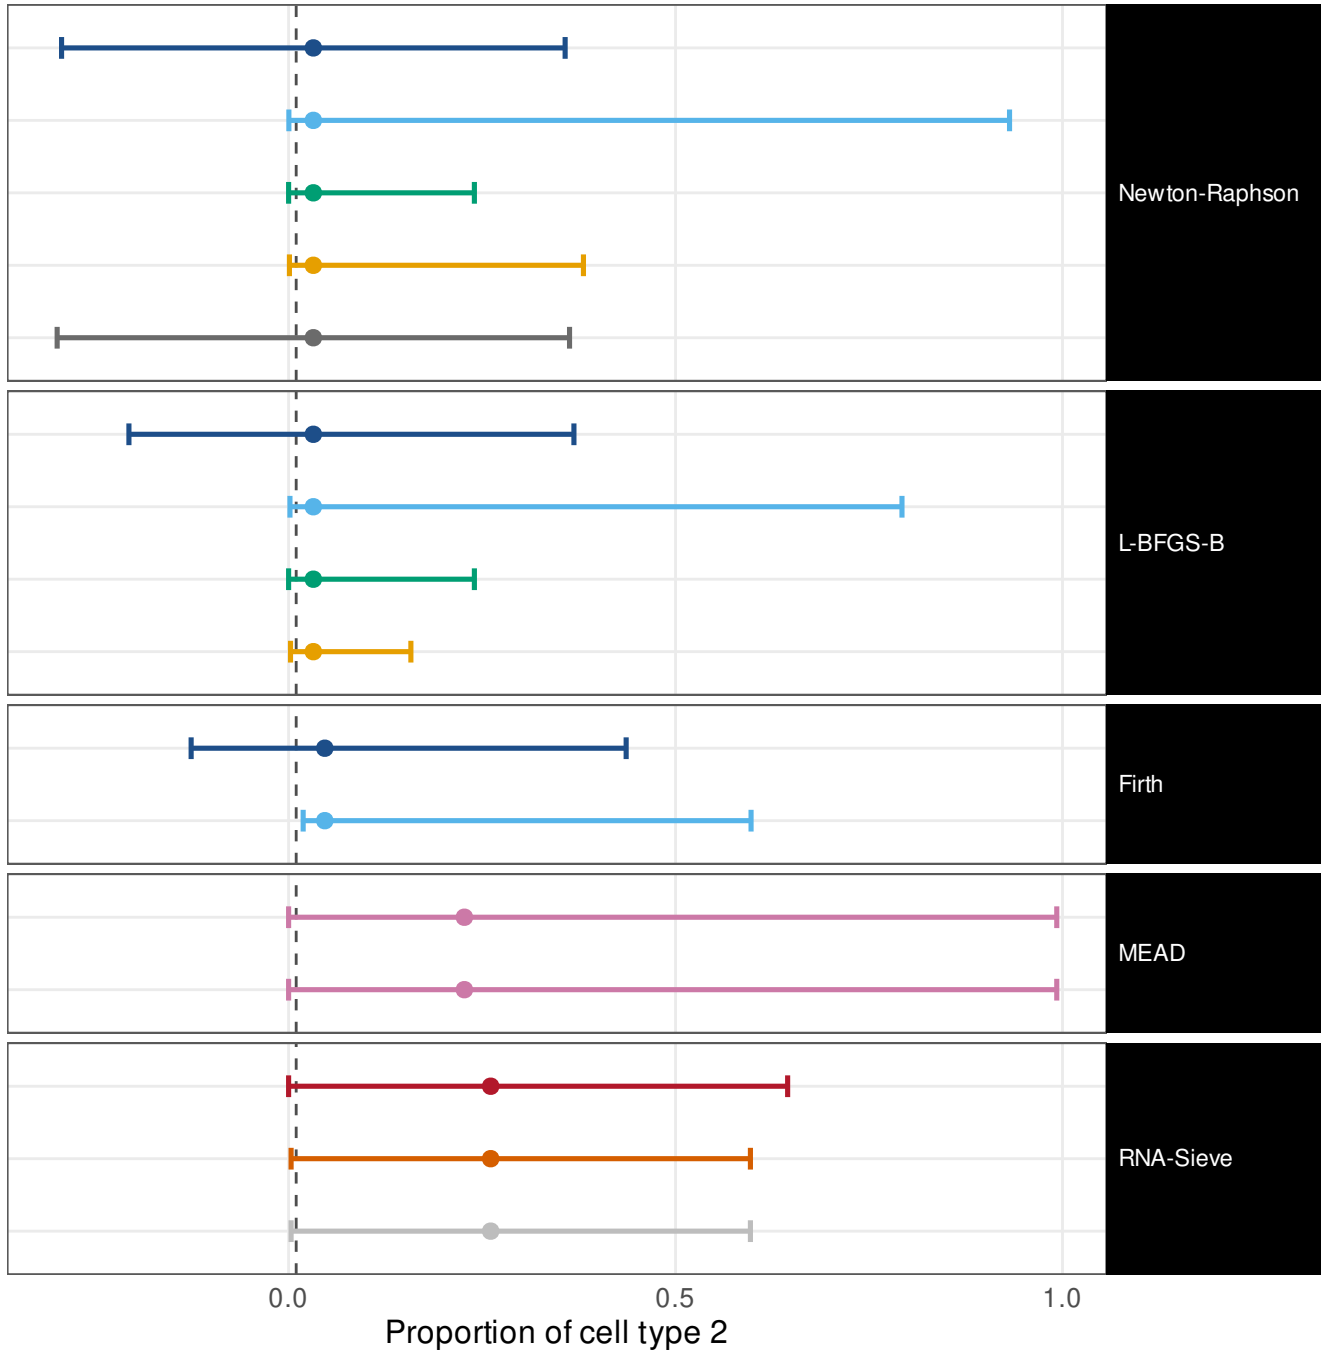


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.406
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.878
Profile likelihood	1	[0.57, 1]	w = 0.152
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0859
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.421
Wald (delta)	1	[0.21, 1]	w = 0.35
ILR, mapped back	0	[0, 0.79]	w = 0.376
Profile likelihood	1	[0.57, 1]	w = 0.152
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.111
Wald (delta)	1	[0.21, 1]	w = 0.314
ILR, mapped back	0	[0, 0.79]	w = 0.325
Method's own interval	1	[0.57, 1]	w = 0.385
Own interval, transcript fractions	1	[0.57, 1]	w = 0.385
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.315
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.183
Released code, as published	0.6	[0.23, 0.88]	w = 0.183

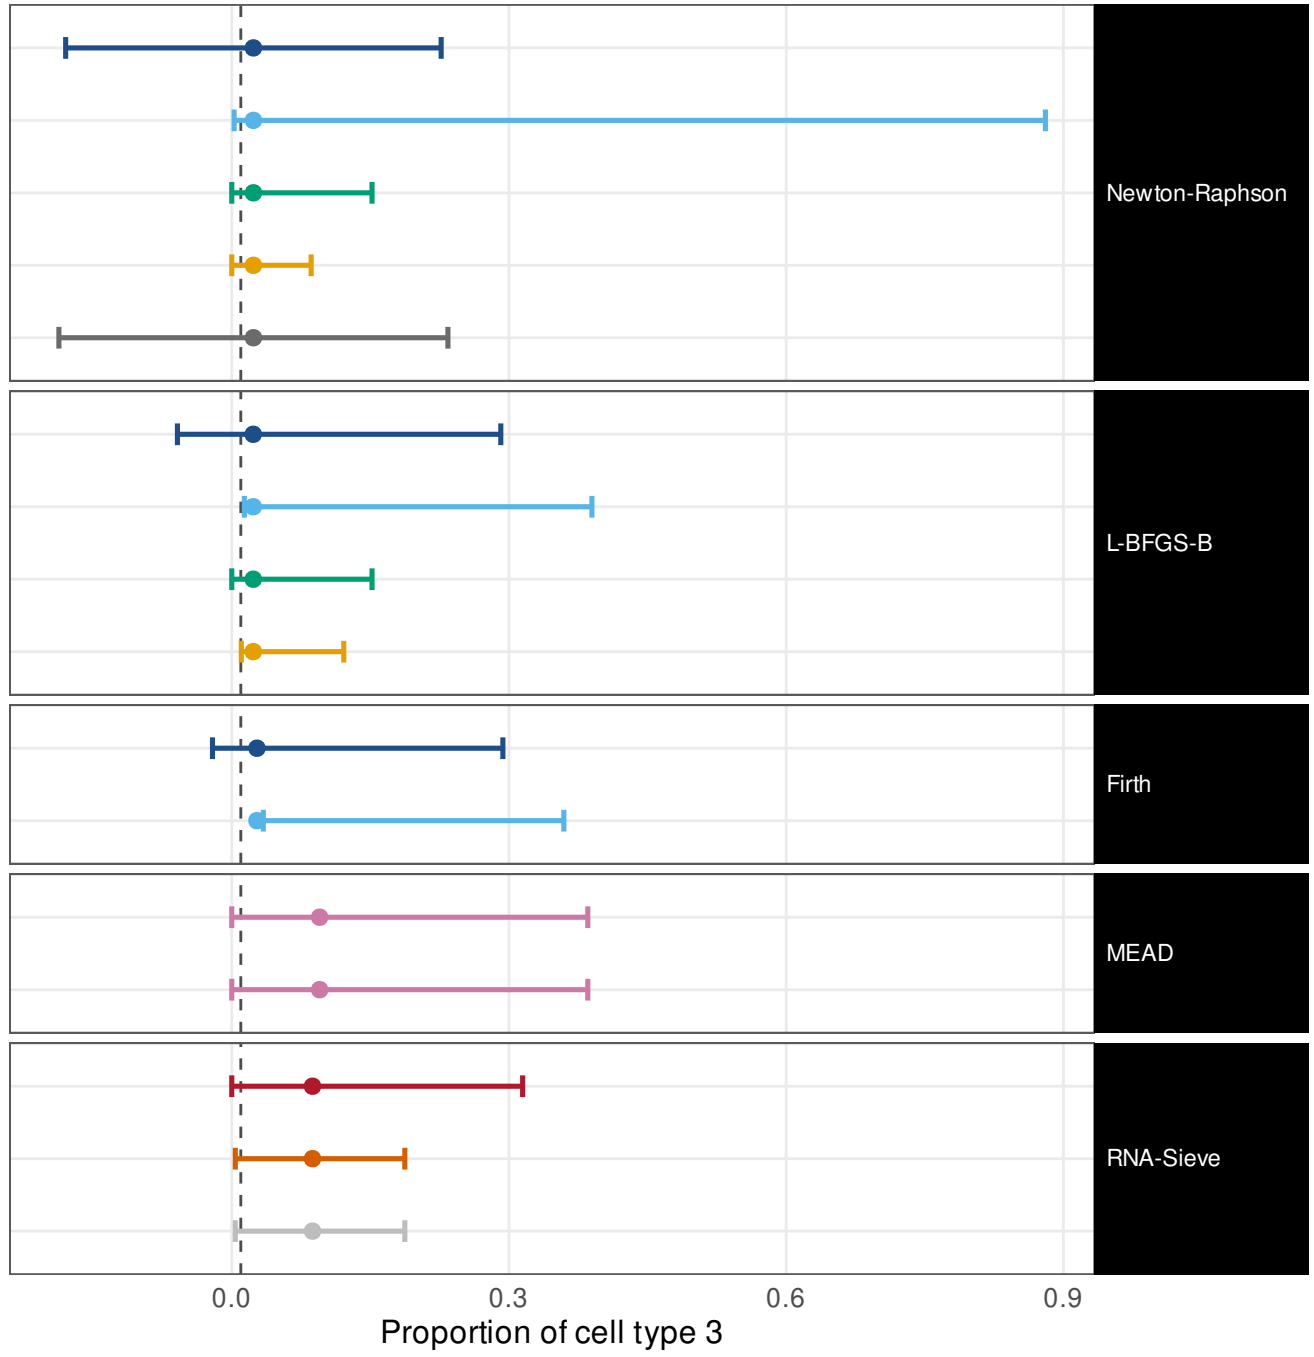


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.8	[0.38, 0.96]	w = 0.583
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.954
Profile likelihood	1	[0.57, 1]	w = 0.404
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.273
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.558
Wald (delta)	1	[0.21, 1]	w = 0.568
ILR, mapped back	0	[0, 0.79]	w = 0.791
Profile likelihood	1	[0.57, 1]	w = 0.404
Parametric bootstrap	1	[0.57, 1]	w = 0.18
Wald (delta)	1	[0.21, 1]	w = 0.561
ILR, mapped back	0	[0, 0.79]	w = 0.593
Method's own interval	1	[0.57, 1]	w = 0.866
Own interval, transcript fractions	1	[0.57, 1]	w = 0.866
Fisher information (Wald)	1	[0.57, 1]	w = 0.556
Godambe sandwich	1	[0.57, 1]	w = 0.393
Released code, as published	1	[0.57, 1]	w = 0.393

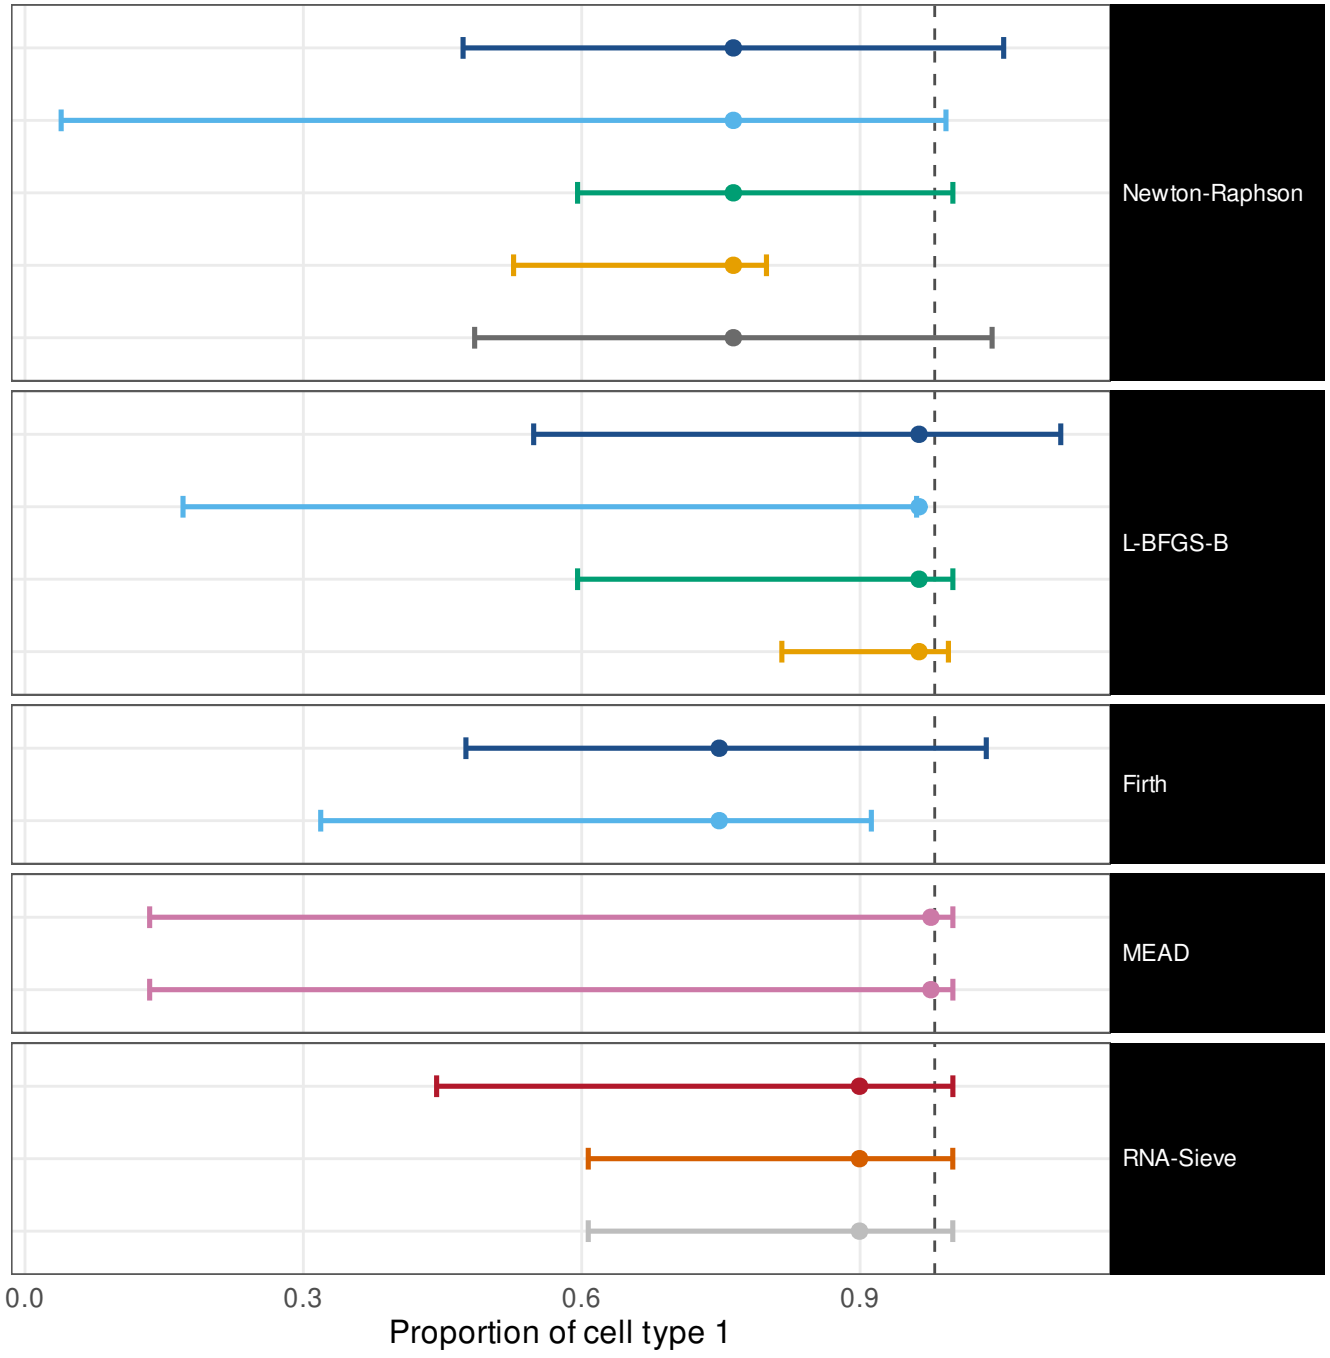


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	0.8	[0.38, 0.96]	w = 0.629
ILR, mapped back	1	[0.57, 1]	w = 0.944
Profile likelihood	1	[0.57, 1]	w = 0.404
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.301
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.646
Wald (delta)	1	[0.21, 1]	w = 0.641
ILR, mapped back	1	[0.21, 1]	w = 0.706
Profile likelihood	1	[0.57, 1]	w = 0.404
Parametric bootstrap	1	[0.57, 1]	w = 0.157
Wald (delta)	1	[0.21, 1]	w = 0.617
ILR, mapped back	0	[0, 0.79]	w = 0.62
Method's own interval	1	[0.57, 1]	w = 0.839
Own interval, transcript fractions	1	[0.57, 1]	w = 0.839
Fisher information (Wald)	1	[0.57, 1]	w = 0.512
Godambe sandwich	1	[0.57, 1]	w = 0.407
Released code, as published	1	[0.57, 1]	w = 0.407

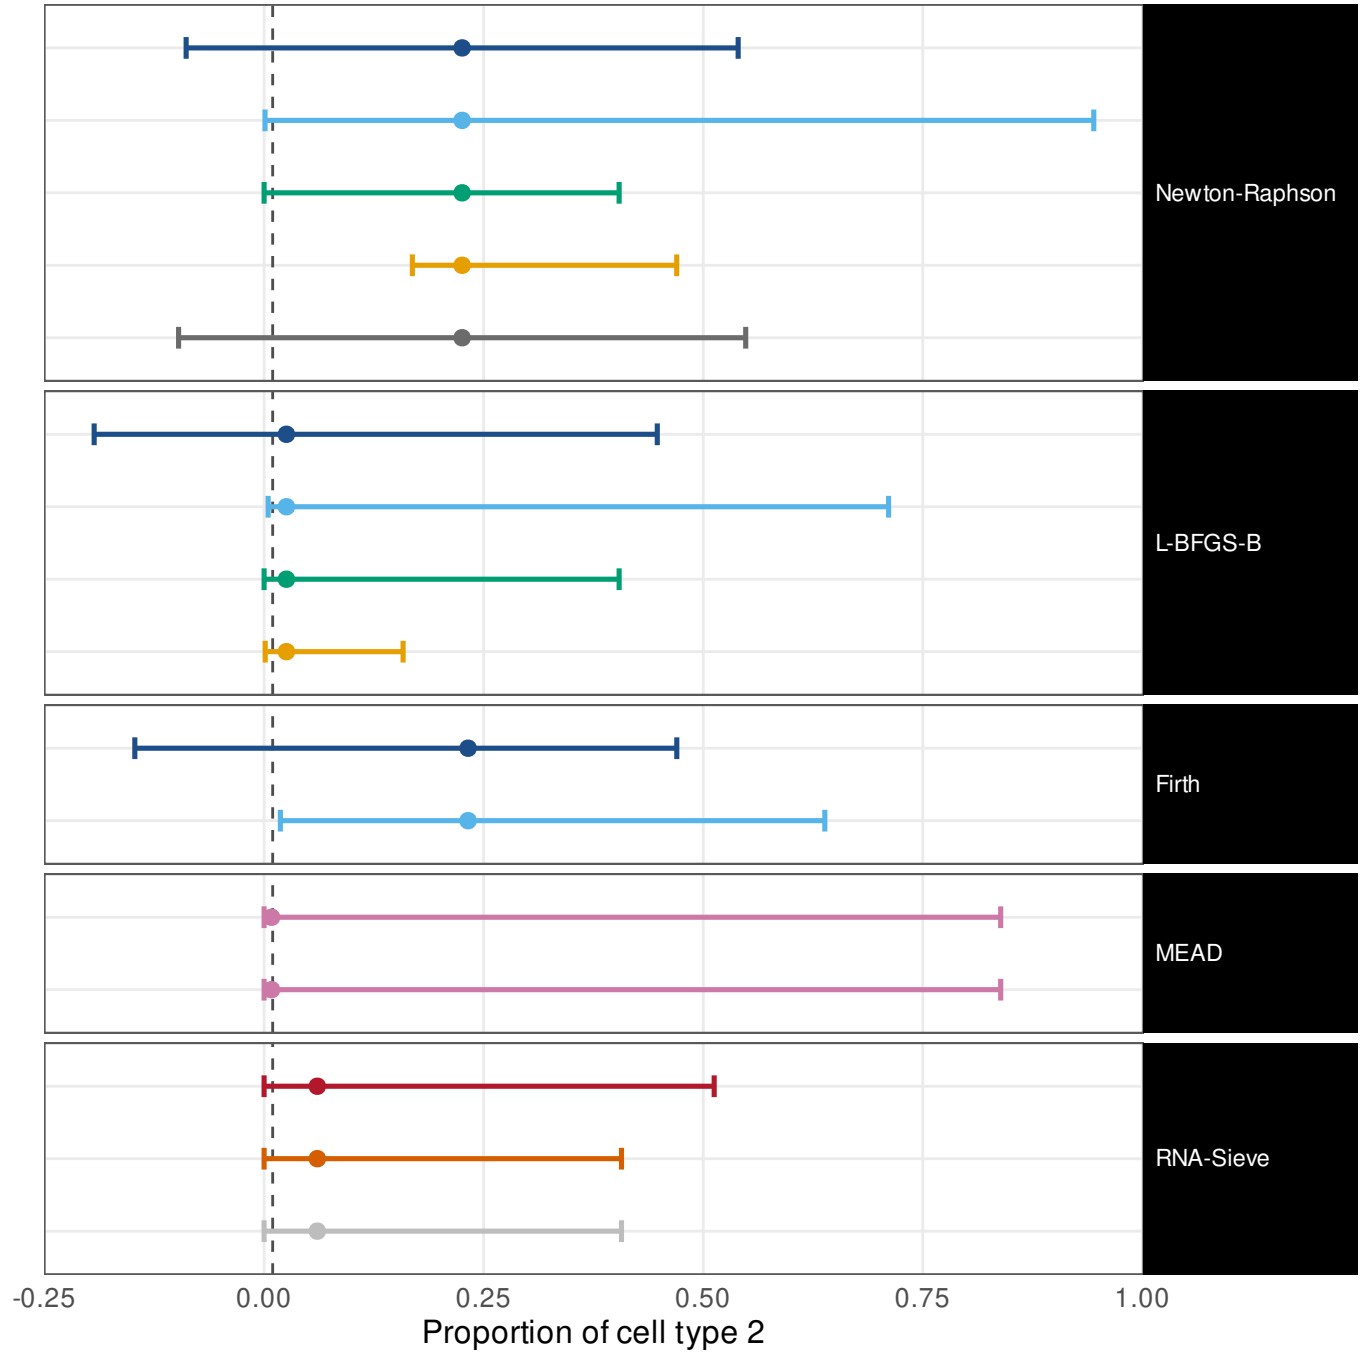


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.388
ILR, mapped back	1	[0.57, 1]	w = 0.937
Profile likelihood	1	[0.57, 1]	w = 0.158
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0877
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.38
Wald (delta)	1	[0.21, 1]	w = 0.329
ILR, mapped back	1	[0.21, 1]	w = 0.737
Profile likelihood	1	[0.57, 1]	w = 0.158
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0767
Wald (delta)	1	[0.21, 1]	w = 0.307
ILR, mapped back	0	[0, 0.79]	w = 0.396
Method's own interval	1	[0.57, 1]	w = 0.251
Own interval, transcript fractions	1	[0.57, 1]	w = 0.251
Fisher information (Wald)	1	[0.57, 1]	w = 0.258
Godambe sandwich	1	[0.57, 1]	w = 0.3
Released code, as published	1	[0.57, 1]	w = 0.3

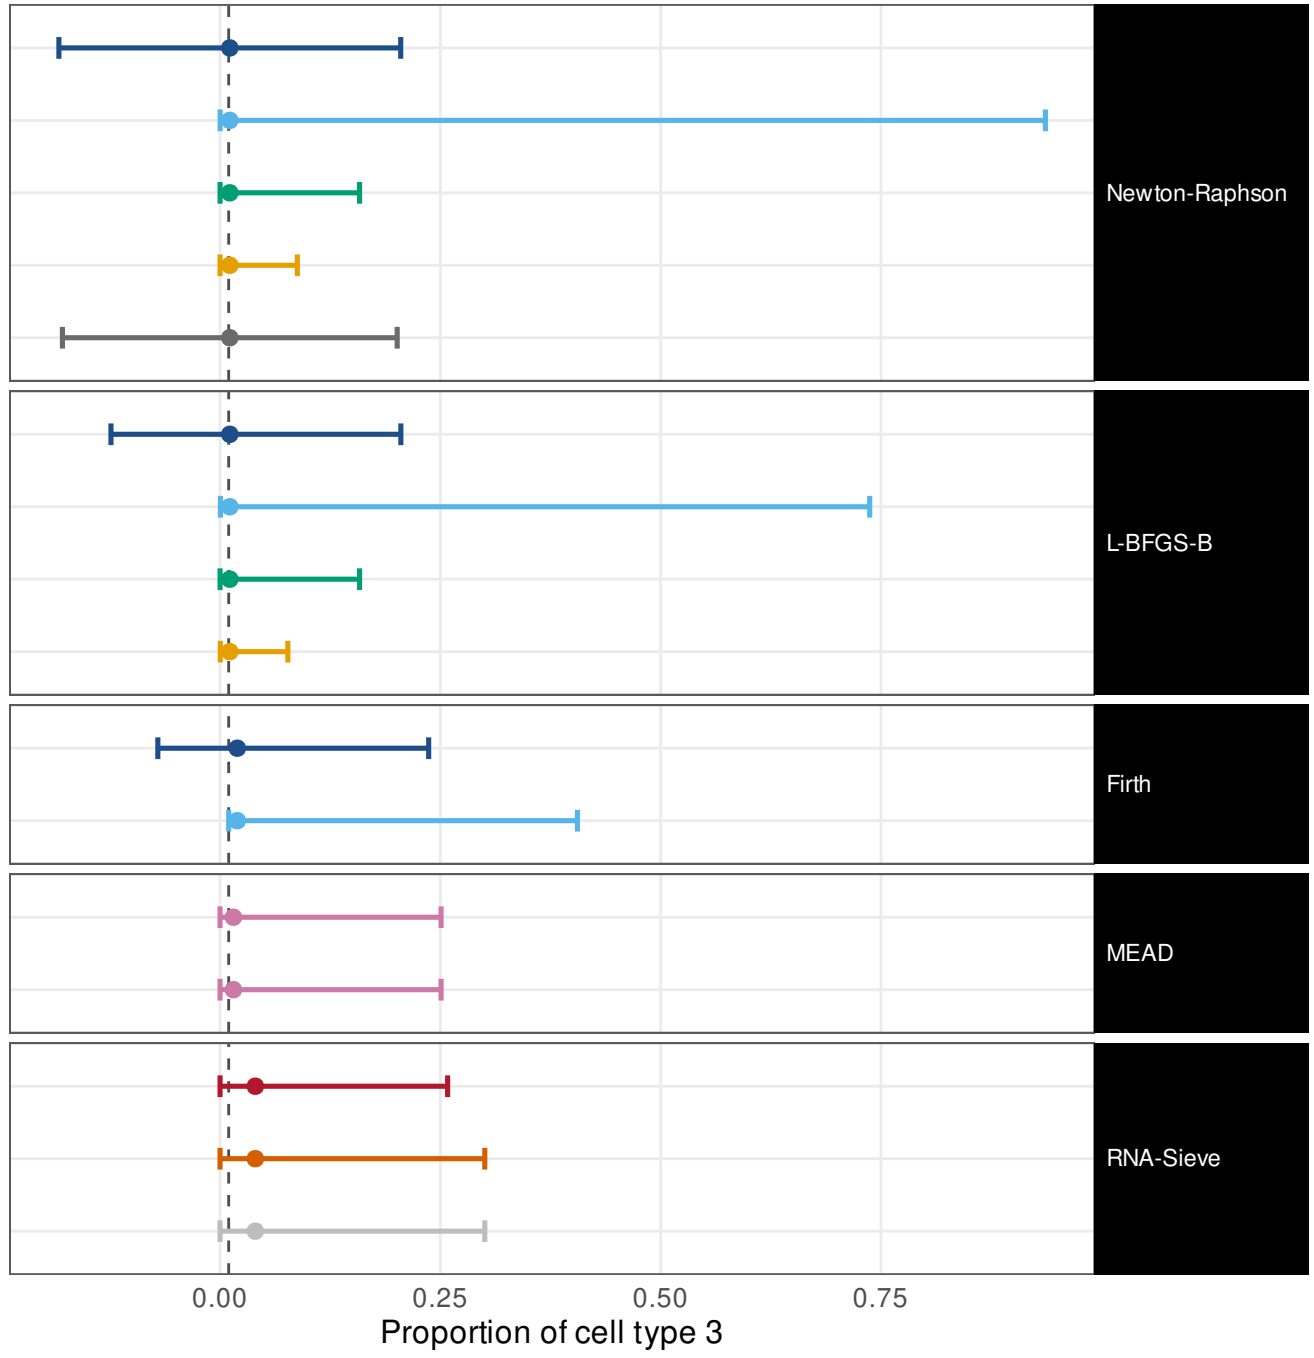


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 SBM / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.552
ILR, mapped back	0.2	[0.036, 0.62]	w = 0.924
Profile likelihood	0.8	[0.38, 0.96]	w = 0.48
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.362
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.554
Profile likelihood	0.8	[0.38, 0.96]	w = 0.48
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.23
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.812
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.682
Released code, as published	0.6	[0.23, 0.88]	w = 0.682

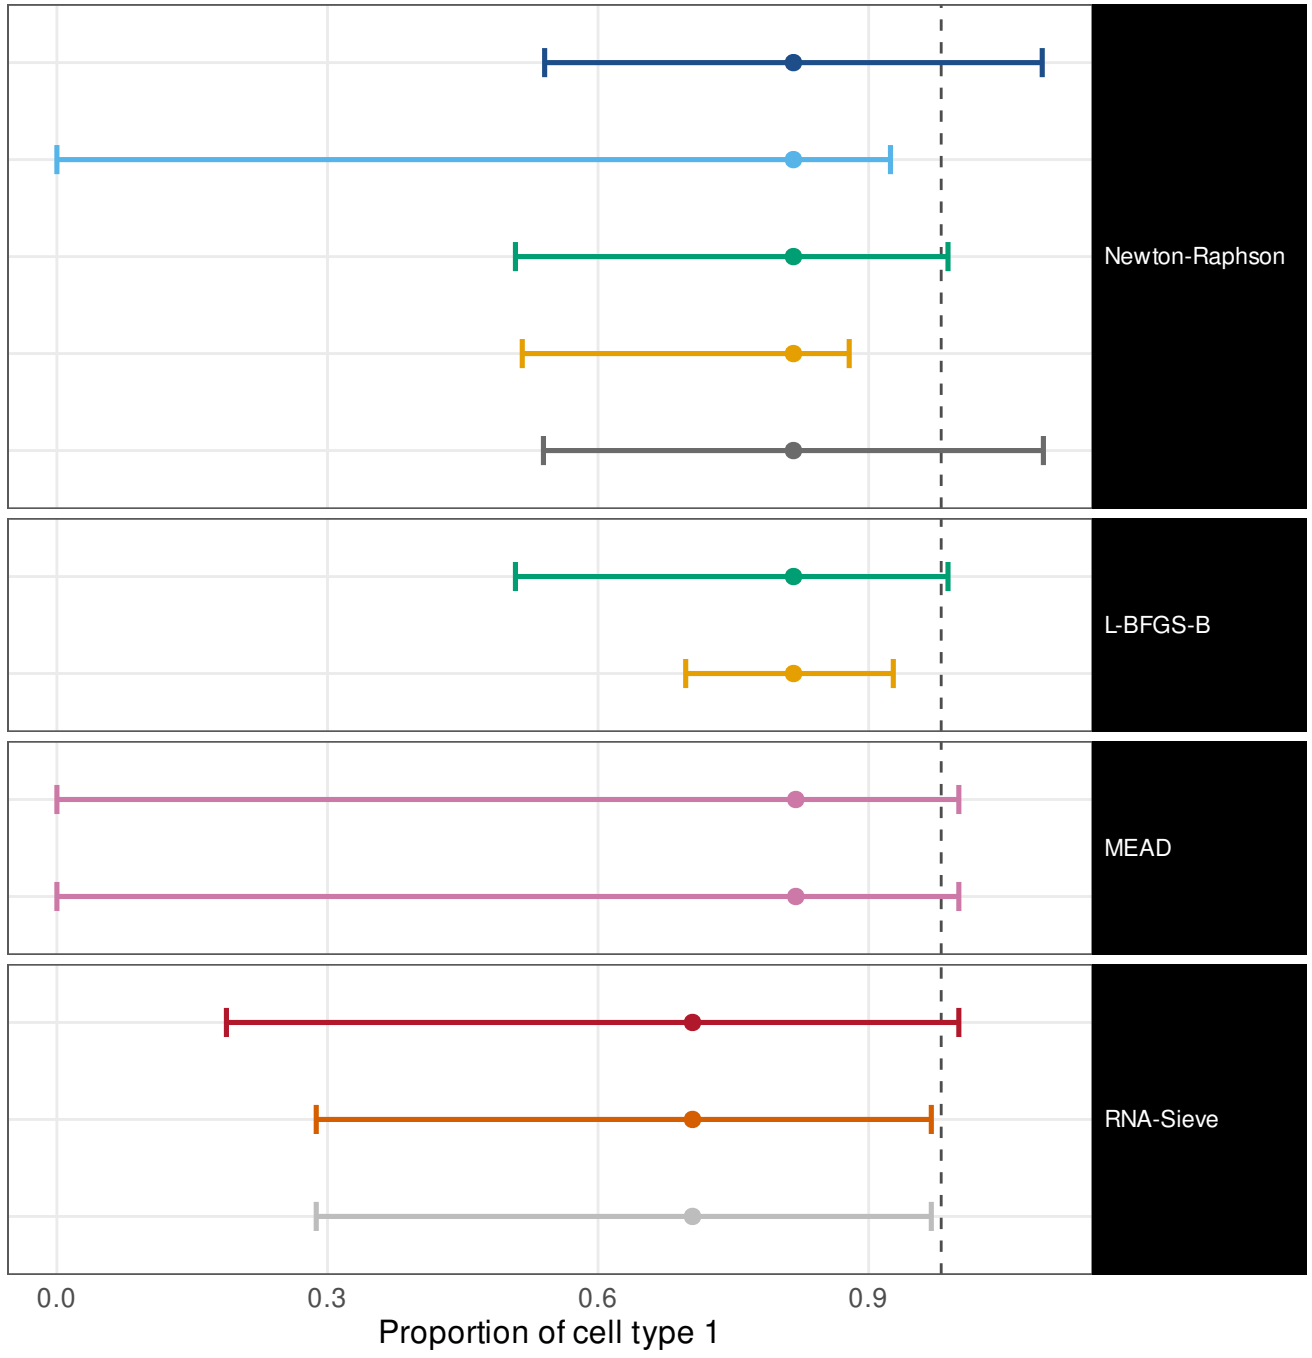


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 SBM / CT2 SBM


Wald (delta)	1	[0.57, 1]	w = 0.645
ILR, mapped back	1	[0.57, 1]	w = 0.784
Profile likelihood	1	[0.57, 1]	w = 0.441
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.384
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.672
Profile likelihood	1	[0.57, 1]	w = 0.441
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.215
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.765
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.703
Released code, as published	0.8	[0.38, 0.96]	w = 0.703

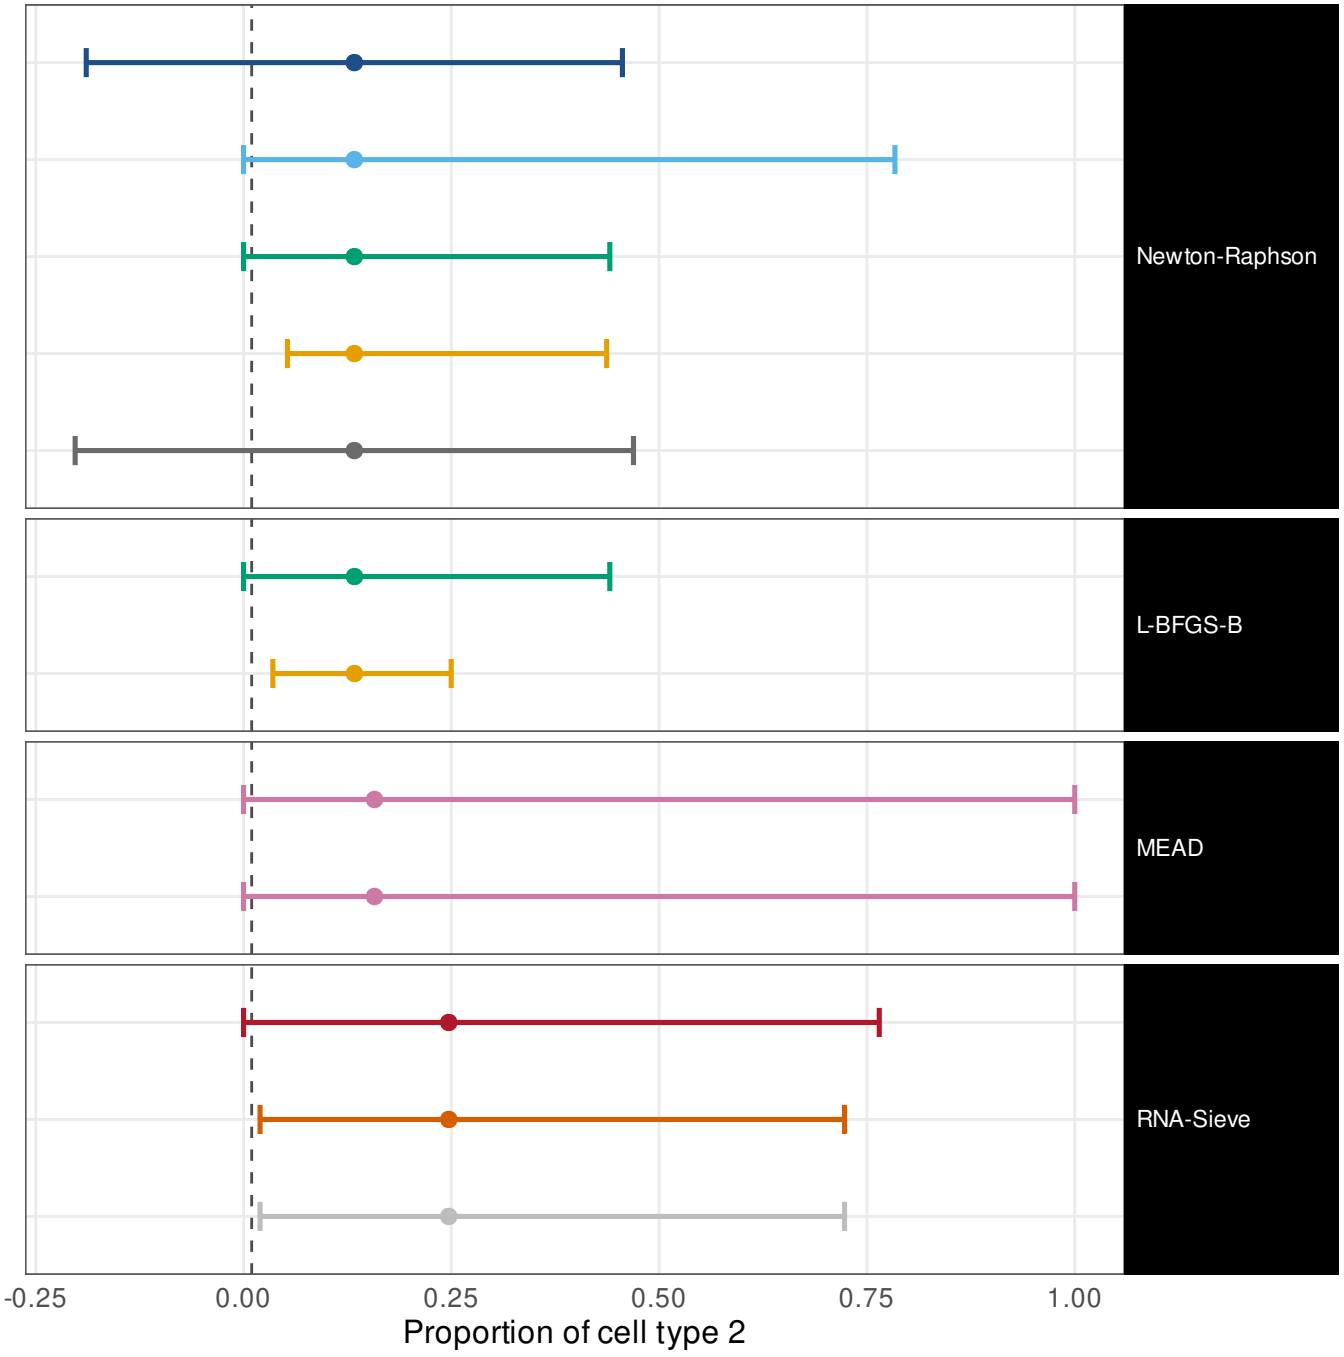

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / low overlap / CT1 SBM / CT2 SBM

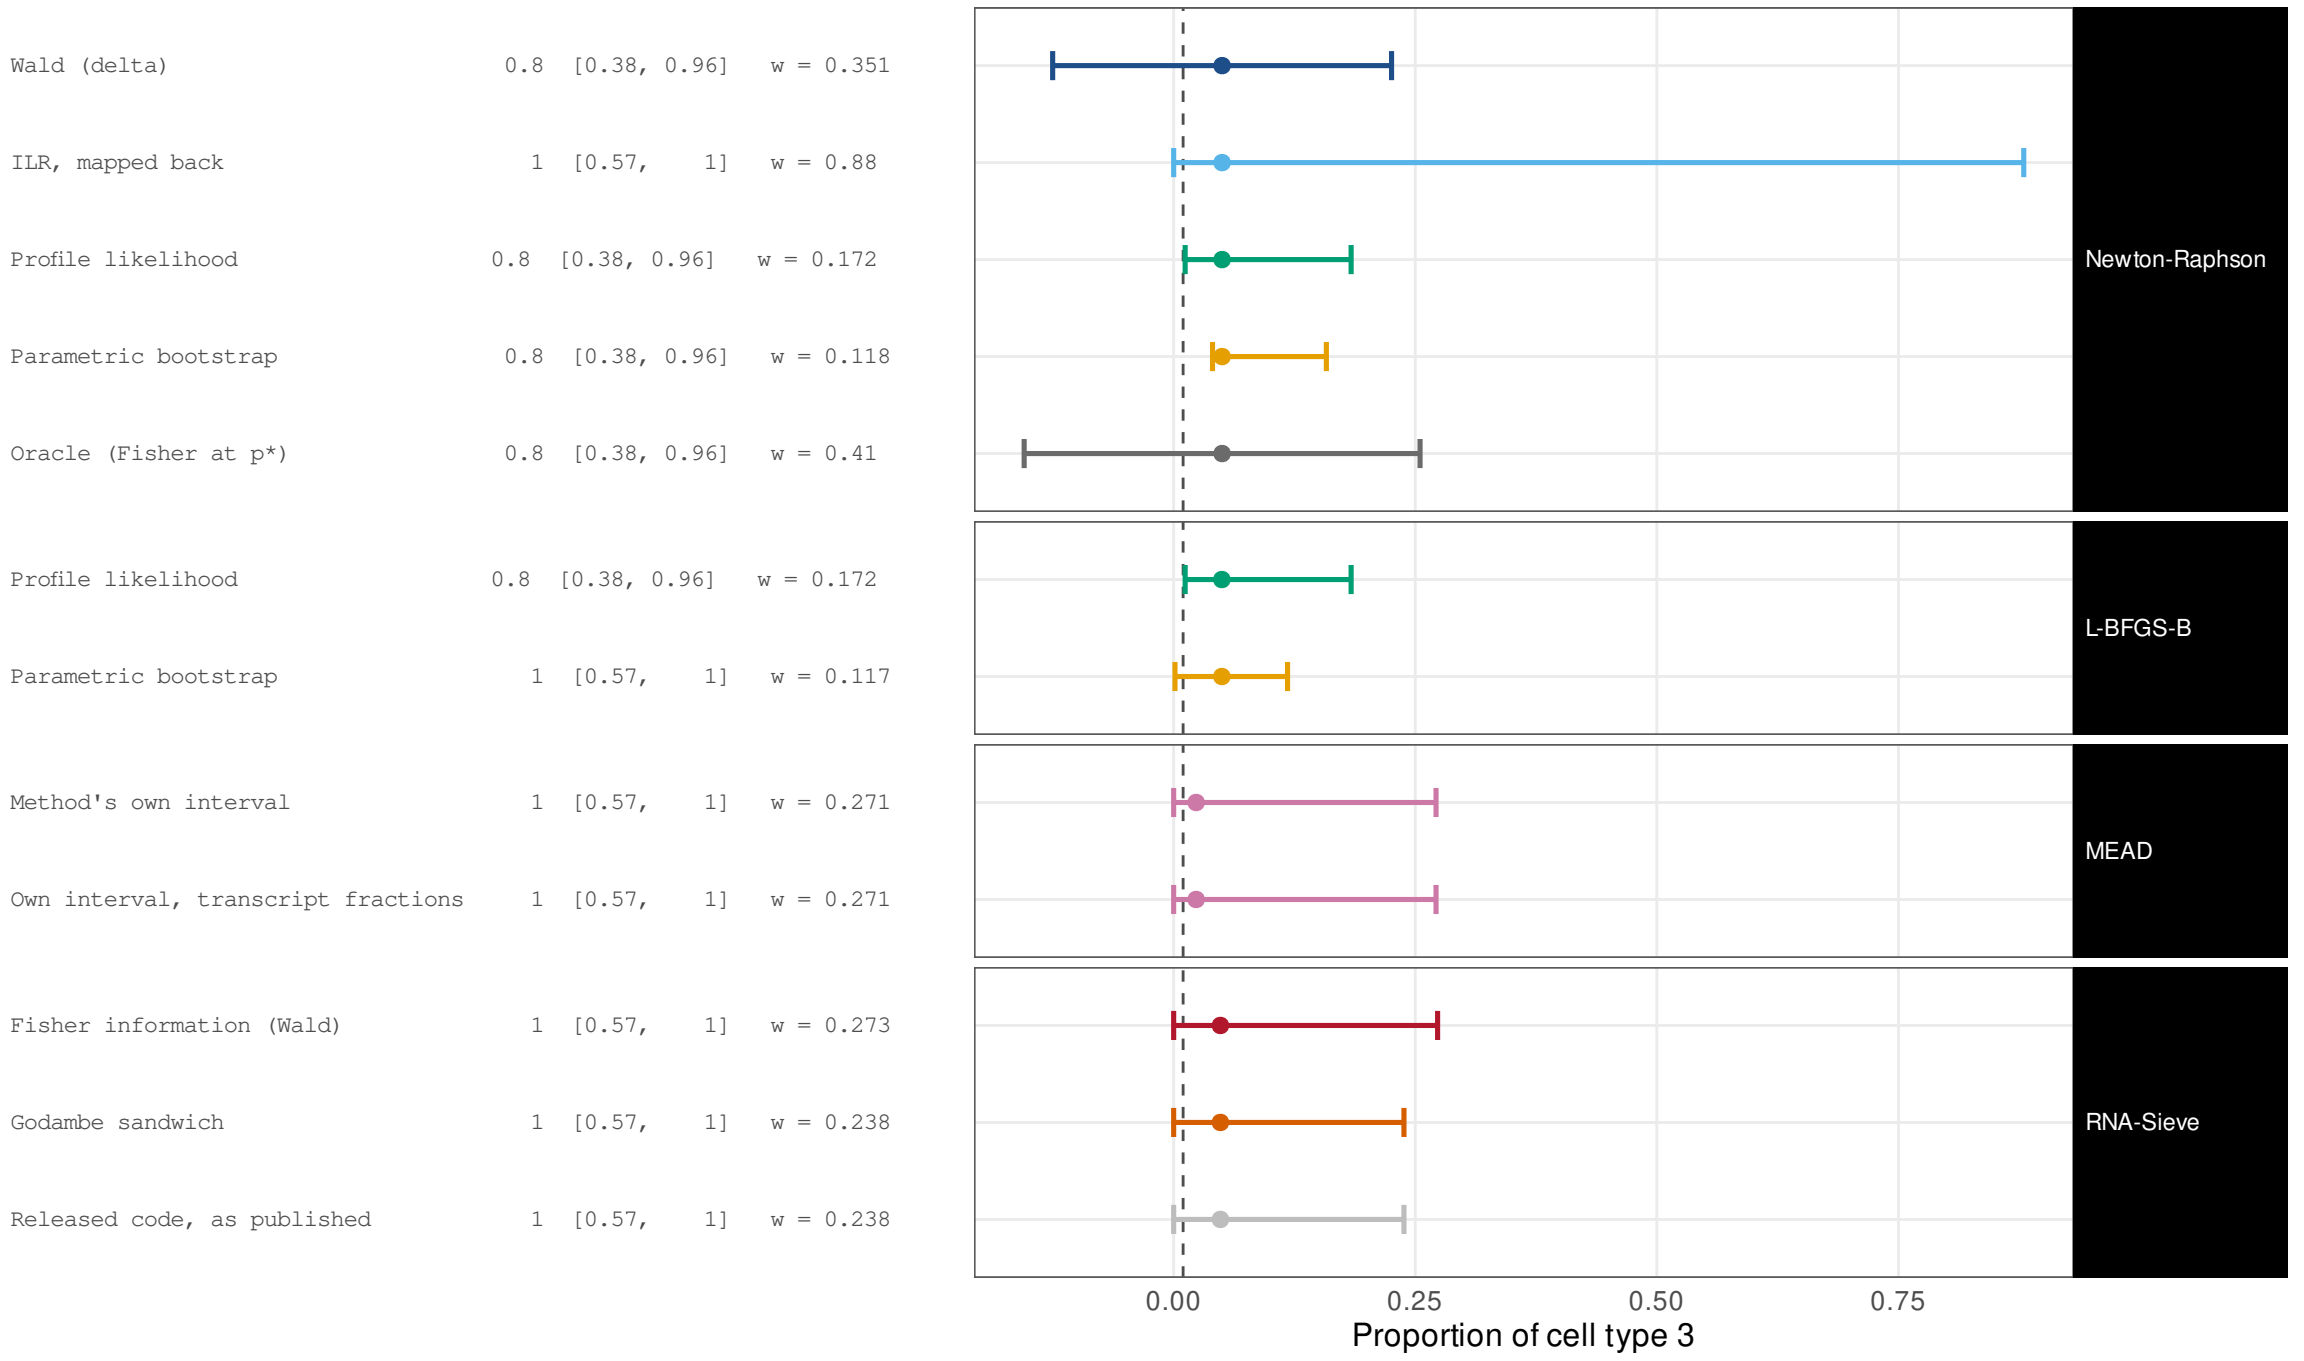


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 0.646
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.979
Profile likelihood	1	[0.57, 1]	w = 0.412
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.346
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.593
Profile likelihood	1	[0.57, 1]	w = 0.412
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.747
Wald (delta)	0	[0, 0.79]	w = 0.801
ILR, mapped back	0	[0, 0.79]	w = 0.777
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.623
Godambe sandwich	0.2	[0.036, 0.62]	w = 0.552
Released code, as published	0.2	[0.036, 0.62]	w = 0.552

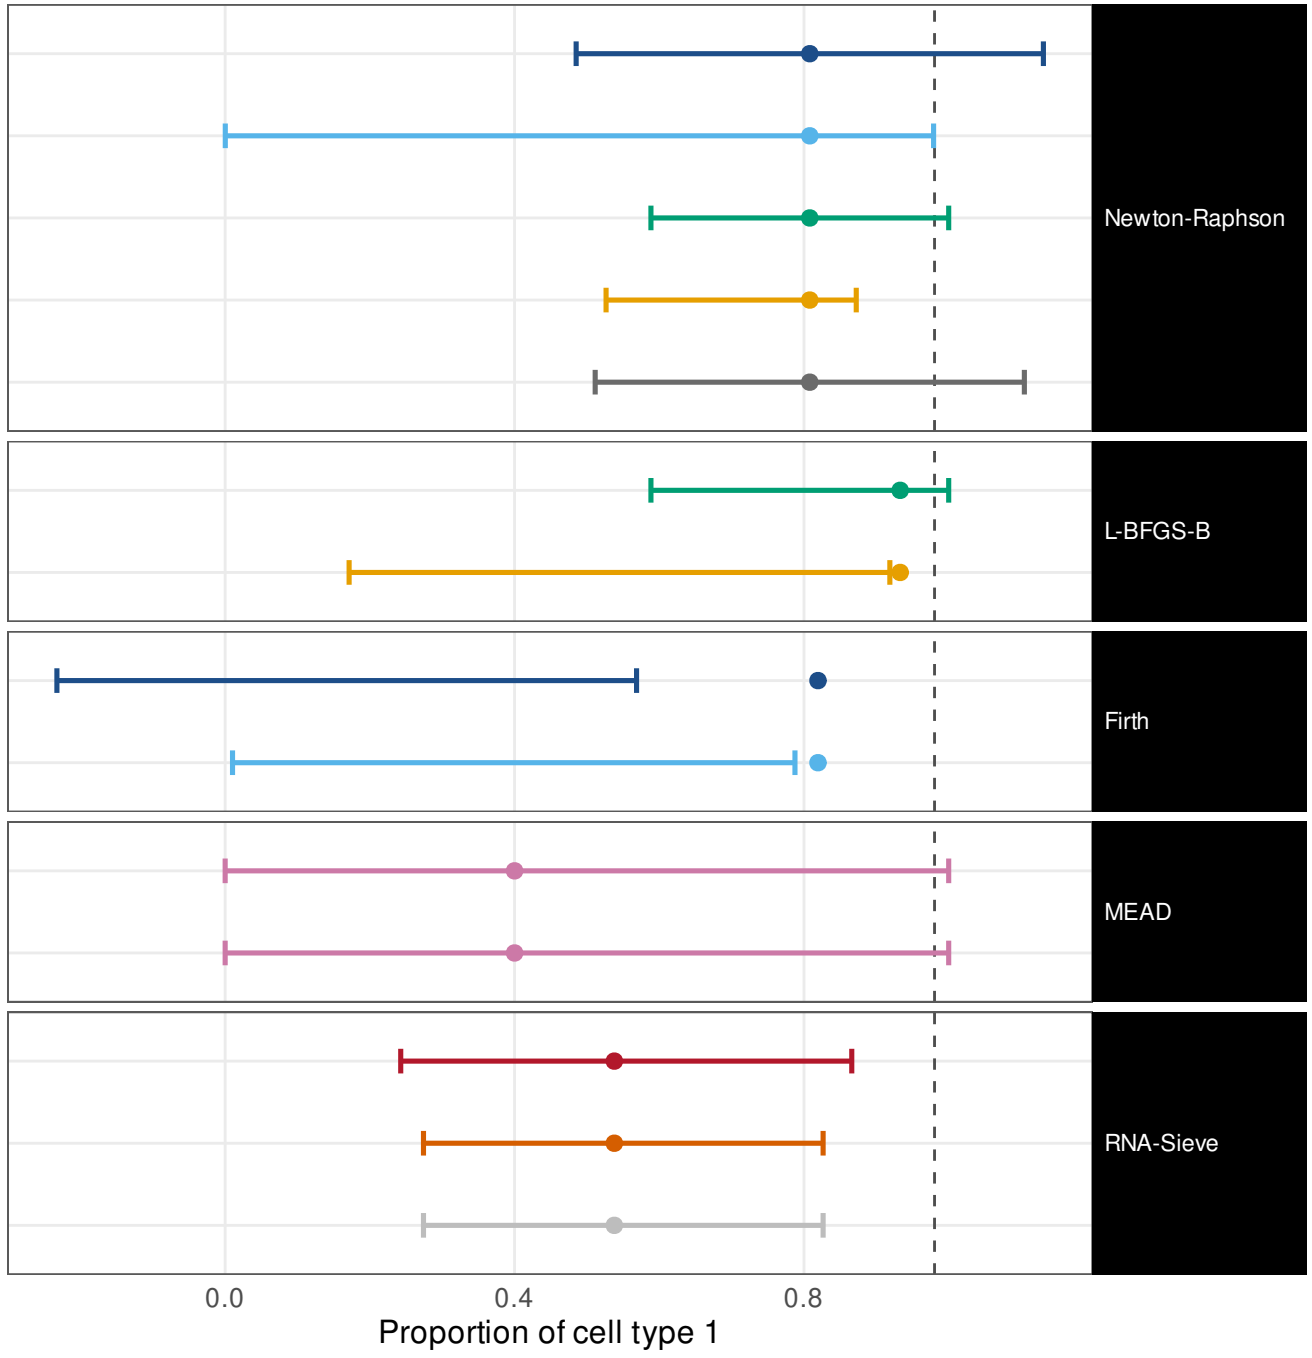


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 0.891
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.967
Profile likelihood	1	[0.57, 1]	w = 0.378
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.308
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.985
Profile likelihood	1	[0.57, 1]	w = 0.378
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.709
Wald (delta)	0	[0, 0.79]	w = 0.596
ILR, mapped back	0	[0, 0.79]	w = 0.666
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.657
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.544
Released code, as published	0.6	[0.23, 0.88]	w = 0.544

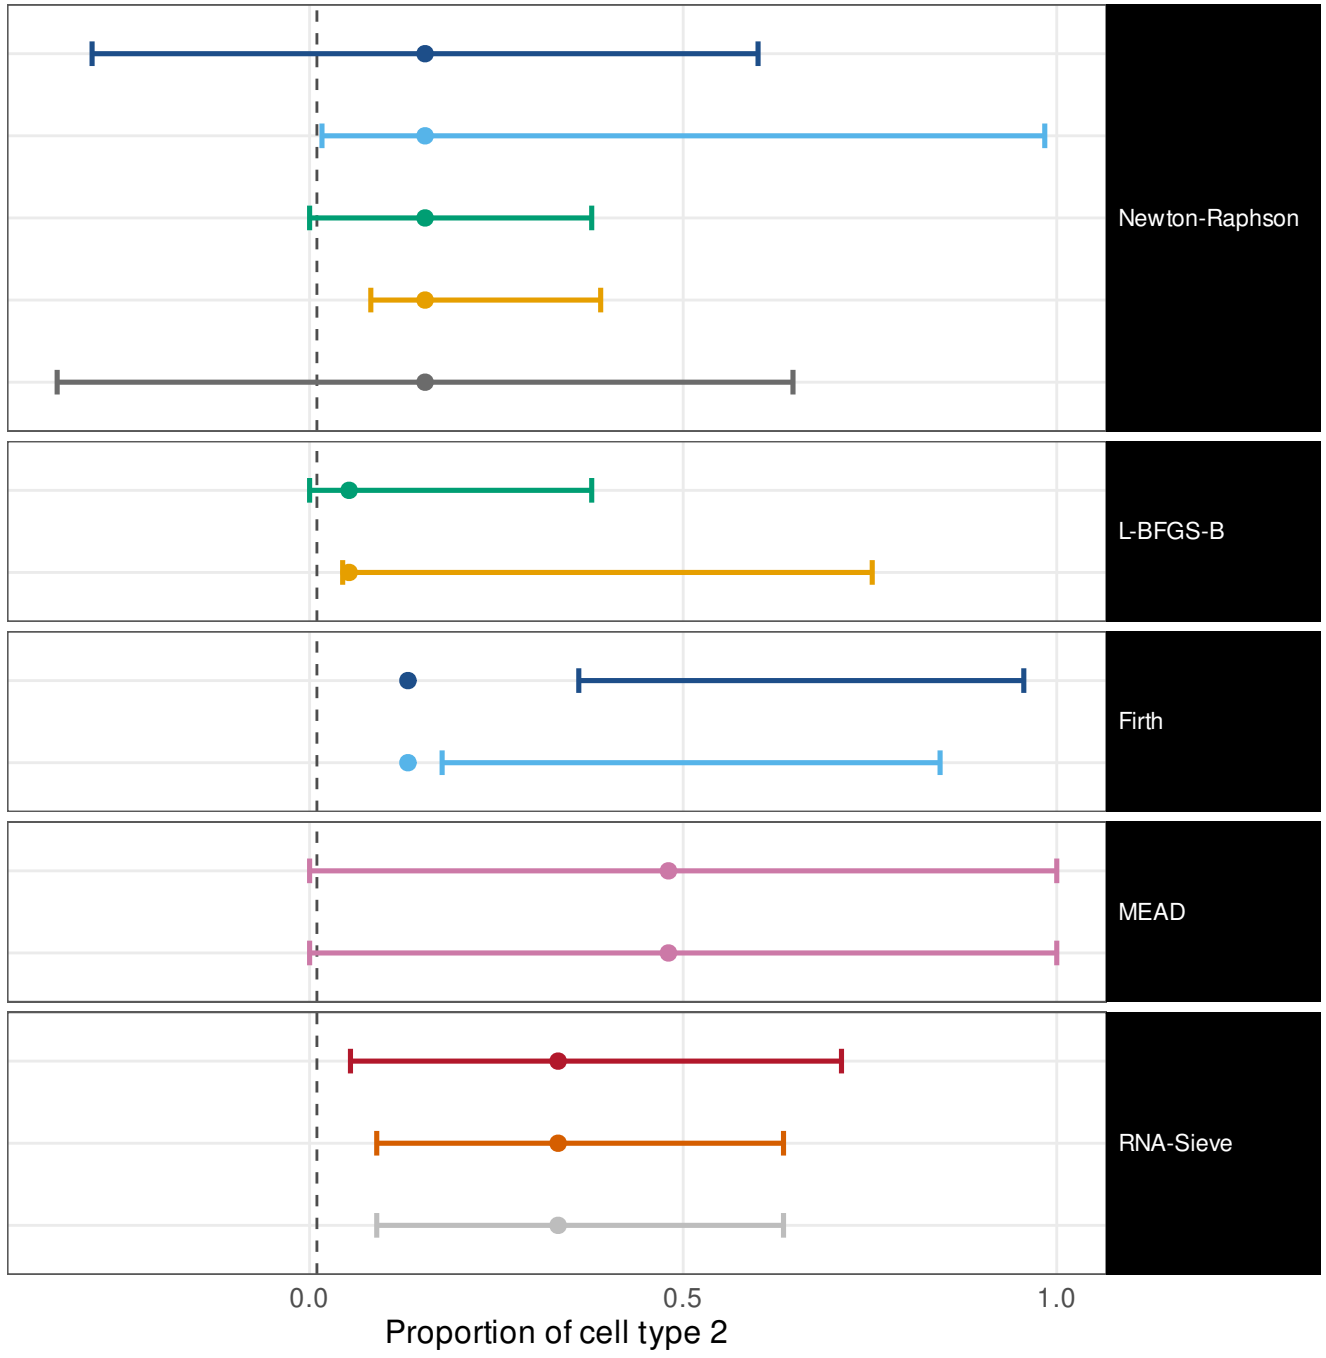


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.789
ILR, mapped back	1	[0.57, 1]	w = 0.939
Profile likelihood	1	[0.57, 1]	w = 0.274
Parametric bootstrap	1	[0.57, 1]	w = 0.144
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.816
Profile likelihood	1	[0.57, 1]	w = 0.274
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.177
Wald (delta)	1	[0.21, 1]	w = 0.589
ILR, mapped back	0	[0, 0.79]	w = 0.537
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.441
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.323
Released code, as published	0.8	[0.38, 0.96]	w = 0.323

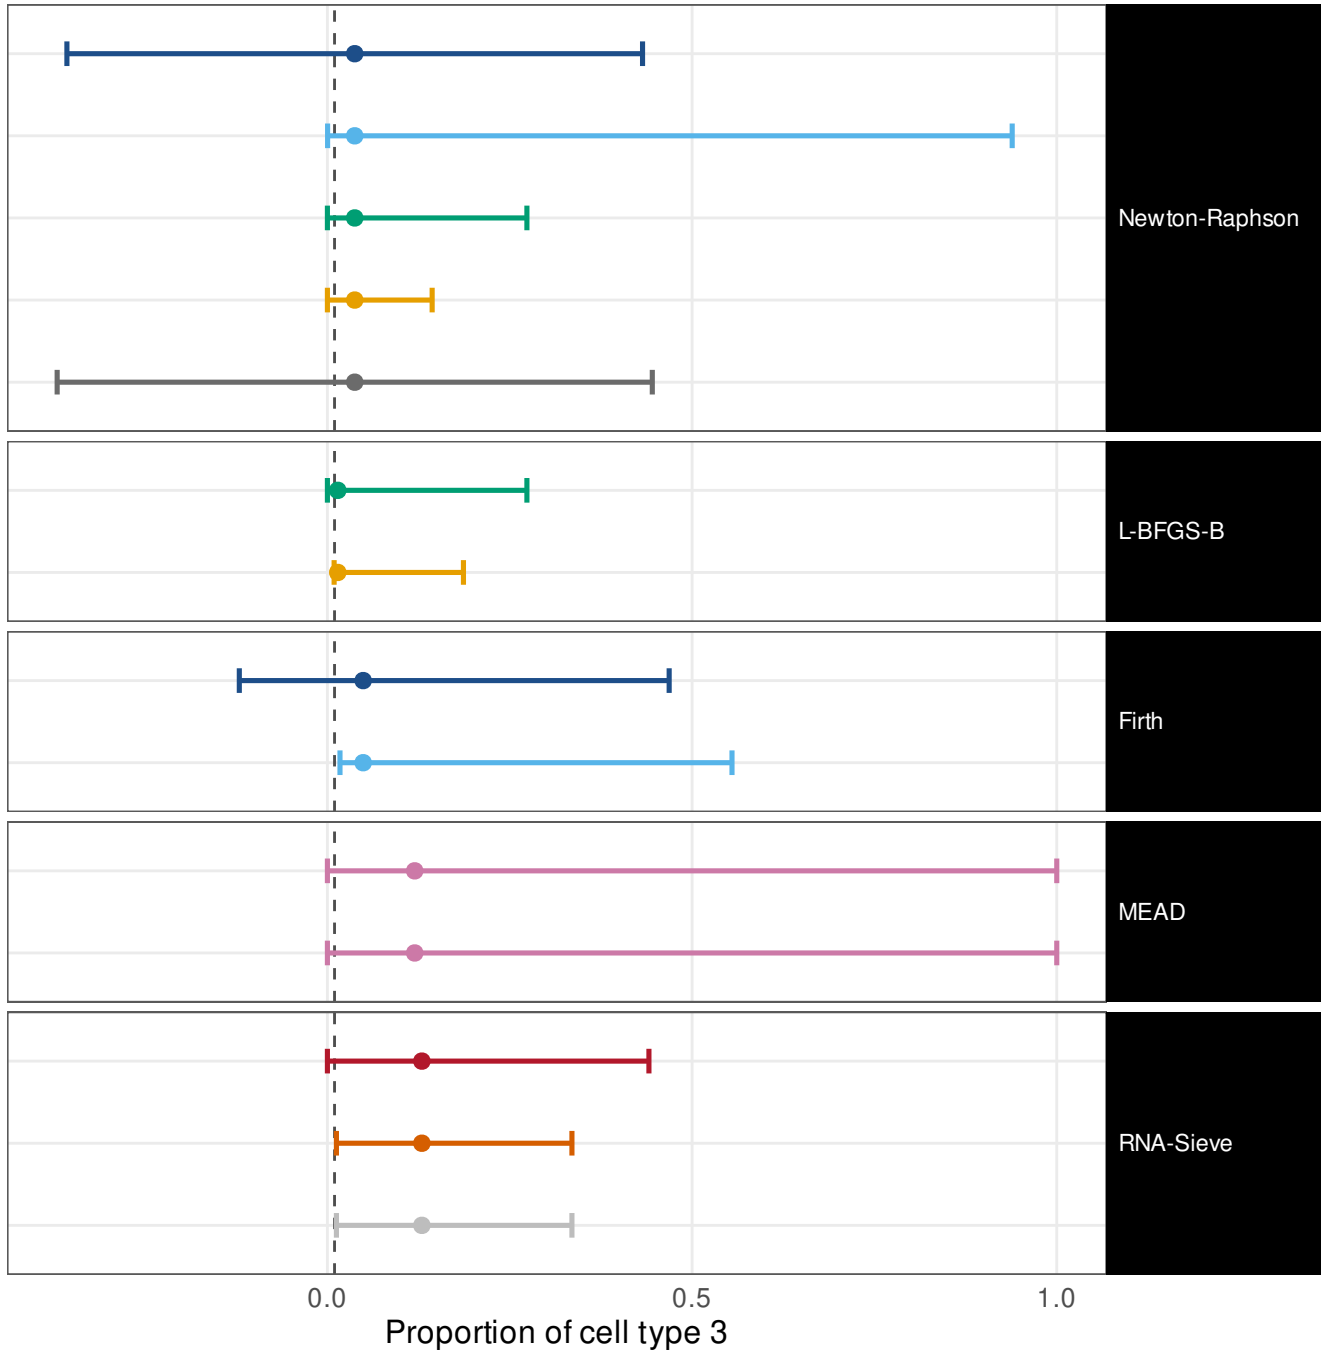


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 0.641
ILR, mapped back	0.2	[0.036, 0.62]	w = 0.901
Profile likelihood	0.8	[0.38, 0.96]	w = 0.611
Parametric bootstrap	0	[0, 0.43]	w = 0.386
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.604
Wald (delta)	0.67	[0.21, 0.94]	w = 0.647
ILR, mapped back	0	[0, 0.56]	w = 0.856
Profile likelihood	0.8	[0.38, 0.96]	w = 0.611
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.343
Wald (delta)	0.33	[0.061, 0.79]	w = 0.622
ILR, mapped back	0	[0, 0.56]	w = 0.709
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.2	[0.036, 0.62]	w = 0.639
Godambe sandwich	0.2	[0.036, 0.62]	w = 0.513
Released code, as published	0.2	[0.036, 0.62]	w = 0.513

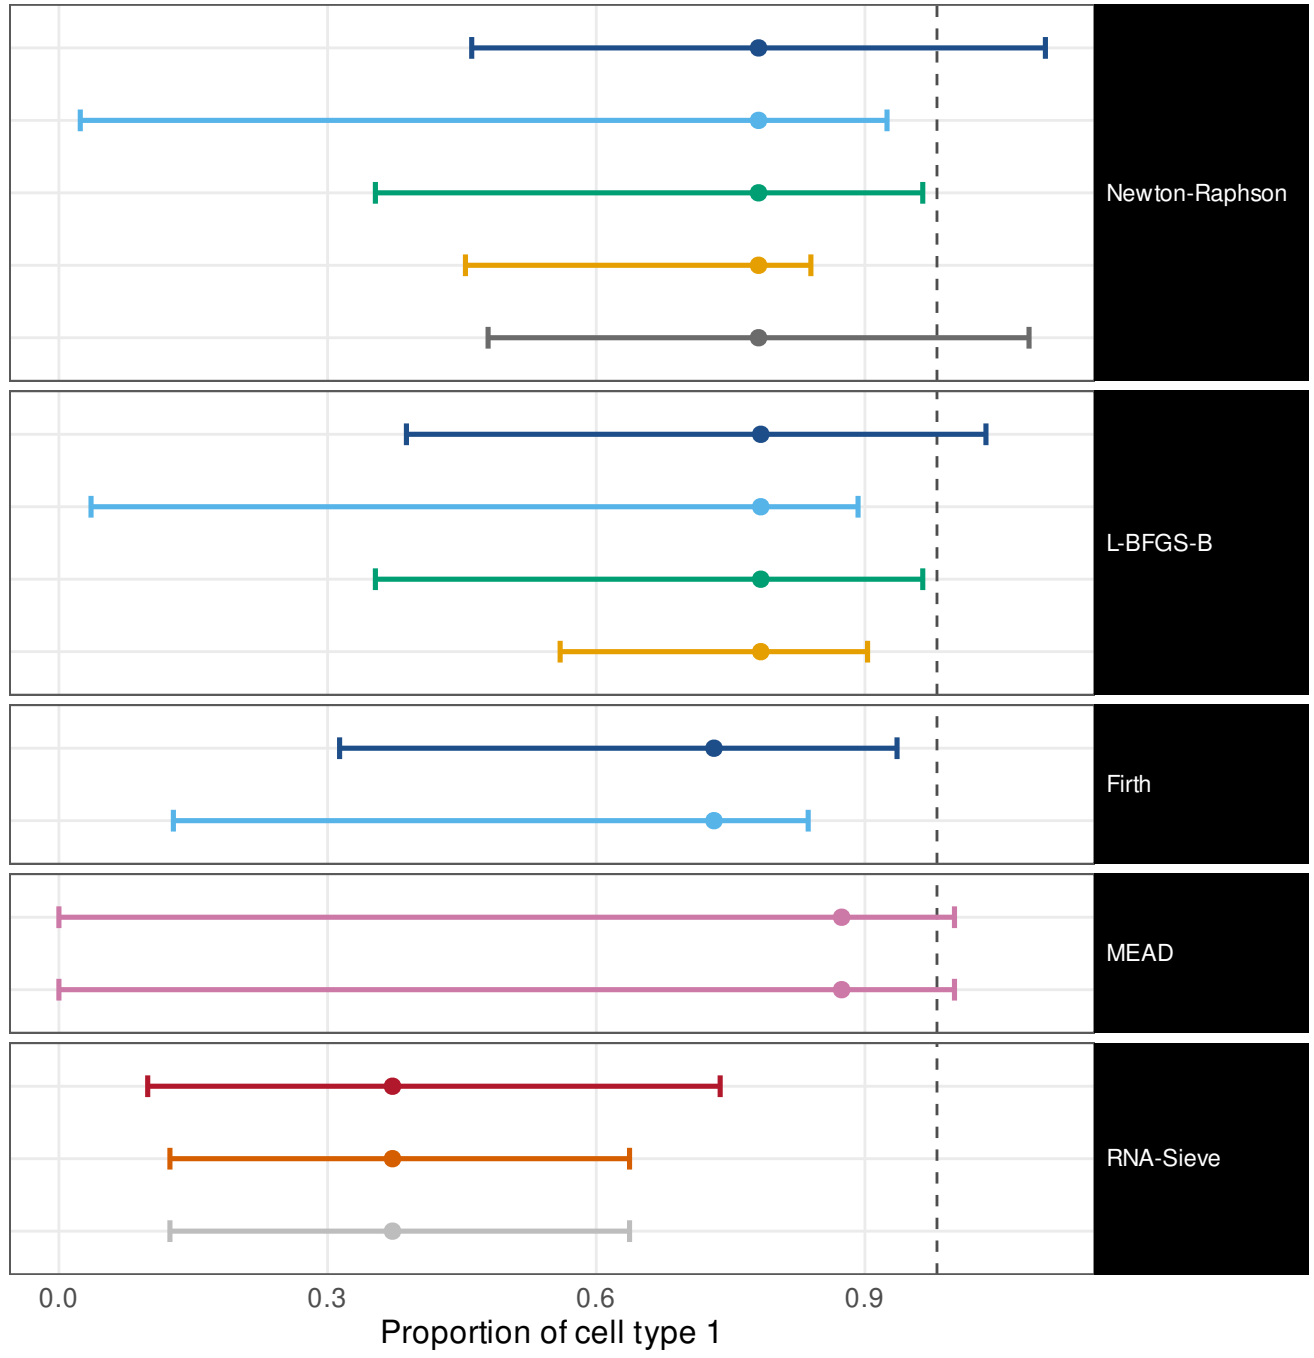


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 1.01
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.903
Profile likelihood	1	[0.57, 1]	w = 0.627
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.343
Oracle (Fisher at p*)	1	[0.57, 1]	w = 1.15
Wald (delta)	0.67	[0.21, 0.94]	w = 0.929
ILR, mapped back	0.67	[0.21, 0.94]	w = 0.899
Profile likelihood	1	[0.57, 1]	w = 0.627
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.307
Wald (delta)	1	[0.44, 1]	w = 0.857
ILR, mapped back	0.67	[0.21, 0.94]	w = 0.782
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.2	[0.036, 0.62]	w = 0.755
Godambe sandwich	0.2	[0.036, 0.62]	w = 0.486
Released code, as published	0.2	[0.036, 0.62]	w = 0.486

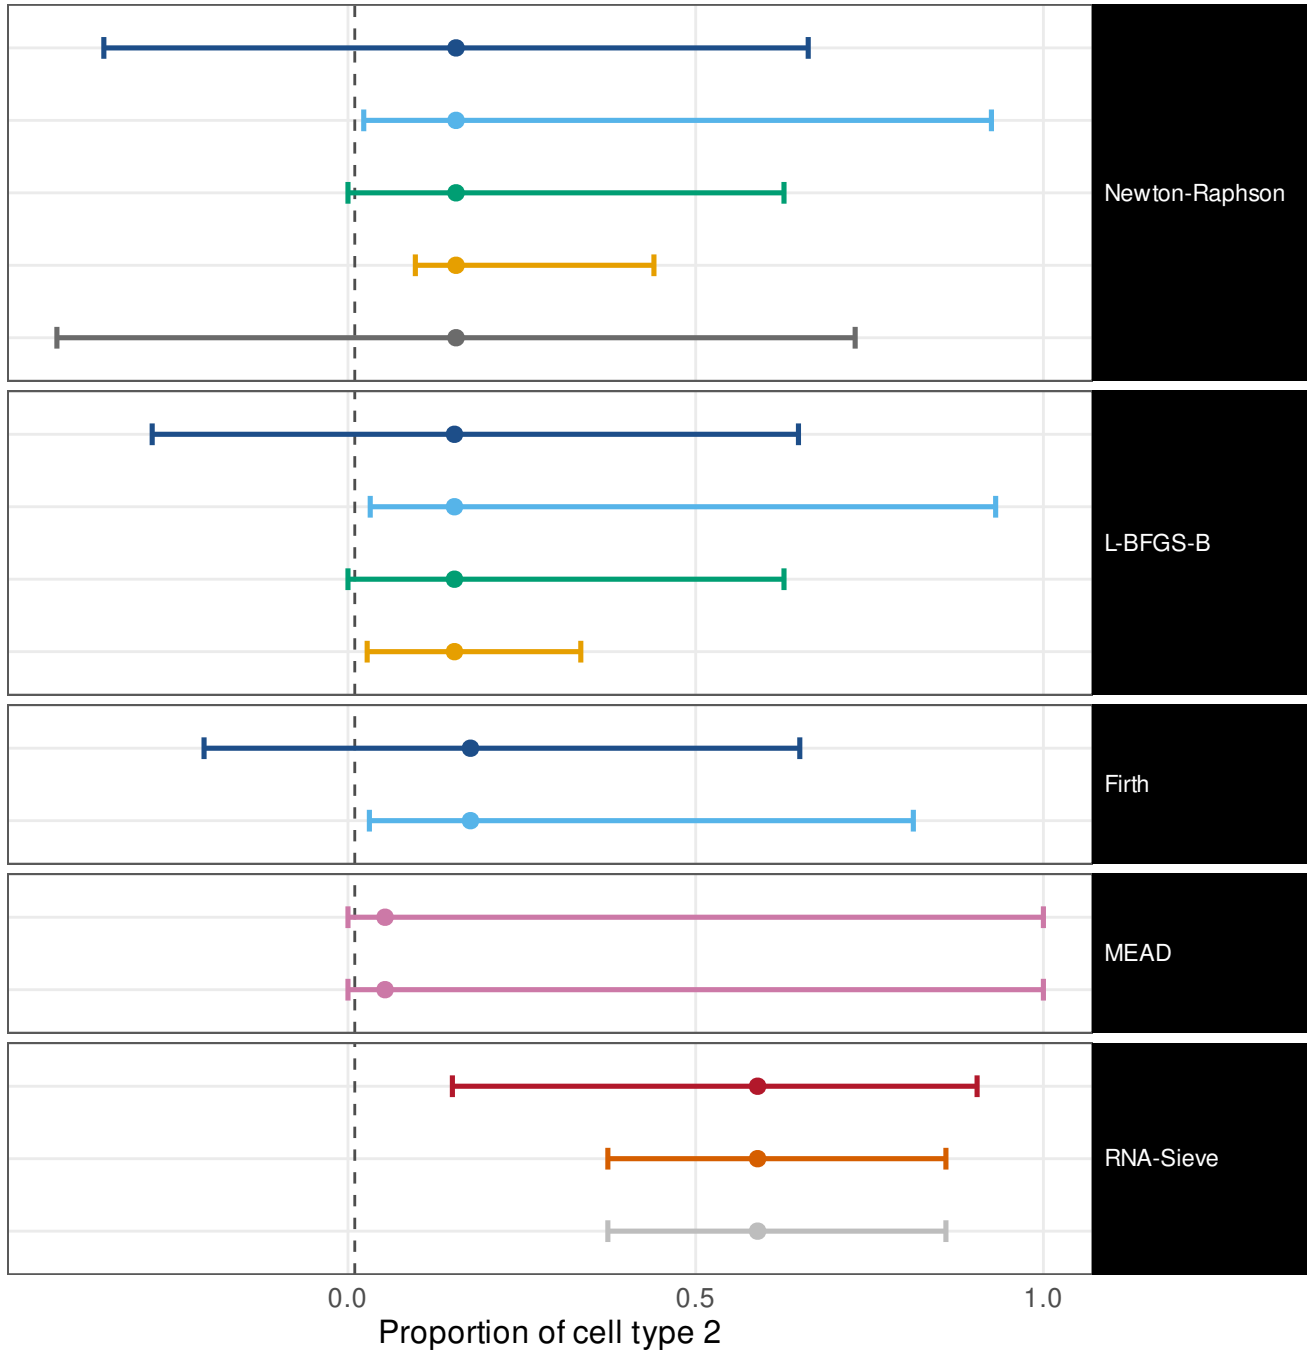


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 0.798
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.863
Profile likelihood	1	[0.57, 1]	w = 0.339
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.205
Oracle (Fisher at p*)	1	[0.57, 1]	w = 1.01
Wald (delta)	1	[0.44, 1]	w = 0.743
ILR, mapped back	1	[0.44, 1]	w = 0.773
Profile likelihood	1	[0.57, 1]	w = 0.339
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.244
Wald (delta)	1	[0.44, 1]	w = 0.656
ILR, mapped back	0.67	[0.21, 0.94]	w = 0.652
Method's own interval	1	[0.57, 1]	w = 0.457
Own interval, transcript fractions	1	[0.57, 1]	w = 0.457
Fisher information (Wald)	1	[0.57, 1]	w = 0.377
Godambe sandwich	1	[0.57, 1]	w = 0.164
Released code, as published	1	[0.57, 1]	w = 0.164

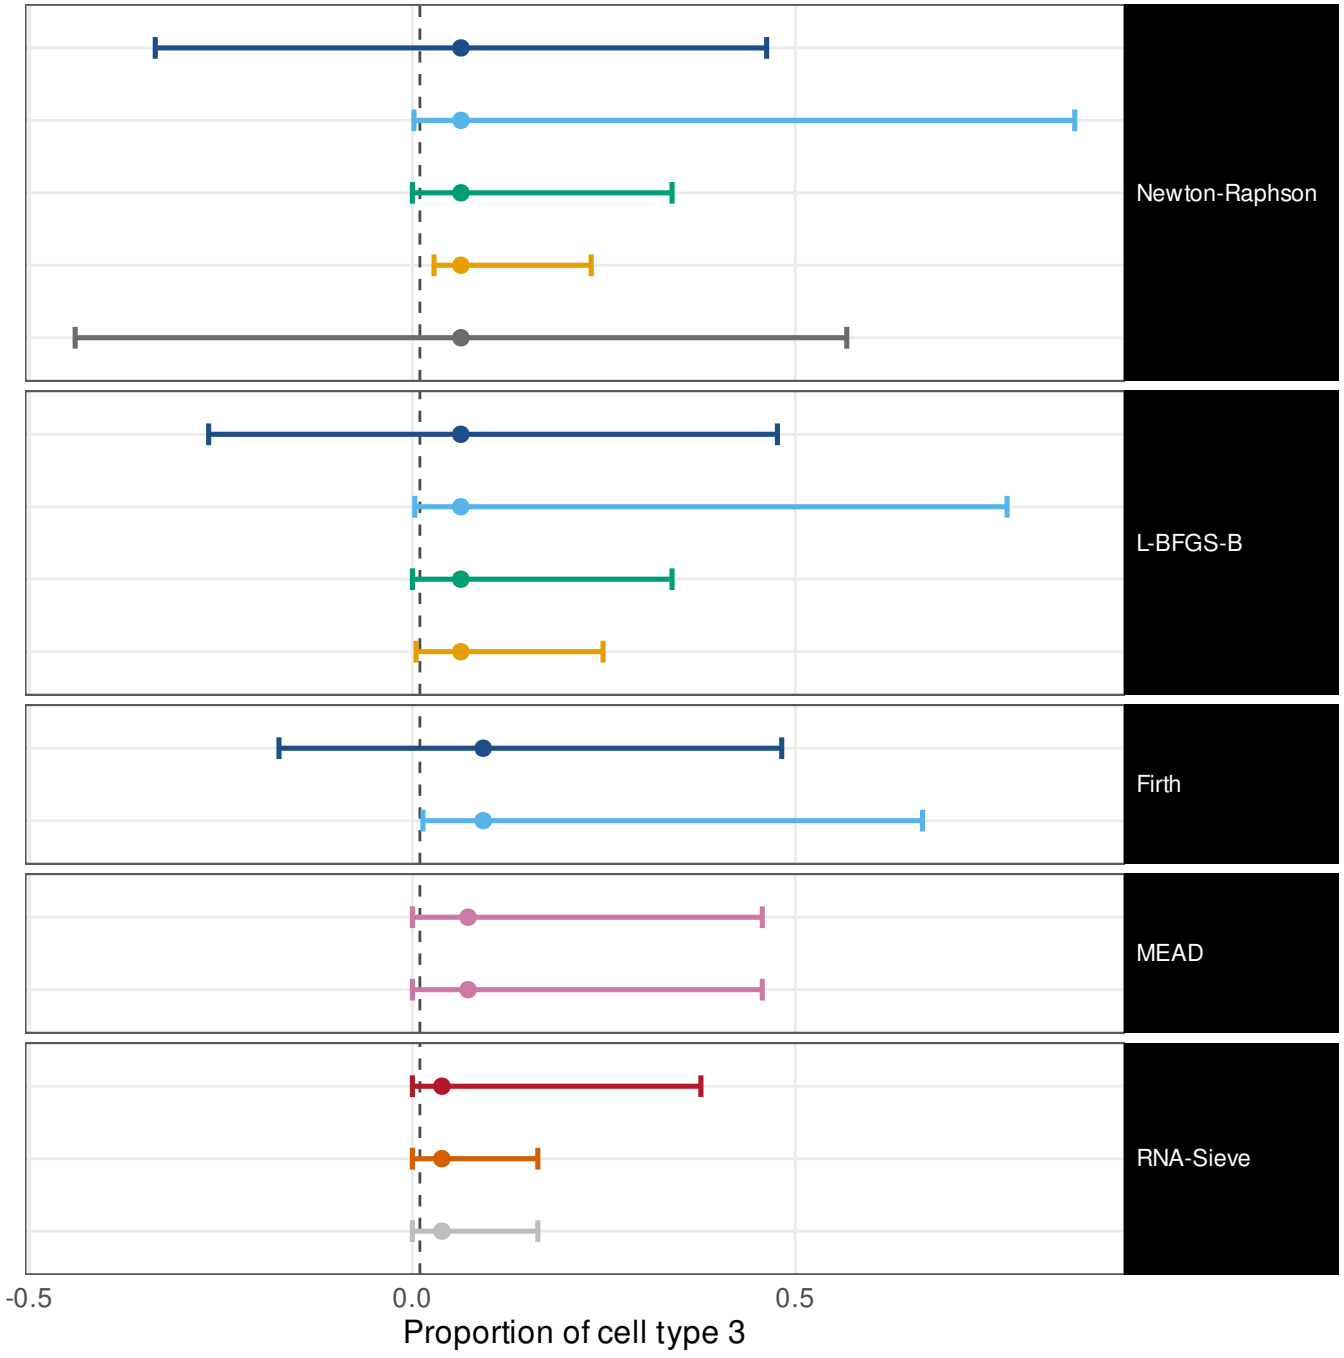


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.584
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.984
Profile likelihood	1	[0.57, 1]	w = 0.904
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.524
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.605
Wald (delta)	1	[0.21, 1]	w = 0.591
ILR, mapped back	1	[0.21, 1]	w = 0.997
Profile likelihood	1	[0.57, 1]	w = 0.904
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.585
Wald (delta)	1	[0.21, 1]	w = 0.609
ILR, mapped back	0	[0, 0.79]	w = 0.852
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.771
Godambe sandwich	0.2	[0.036, 0.62]	w = 0.421
Released code, as published	0.2	[0.036, 0.62]	w = 0.421

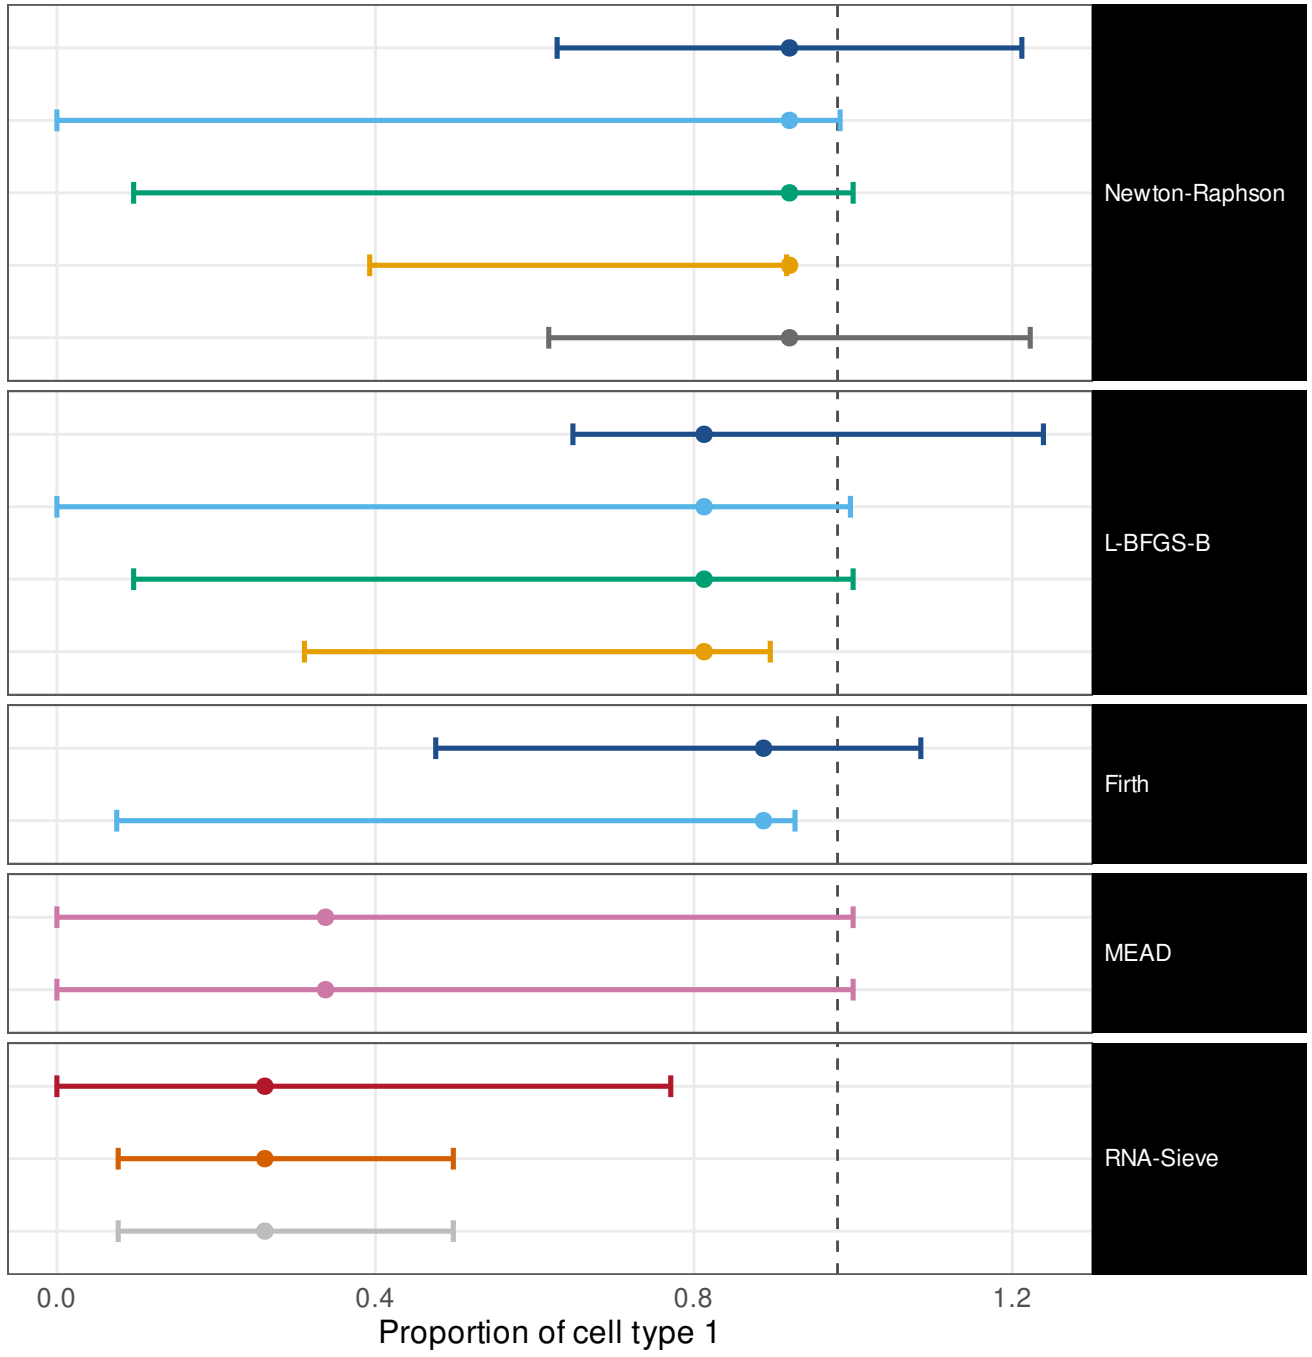


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.918
ILR, mapped back	1	[0.57, 1]	w = 1
Profile likelihood	1	[0.57, 1]	w = 0.885
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.445
Oracle (Fisher at p*)	1	[0.57, 1]	w = 1.05
Wald (delta)	1	[0.21, 1]	w = 0.986
ILR, mapped back	1	[0.21, 1]	w = 1
Profile likelihood	1	[0.57, 1]	w = 0.885
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.612
Wald (delta)	1	[0.21, 1]	w = 0.897
ILR, mapped back	1	[0.21, 1]	w = 0.906
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.665
Godambe sandwich	0.2	[0.036, 0.62]	w = 0.488
Released code, as published	0.2	[0.036, 0.62]	w = 0.488

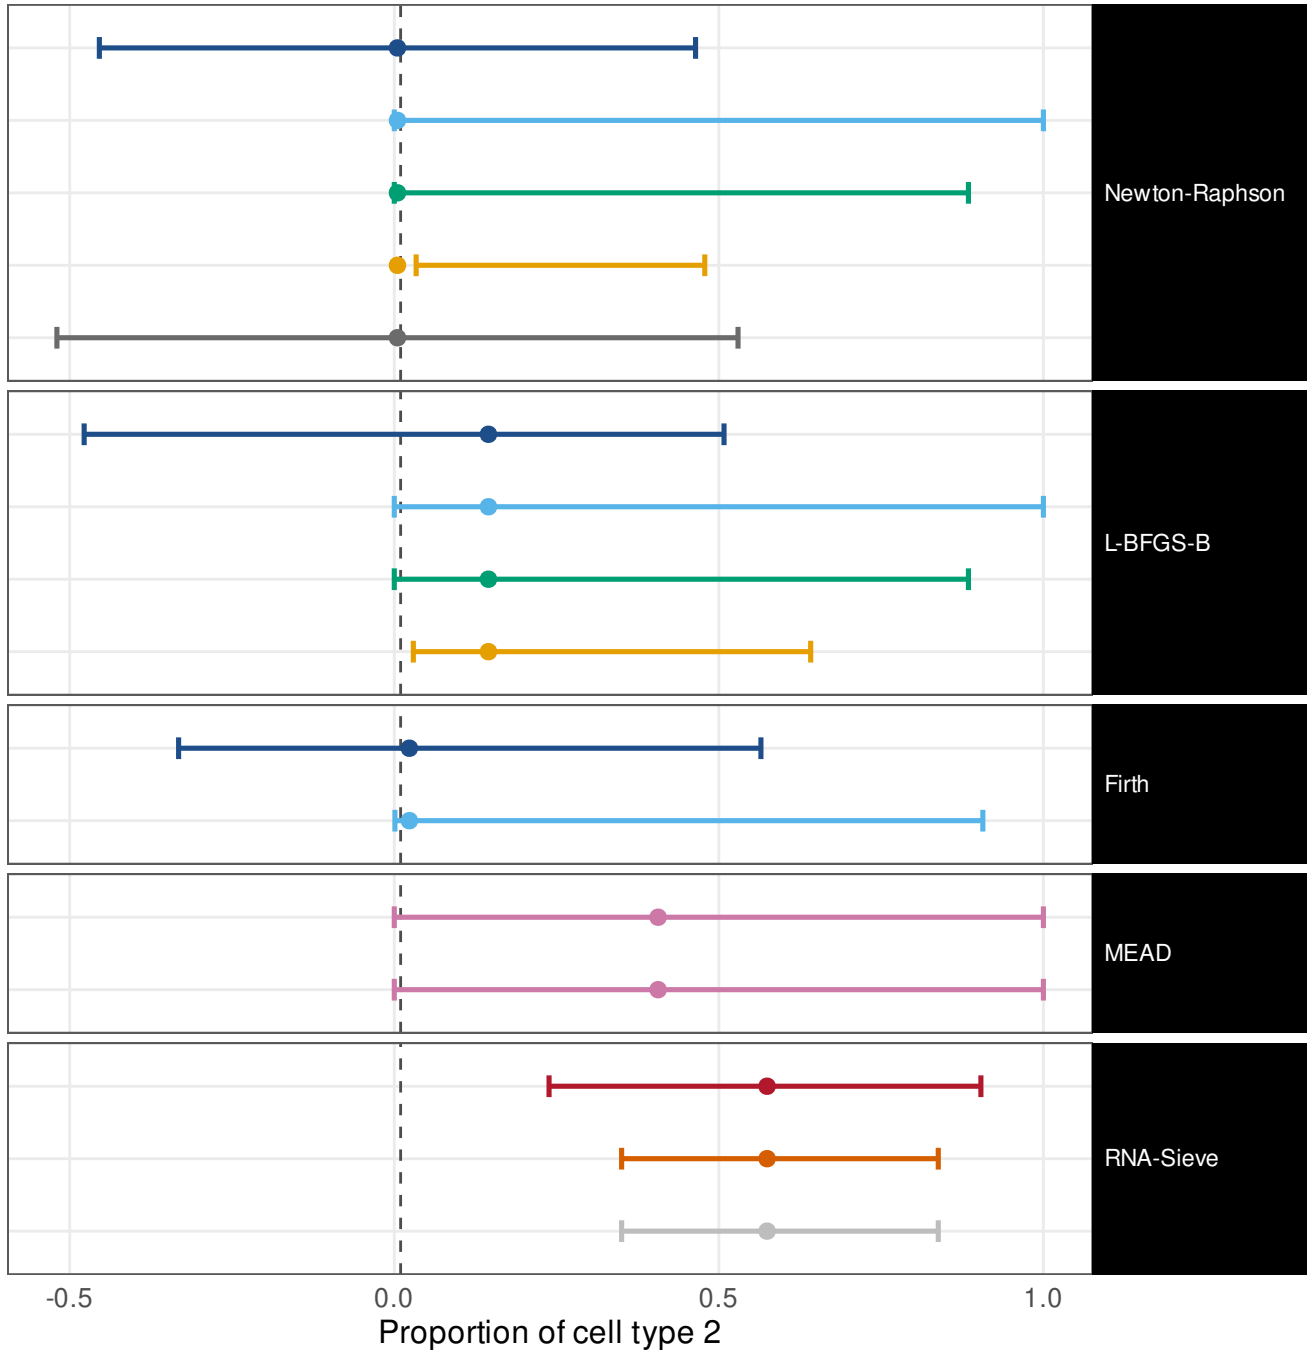


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.821
ILR, mapped back	1	[0.57, 1]	w = 0.913
Profile likelihood	1	[0.57, 1]	w = 0.328
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.26
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.883
Wald (delta)	1	[0.21, 1]	w = 0.849
ILR, mapped back	1	[0.21, 1]	w = 0.999
Profile likelihood	1	[0.57, 1]	w = 0.328
Parametric bootstrap	1	[0.57, 1]	w = 0.197
Wald (delta)	1	[0.21, 1]	w = 0.692
ILR, mapped back	1	[0.21, 1]	w = 0.828
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.592
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.445
Released code, as published	0.8	[0.38, 0.96]	w = 0.445

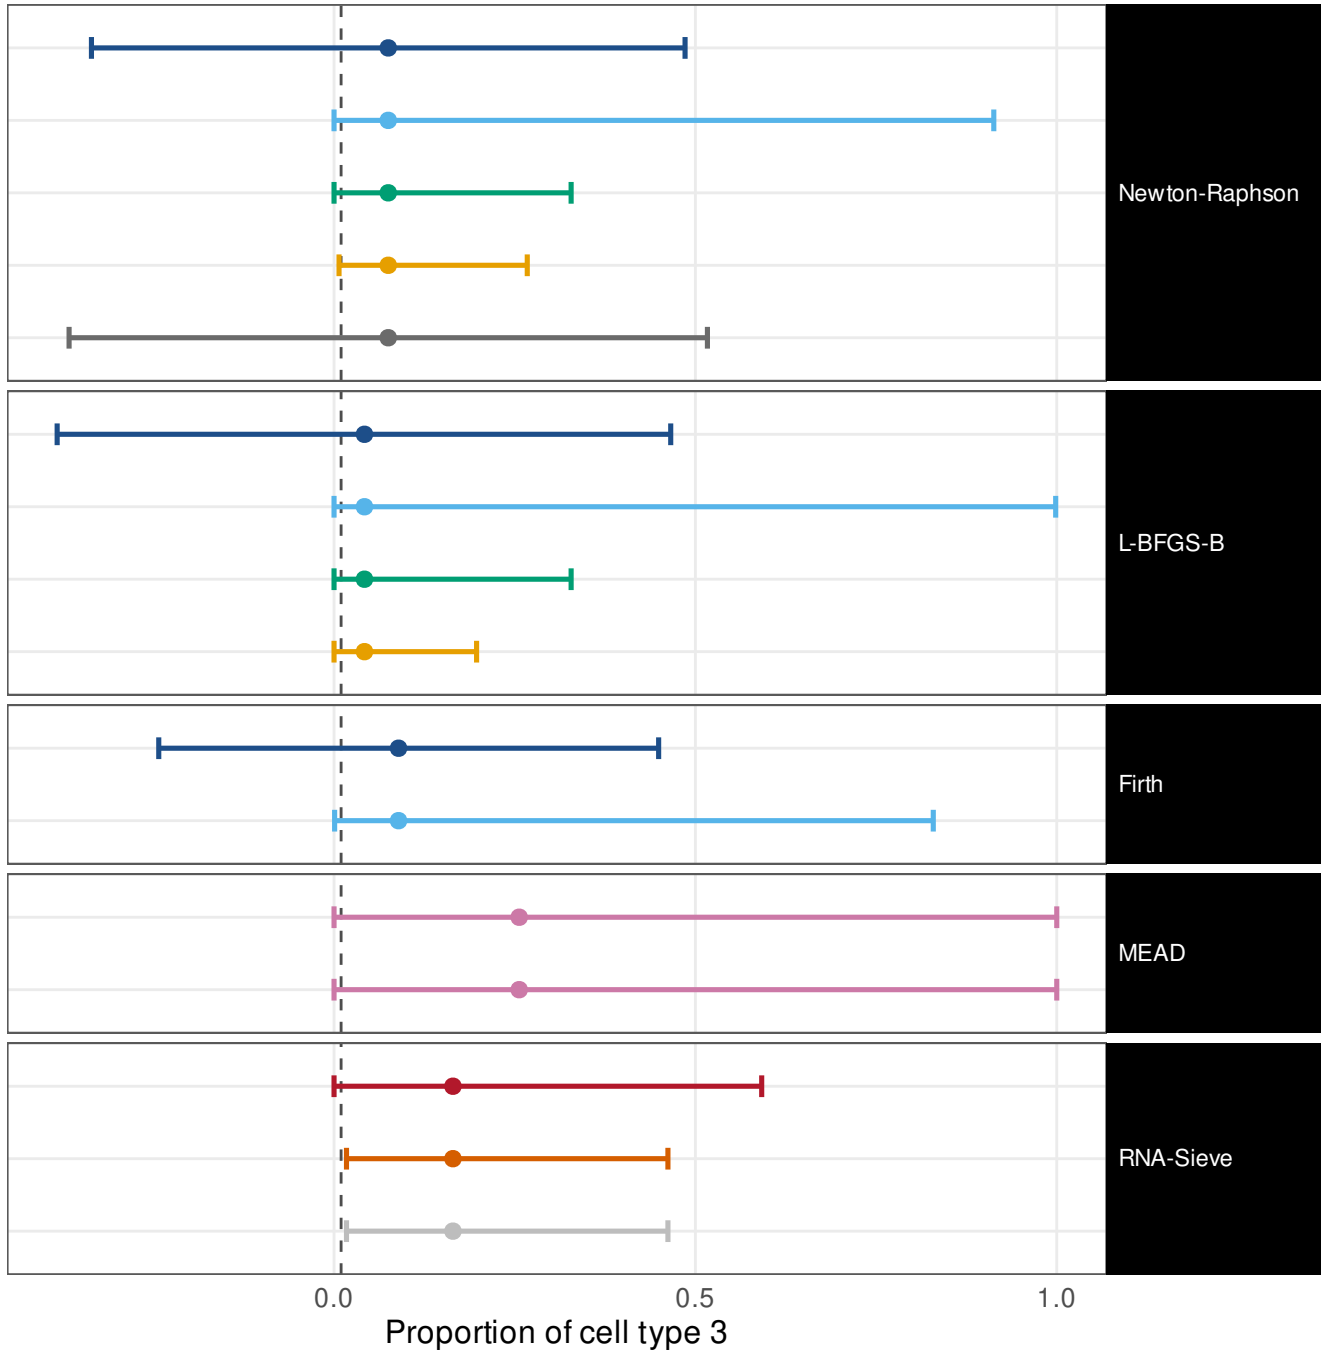


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.6	[0.23, 0.88]	w = 0.719
ILR, mapped back	0.2	[0.036, 0.62]	w = 0.861
Profile likelihood	0.8	[0.38, 0.96]	w = 0.756
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.292
Oracle (Fisher at p*)	0.6	[0.23, 0.88]	w = 0.599
Wald (delta)	0.5	[0.15, 0.85]	w = 0.752
ILR, mapped back	0	[0, 0.49]	w = 0.798
Profile likelihood	0.8	[0.38, 0.96]	w = 0.756
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.387
Wald (delta)	0.25	[0.046, 0.7]	w = 0.596
ILR, mapped back	0	[0, 0.49]	w = 0.665
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.561
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.511
Released code, as published	0.6	[0.23, 0.88]	w = 0.511

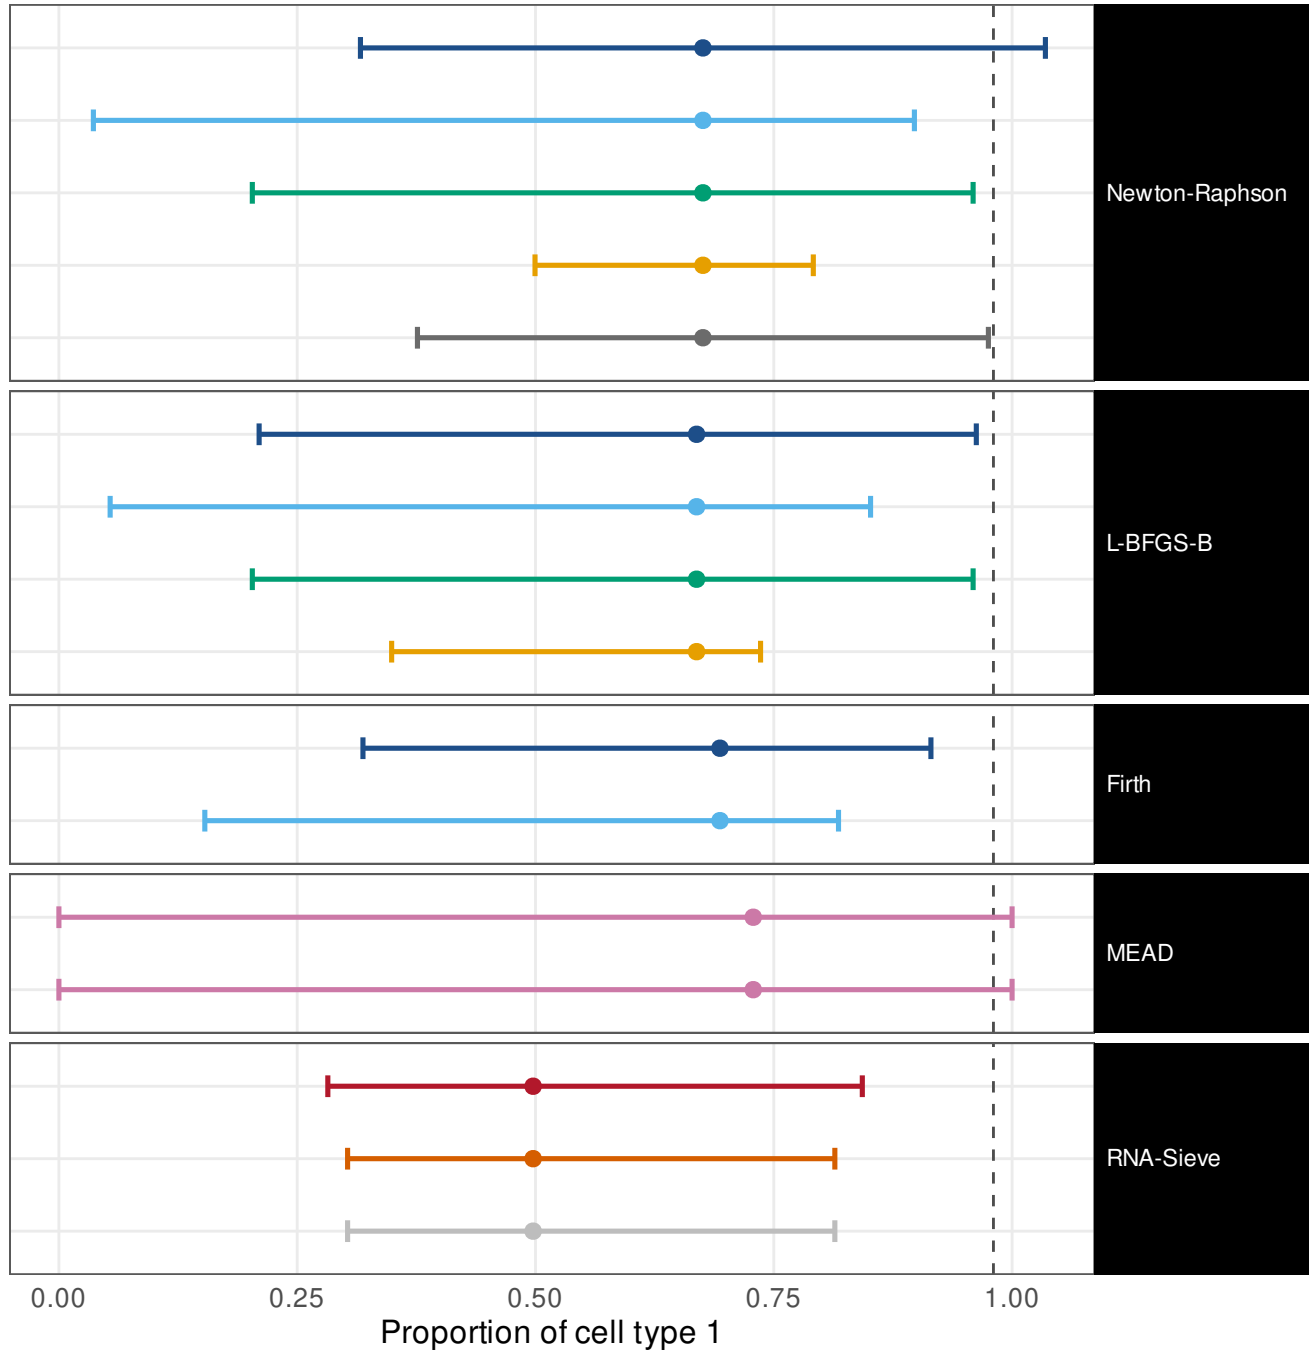


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 SBM / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.913
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.898
Profile likelihood	1	[0.57, 1]	w = 0.646
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.268
Oracle (Fisher at p*)	1	[0.57, 1]	w = 1.03
Wald (delta)	1	[0.51, 1]	w = 0.898
ILR, mapped back	0.75	[0.3, 0.95]	w = 0.858
Profile likelihood	1	[0.57, 1]	w = 0.646
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.385
Wald (delta)	1	[0.51, 1]	w = 0.777
ILR, mapped back	0.5	[0.15, 0.85]	w = 0.753
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.485
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.461
Released code, as published	0.6	[0.23, 0.88]	w = 0.461

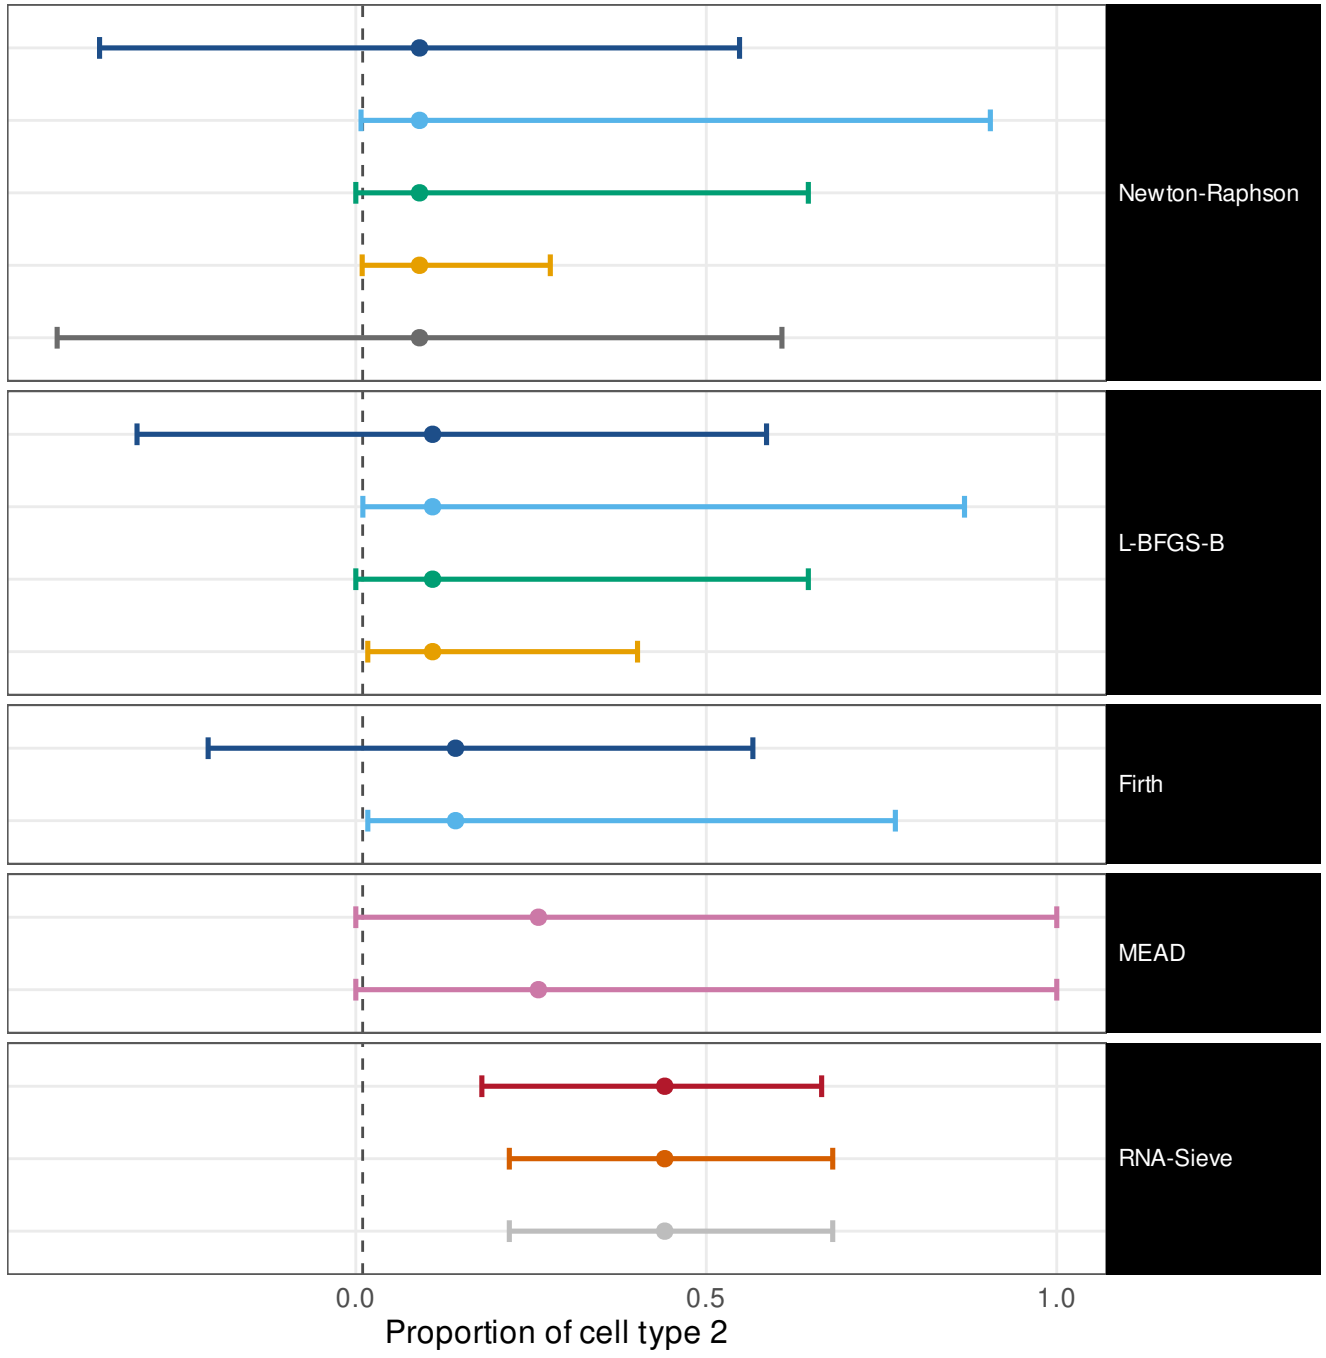


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / moderate overlap / CT1 SBM / CT2 SBM

Wald (delta)	0.6	[0.23, 0.88]	w = 0.678
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.819
Profile likelihood	1	[0.57, 1]	w = 0.491
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.251
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.859
Wald (delta)	0.5	[0.15, 0.85]	w = 0.619
ILR, mapped back	0.75	[0.3, 0.95]	w = 0.812
Profile likelihood	1	[0.57, 1]	w = 0.491
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.225
Wald (delta)	0.5	[0.15, 0.85]	w = 0.582
ILR, mapped back	0.5	[0.15, 0.85]	w = 0.607
Method's own interval	1	[0.57, 1]	w = 0.752
Own interval, transcript fractions	1	[0.57, 1]	w = 0.752
Fisher information (Wald)	1	[0.57, 1]	w = 0.358
Godambe sandwich	1	[0.57, 1]	w = 0.32
Released code, as published	1	[0.57, 1]	w = 0.32

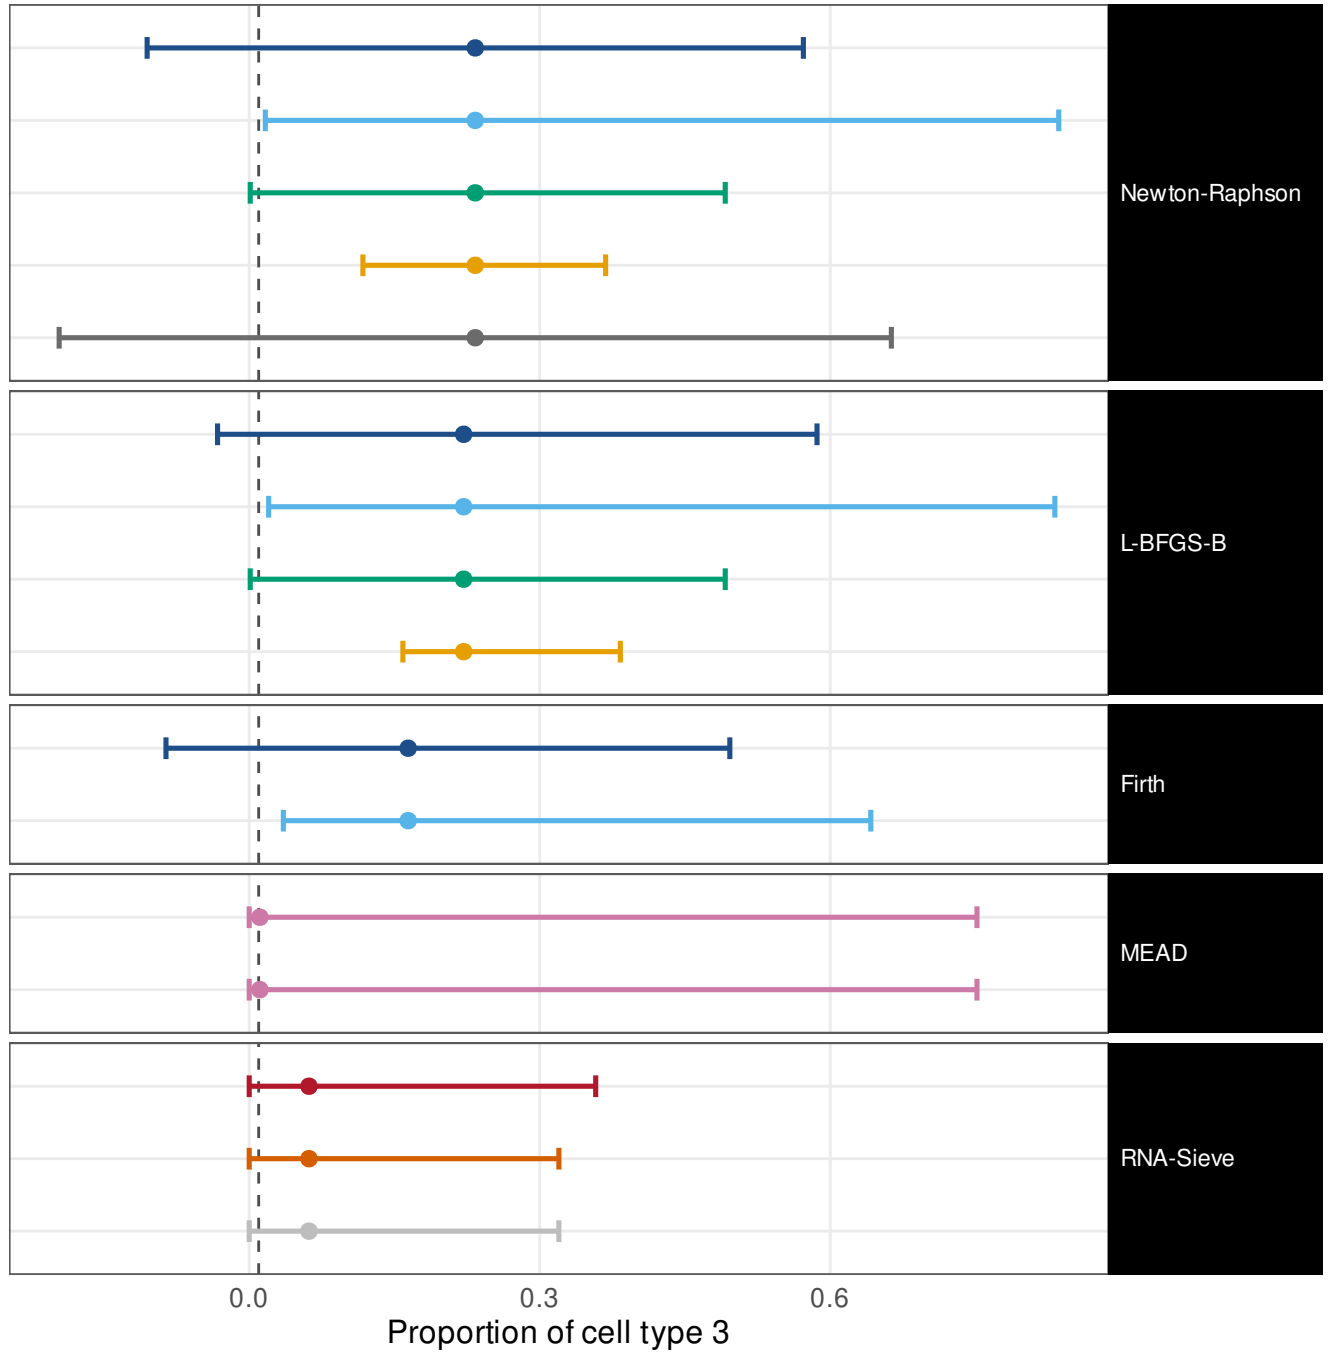

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 Scale-free / CT2 Scale-free


```
Wald (delta)                          1  [0.57,    1]   w = 1.07
ILR, mapped back                    0.8  [0.38, 0.96]   w = 0.968
Profile likelihood                    1  [0.57,    1]   w = 0.662
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.77
Oracle (Fisher at p*)               0.8  [0.38, 0.96]   w = 0.611

Wald (delta)                          1  [0.21,    1]   w = 0.611
ILR, mapped back                      0  [   0, 0.79]   w = 0.85
Profile likelihood                    1  [0.57,    1]   w = 0.662
Parametric bootstrap                0.4  [0.12, 0.77]   w = 0.537

Wald (delta)                          0  [   0, 0.79]   w = 0.65
ILR, mapped back                      0  [   0, 0.79]   w = 0.757

Method's own interval                 1  [0.57,    1]   w =    1
Own interval, transcript fractions    1  [0.57,    1]   w =    1

Fisher information (Wald)           0.2  [0.036, 0.62]   w = 0.684
Godambe sandwich                      0  [   0, 0.43]   w = 0.38
Released code, as published           0  [   0, 0.43]   w = 0.38
```

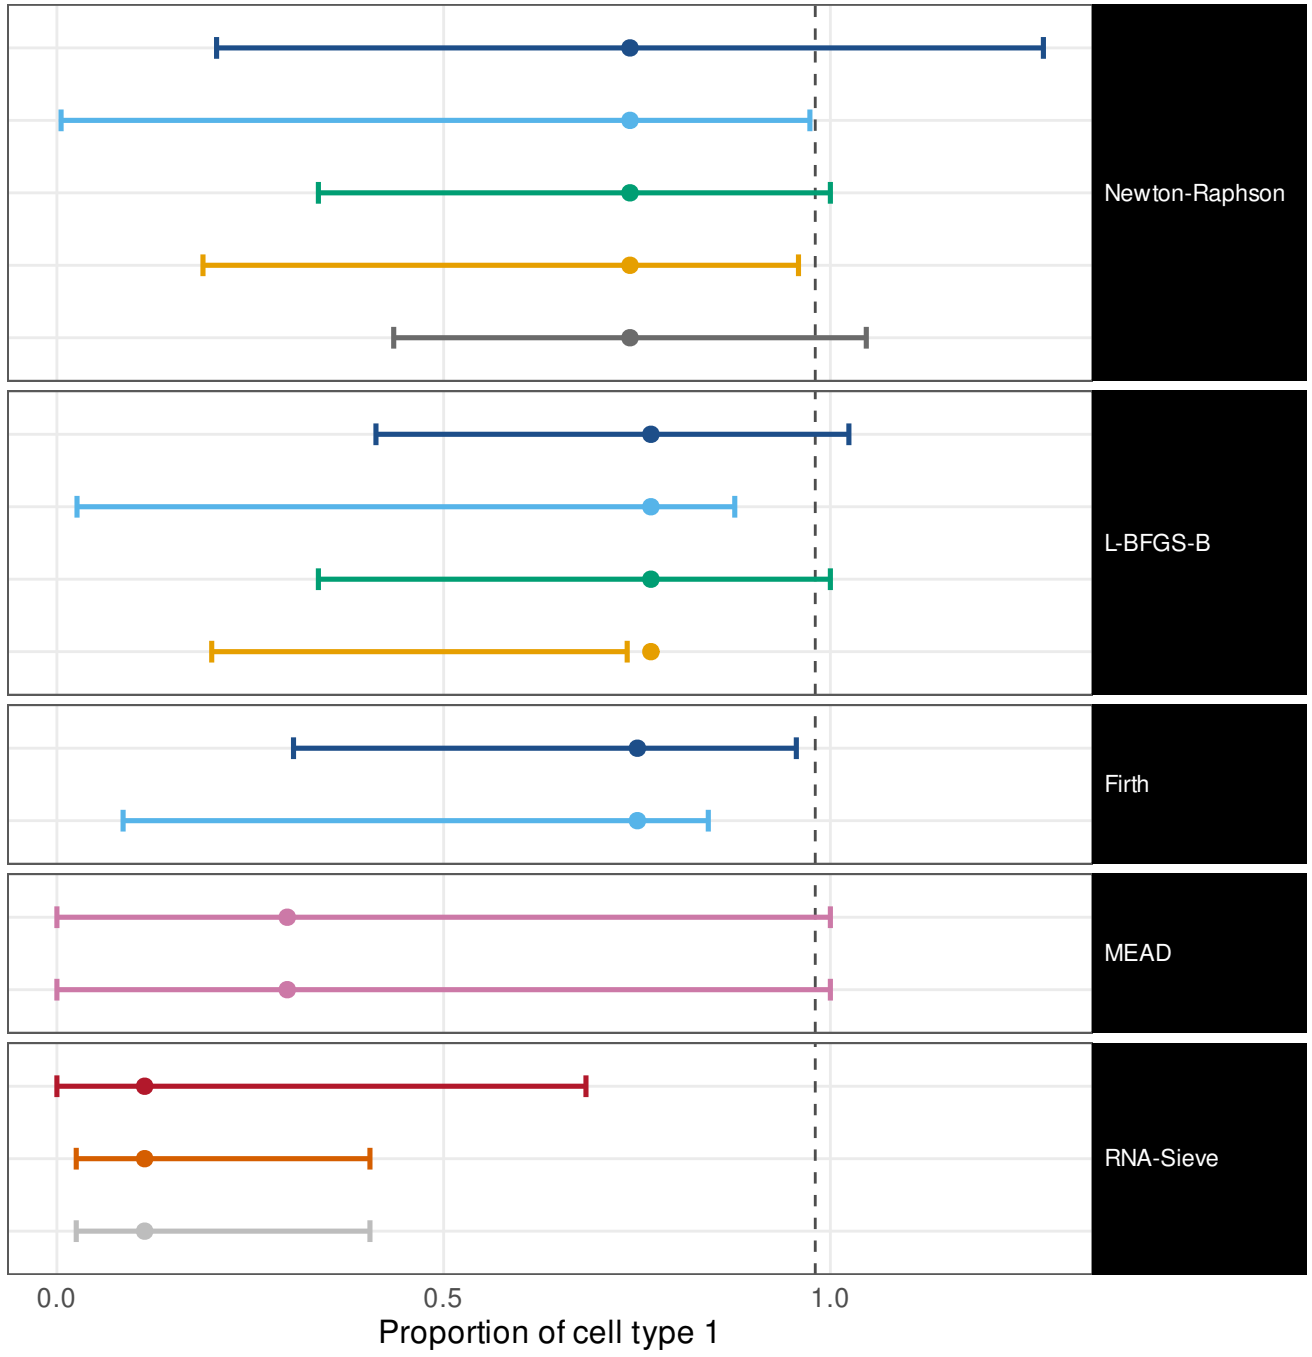


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 2.05
ILR, mapped back	1	[0.57, 1]	w = 0.992
Profile likelihood	1	[0.57, 1]	w = 0.504
Parametric bootstrap	1	[0.57, 1]	w = 0.722
Oracle (Fisher at p*)	1	[0.57, 1]	w = 1.9
Wald (delta)	1	[0.21, 1]	w = 1.27
ILR, mapped back	1	[0.21, 1]	w = 0.963
Profile likelihood	1	[0.57, 1]	w = 0.504
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.398
Wald (delta)	1	[0.21, 1]	w = 1.09
ILR, mapped back	1	[0.21, 1]	w = 0.879
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.2	[0.036, 0.62]	w = 0.644
Godambe sandwich	0	[0, 0.43]	w = 0.349
Released code, as published	0	[0, 0.43]	w = 0.349

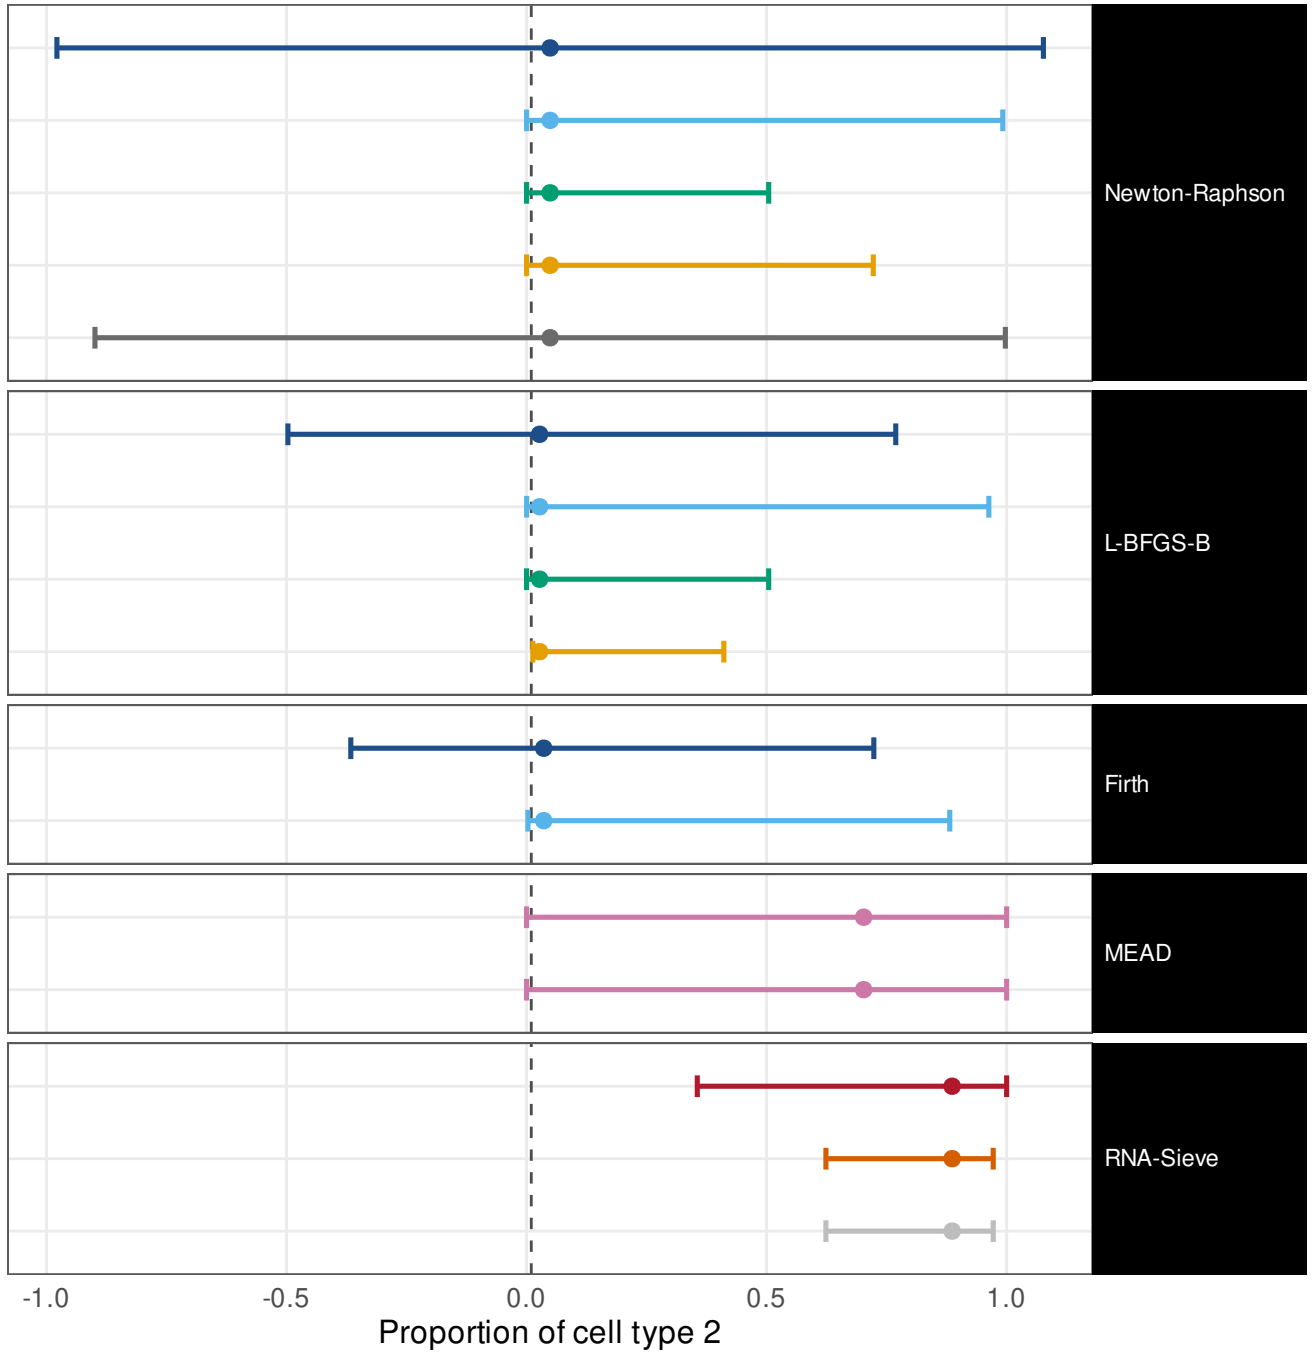


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 Scale-free / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 1.48
ILR, mapped back	1	[0.57, 1]	w = 0.971
Profile likelihood	1	[0.57, 1]	w = 0.443
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.271
Oracle (Fisher at p*)	1	[0.57, 1]	w = 1.81
Wald (delta)	1	[0.21, 1]	w = 1.2
ILR, mapped back	1	[0.21, 1]	w = 0.94
Profile likelihood	1	[0.57, 1]	w = 0.443
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.408
Wald (delta)	1	[0.21, 1]	w = 1.03
ILR, mapped back	1	[0.21, 1]	w = 0.807
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.407
Godambe sandwich	1	[0.57, 1]	w = 0.13
Released code, as published	1	[0.57, 1]	w = 0.13

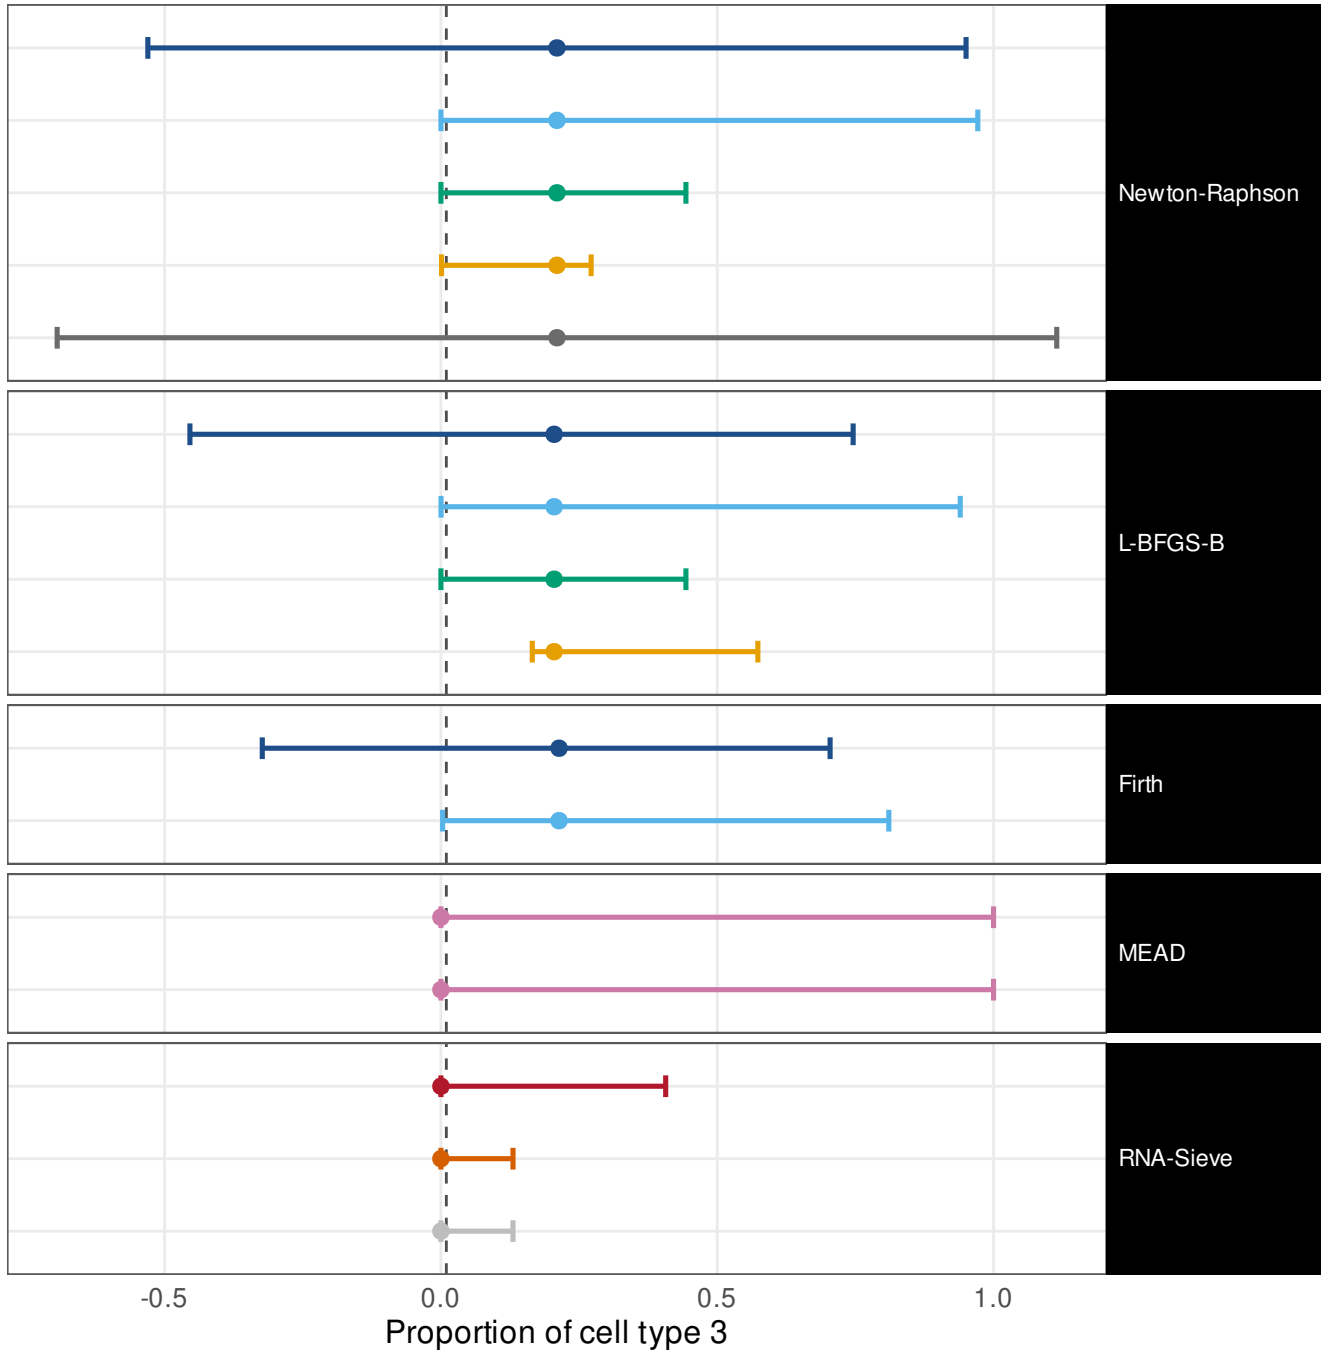


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 0.739
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.96
Profile likelihood	0.8	[0.38, 0.96]	w = 0.82
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.425
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.613
Profile likelihood	0.8	[0.38, 0.96]	w = 0.82
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.366
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.8	[0.38, 0.96]	w = 0.871
Godambe sandwich	0.4	[0.12, 0.77]	w = 0.665
Released code, as published	0.4	[0.12, 0.77]	w = 0.665

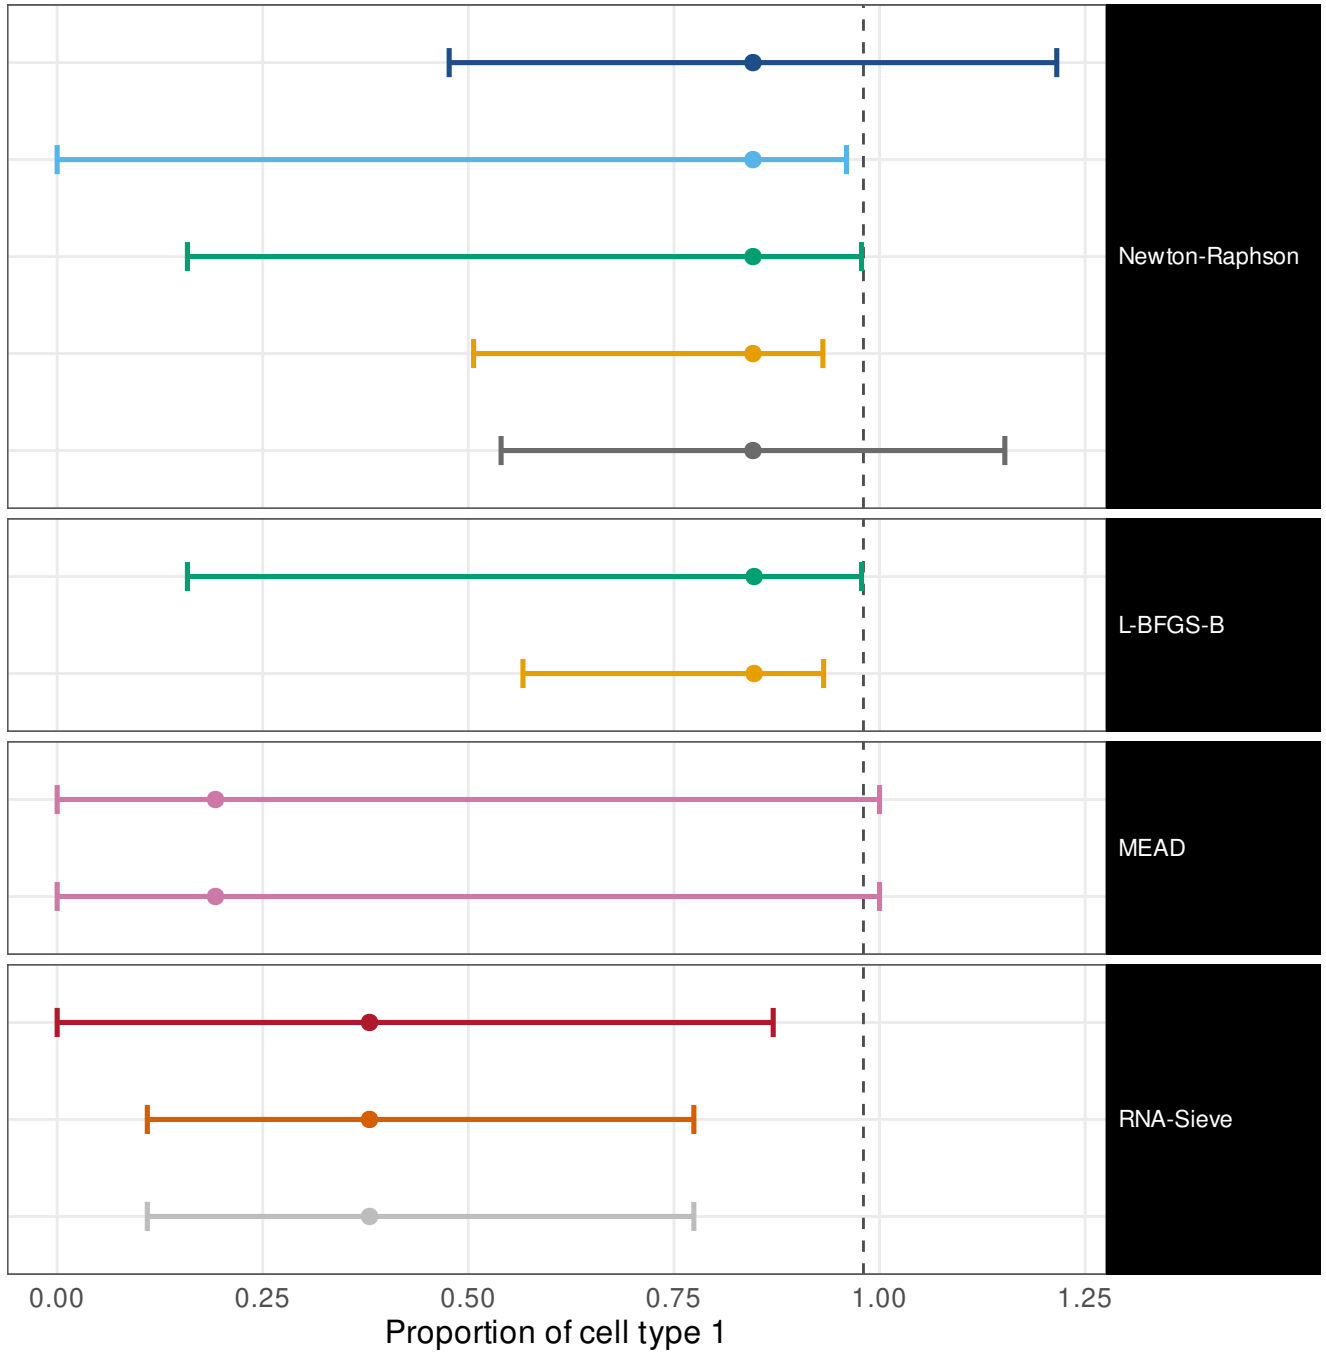


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	0.8	[0.38, 0.96]	w = 2.23
ILR, mapped back	1	[0.57, 1]	w = 0.98
Profile likelihood	1	[0.57, 1]	w = 0.673
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.439
Oracle (Fisher at p*)	1	[0.57, 1]	w = 2.55
Profile likelihood	1	[0.57, 1]	w = 0.673
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.196
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.827
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.709
Released code, as published	0.6	[0.23, 0.88]	w = 0.709

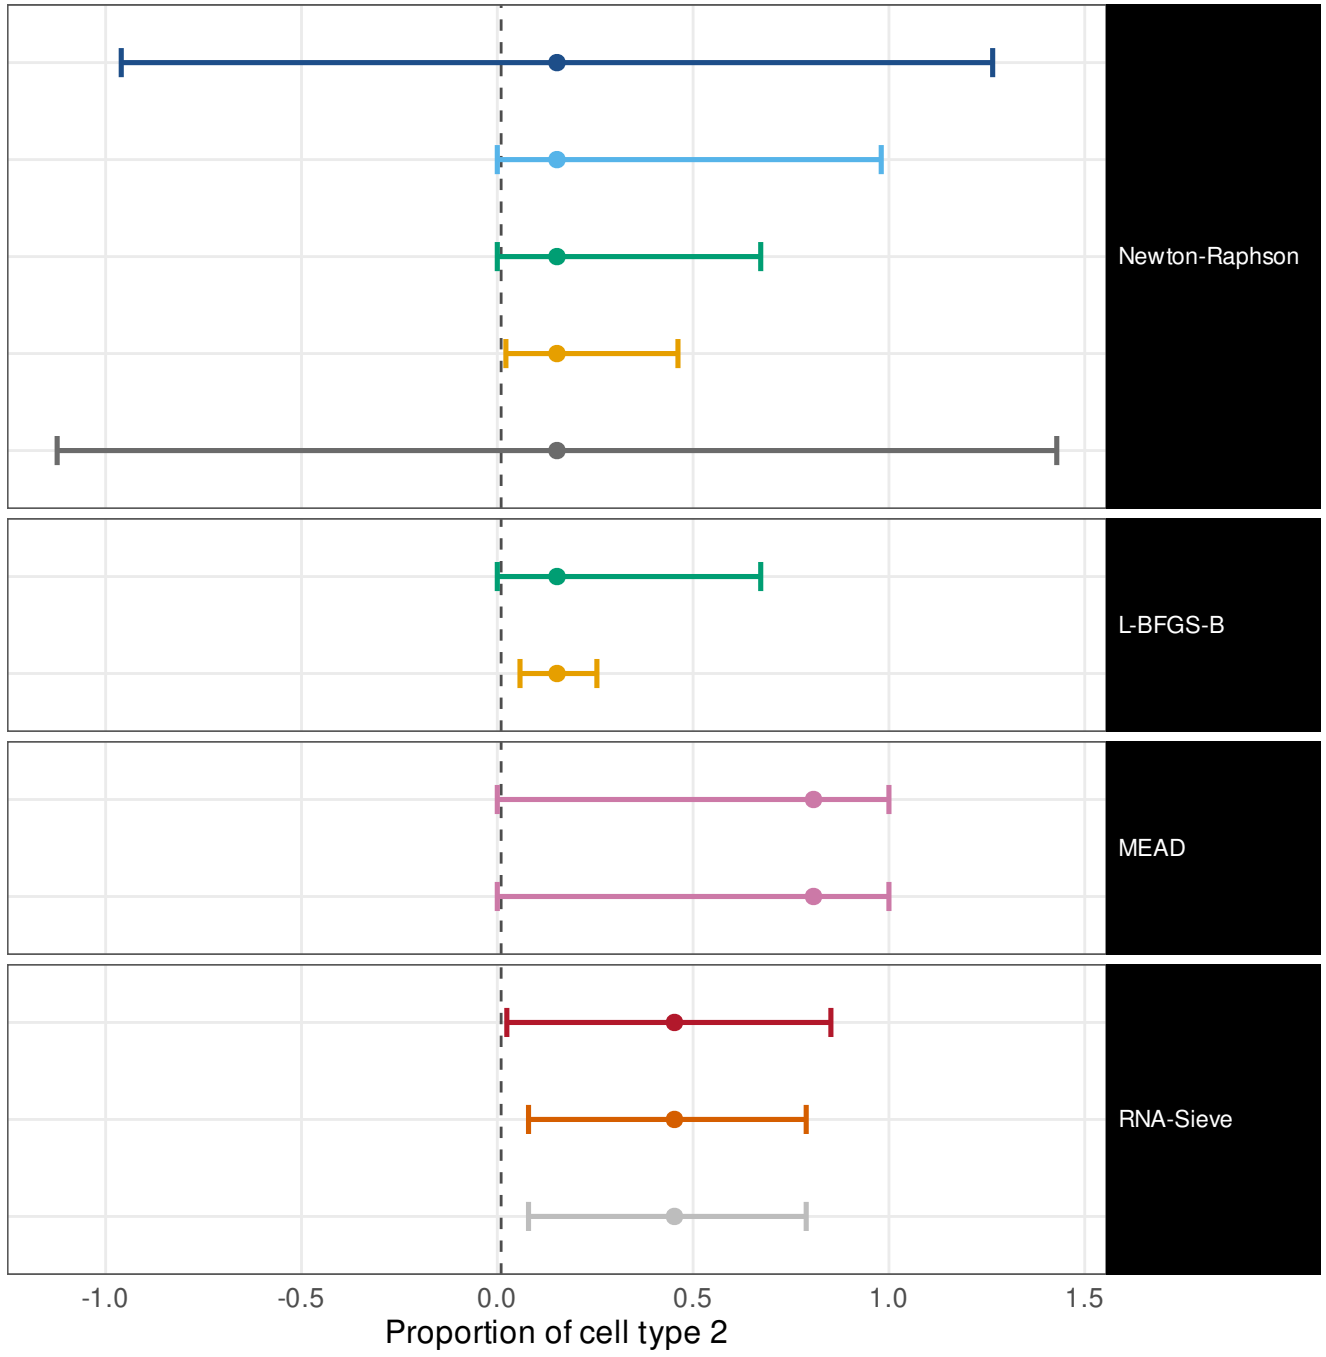


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 SBM / CT2 Scale-free

Wald (delta)	1	[0.57, 1]	w = 2.09
ILR, mapped back	1	[0.57, 1]	w = 1
Profile likelihood	1	[0.57, 1]	w = 0.549
Parametric bootstrap	1	[0.57, 1]	w = 0.219
Oracle (Fisher at p*)	1	[0.57, 1]	w = 2.49
Profile likelihood	1	[0.57, 1]	w = 0.549
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.271
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.858
Godambe sandwich	0.8	[0.38, 0.96]	w = 0.567
Released code, as published	0.8	[0.38, 0.96]	w = 0.567

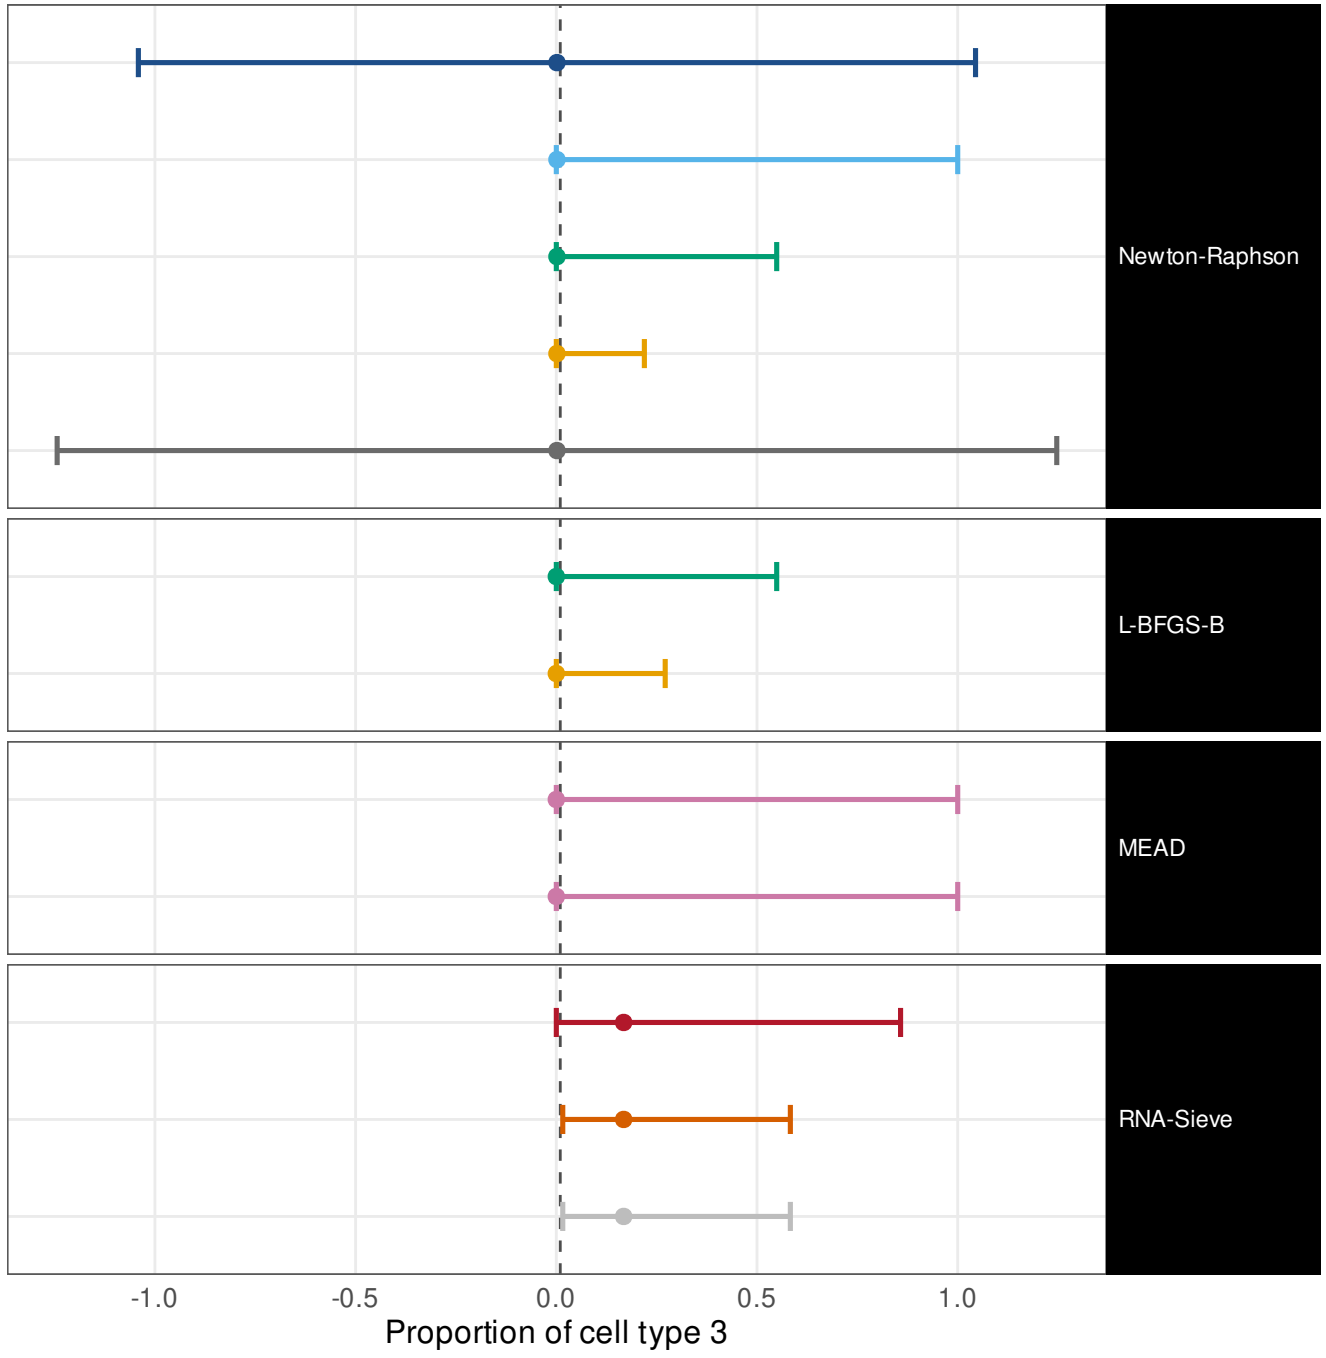


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.62
ILR, mapped back	1	[0.57, 1]	w = 0.996
Profile likelihood	1	[0.57, 1]	w = 0.281
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.948
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.615
Profile likelihood	1	[0.57, 1]	w = 0.281
Parametric bootstrap	1	[0.57, 1]	w = 0.96
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.502
Godambe sandwich	0.4	[0.12, 0.77]	w = 0.397
Released code, as published	0.4	[0.12, 0.77]	w = 0.397

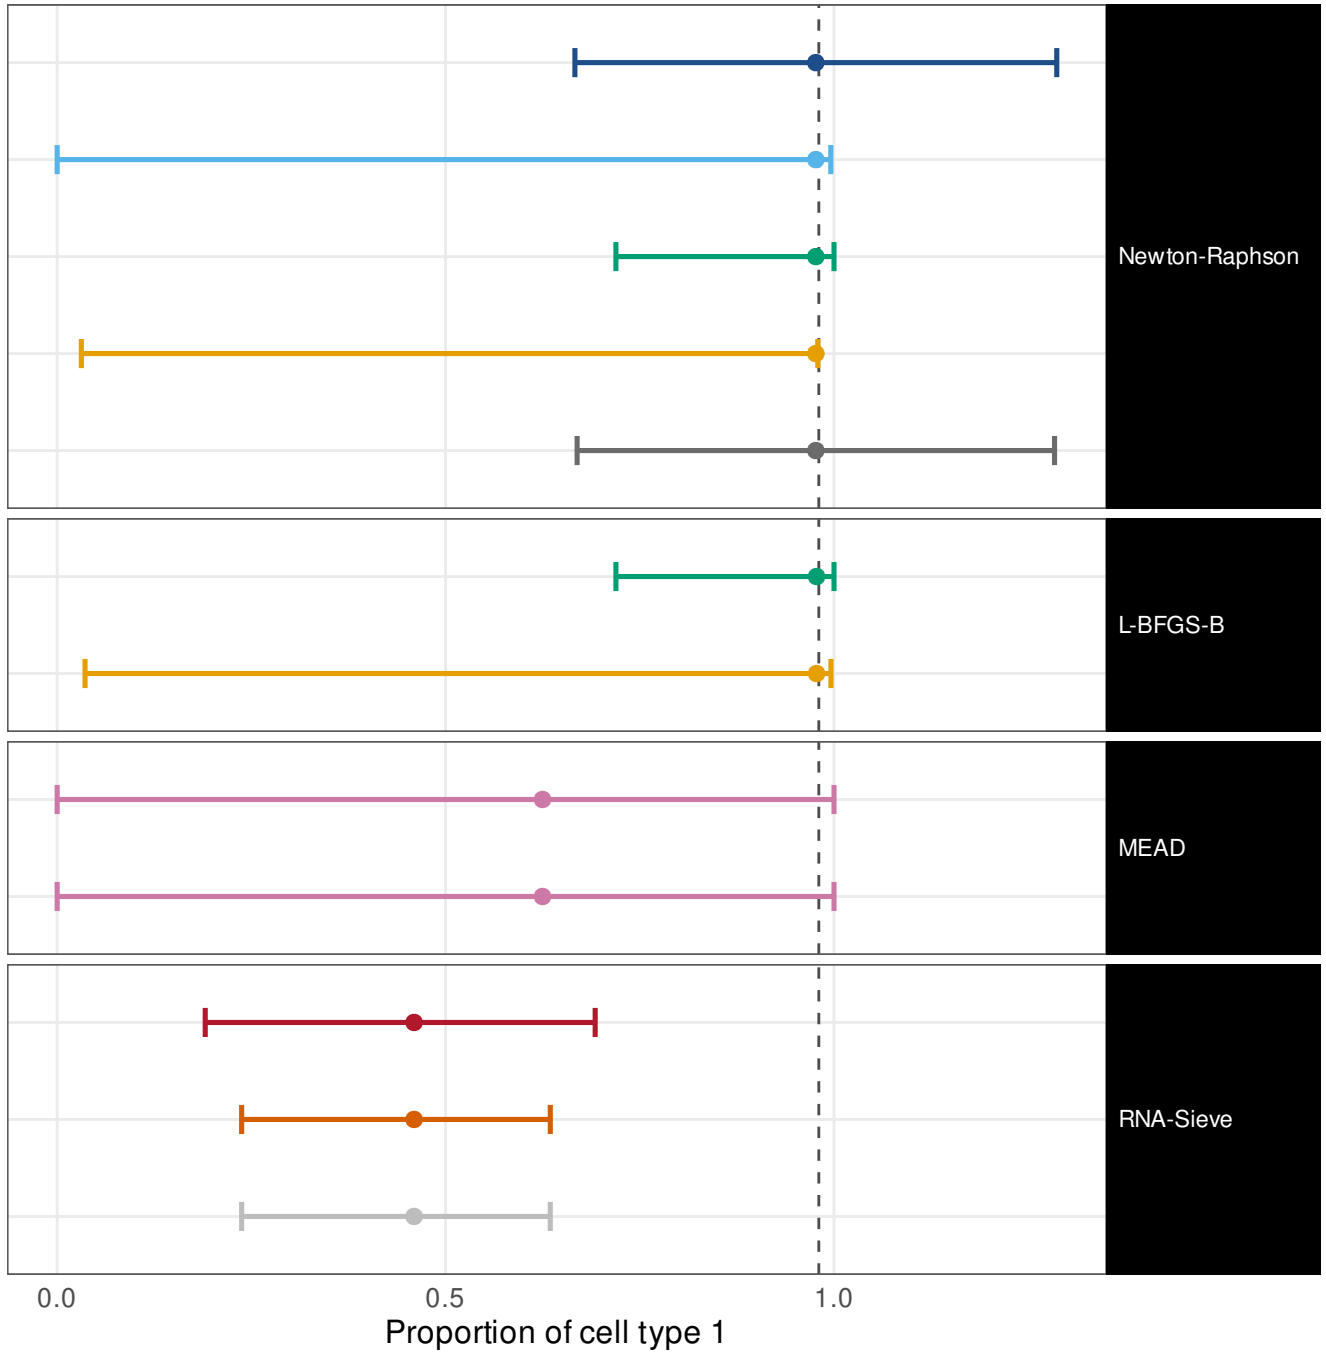


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 2.04
ILR, mapped back	1	[0.57, 1]	w = 1
Profile likelihood	1	[0.57, 1]	w = 0.26
Parametric bootstrap	1	[0.57, 1]	w = 0.728
Oracle (Fisher at p*)	1	[0.57, 1]	w = 2.09
Profile likelihood	1	[0.57, 1]	w = 0.26
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.802
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.695
Godambe sandwich	1	[0.57, 1]	w = 0.516
Released code, as published	1	[0.57, 1]	w = 0.516

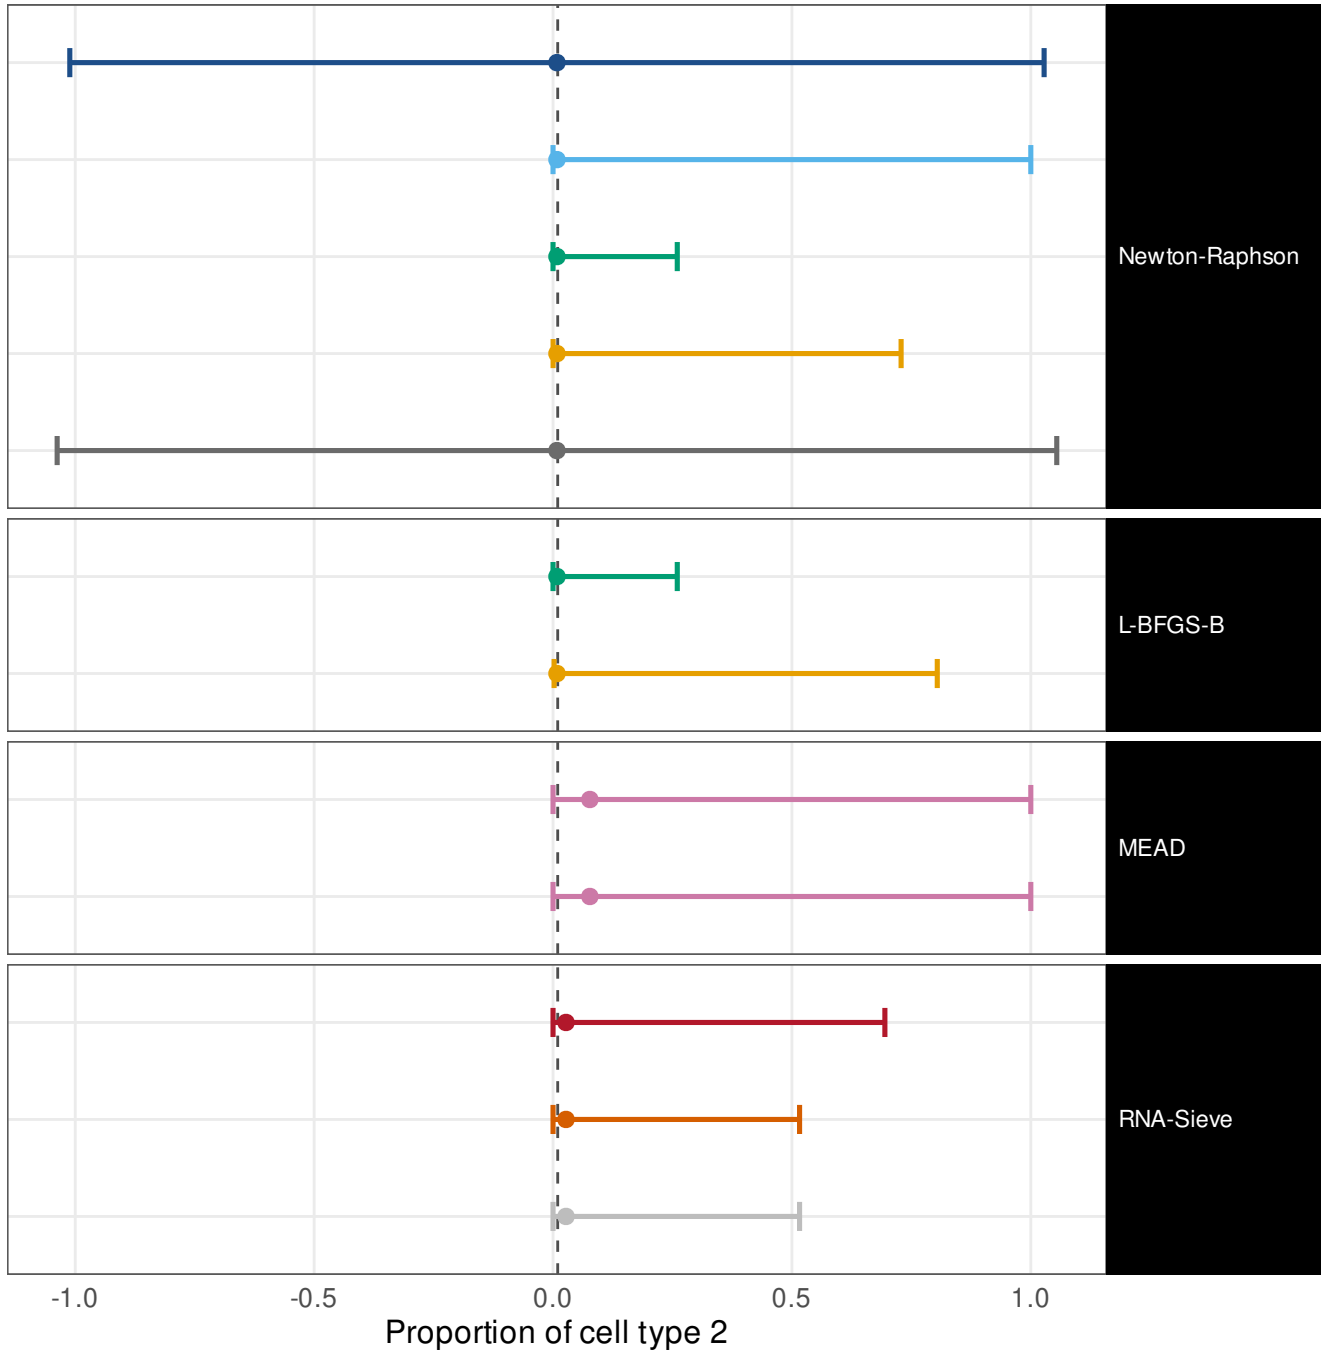


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 Scale-free / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 1.97
ILR, mapped back	1	[0.57, 1]	w = 1
Profile likelihood	1	[0.57, 1]	w = 0.257
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.448
Oracle (Fisher at p*)	1	[0.57, 1]	w = 2.01
Profile likelihood	1	[0.57, 1]	w = 0.257
Parametric bootstrap	1	[0.57, 1]	w = 0.683
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.6	[0.23, 0.88]	w = 0.657
Godambe sandwich	0.6	[0.23, 0.88]	w = 0.538
Released code, as published	0.6	[0.23, 0.88]	w = 0.538

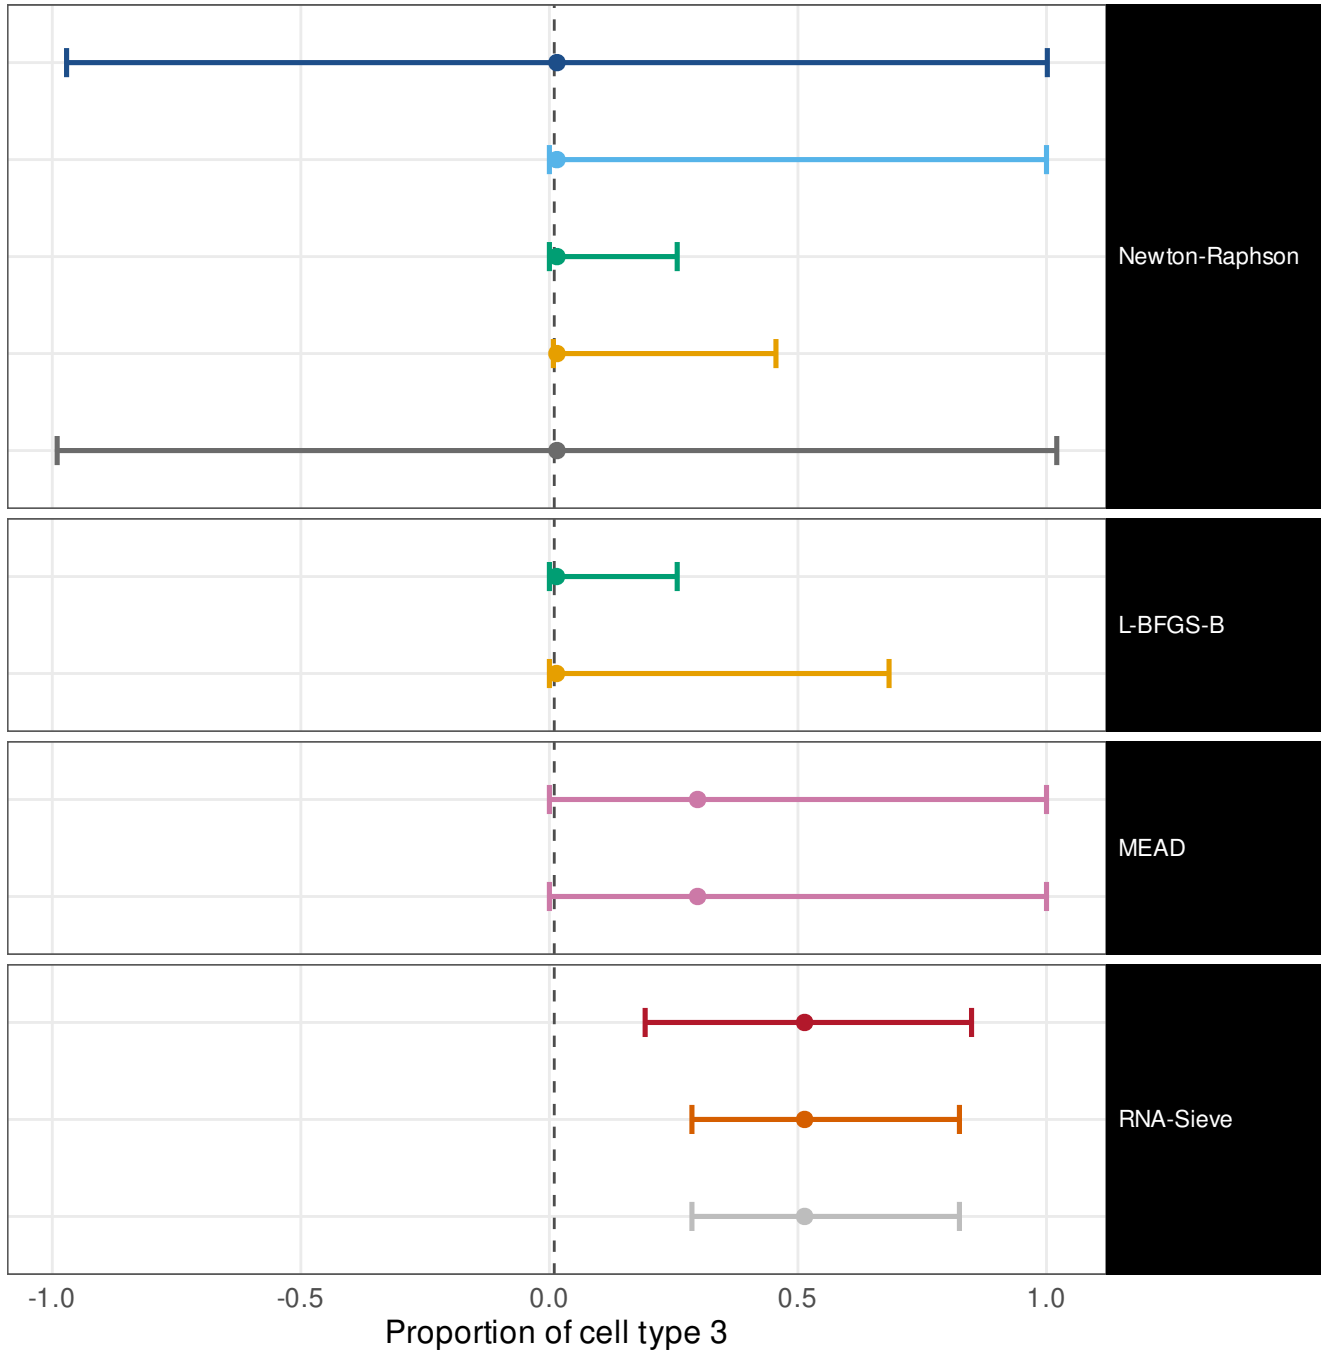


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 0.687
ILR, mapped back	0.4	[0.12, 0.77]	w = 0.917
Profile likelihood	1	[0.57, 1]	w = 0.577
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.455
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.611
Profile likelihood	1	[0.57, 1]	w = 0.577
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.472
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.825
Godambe sandwich	1	[0.57, 1]	w = 0.679
Released code, as published	1	[0.57, 1]	w = 0.679

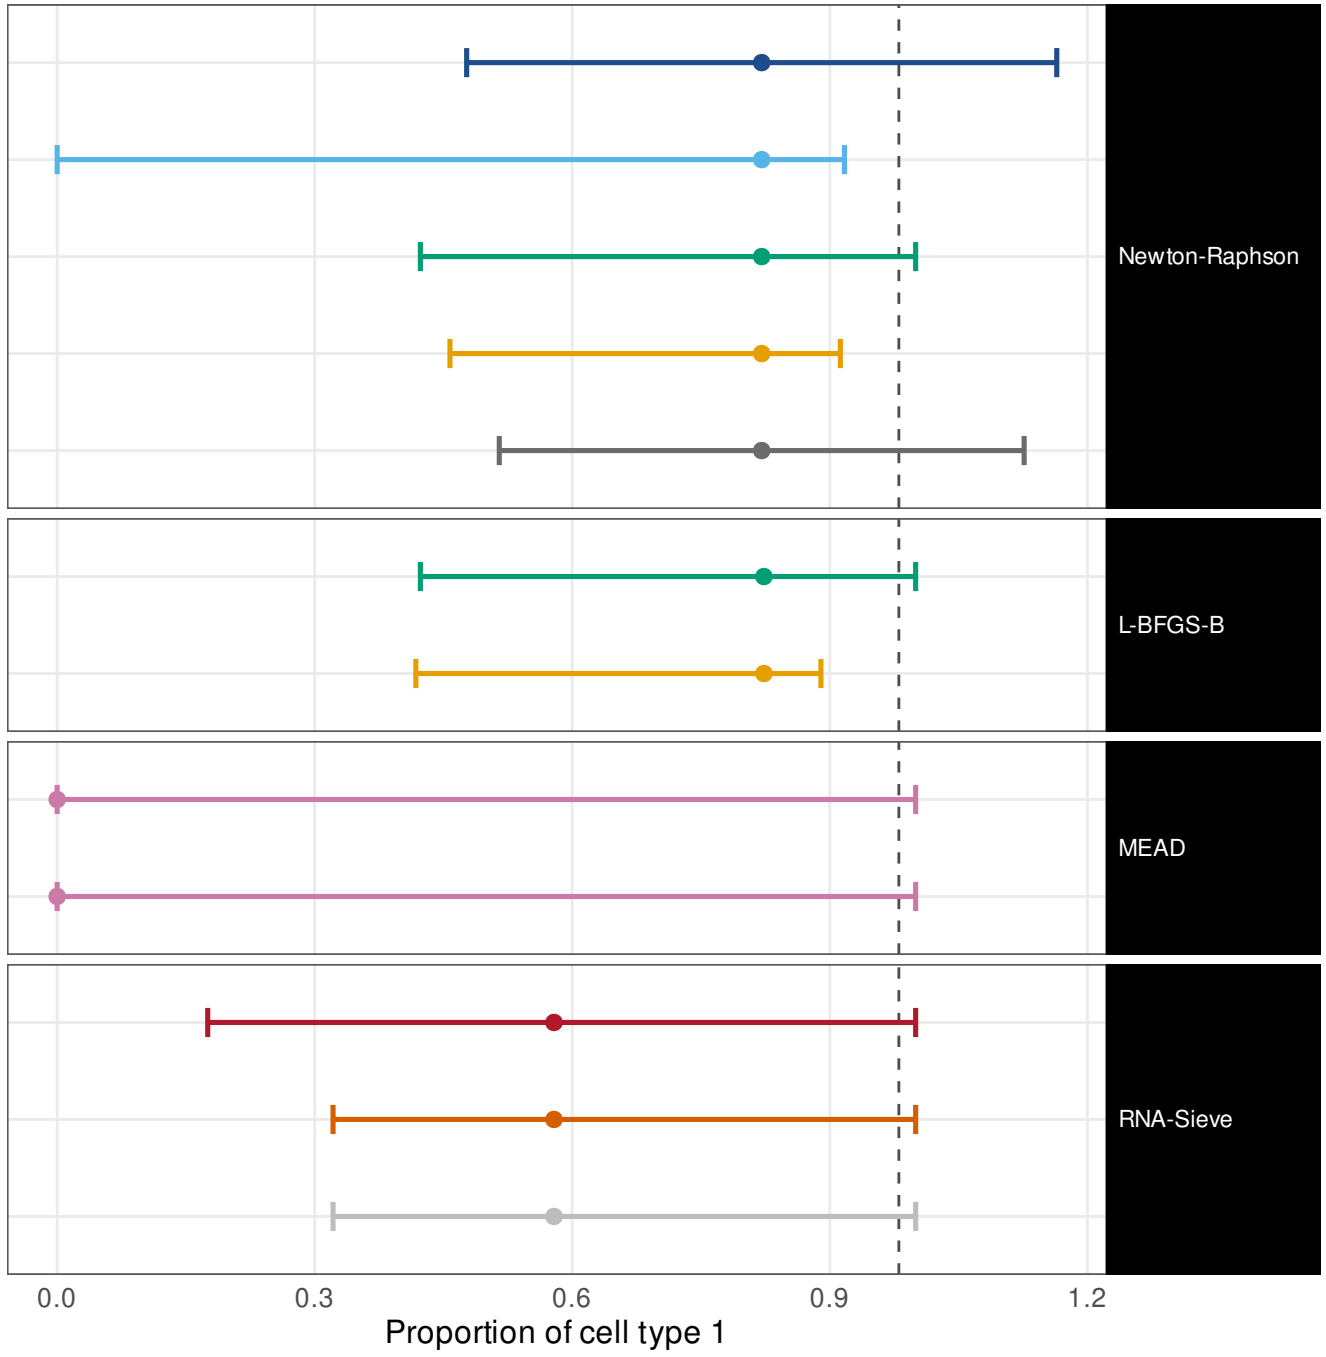


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 1.6
ILR, mapped back	1	[0.57, 1]	w = 0.951
Profile likelihood	1	[0.57, 1]	w = 0.522
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.322
Oracle (Fisher at p*)	1	[0.57, 1]	w = 2.08
Profile likelihood	1	[0.57, 1]	w = 0.522
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.234
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.668
Godambe sandwich	1	[0.57, 1]	w = 0.62
Released code, as published	1	[0.57, 1]	w = 0.62

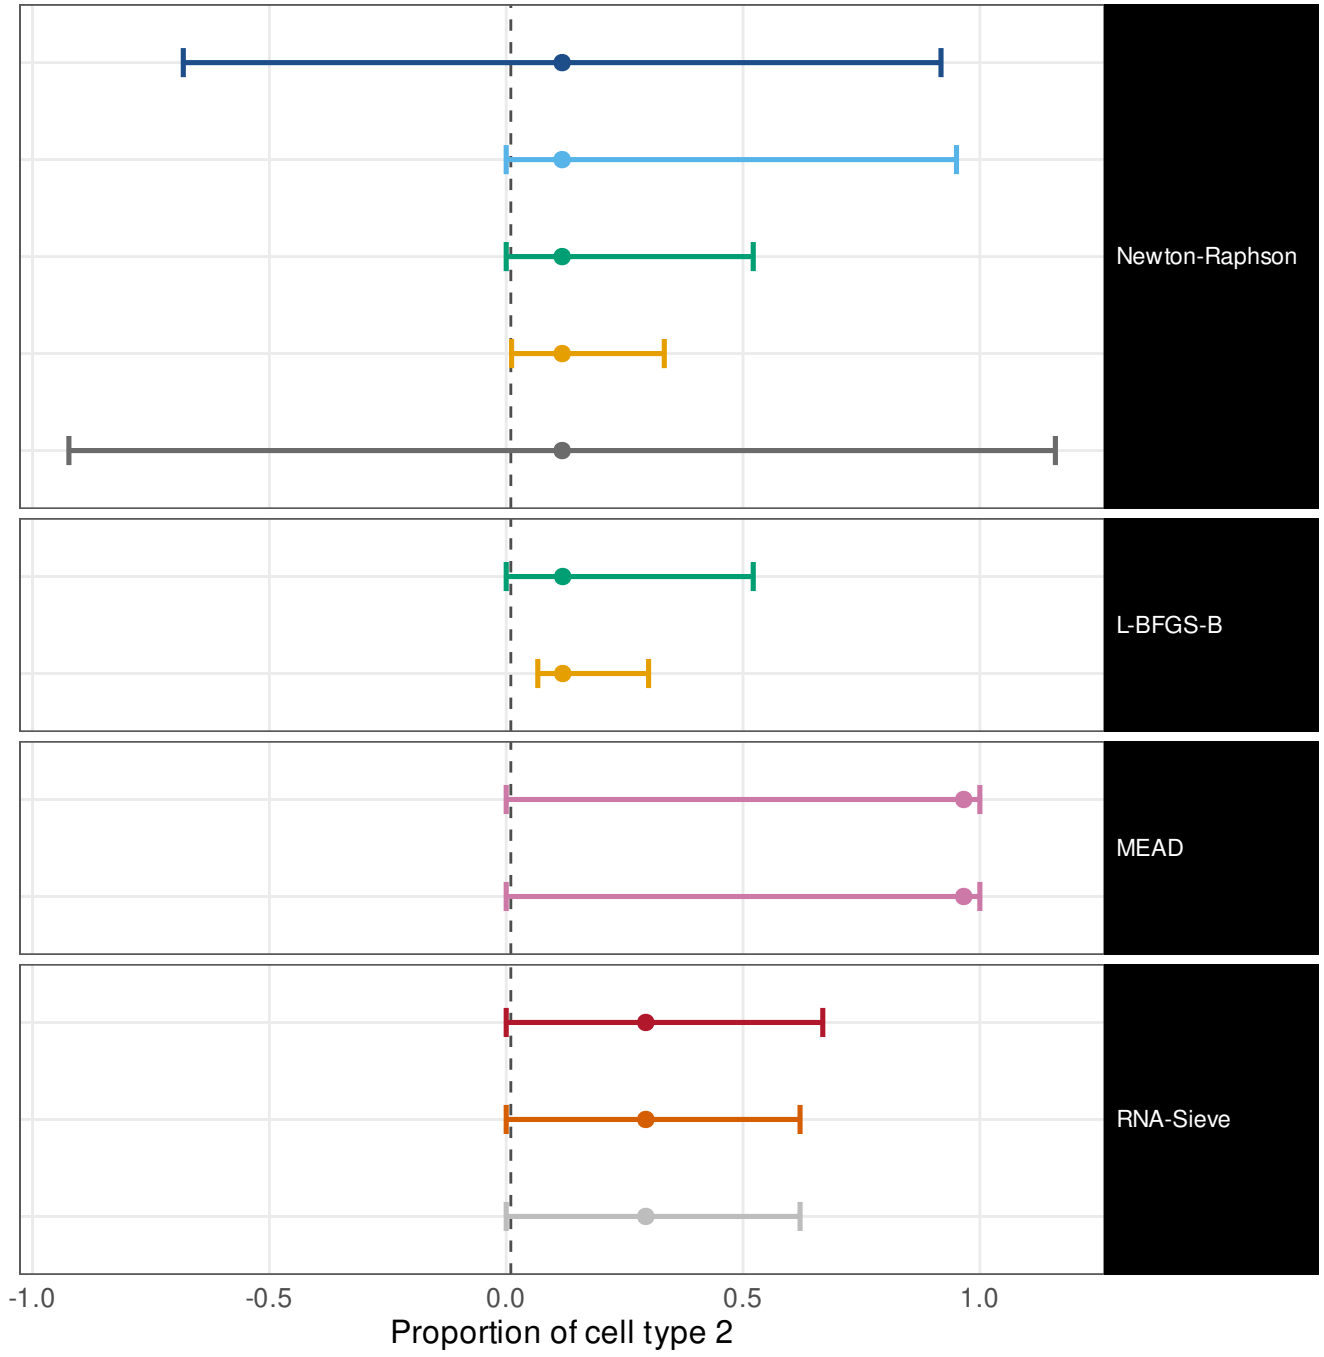


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

highly unbalanced / high overlap / CT1 SBM / CT2 SBM

Wald (delta)	1	[0.57, 1]	w = 1.44
ILR, mapped back	1	[0.57, 1]	w = 0.966
Profile likelihood	1	[0.57, 1]	w = 0.413
Parametric bootstrap	1	[0.57, 1]	w = 0.303
Oracle (Fisher at p*)	1	[0.57, 1]	w = 2
Profile likelihood	1	[0.57, 1]	w = 0.413
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.391
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	1	[0.57, 1]	w = 0.779
Godambe sandwich	1	[0.57, 1]	w = 0.528
Released code, as published	1	[0.57, 1]	w = 0.528

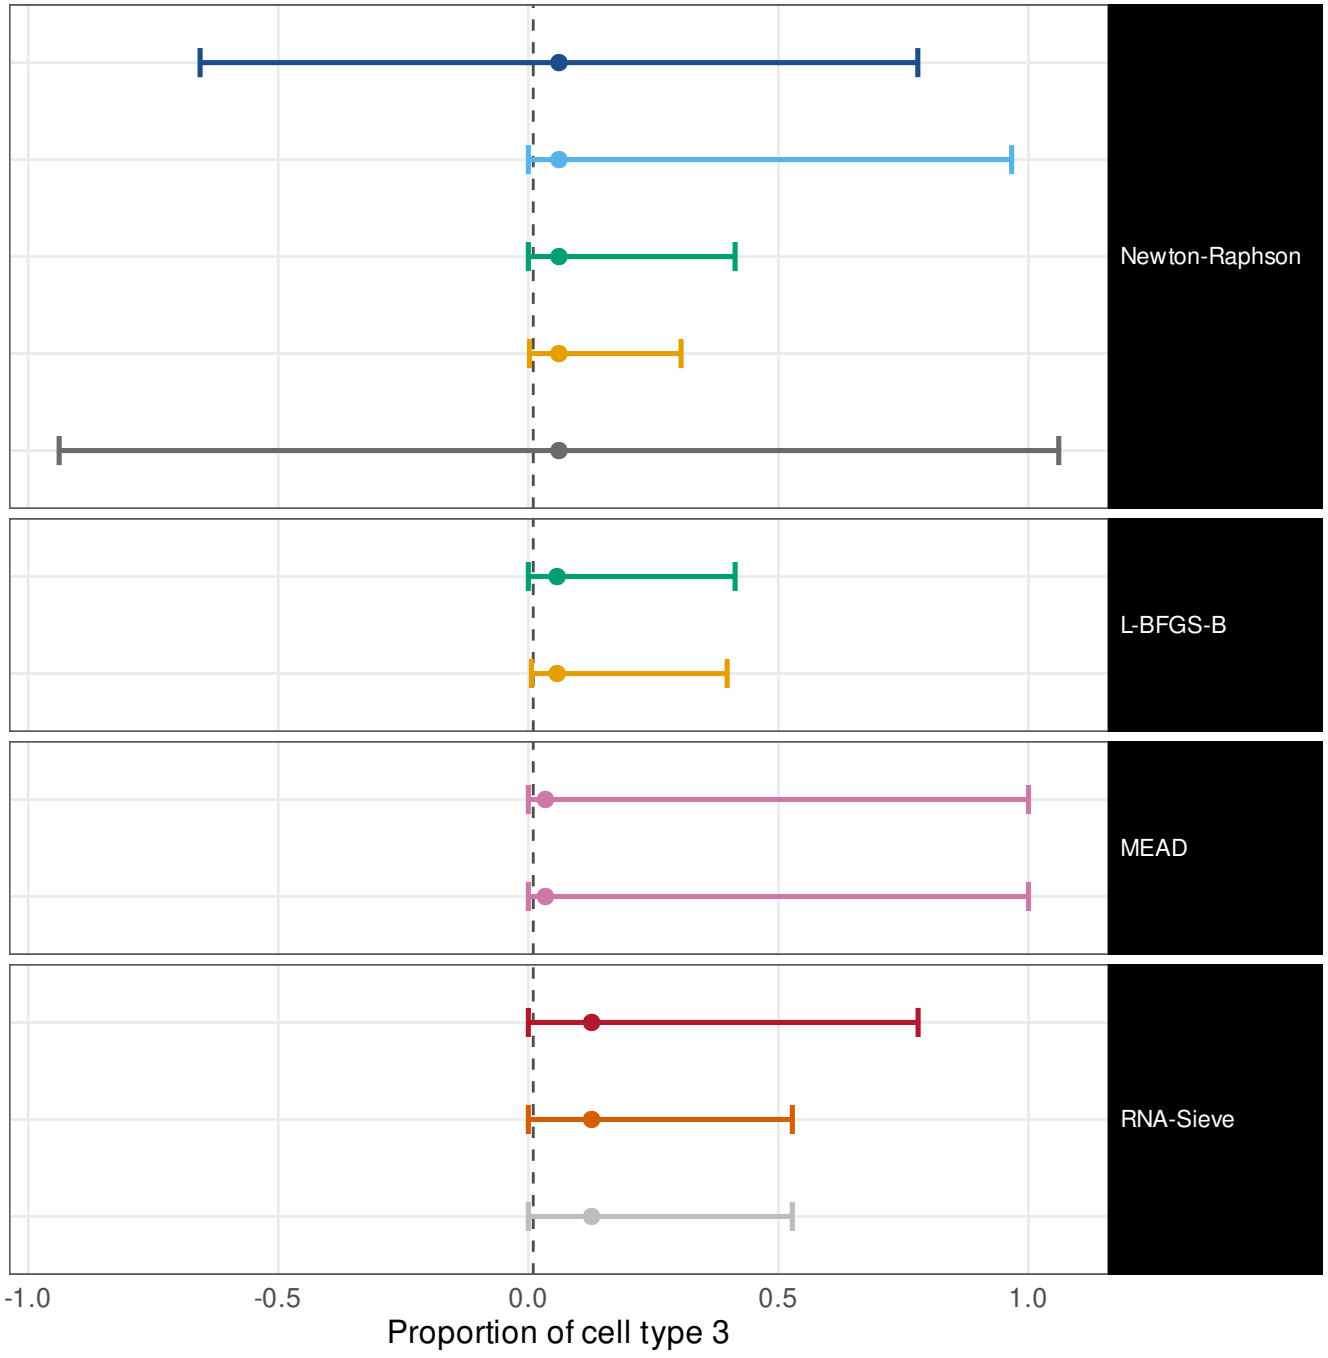

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.