
Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.0255
ILR, mapped back	1	[0.57, 1]	w = 0.0255
ILR, REML	1	[0.57, 1]	w = 0.0307
Profile likelihood	1	[0.57, 1]	w = 0.0268
Profile, REML	1	[0.57, 1]	w = 0.0309
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0158
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0384
Wald (delta)	1	[0.57, 1]	w = 0.0255
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0253
ILR, REML	1	[0.57, 1]	w = 0.0305
Profile likelihood	1	[0.57, 1]	w = 0.0268
Profile, REML	1	[0.57, 1]	w = 0.0309
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.0136
Wald (delta)	1	[0.57, 1]	w = 0.0255
ILR, mapped back	1	[0.57, 1]	w = 0.0255
ILR, REML	1	[0.57, 1]	w = 0.0306
Method's own interval	1	[0.57, 1]	w = 0.078
Own interval, transcript fractions	1	[0.57, 1]	w = 0.078
Fisher information (Wald)	0	[0, 0.43]	w = 0.000755
Godambe sandwich	1	[0.57, 1]	w = 0.329
Released code, as published	1	[0.57, 1]	w = 1

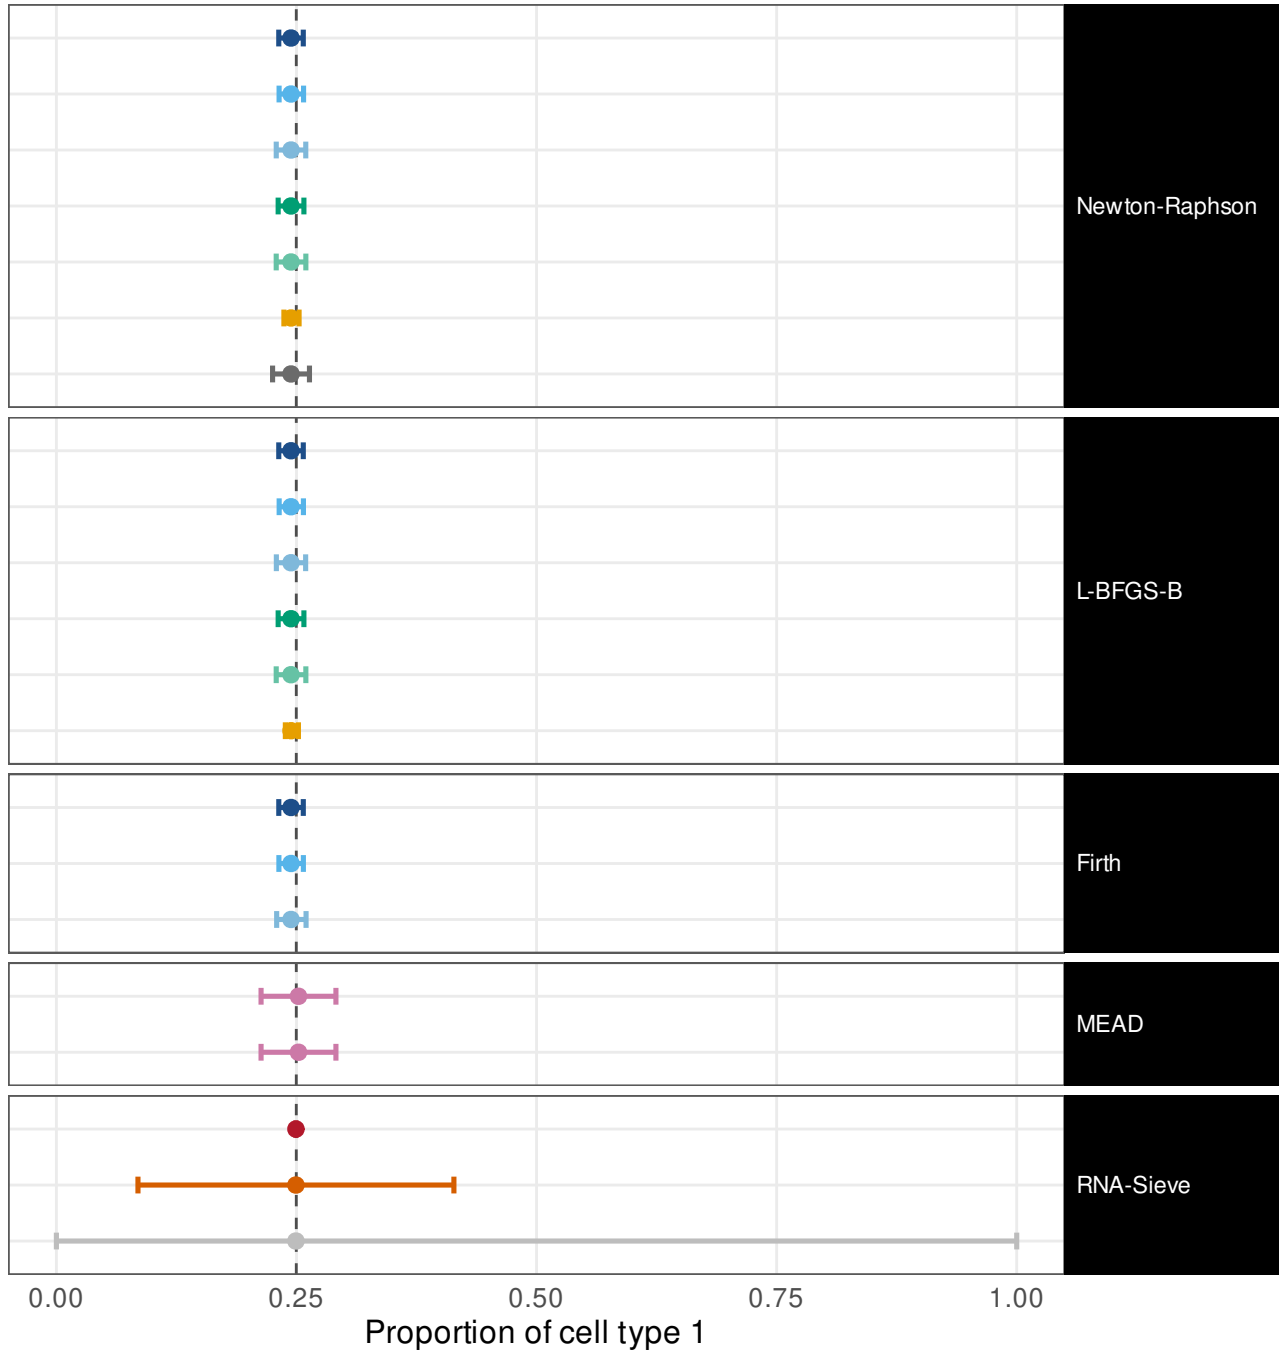


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	0.8	[0.38, 0.96]	w = 0.0257
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0257
ILR, REML	0.8	[0.38, 0.96]	w = 0.0313
Profile likelihood	0.8	[0.38, 0.96]	w = 0.027
Profile, REML	1	[0.57, 1]	w = 0.0311
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0121
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0516
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0257
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.0255
ILR, REML	0.8	[0.38, 0.96]	w = 0.0308
Profile likelihood	0.8	[0.38, 0.96]	w = 0.027
Profile, REML	1	[0.57, 1]	w = 0.0311
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.0132
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0257
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0259
ILR, REML	1	[0.57, 1]	w = 0.0307
Method's own interval	1	[0.57, 1]	w = 0.0704
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0704
Fisher information (Wald)	0	[0, 0.43]	w = 0.000814
Godambe sandwich	1	[0.57, 1]	w = 0.32
Released code, as published	1	[0.57, 1]	w = 1

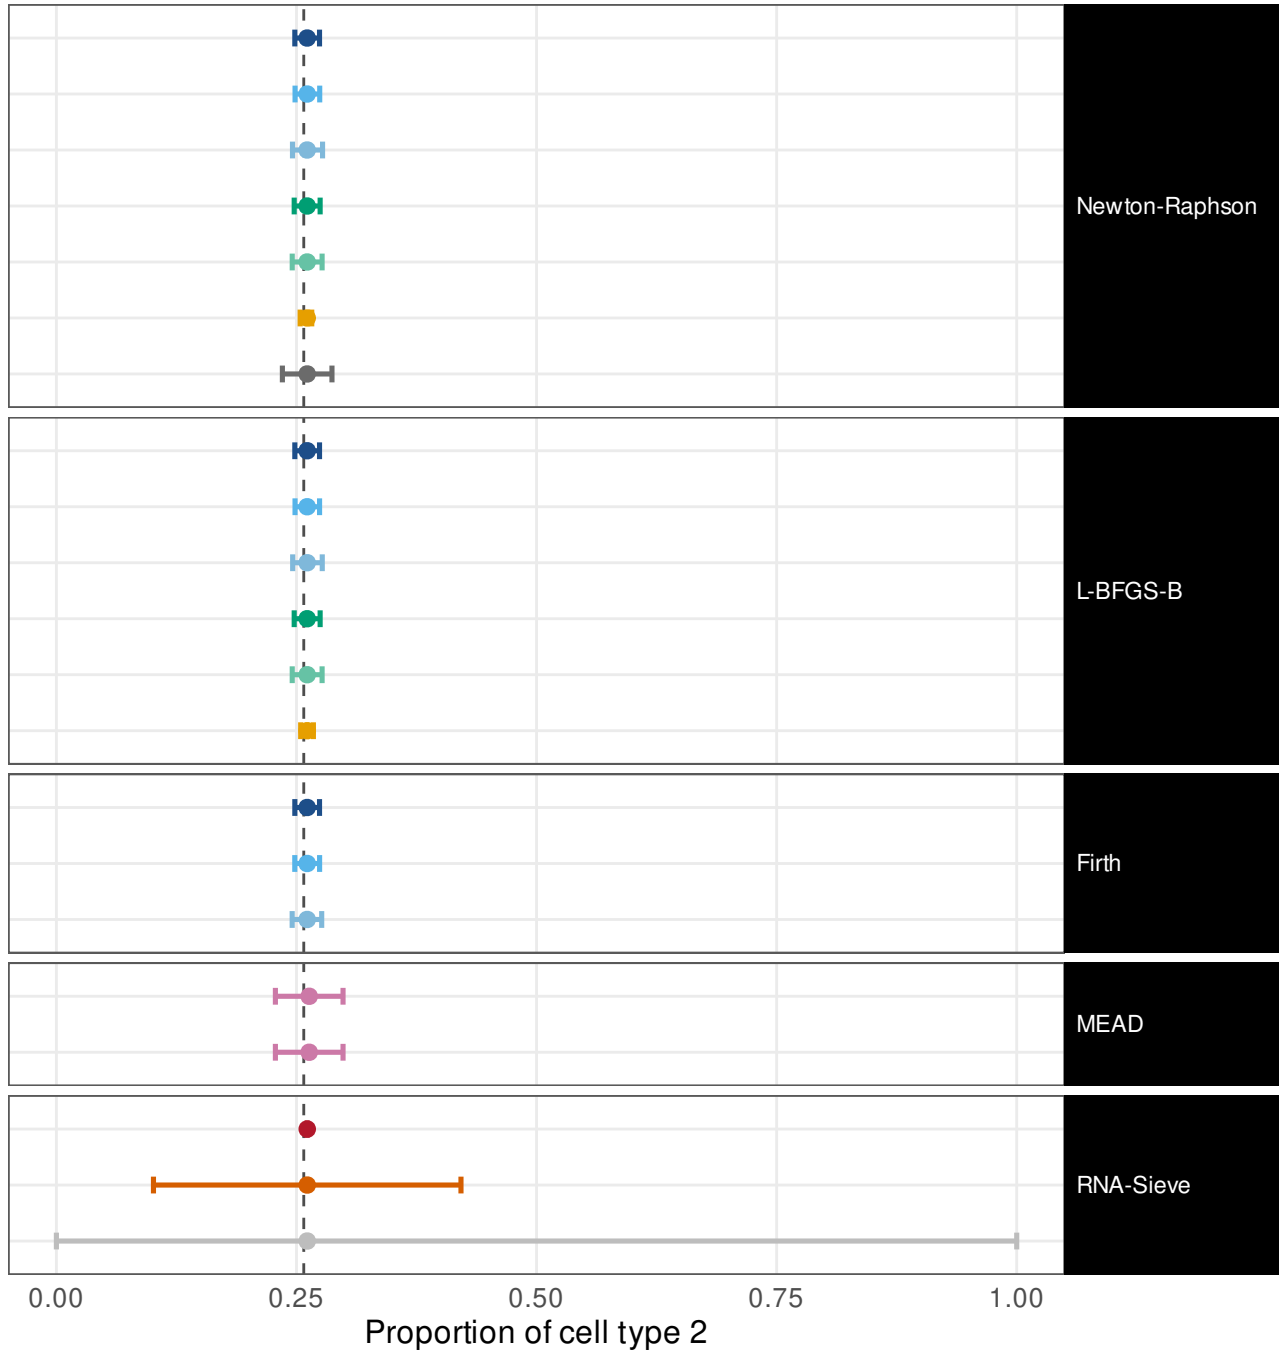

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes


```
Wald (delta)                        0.4  [0.12, 0.77]   w = 0.0225
ILR, mapped back                    0.4  [0.12, 0.77]   w = 0.0222
ILR, REML                           0.8  [0.38, 0.96]   w = 0.027
Profile likelihood                  0.4  [0.12, 0.77]   w = 0.0236
Profile, REML                       0.8  [0.38, 0.96]   w = 0.0272
Parametric bootstrap                0.2  [0.036, 0.62]   w = 0.0125
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0566

Wald (delta)                        0.4  [0.12, 0.77]   w = 0.0225
ILR, mapped back                    0.4  [0.12, 0.77]   w = 0.0224
ILR, REML                           0.8  [0.38, 0.96]   w = 0.0272
Profile likelihood                  0.4  [0.12, 0.77]   w = 0.0236
Profile, REML                       0.8  [0.38, 0.96]   w = 0.0272
Parametric bootstrap                  0  [   0, 0.43]   w = 0.0124

Wald (delta)                        0.4  [0.12, 0.77]   w = 0.0225
ILR, mapped back                    0.4  [0.12, 0.77]   w = 0.0223
ILR, REML                           0.6  [0.23, 0.88]   w = 0.0275

Method's own interval               0.8  [0.38, 0.96]   w = 0.0606
Own interval, transcript fractions  0.8  [0.38, 0.96]   w = 0.0606

Fisher information (Wald)             0  [   0, 0.43]   w = 0.000791
Godambe sandwich                      1  [0.57,    1]   w = 0.306
Released code, as published           1  [0.57,    1]   w =     1
```

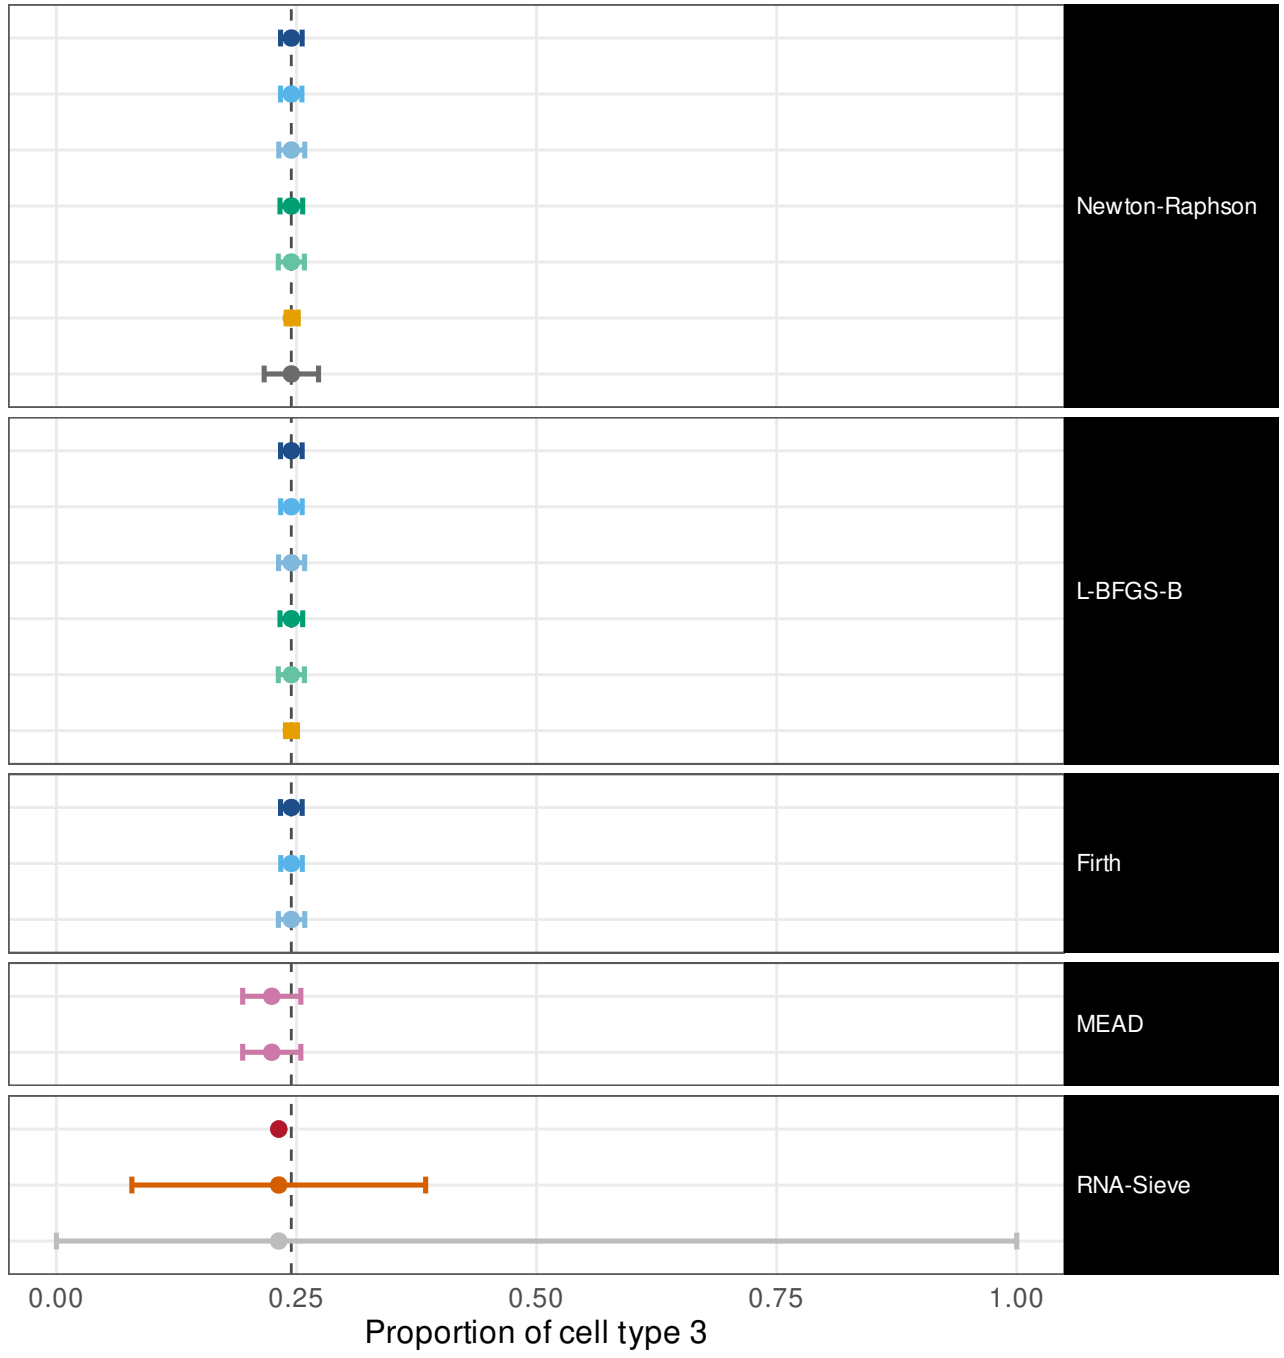


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	0.6	[0.23, 0.88]	w = 0.0229
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.0227
ILR, REML	0.8	[0.38, 0.96]	w = 0.0274
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0241
Profile, REML	0.8	[0.38, 0.96]	w = 0.0277
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.013
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0435
Wald (delta)	0.6	[0.23, 0.88]	w = 0.0229
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.023
ILR, REML	0.8	[0.38, 0.96]	w = 0.0276
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0241
Profile, REML	0.8	[0.38, 0.96]	w = 0.0277
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0127
Wald (delta)	0.6	[0.23, 0.88]	w = 0.0229
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.0229
ILR, REML	0.8	[0.38, 0.96]	w = 0.028
Method's own interval	1	[0.57, 1]	w = 0.0679
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0679
Fisher information (Wald)	0	[0, 0.43]	w = 0.000781
Godambe sandwich	1	[0.57, 1]	w = 0.316
Released code, as published	1	[0.57, 1]	w = 1

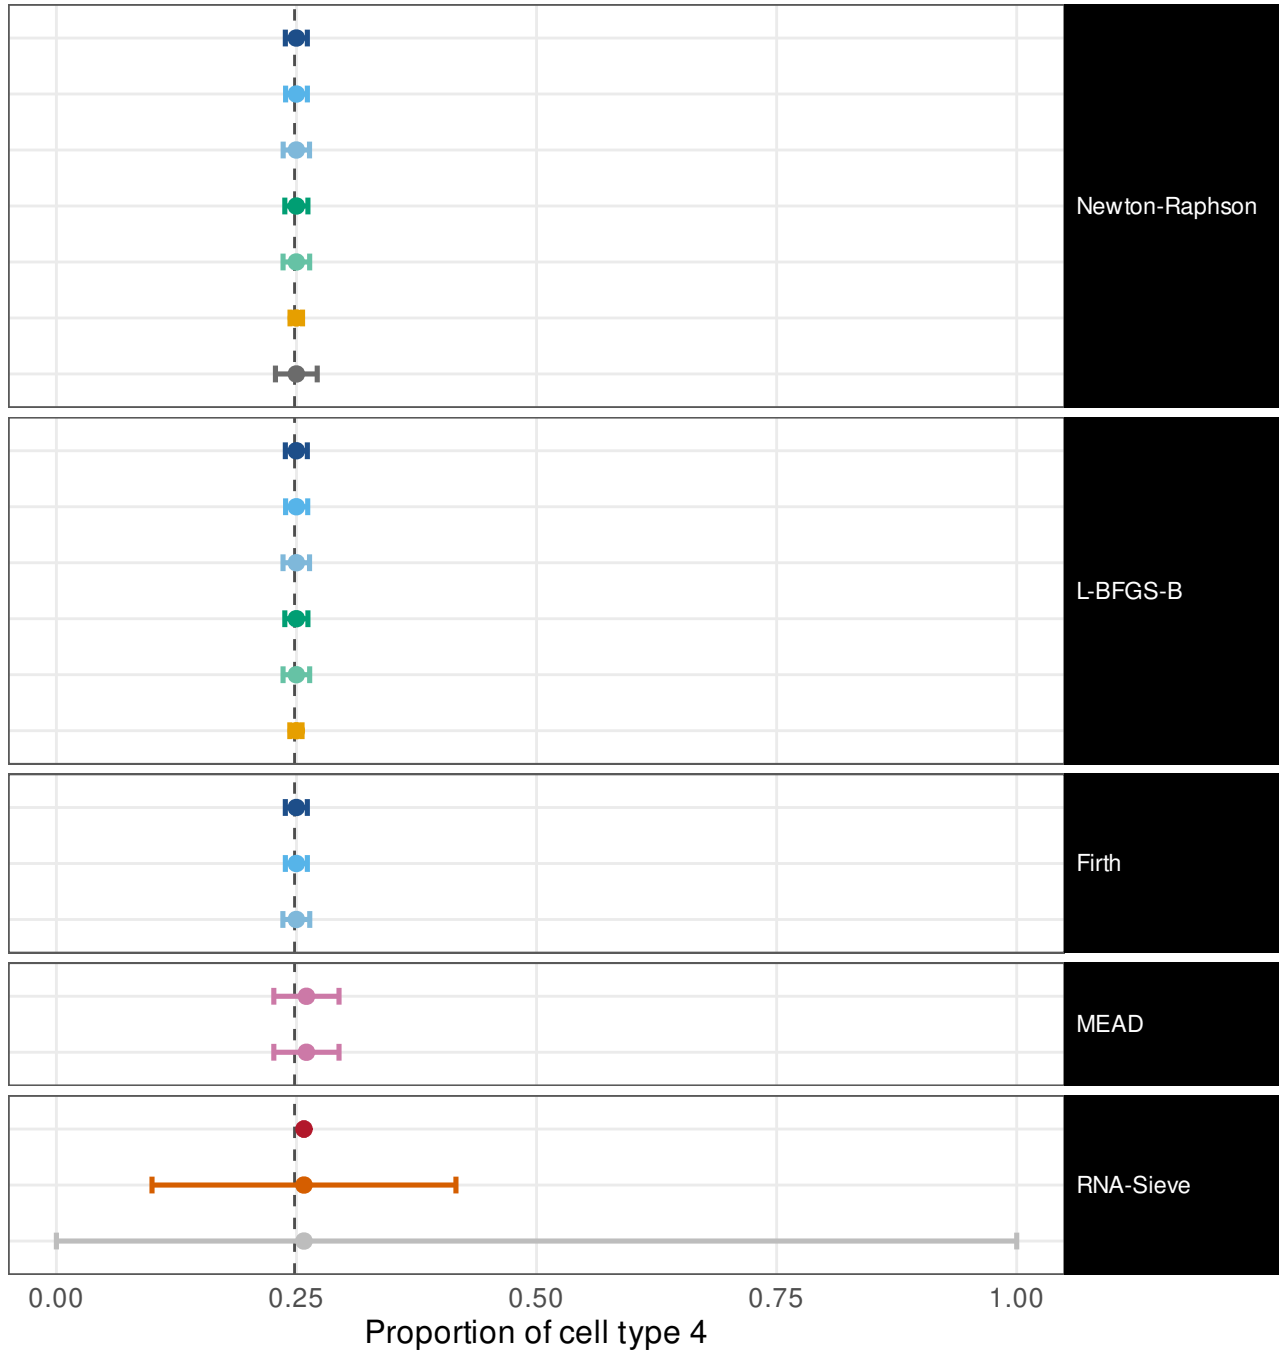


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5


Wald (delta)	0.8	[0.38, 0.96]	w = 0.0697
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0686
ILR, REML	1	[0.57, 1]	w = 0.0825
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0732
Profile, REML	1	[0.57, 1]	w = 0.0843
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0374
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.119
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0697
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.069
ILR, REML	1	[0.57, 1]	w = 0.0867
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0732
Profile, REML	1	[0.57, 1]	w = 0.0843
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0425
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0689
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0696
ILR, REML	0.8	[0.38, 0.96]	w = 0.0836
Method's own interval	0	[0, 0.43]	w = 0.0477
Own interval, transcript fractions	0.2	[0.036, 0.62]	w = 0.0477
Fisher information (Wald)	0	[0, 0.43]	w = 0.00665
Godambe sandwich	1	[0.57, 1]	w = 0.762
Released code, as published	1	[0.57, 1]	w = 1

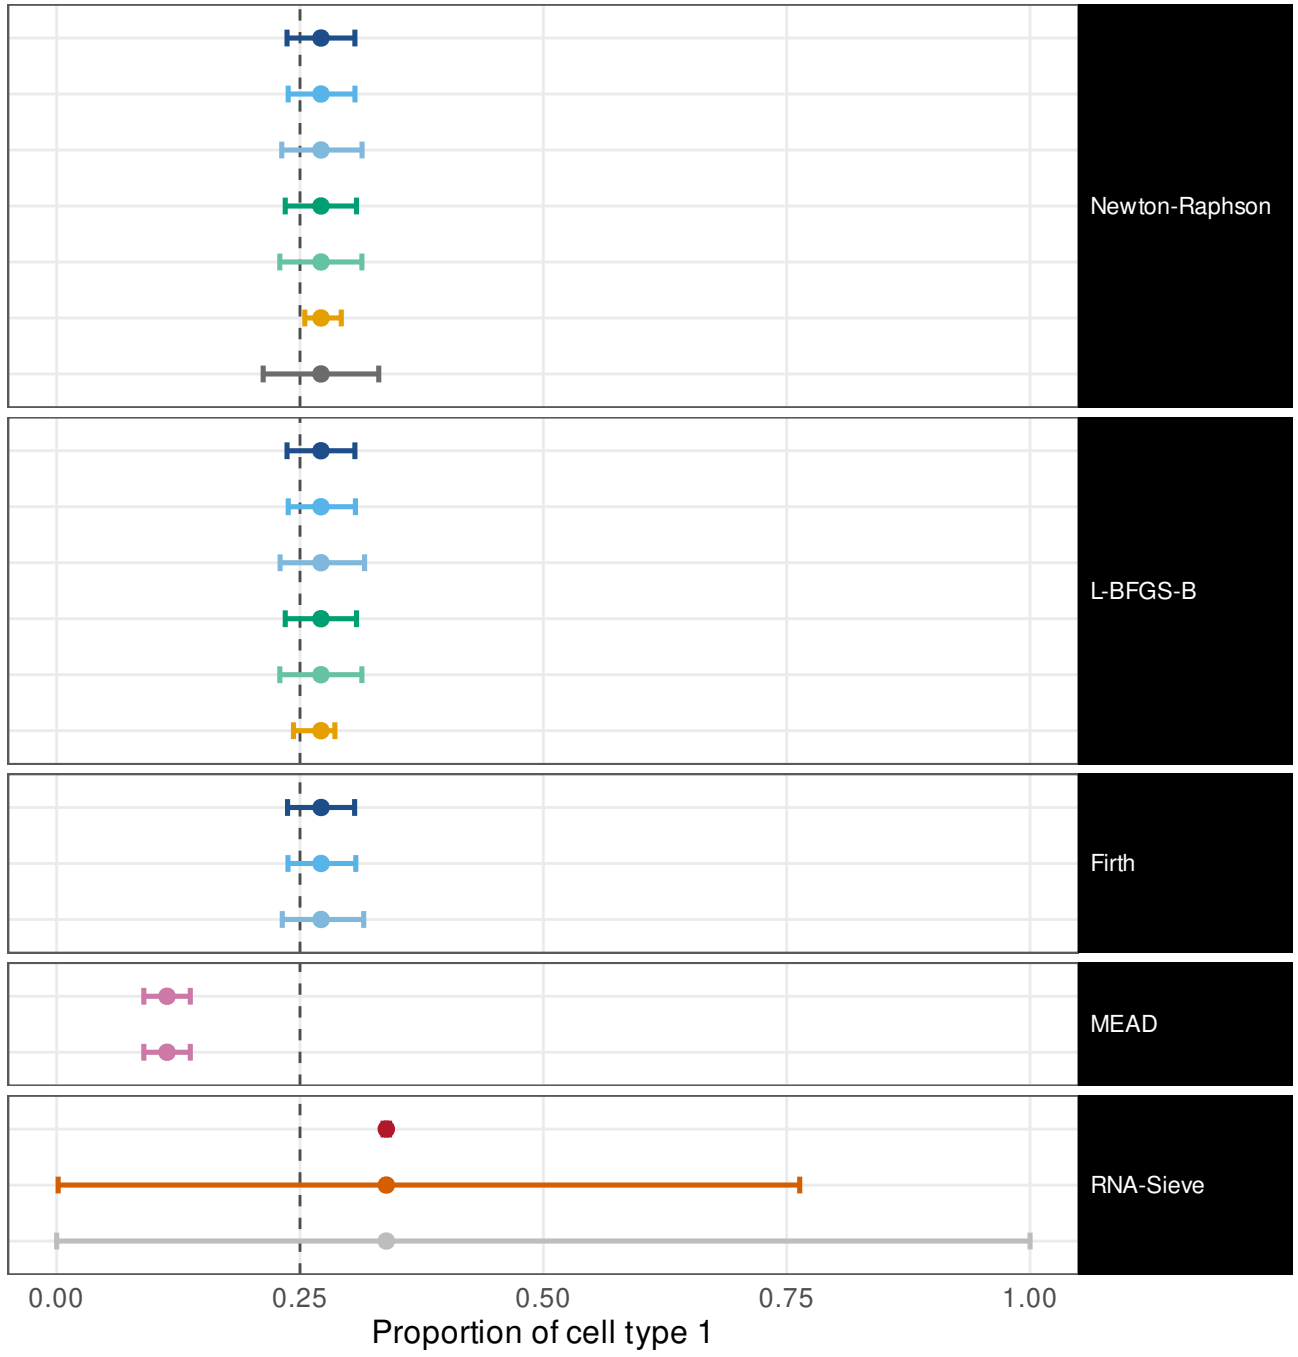

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5

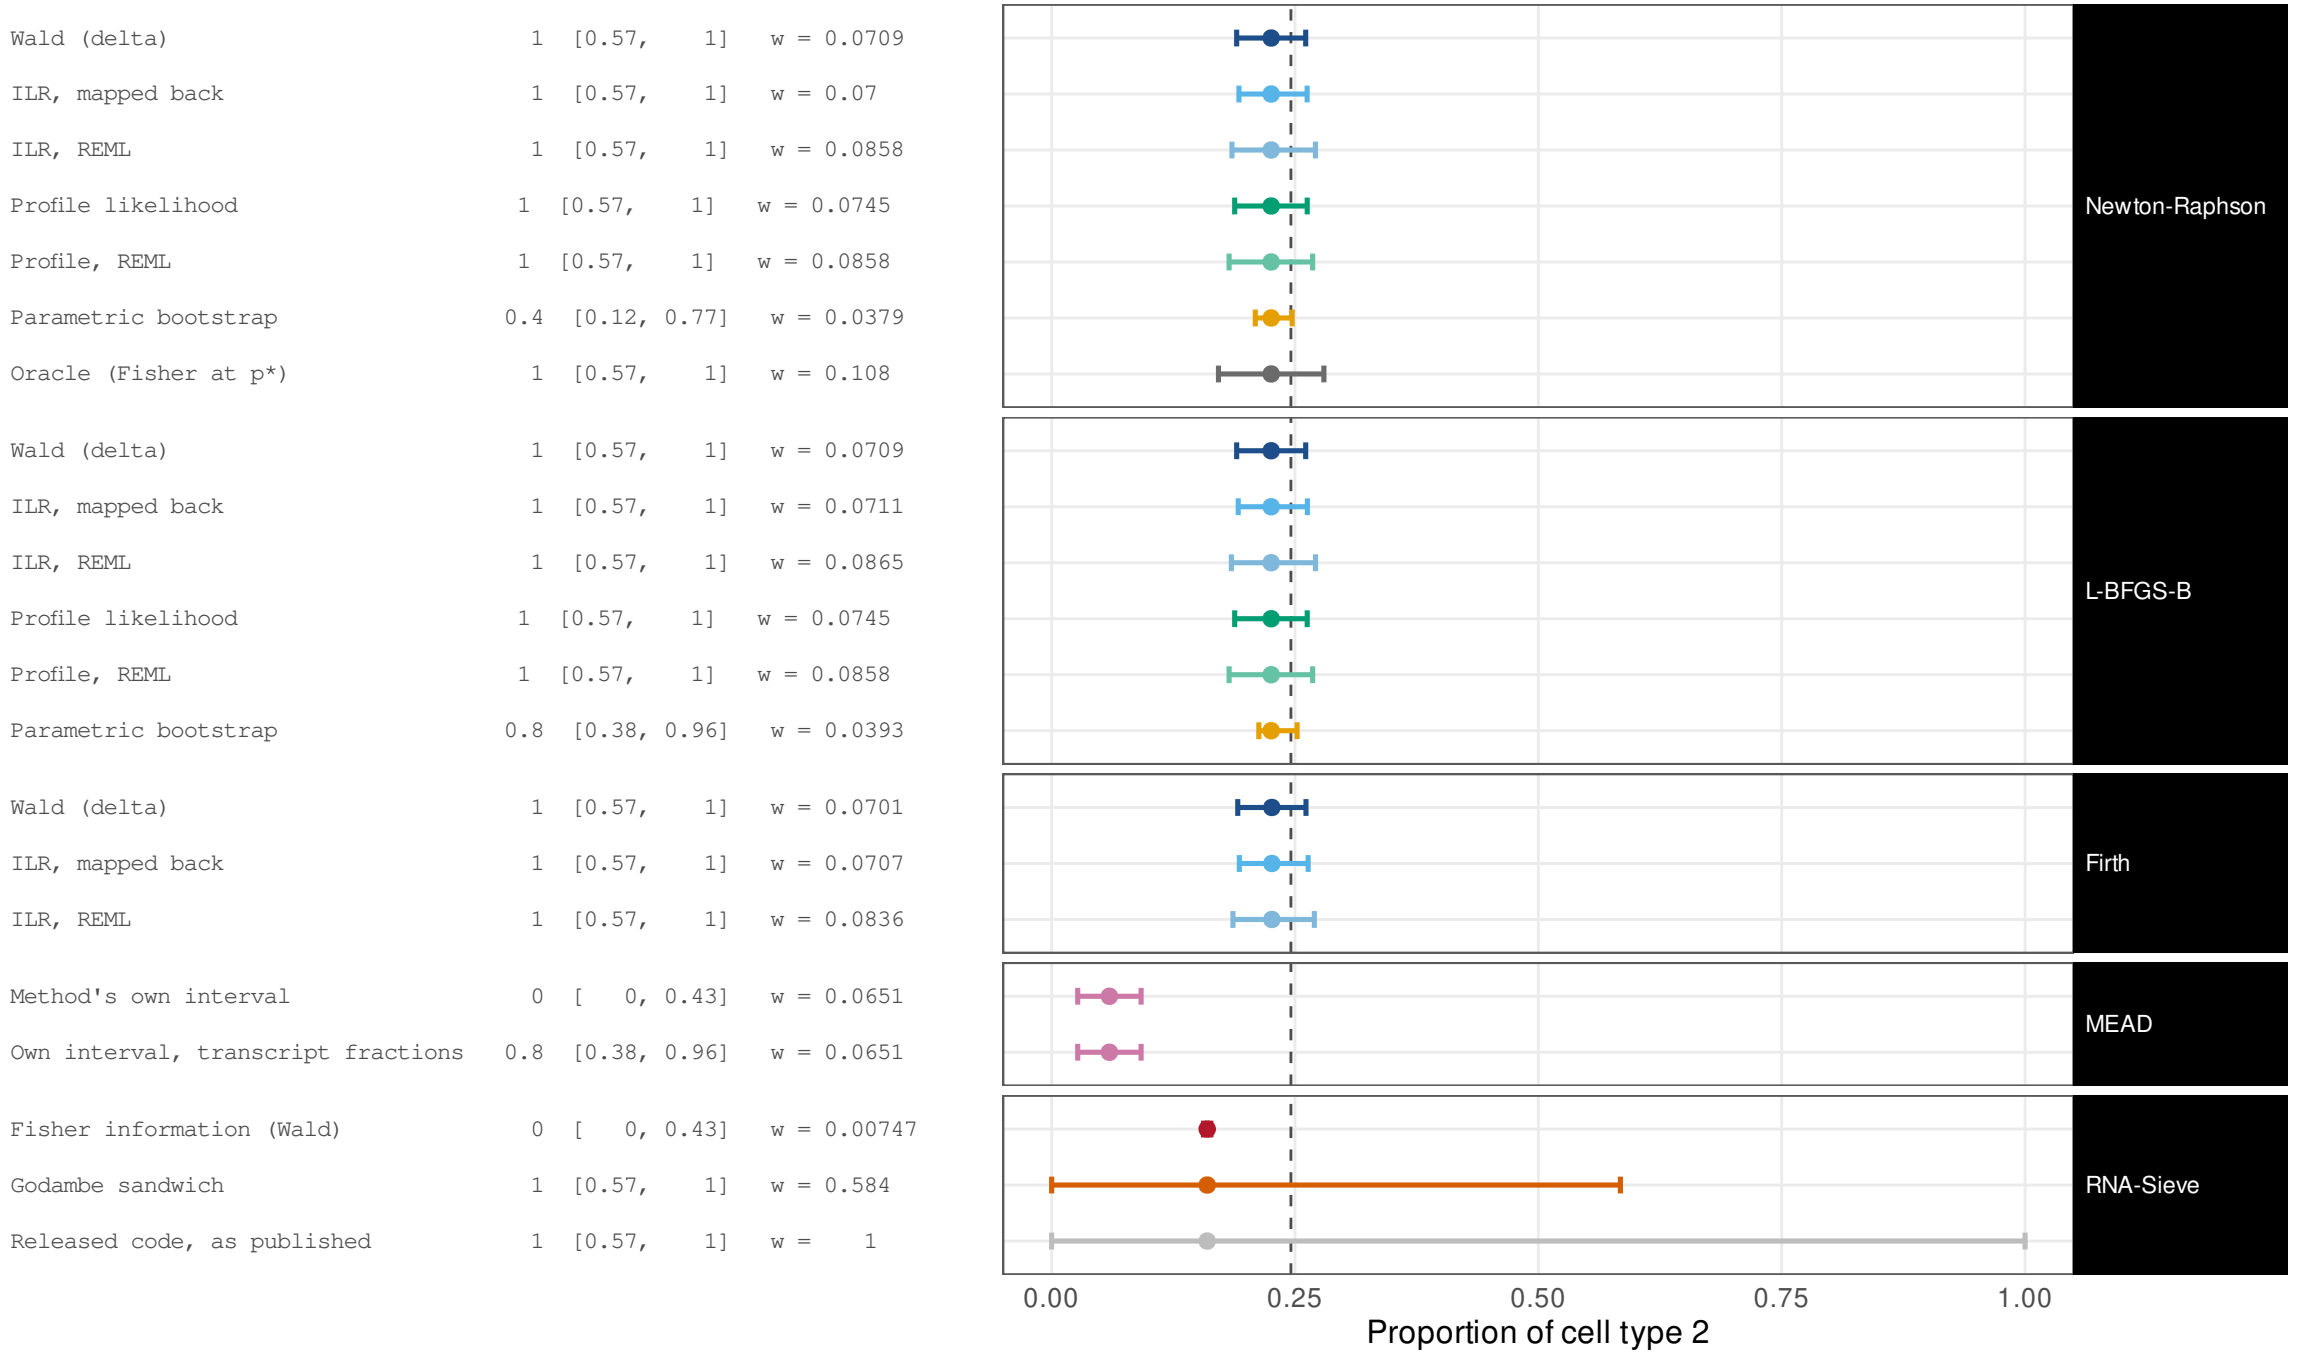

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          0.8  [0.38, 0.96]   w = 0.0189
ILR, mapped back                      0.8  [0.38, 0.96]   w = 0.0191
ILR, REML                               1  [0.57,    1]   w = 0.0233
Profile likelihood                    0.8  [0.38, 0.96]   w = 0.0199
Profile, REML                           1  [0.57,    1]   w = 0.0229
Parametric bootstrap                  0.6  [0.23, 0.88]   w = 0.0105
Oracle (Fisher at p*)                   1  [0.57,    1]   w = 0.0264

Wald (delta)                          0.8  [0.38, 0.96]   w = 0.0189
ILR, mapped back                      0.8  [0.38, 0.96]   w = 0.0188
ILR, REML                               1  [0.57,    1]   w = 0.0231
Profile likelihood                    0.8  [0.38, 0.96]   w = 0.0199
Profile, REML                           1  [0.57,    1]   w = 0.0229
Parametric bootstrap                  0.4  [0.12, 0.77]   w = 0.0114

Wald (delta)                          0.8  [0.38, 0.96]   w = 0.0189
ILR, mapped back                      0.8  [0.38, 0.96]   w = 0.0188
ILR, REML                               1  [0.57,    1]   w = 0.0233

Method's own interval                   0  [   0, 0.43]   w = 0.0523
Own interval, transcript fractions    0.8  [0.38, 0.96]   w = 0.0523

Fisher information (Wald)             0.2  [0.036, 0.62]   w = 0.00254
Godambe sandwich                        1  [0.57,    1]   w = 0.256
Released code, as published             1  [0.57,    1]   w =    1
```

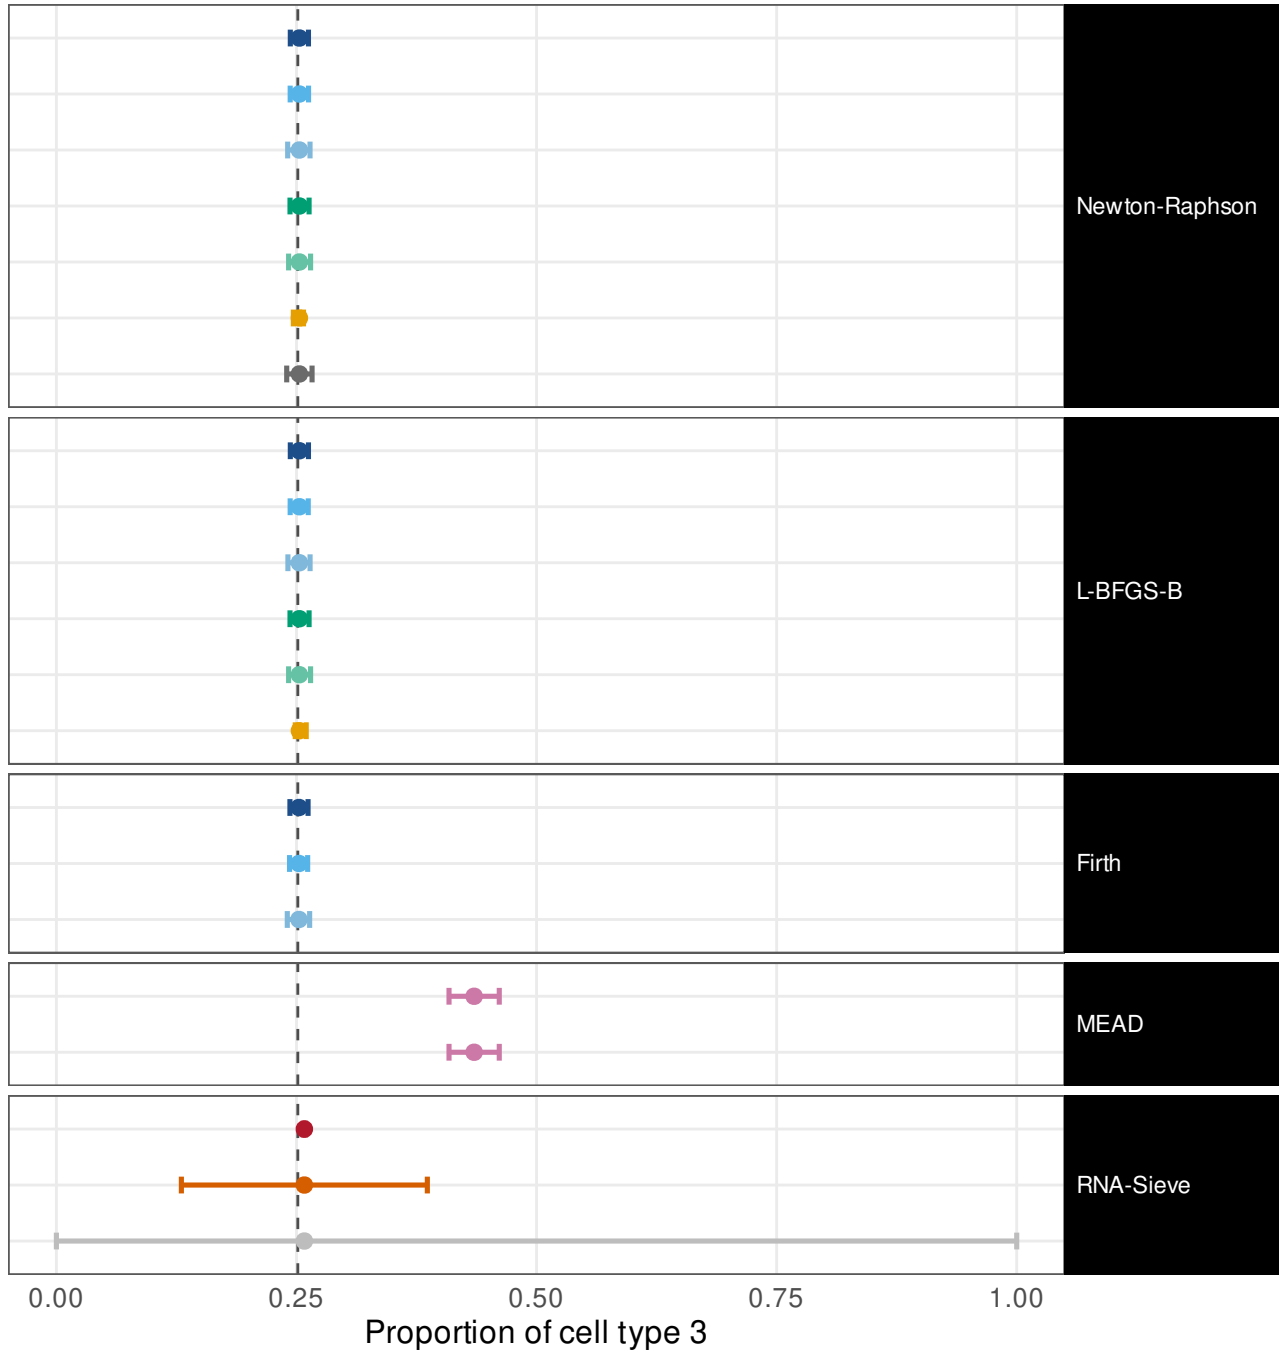

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          0.8  [0.38, 0.96]   w = 0.0205
ILR, mapped back                      0.8  [0.38, 0.96]   w = 0.0204
ILR, REML                             0.8  [0.38, 0.96]   w = 0.0247
Profile likelihood                    0.8  [0.38, 0.96]   w = 0.0215
Profile, REML                         0.8  [0.38, 0.96]   w = 0.0247
Parametric bootstrap                  0.4  [0.12, 0.77]   w = 0.00859
Oracle (Fisher at p*)                   1  [0.57,    1]   w = 0.03

Wald (delta)                          0.8  [0.38, 0.96]   w = 0.0205
ILR, mapped back                      0.8  [0.38, 0.96]   w = 0.0207
ILR, REML                             0.8  [0.38, 0.96]   w = 0.0245
Profile likelihood                    0.8  [0.38, 0.96]   w = 0.0215
Profile, REML                         0.8  [0.38, 0.96]   w = 0.0247
Parametric bootstrap                  0.4  [0.12, 0.77]   w = 0.0124

Wald (delta)                          0.8  [0.38, 0.96]   w = 0.0204
ILR, mapped back                      0.8  [0.38, 0.96]   w = 0.0205
ILR, REML                             0.8  [0.38, 0.96]   w = 0.0243

Method's own interval                   0  [   0, 0.43]   w = 0.0482
Own interval, transcript fractions    0.4  [0.12, 0.77]   w = 0.0482

Fisher information (Wald)             0.2  [0.036, 0.62]   w = 0.00245
Godambe sandwich                        1  [0.57,    1]   w = 0.258
Released code, as published             1  [0.57,    1]   w =    1
```

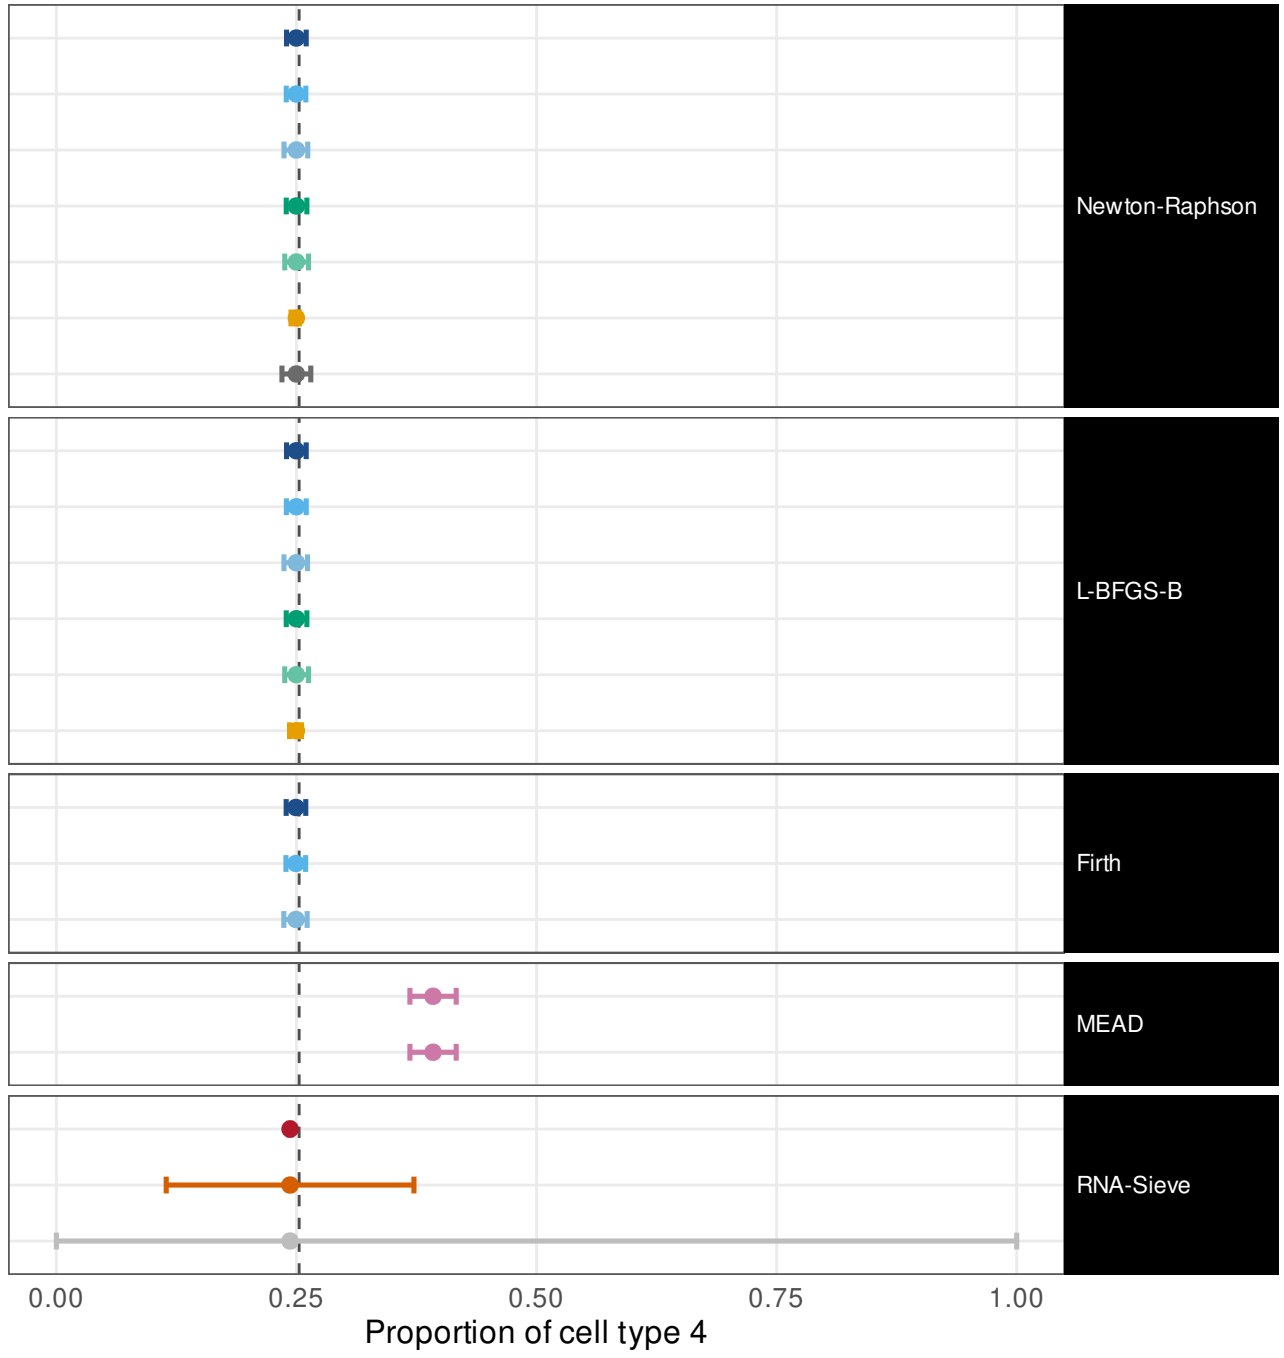

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.0359
ILR, mapped back                      1  [0.57,    1]   w = 0.0351
ILR, REML                             1  [0.57,    1]   w = 0.043
Profile likelihood                    1  [0.57,    1]   w = 0.0377
Profile, REML                         1  [0.57,    1]   w = 0.0434
Parametric bootstrap                  1  [0.57,    1]   w = 0.0162
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0389

Wald (delta)                          1  [0.57,    1]   w = 0.0359
ILR, mapped back                      1  [0.57,    1]   w = 0.0357
ILR, REML                             1  [0.57,    1]   w = 0.0441
Profile likelihood                    1  [0.57,    1]   w = 0.0377
Profile, REML                         1  [0.57,    1]   w = 0.0434
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.0184

Wald (delta)                          1  [0.57,    1]   w = 0.0359
ILR, mapped back                      1  [0.57,    1]   w = 0.0357
ILR, REML                             1  [0.57,    1]   w = 0.0429

Method's own interval                 1  [0.57,    1]   w = 0.195
Own interval, transcript fractions    1  [0.57,    1]   w = 0.195

Fisher information (Wald)           0.2  [0.036, 0.62]   w = 0.00149
Godambe sandwich                      1  [0.57,    1]   w = 0.445
Released code, as published           1  [0.57,    1]   w =    1
```

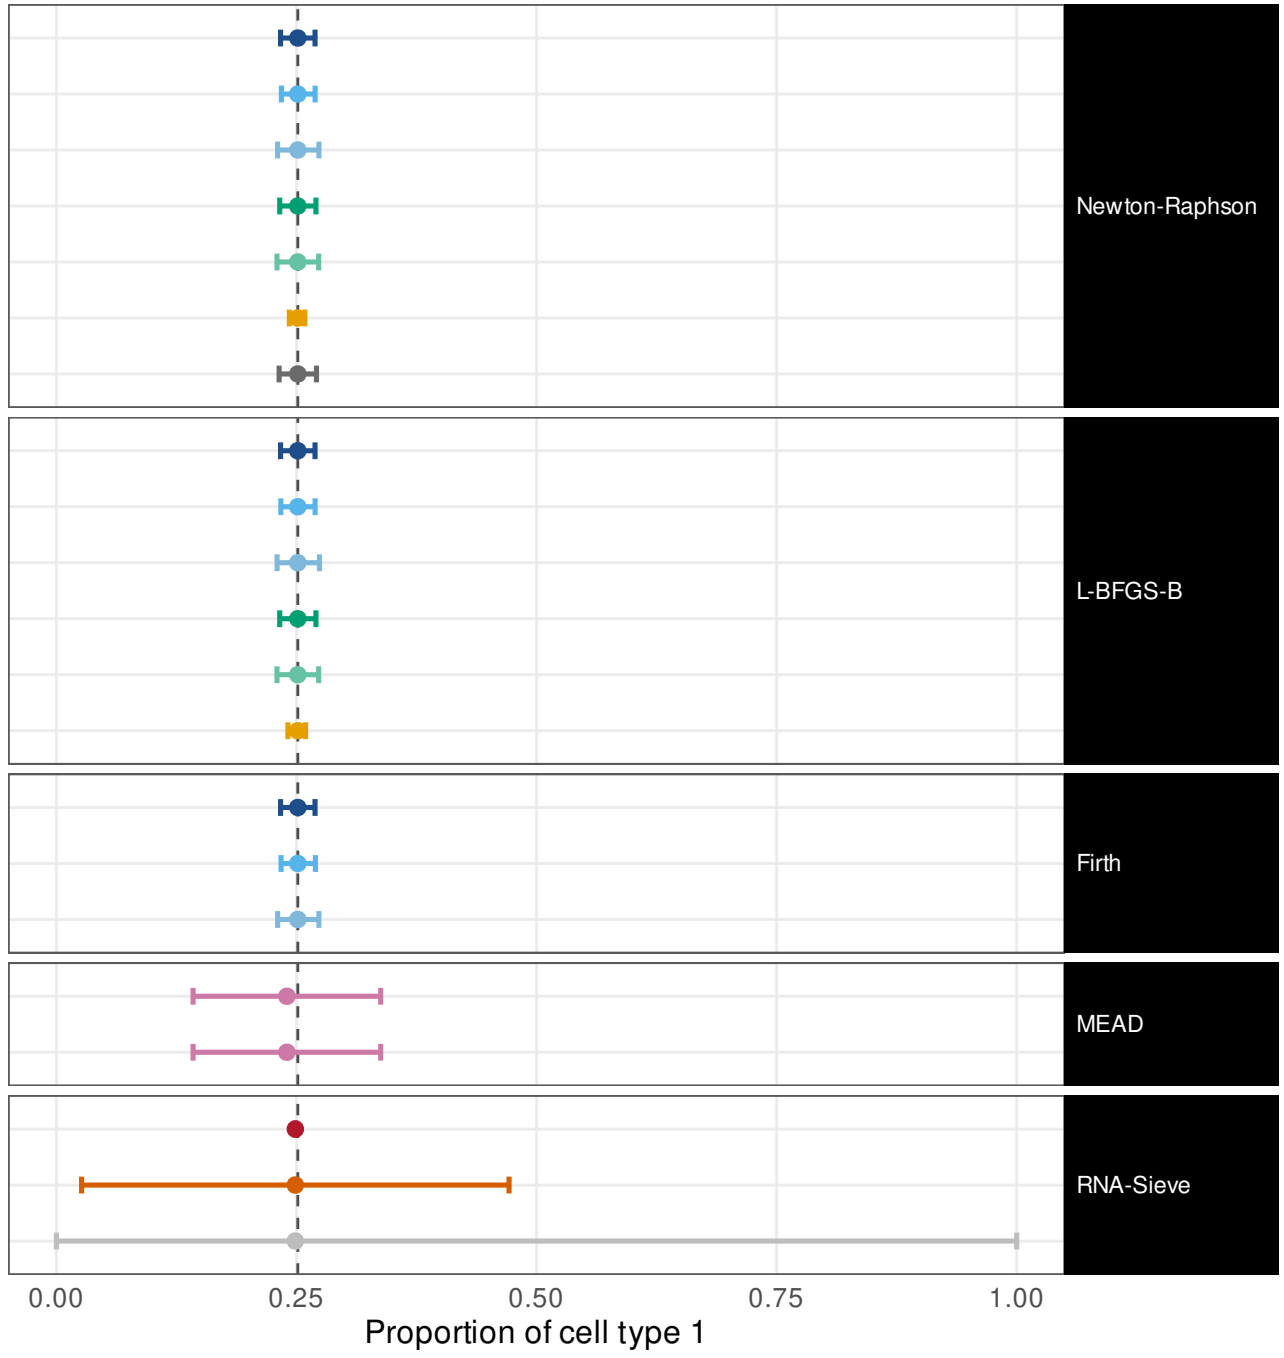


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.0362
ILR, mapped back	1	[0.57, 1]	w = 0.036
ILR, REML	1	[0.57, 1]	w = 0.0436
Profile likelihood	1	[0.57, 1]	w = 0.0381
Profile, REML	1	[0.57, 1]	w = 0.0438
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0149
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.041
Wald (delta)	1	[0.57, 1]	w = 0.0362
ILR, mapped back	1	[0.57, 1]	w = 0.0361
ILR, REML	1	[0.57, 1]	w = 0.0435
Profile likelihood	1	[0.57, 1]	w = 0.0381
Profile, REML	1	[0.57, 1]	w = 0.0438
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0265
Wald (delta)	1	[0.57, 1]	w = 0.0362
ILR, mapped back	1	[0.57, 1]	w = 0.0362
ILR, REML	1	[0.57, 1]	w = 0.0436
Method's own interval	1	[0.57, 1]	w = 0.195
Own interval, transcript fractions	1	[0.57, 1]	w = 0.195
Fisher information (Wald)	0	[0, 0.43]	w = 0.00171
Godambe sandwich	1	[0.57, 1]	w = 0.425
Released code, as published	1	[0.57, 1]	w = 1

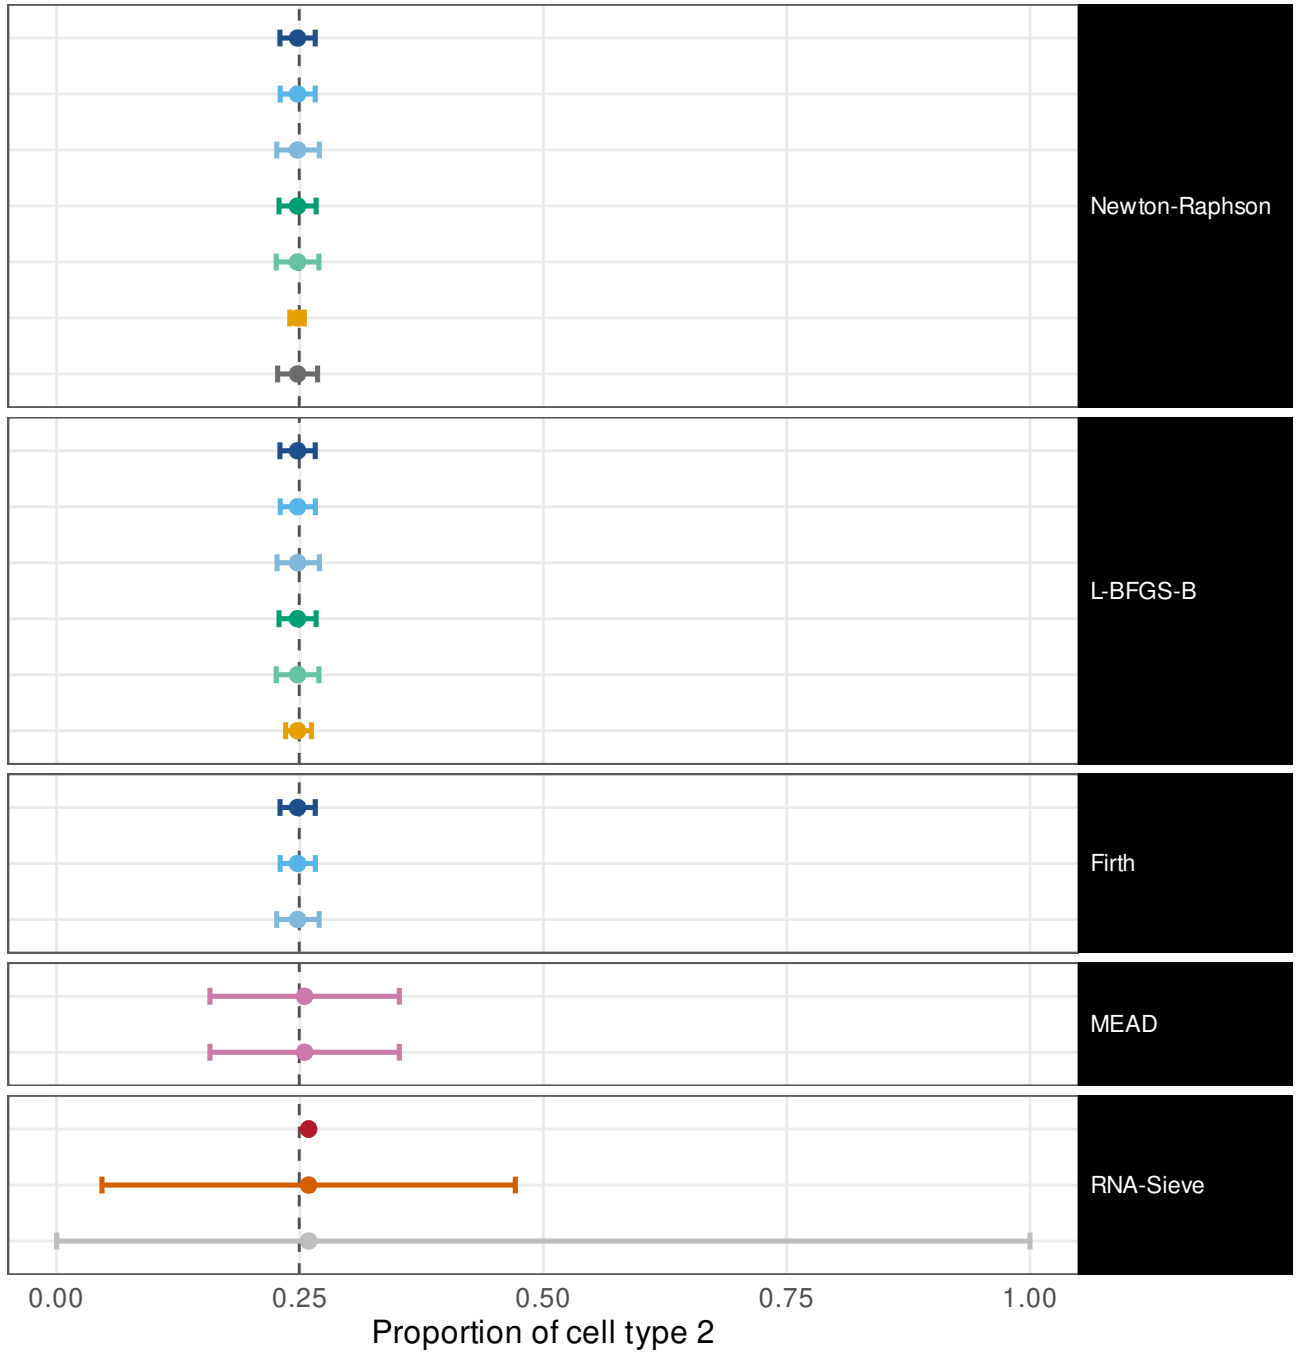


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.0317
ILR, mapped back	1	[0.57, 1]	w = 0.0316
ILR, REML	1	[0.57, 1]	w = 0.0376
Profile likelihood	1	[0.57, 1]	w = 0.0333
Profile, REML	1	[0.57, 1]	w = 0.0383
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.015
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0381
Wald (delta)	1	[0.57, 1]	w = 0.0317
ILR, mapped back	1	[0.57, 1]	w = 0.0316
ILR, REML	1	[0.57, 1]	w = 0.038
Profile likelihood	1	[0.57, 1]	w = 0.0333
Profile, REML	1	[0.57, 1]	w = 0.0383
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0153
Wald (delta)	1	[0.57, 1]	w = 0.0317
ILR, mapped back	1	[0.57, 1]	w = 0.0313
ILR, REML	1	[0.57, 1]	w = 0.0386
Method's own interval	1	[0.57, 1]	w = 0.156
Own interval, transcript fractions	1	[0.57, 1]	w = 0.156
Fisher information (Wald)	0	[0, 0.43]	w = 0.00156
Godambe sandwich	1	[0.57, 1]	w = 0.438
Released code, as published	1	[0.57, 1]	w = 1

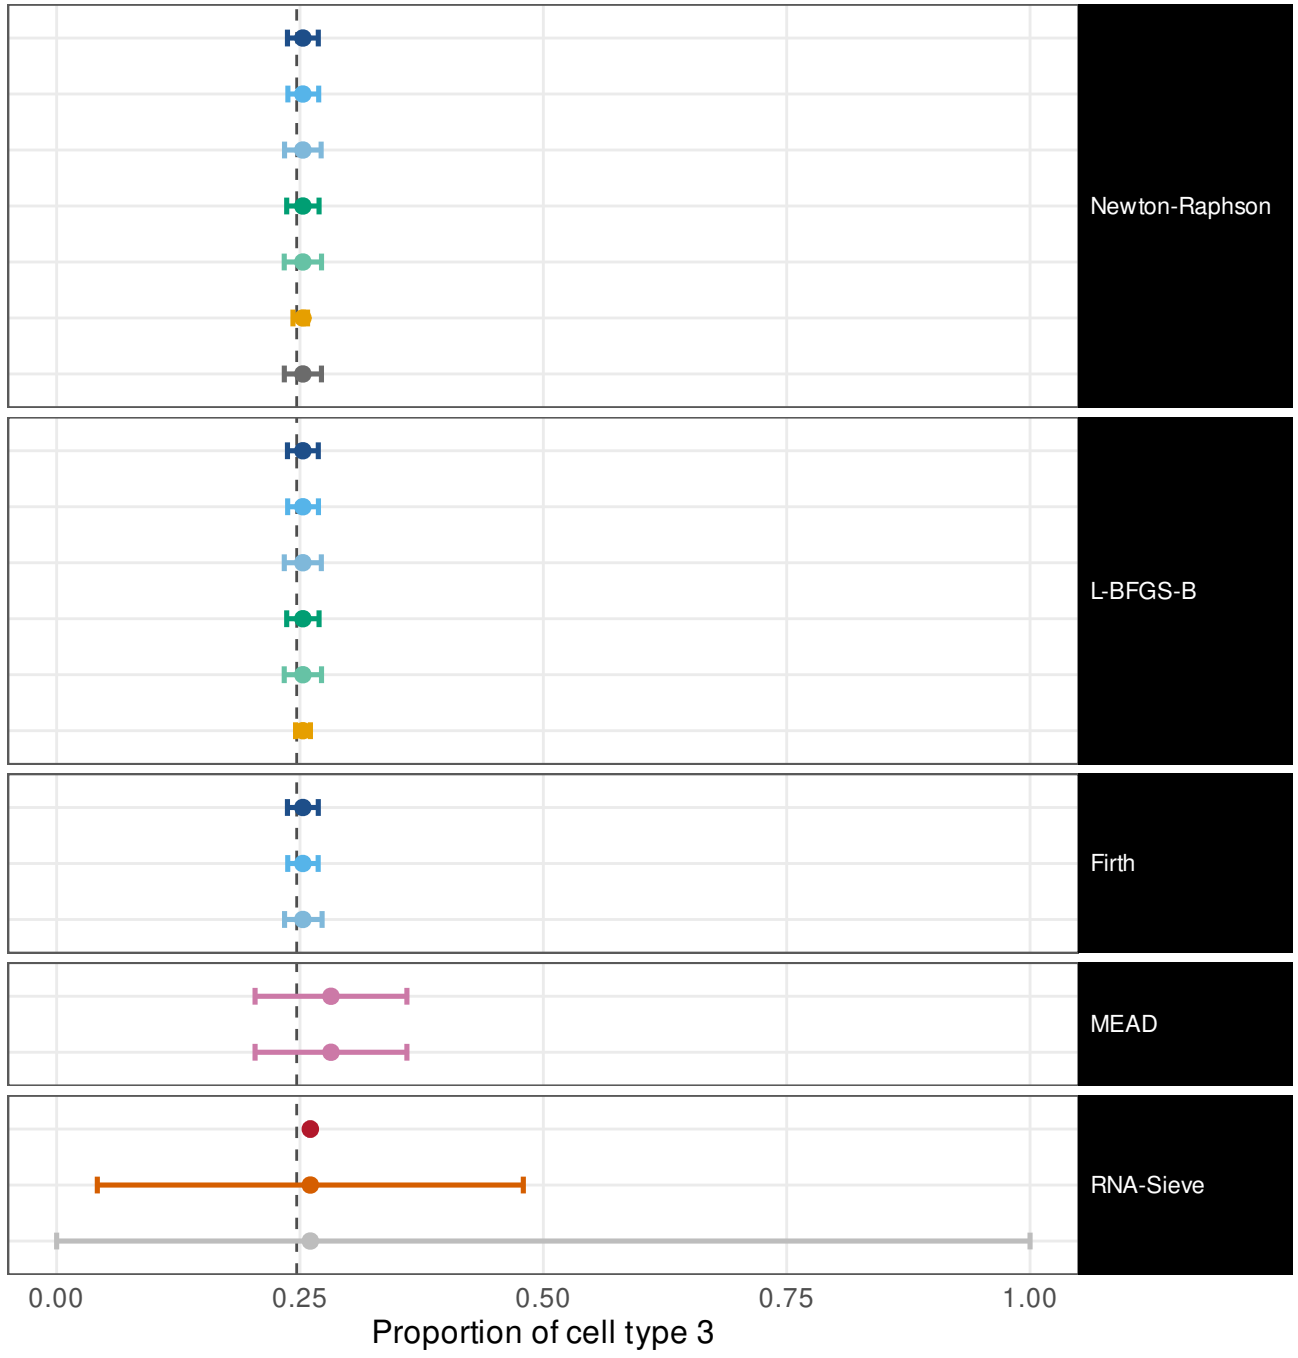

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.0323
ILR, mapped back                      1  [0.57,    1]   w = 0.0323
ILR, REML                             1  [0.57,    1]   w = 0.0383
Profile likelihood                    1  [0.57,    1]   w = 0.0339
Profile, REML                         1  [0.57,    1]   w = 0.0391
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.0154
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.037

Wald (delta)                          1  [0.57,    1]   w = 0.0323
ILR, mapped back                      1  [0.57,    1]   w = 0.0325
ILR, REML                             1  [0.57,    1]   w = 0.0392
Profile likelihood                    1  [0.57,    1]   w = 0.0339
Profile, REML                         1  [0.57,    1]   w = 0.0391
Parametric bootstrap                0.4  [0.12, 0.77]   w = 0.0178

Wald (delta)                          1  [0.57,    1]   w = 0.0323
ILR, mapped back                      1  [0.57,    1]   w = 0.0314
ILR, REML                             1  [0.57,    1]   w = 0.0387

Method's own interval                 1  [0.57,    1]   w = 0.144
Own interval, transcript fractions    1  [0.57,    1]   w = 0.144

Fisher information (Wald)             0  [   0, 0.43]   w = 0.0019
Godambe sandwich                      1  [0.57,    1]   w = 0.434
Released code, as published           1  [0.57,    1]   w =    1
```

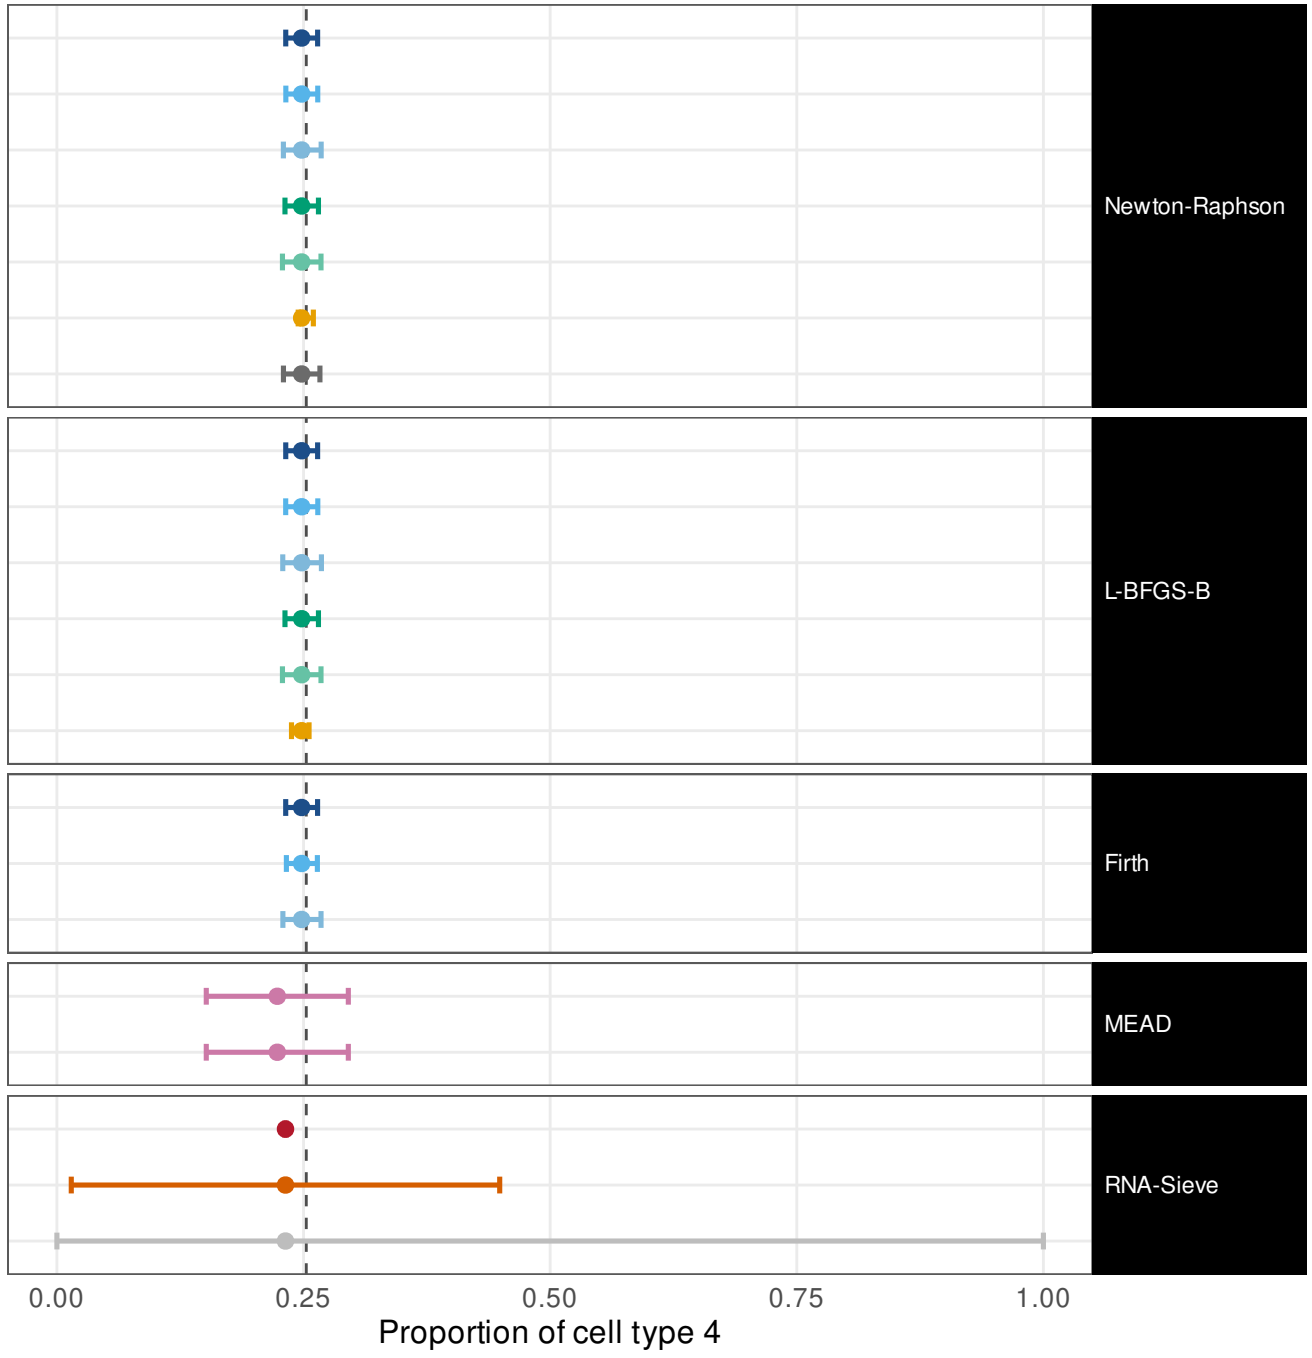


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	0.8	[0.38, 0.96]	w = 0.123
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.122
ILR, REML	1	[0.57, 1]	w = 0.144
Profile likelihood	0.8	[0.38, 0.96]	w = 0.129
Profile, REML	1	[0.57, 1]	w = 0.148
Parametric bootstrap	0	[0, 0.43]	w = 0.0569
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.154
Wald (delta)	0.8	[0.38, 0.96]	w = 0.123
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.122
ILR, REML	0.8	[0.38, 0.96]	w = 0.147
Profile likelihood	0.8	[0.38, 0.96]	w = 0.129
Profile, REML	1	[0.57, 1]	w = 0.148
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0689
Wald (delta)	0.8	[0.38, 0.96]	w = 0.119
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.118
ILR, REML	0.8	[0.38, 0.96]	w = 0.144
Method's own interval	0	[0, 0.43]	w = 0.11
Own interval, transcript fractions	1	[0.57, 1]	w = 0.11
Fisher information (Wald)	0	[0, 0.43]	w = 0.0143
Godambe sandwich	1	[0.57, 1]	w = 1
Released code, as published	1	[0.57, 1]	w = 1

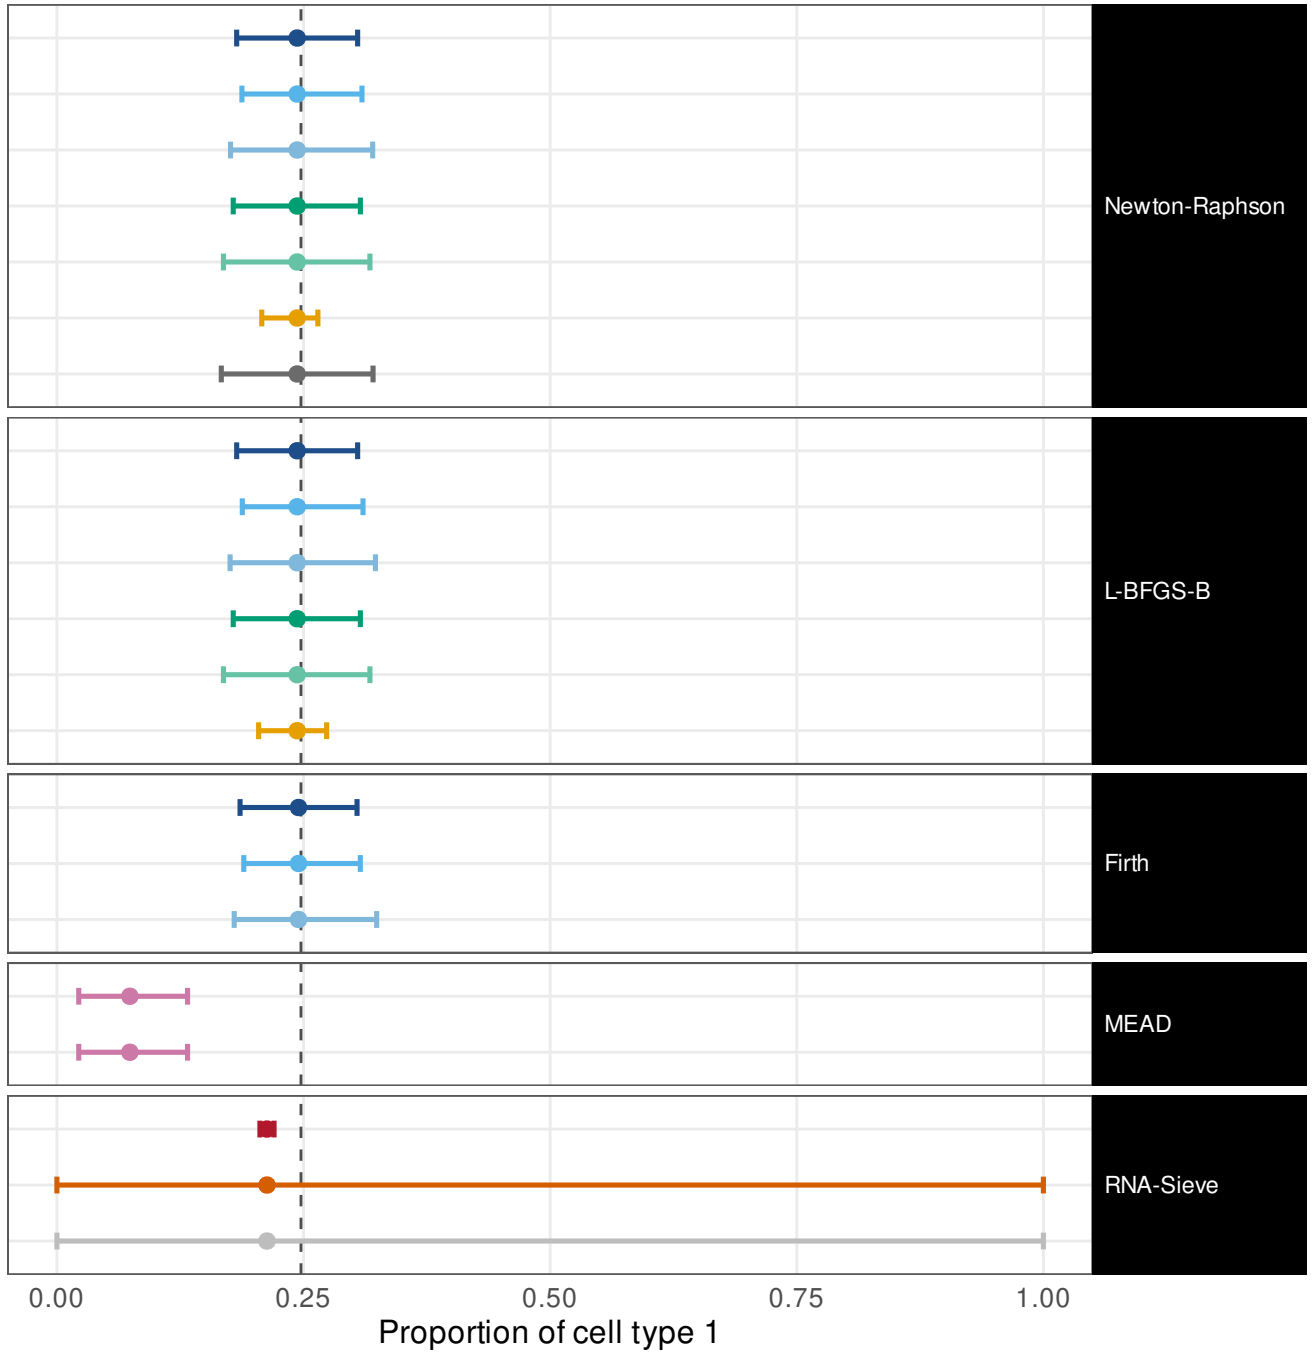

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                        0.8  [0.38, 0.96]   w = 0.124
ILR, mapped back                      1  [0.57,    1]   w = 0.123
ILR, REML                             1  [0.57,    1]   w = 0.146
Profile likelihood                    1  [0.57,    1]   w = 0.13
Profile, REML                         1  [0.57,    1]   w = 0.15
Parametric bootstrap                0.4  [0.12, 0.77]   w = 0.0635
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.153

Wald (delta)                        0.8  [0.38, 0.96]   w = 0.124
ILR, mapped back                      1  [0.57,    1]   w = 0.123
ILR, REML                             1  [0.57,    1]   w = 0.149
Profile likelihood                    1  [0.57,    1]   w = 0.13
Profile, REML                         1  [0.57,    1]   w = 0.15
Parametric bootstrap                0.4  [0.12, 0.77]   w = 0.0674

Wald (delta)                          1  [0.57,    1]   w = 0.12
ILR, mapped back                      1  [0.57,    1]   w = 0.119
ILR, REML                             1  [0.57,    1]   w = 0.144

Method's own interval                 0  [   0, 0.43]   w = 0.128
Own interval, transcript fractions    1  [0.57,    1]   w = 0.128

Fisher information (Wald)             0  [   0, 0.43]   w = 0.00941
Godambe sandwich                      1  [0.57,    1]   w =     1
Released code, as published           1  [0.57,    1]   w =     1
```

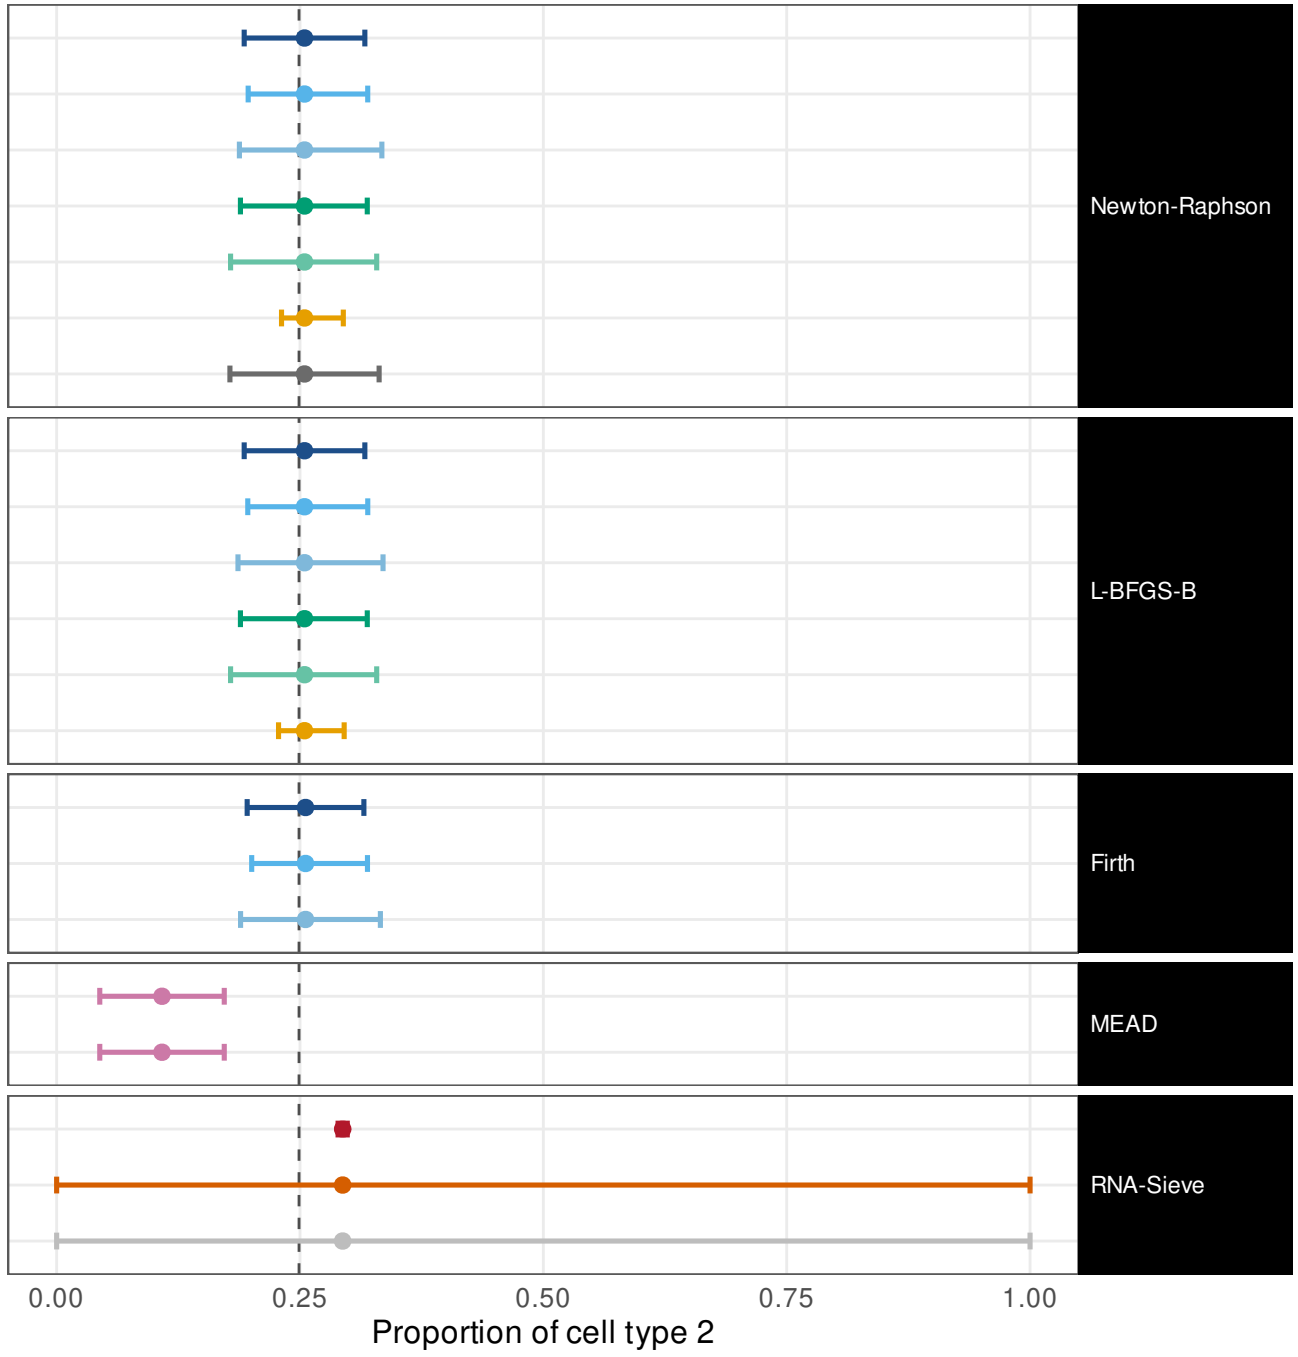

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.0328
ILR, mapped back                      1  [0.57,    1]   w = 0.0339
ILR, REML                             1  [0.57,    1]   w = 0.0405
Profile likelihood                    1  [0.57,    1]   w = 0.0345
Profile, REML                         1  [0.57,    1]   w = 0.0398
Parametric bootstrap                  1  [0.57,    1]   w = 0.0224
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0348

Wald (delta)                          1  [0.57,    1]   w = 0.0328
ILR, mapped back                      1  [0.57,    1]   w = 0.0329
ILR, REML                             1  [0.57,    1]   w = 0.0403
Profile likelihood                    1  [0.57,    1]   w = 0.0345
Profile, REML                         1  [0.57,    1]   w = 0.0398
Parametric bootstrap                  1  [0.57,    1]   w = 0.0194

Wald (delta)                          1  [0.57,    1]   w = 0.0327
ILR, mapped back                      1  [0.57,    1]   w = 0.0328
ILR, REML                             1  [0.57,    1]   w = 0.0401

Method's own interval                 0  [   0, 0.43]   w = 0.107
Own interval, transcript fractions    1  [0.57,    1]   w = 0.107

Fisher information (Wald)             0  [   0, 0.43]   w = 0.00508
Godambe sandwich                      1  [0.57,    1]   w = 0.342
Released code, as published           1  [0.57,    1]   w =    1
```

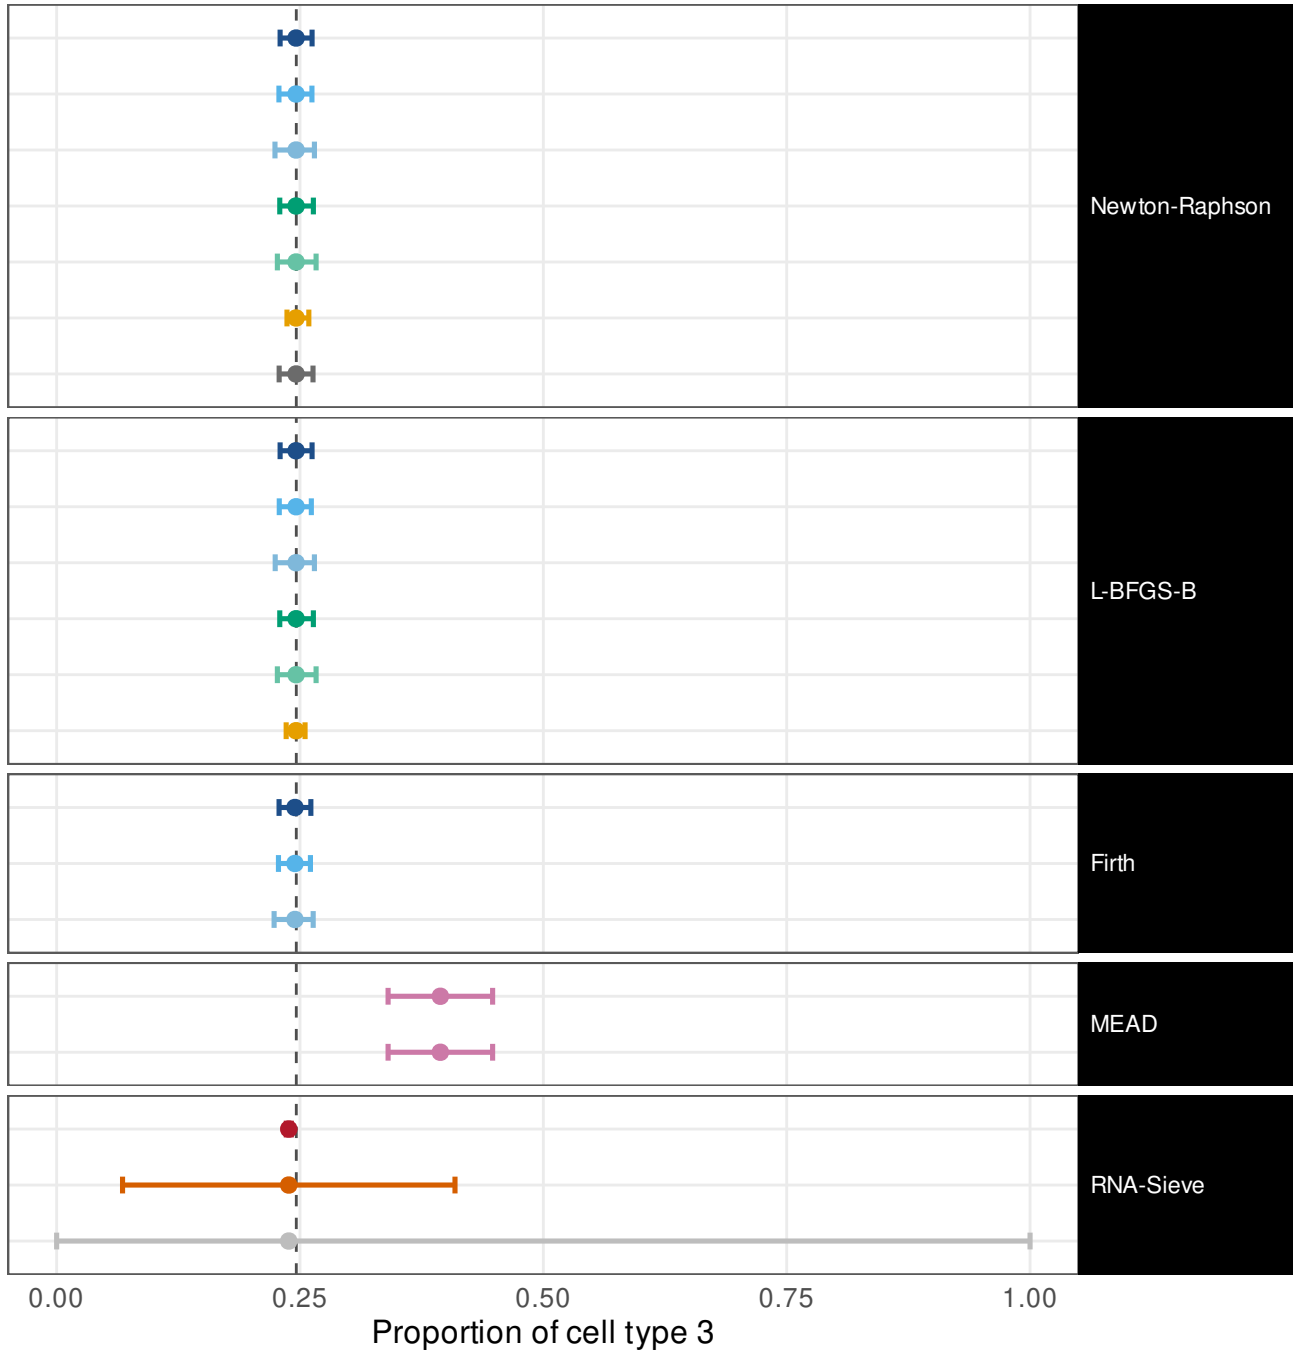

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.0362
ILR, mapped back                      1  [0.57,    1]   w = 0.0365
ILR, REML                             1  [0.57,    1]   w = 0.0444
Profile likelihood                    1  [0.57,    1]   w = 0.0381
Profile, REML                         1  [0.57,    1]   w = 0.0439
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.0205
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0403

Wald (delta)                          1  [0.57,    1]   w = 0.0362
ILR, mapped back                      1  [0.57,    1]   w = 0.0369
ILR, REML                             1  [0.57,    1]   w = 0.0439
Profile likelihood                    1  [0.57,    1]   w = 0.0381
Profile, REML                         1  [0.57,    1]   w = 0.0439
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.0253

Wald (delta)                          1  [0.57,    1]   w = 0.036
ILR, mapped back                      1  [0.57,    1]   w = 0.0359
ILR, REML                             1  [0.57,    1]   w = 0.0448

Method's own interval                 0  [   0, 0.43]   w = 0.111
Own interval, transcript fractions    1  [0.57,    1]   w = 0.111

Fisher information (Wald)           0.2  [0.036, 0.62]   w = 0.00548
Godambe sandwich                      1  [0.57,    1]   w = 0.334
Released code, as published           1  [0.57,    1]   w =    1
```

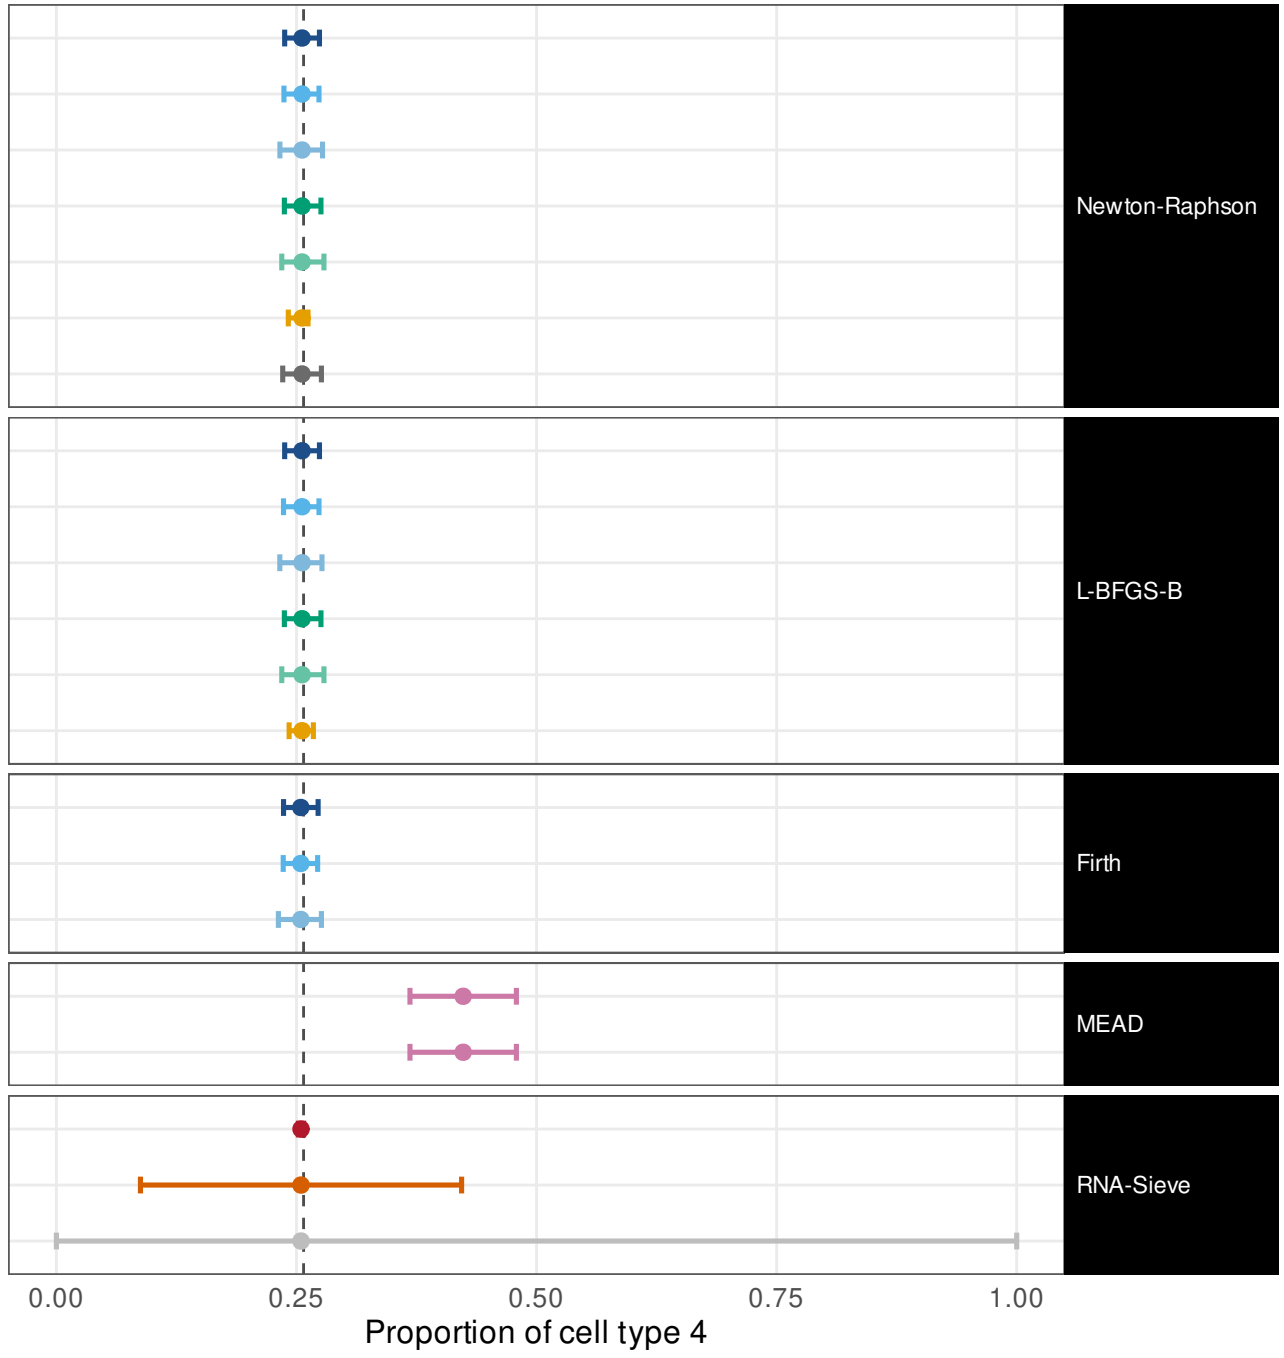


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	0.8	[0.38, 0.96]	w = 0.0255
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0253
ILR, REML	1	[0.57, 1]	w = 0.0306
Profile likelihood	1	[0.57, 1]	w = 0.0268
Profile, REML	1	[0.57, 1]	w = 0.0308
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.014
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0293
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0255
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0253
ILR, REML	1	[0.57, 1]	w = 0.0308
Profile likelihood	1	[0.57, 1]	w = 0.0268
Profile, REML	1	[0.57, 1]	w = 0.0308
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0165
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0255
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0252
ILR, REML	1	[0.57, 1]	w = 0.0309
Method's own interval	1	[0.57, 1]	w = 0.057
Own interval, transcript fractions	1	[0.57, 1]	w = 0.057
Fisher information (Wald)	0	[0, 0.43]	w = 0.00147
Godambe sandwich	1	[0.57, 1]	w = 0.303
Released code, as published	1	[0.57, 1]	w = 1

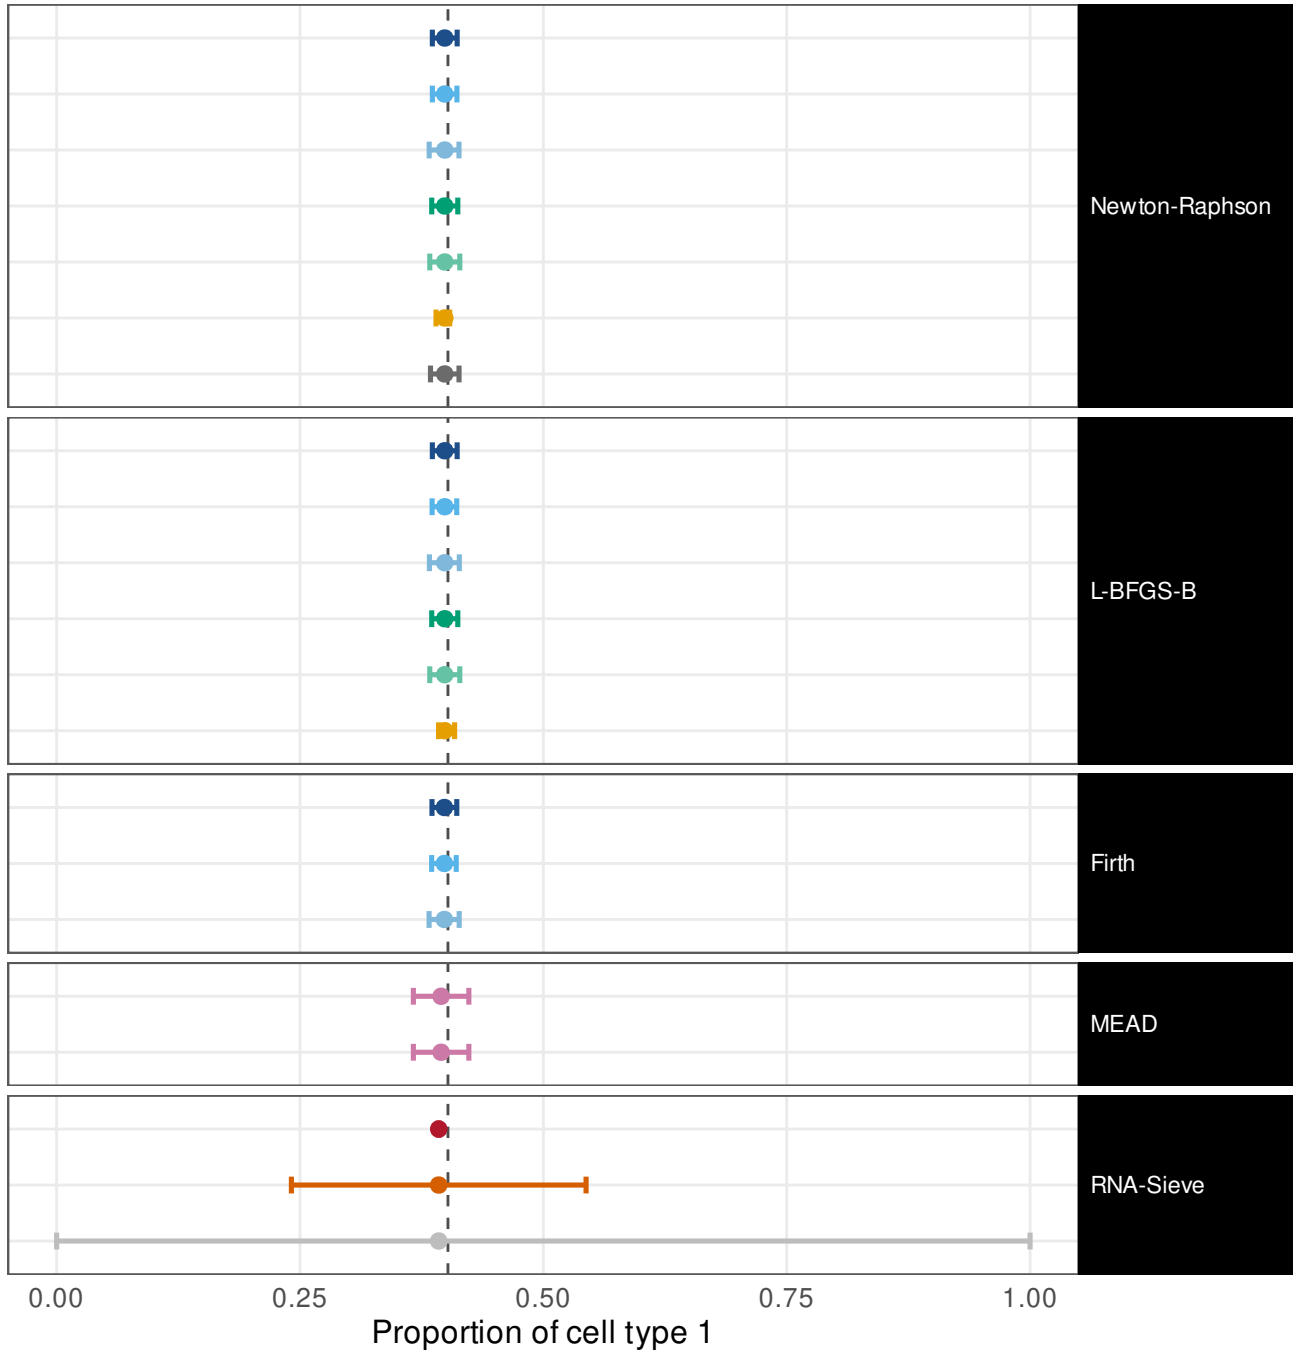

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.0257
ILR, mapped back                      1  [0.57,    1]   w = 0.0257
ILR, REML                             1  [0.57,    1]   w = 0.0305
Profile likelihood                    1  [0.57,    1]   w = 0.027
Profile, REML                         1  [0.57,    1]   w = 0.0311
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.0148
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0291

Wald (delta)                          1  [0.57,    1]   w = 0.0257
ILR, mapped back                      1  [0.57,    1]   w = 0.0255
ILR, REML                             1  [0.57,    1]   w = 0.0312
Profile likelihood                    1  [0.57,    1]   w = 0.027
Profile, REML                         1  [0.57,    1]   w = 0.0311
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.0168

Wald (delta)                          1  [0.57,    1]   w = 0.0256
ILR, mapped back                      1  [0.57,    1]   w = 0.0259
ILR, REML                             1  [0.57,    1]   w = 0.0311

Method's own interval                 1  [0.57,    1]   w = 0.0521
Own interval, transcript fractions    1  [0.57,    1]   w = 0.0521

Fisher information (Wald)             0  [   0, 0.43]   w = 0.000788
Godambe sandwich                      1  [0.57,    1]   w = 0.26
Released code, as published           1  [0.57,    1]   w =    1
```

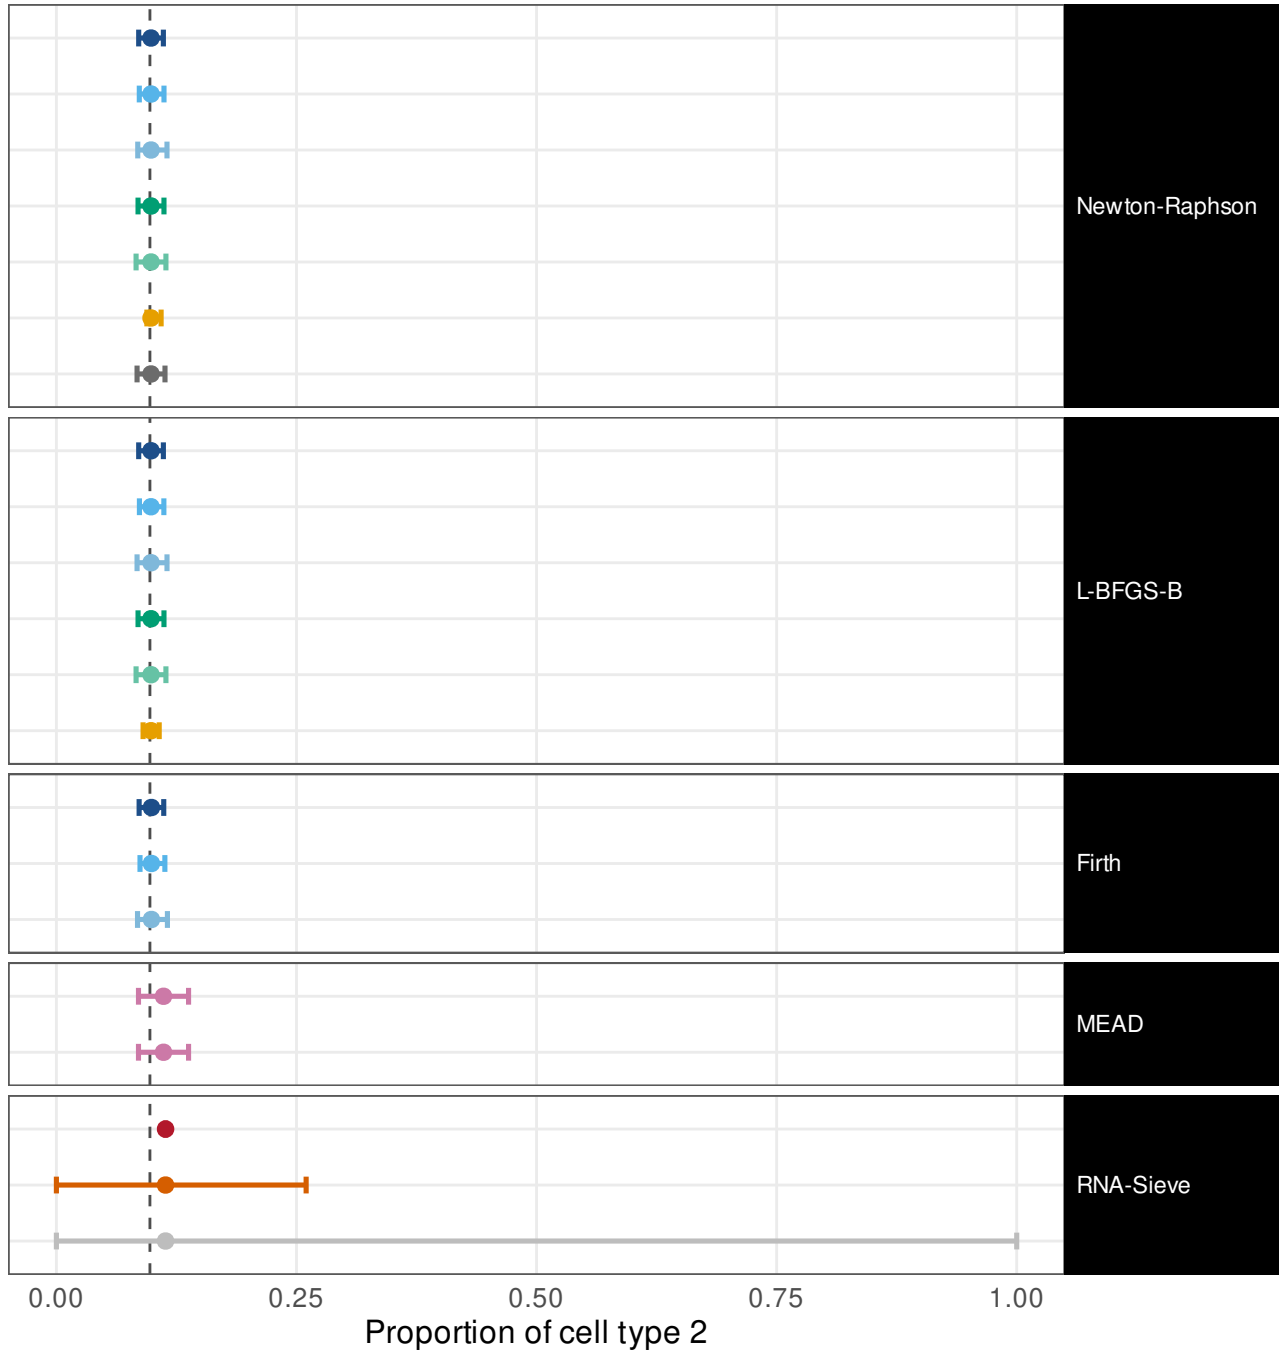


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes


Wald (delta)	1	[0.57, 1]	w = 0.0222
ILR, mapped back	1	[0.57, 1]	w = 0.022
ILR, REML	1	[0.57, 1]	w = 0.0269
Profile likelihood	1	[0.57, 1]	w = 0.0233
Profile, REML	1	[0.57, 1]	w = 0.0268
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0129
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0249
Wald (delta)	1	[0.57, 1]	w = 0.0222
ILR, mapped back	1	[0.57, 1]	w = 0.0223
ILR, REML	1	[0.57, 1]	w = 0.0269
Profile likelihood	1	[0.57, 1]	w = 0.0233
Profile, REML	1	[0.57, 1]	w = 0.0268
Parametric bootstrap	1	[0.57, 1]	w = 0.0172
Wald (delta)	1	[0.57, 1]	w = 0.0222
ILR, mapped back	1	[0.57, 1]	w = 0.0218
ILR, REML	1	[0.57, 1]	w = 0.0265
Method's own interval	1	[0.57, 1]	w = 0.088
Own interval, transcript fractions	1	[0.57, 1]	w = 0.088
Fisher information (Wald)	0	[0, 0.43]	w = 0.00156
Godambe sandwich	1	[0.57, 1]	w = 0.283
Released code, as published	1	[0.57, 1]	w = 1

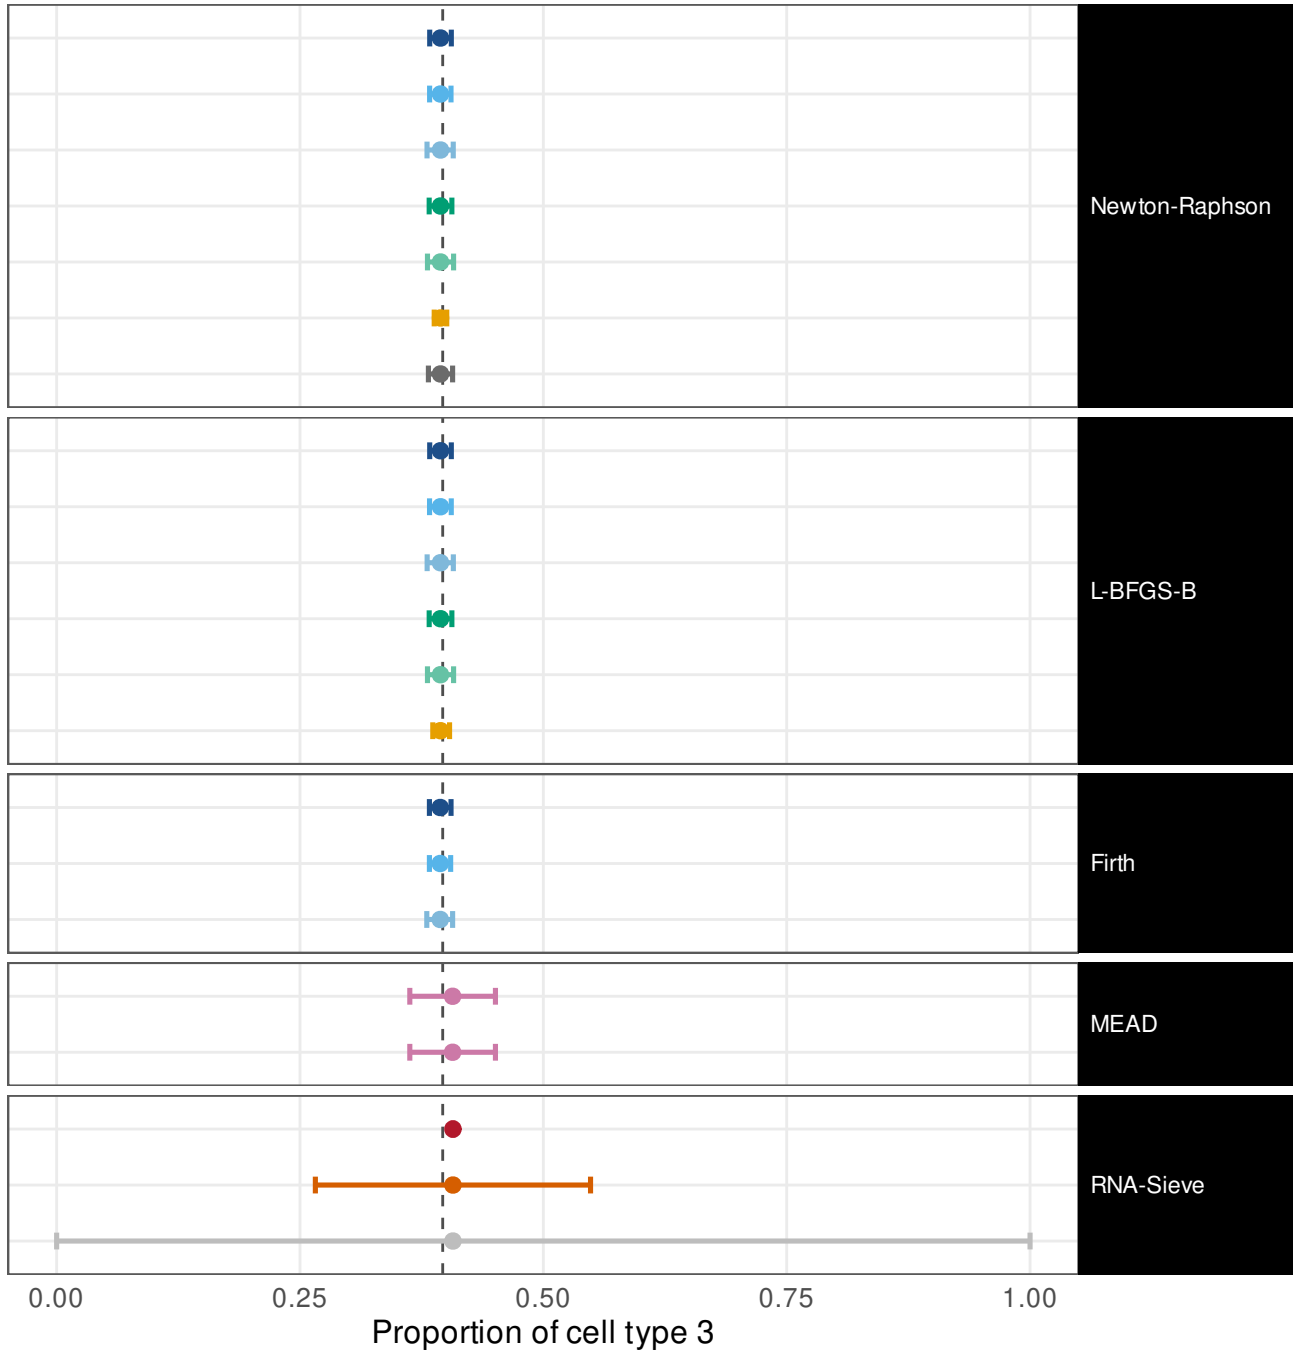

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes

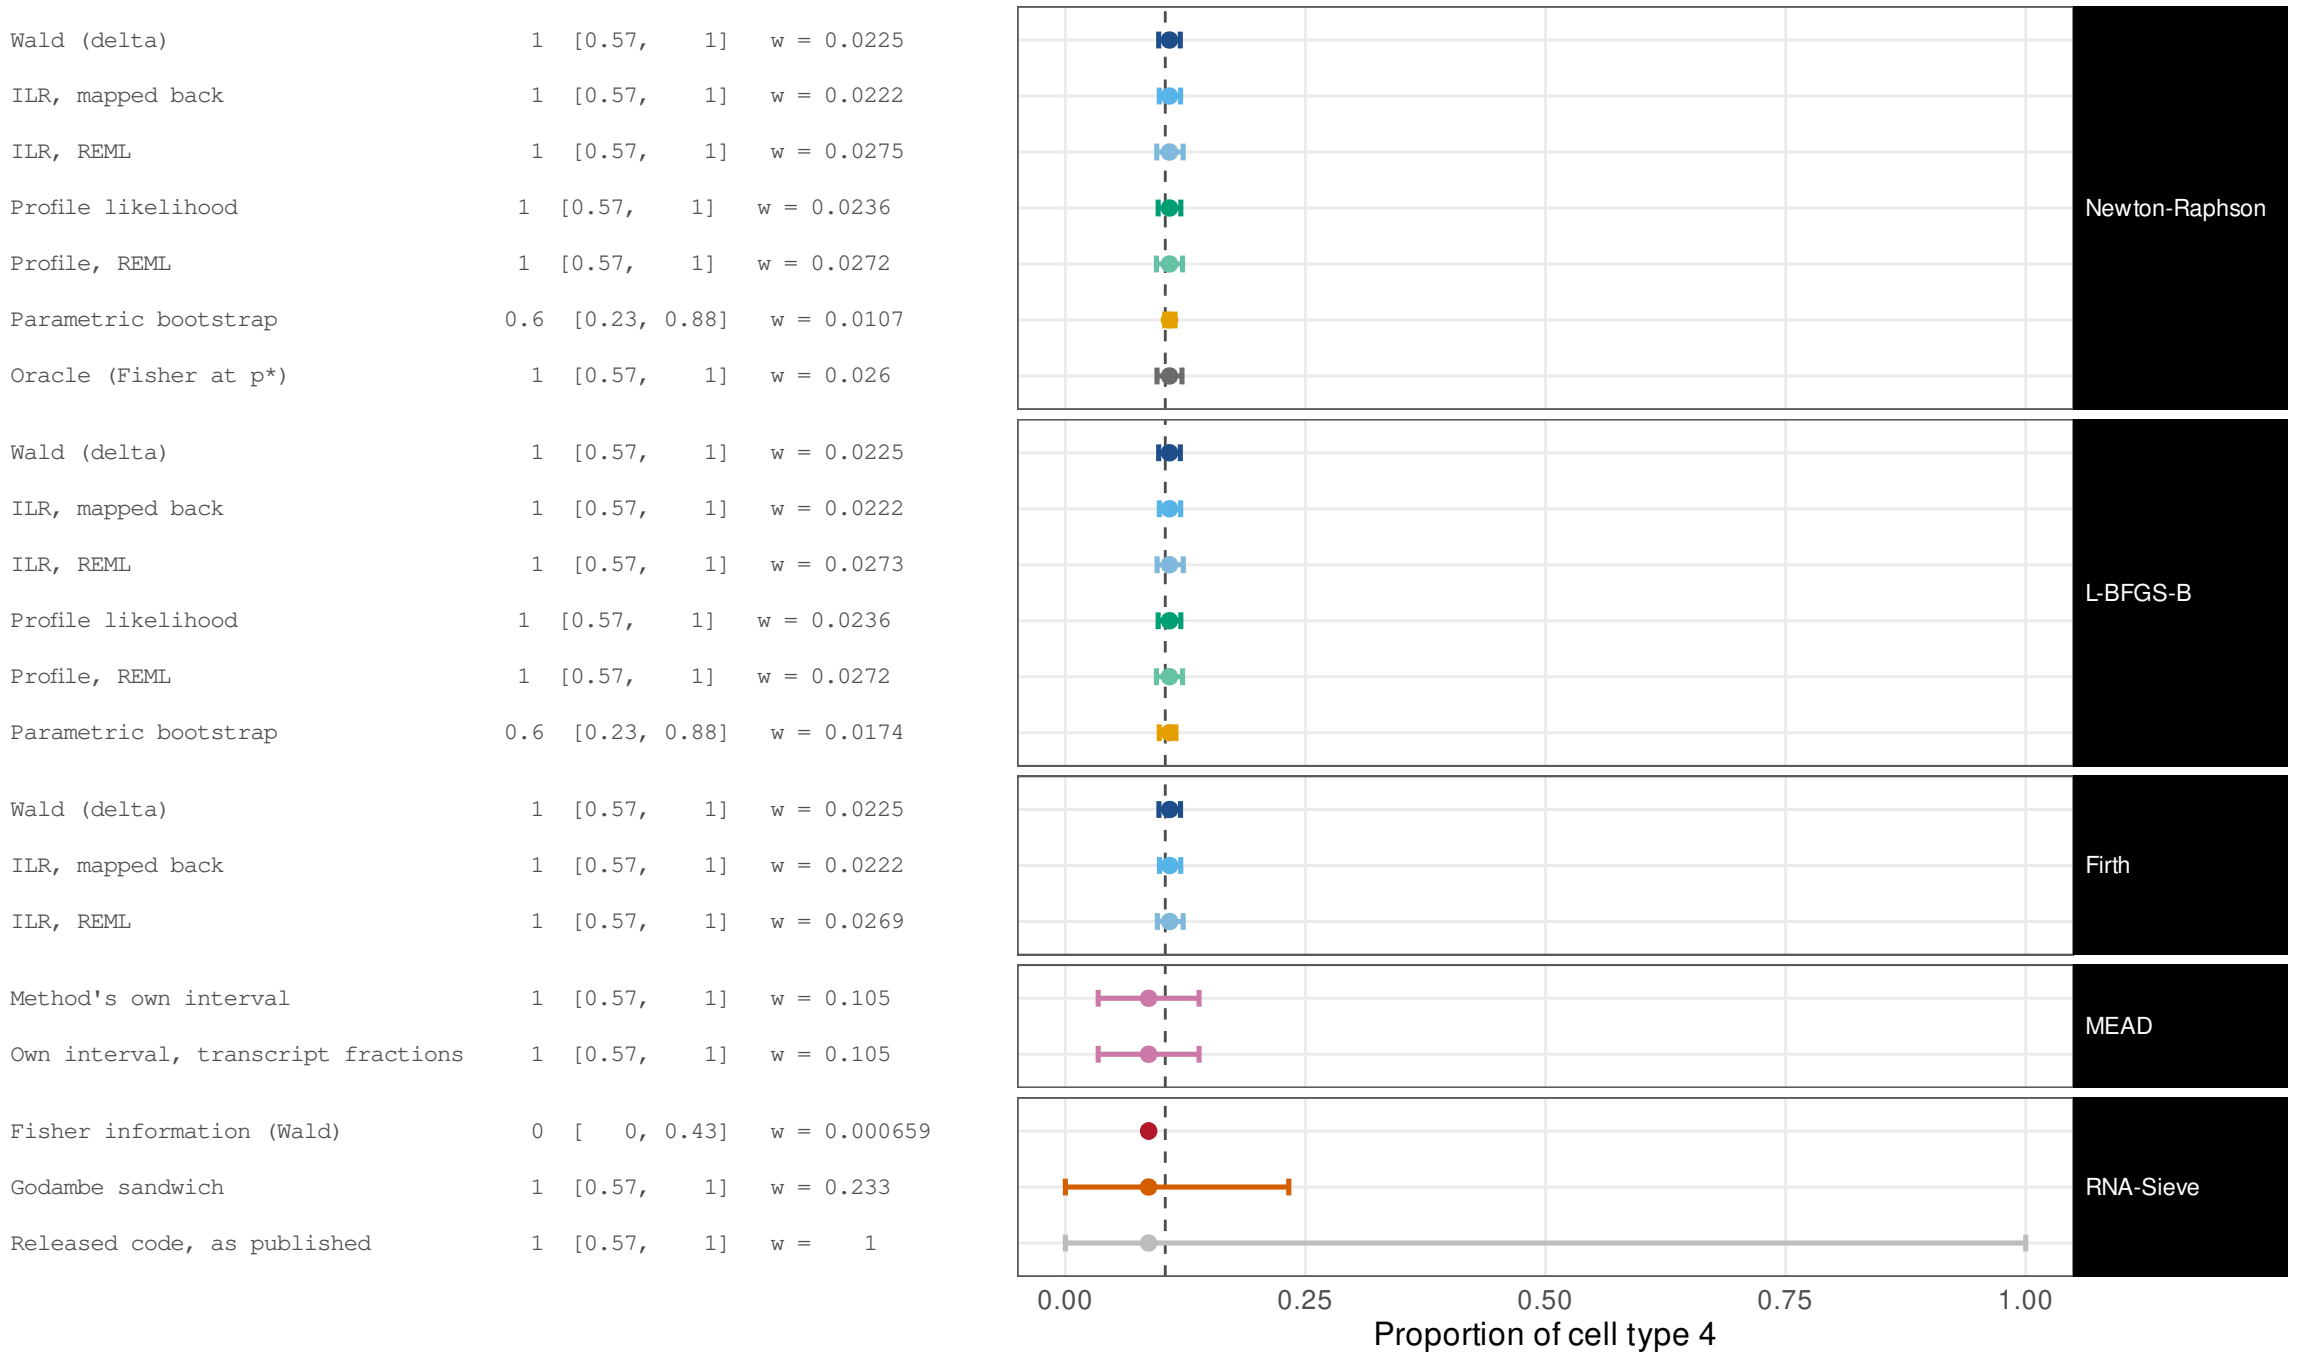


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	0.8	[0.38, 0.96]	w = 0.0722
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0726
ILR, REML	0.8	[0.38, 0.96]	w = 0.0871
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0758
Profile, REML	0.8	[0.38, 0.96]	w = 0.0873
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0427
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.095
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0722
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.072
ILR, REML	0.8	[0.38, 0.96]	w = 0.0856
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0758
Profile, REML	0.8	[0.38, 0.96]	w = 0.0873
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0591
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0704
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.07
ILR, REML	0.8	[0.38, 0.96]	w = 0.0834
Method's own interval	0	[0, 0.43]	w = 0.104
Own interval, transcript fractions	1	[0.57, 1]	w = 0.104
Fisher information (Wald)	0.2	[0.036, 0.62]	w = 0.00809
Godambe sandwich	1	[0.57, 1]	w = 0.731
Released code, as published	1	[0.57, 1]	w = 1

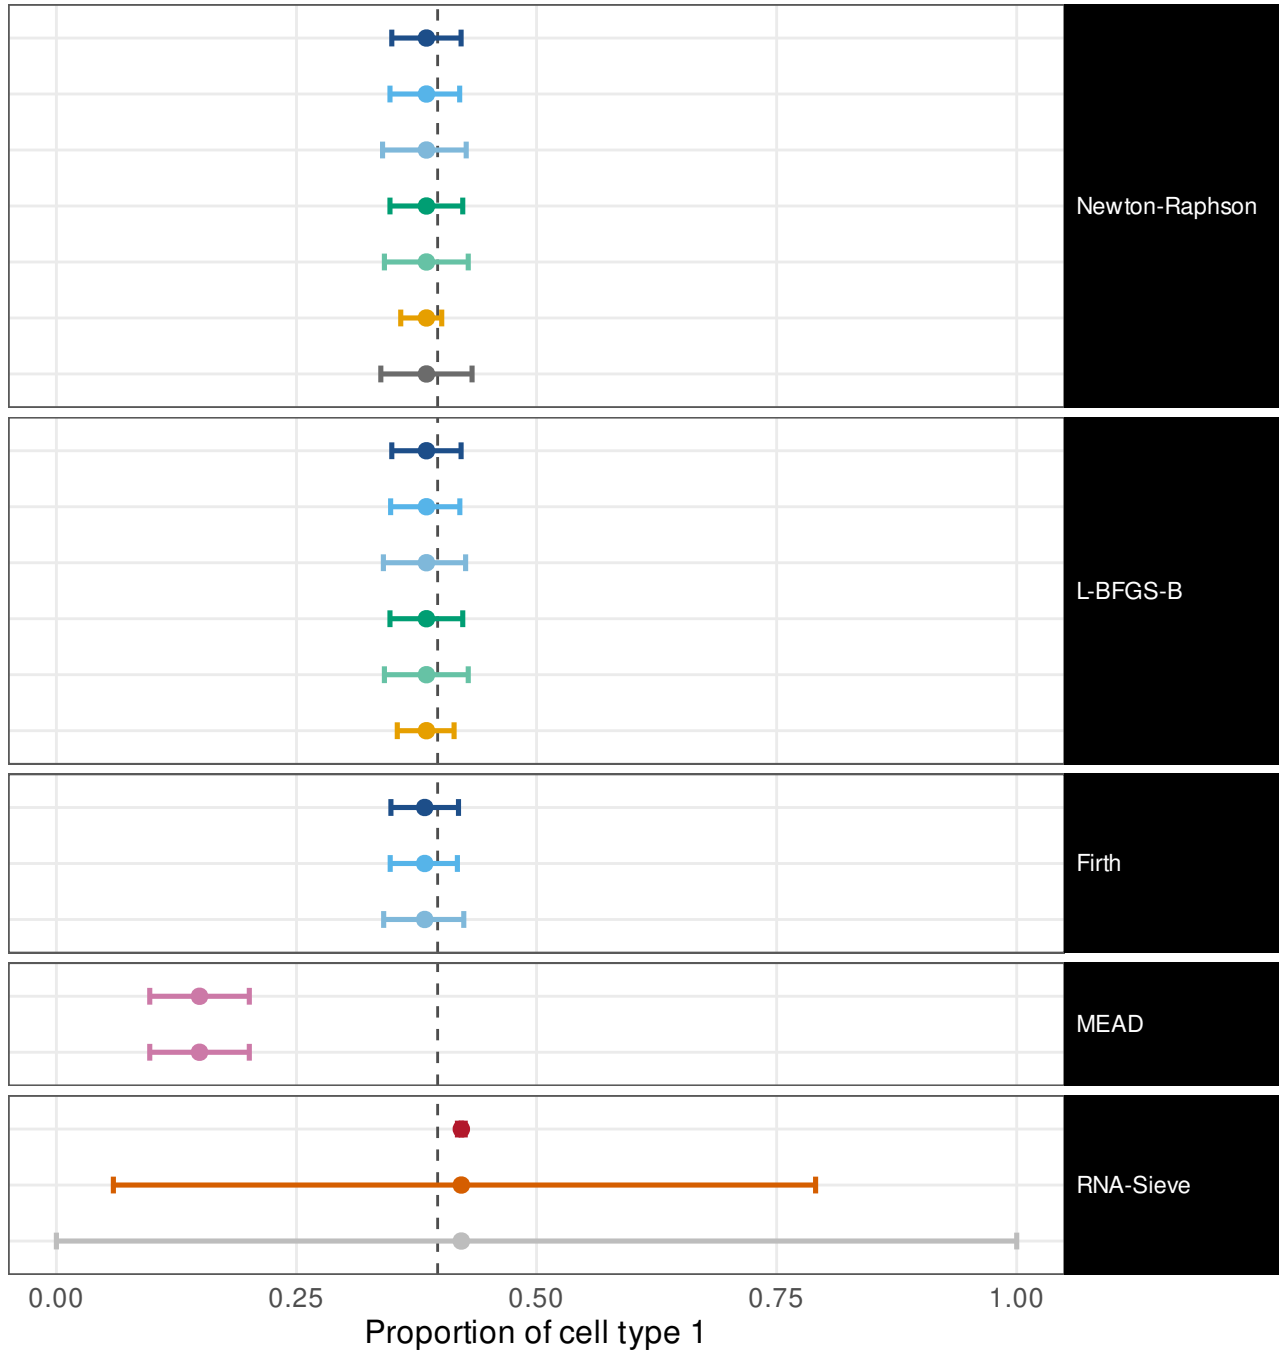


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	0.8	[0.38, 0.96]	w = 0.0742
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0751
ILR, REML	0.8	[0.38, 0.96]	w = 0.0906
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0779
Profile, REML	1	[0.57, 1]	w = 0.0897
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0396
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0967
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0742
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0752
ILR, REML	0.8	[0.38, 0.96]	w = 0.0895
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0779
Profile, REML	1	[0.57, 1]	w = 0.0897
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0569
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0721
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0736
ILR, REML	0.8	[0.38, 0.96]	w = 0.0839
Method's own interval	0.2	[0.036, 0.62]	w = 0.0712
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0712
Fisher information (Wald)	0	[0, 0.43]	w = 0.00728
Godambe sandwich	1	[0.57, 1]	w = 0.484
Released code, as published	1	[0.57, 1]	w = 1

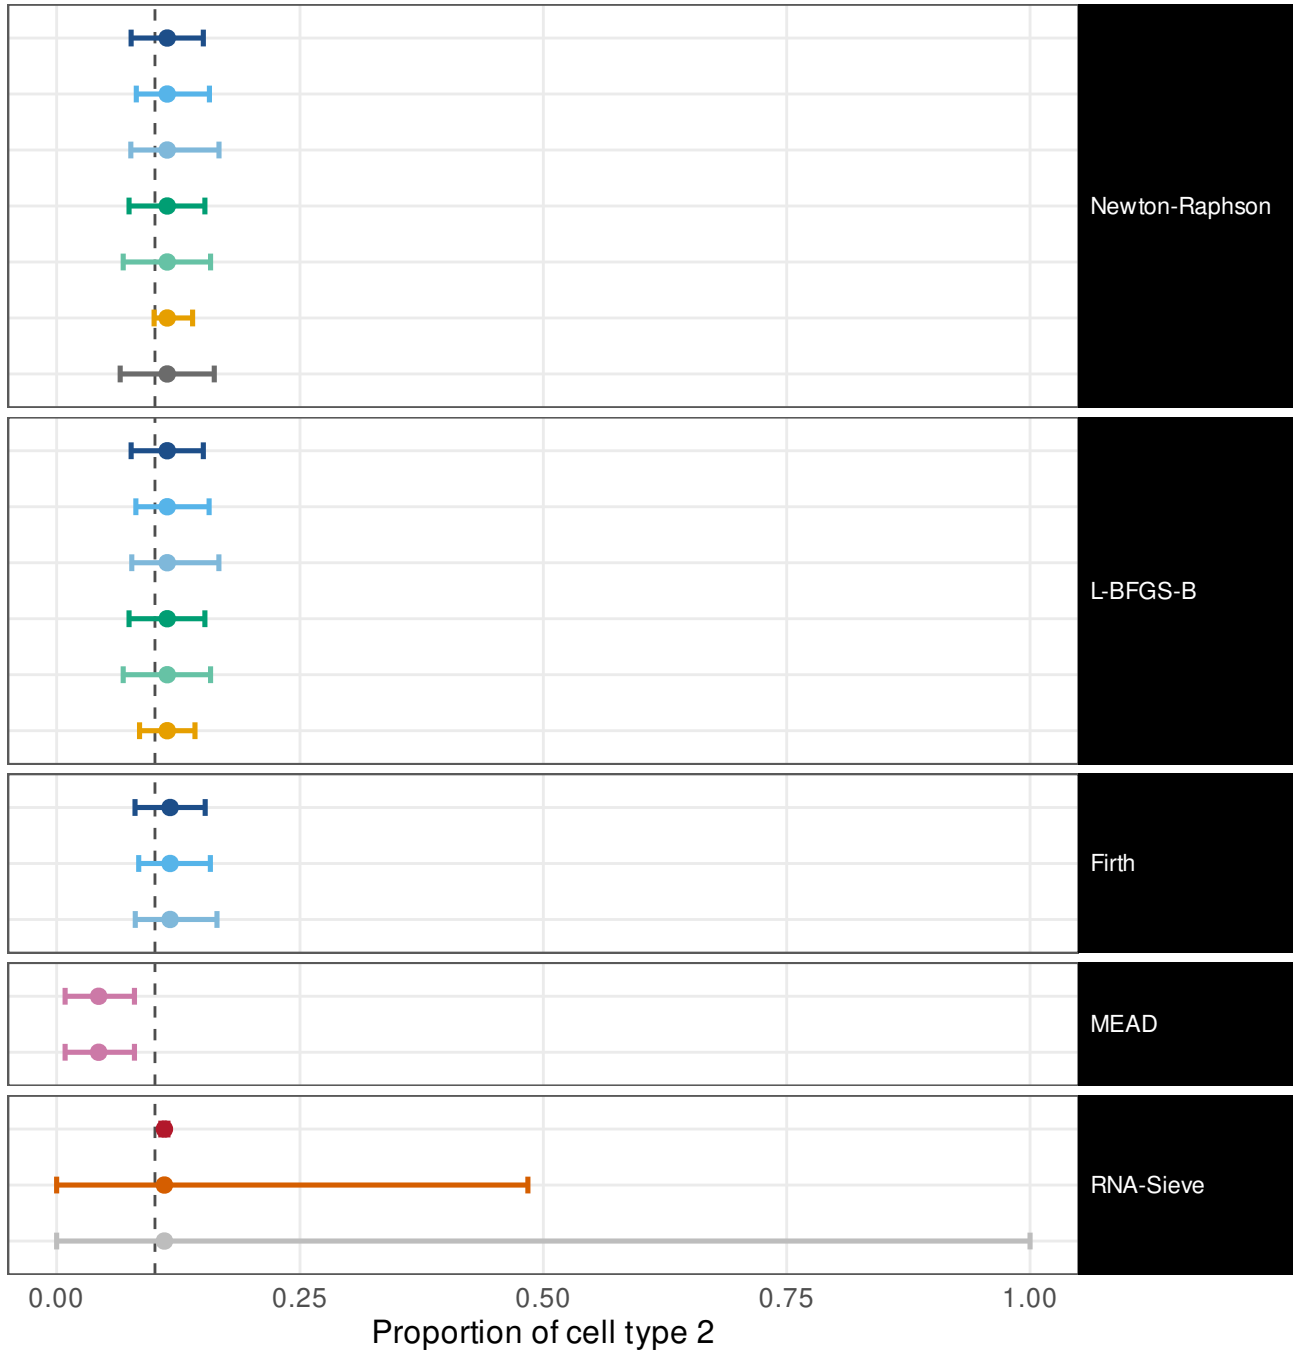


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5


Wald (delta)	1	[0.57, 1]	w = 0.0252
ILR, mapped back	1	[0.57, 1]	w = 0.0257
ILR, REML	1	[0.57, 1]	w = 0.0309
Profile likelihood	1	[0.57, 1]	w = 0.0265
Profile, REML	1	[0.57, 1]	w = 0.0305
Parametric bootstrap	1	[0.57, 1]	w = 0.0111
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0281
Wald (delta)	1	[0.57, 1]	w = 0.0252
ILR, mapped back	1	[0.57, 1]	w = 0.0255
ILR, REML	1	[0.57, 1]	w = 0.0313
Profile likelihood	1	[0.57, 1]	w = 0.0265
Profile, REML	1	[0.57, 1]	w = 0.0305
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0132
Wald (delta)	1	[0.57, 1]	w = 0.0251
ILR, mapped back	1	[0.57, 1]	w = 0.0258
ILR, REML	1	[0.57, 1]	w = 0.0311
Method's own interval	0	[0, 0.43]	w = 0.0523
Own interval, transcript fractions	0.8	[0.38, 0.96]	w = 0.0523
Fisher information (Wald)	0	[0, 0.43]	w = 0.00316
Godambe sandwich	1	[0.57, 1]	w = 0.221
Released code, as published	1	[0.57, 1]	w = 1

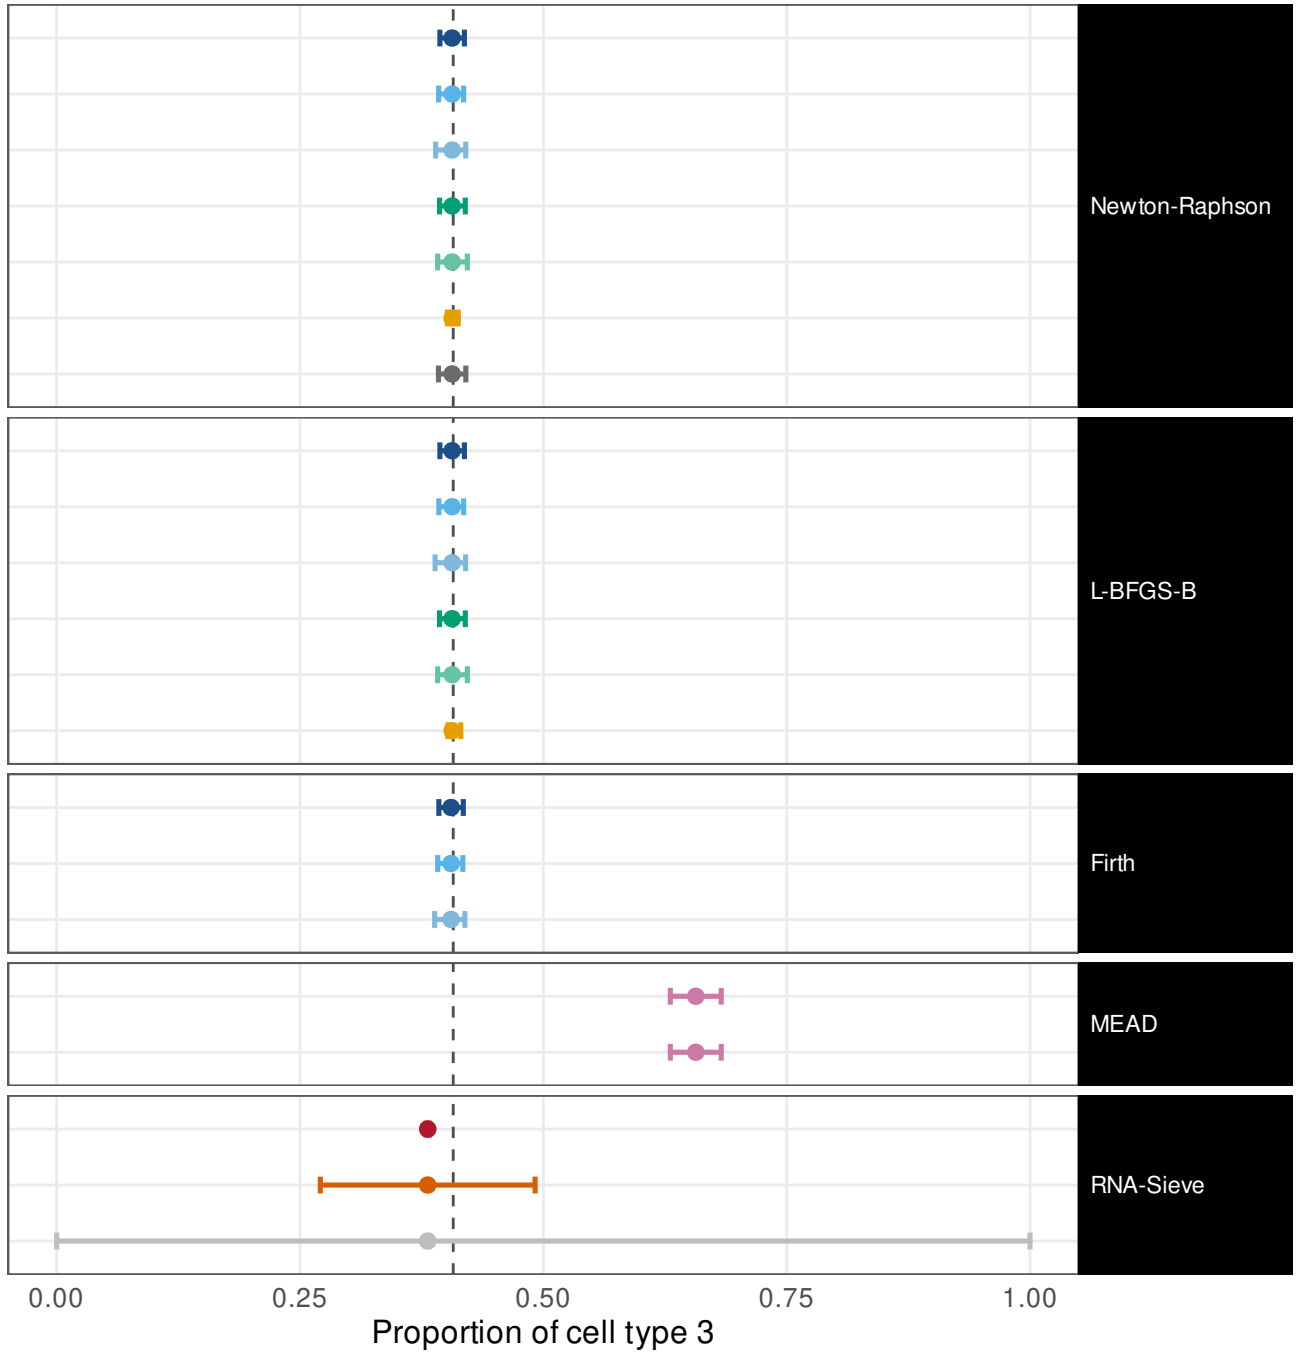

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5

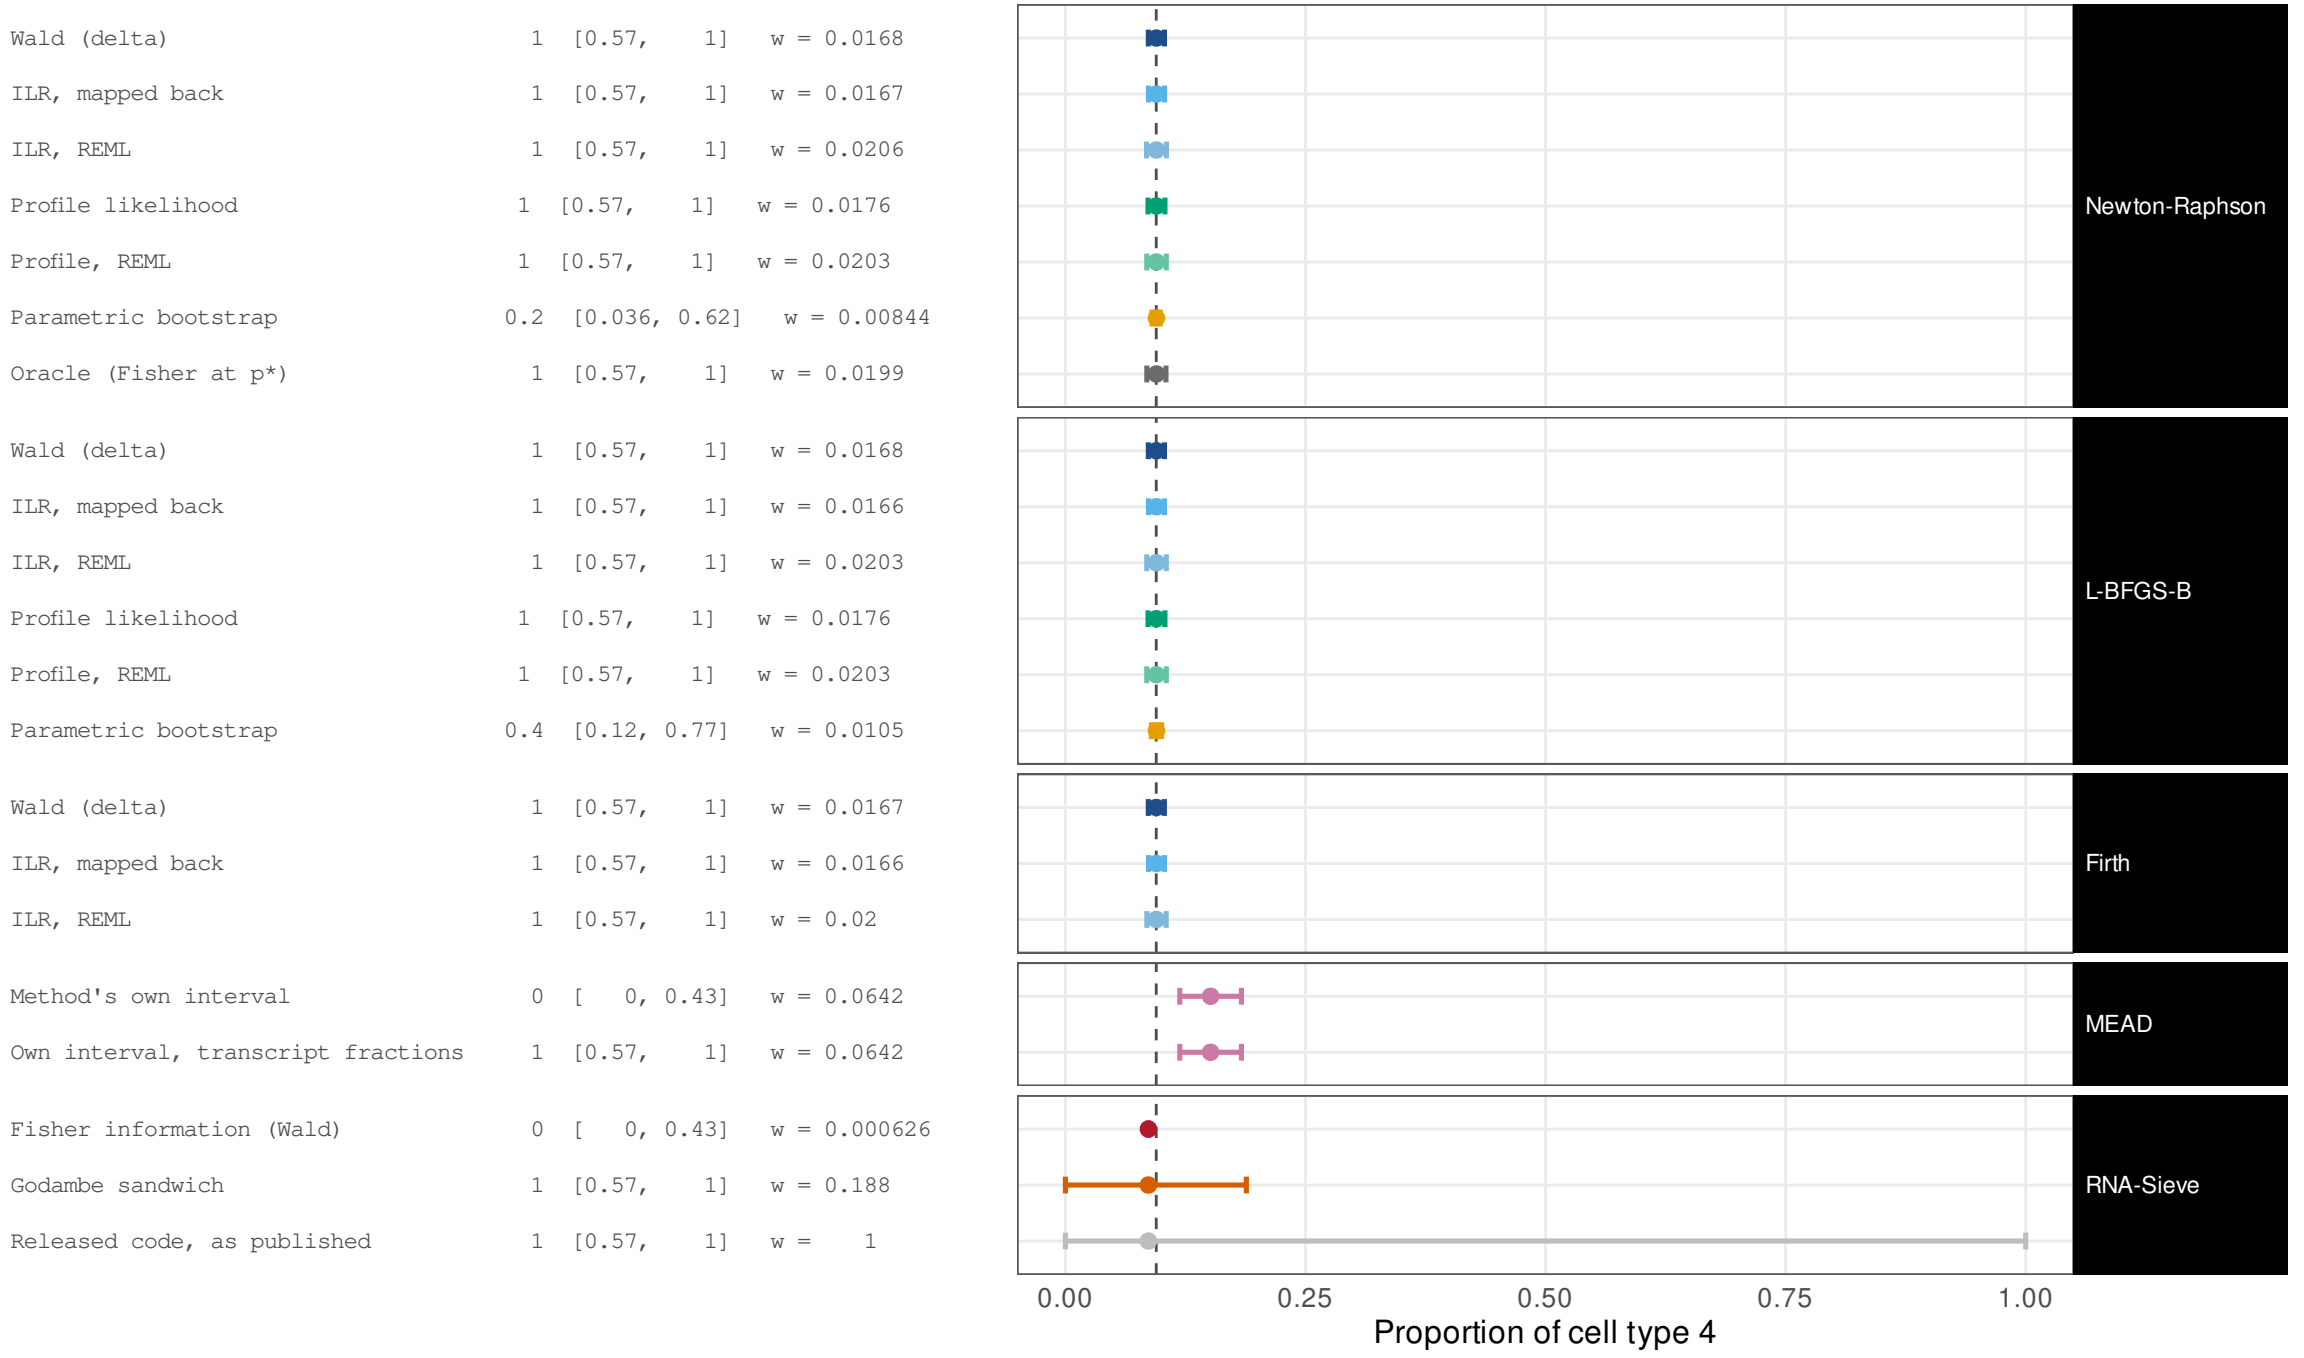


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	0.8	[0.38, 0.96]	w = 0.0341
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0335
ILR, REML	0.8	[0.38, 0.96]	w = 0.0412
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0358
Profile, REML	0.8	[0.38, 0.96]	w = 0.0412
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0227
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0406
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0341
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0339
ILR, REML	0.8	[0.38, 0.96]	w = 0.0408
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0358
Profile, REML	0.8	[0.38, 0.96]	w = 0.0412
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0147
Wald (delta)	0.8	[0.38, 0.96]	w = 0.034
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0334
ILR, REML	0.8	[0.38, 0.96]	w = 0.0412
Method's own interval	0.4	[0.12, 0.77]	w = 0.0637
Own interval, transcript fractions	0.4	[0.12, 0.77]	w = 0.0637
Fisher information (Wald)	0	[0, 0.43]	w = 0.00289
Godambe sandwich	1	[0.57, 1]	w = 0.347
Released code, as published	1	[0.57, 1]	w = 1

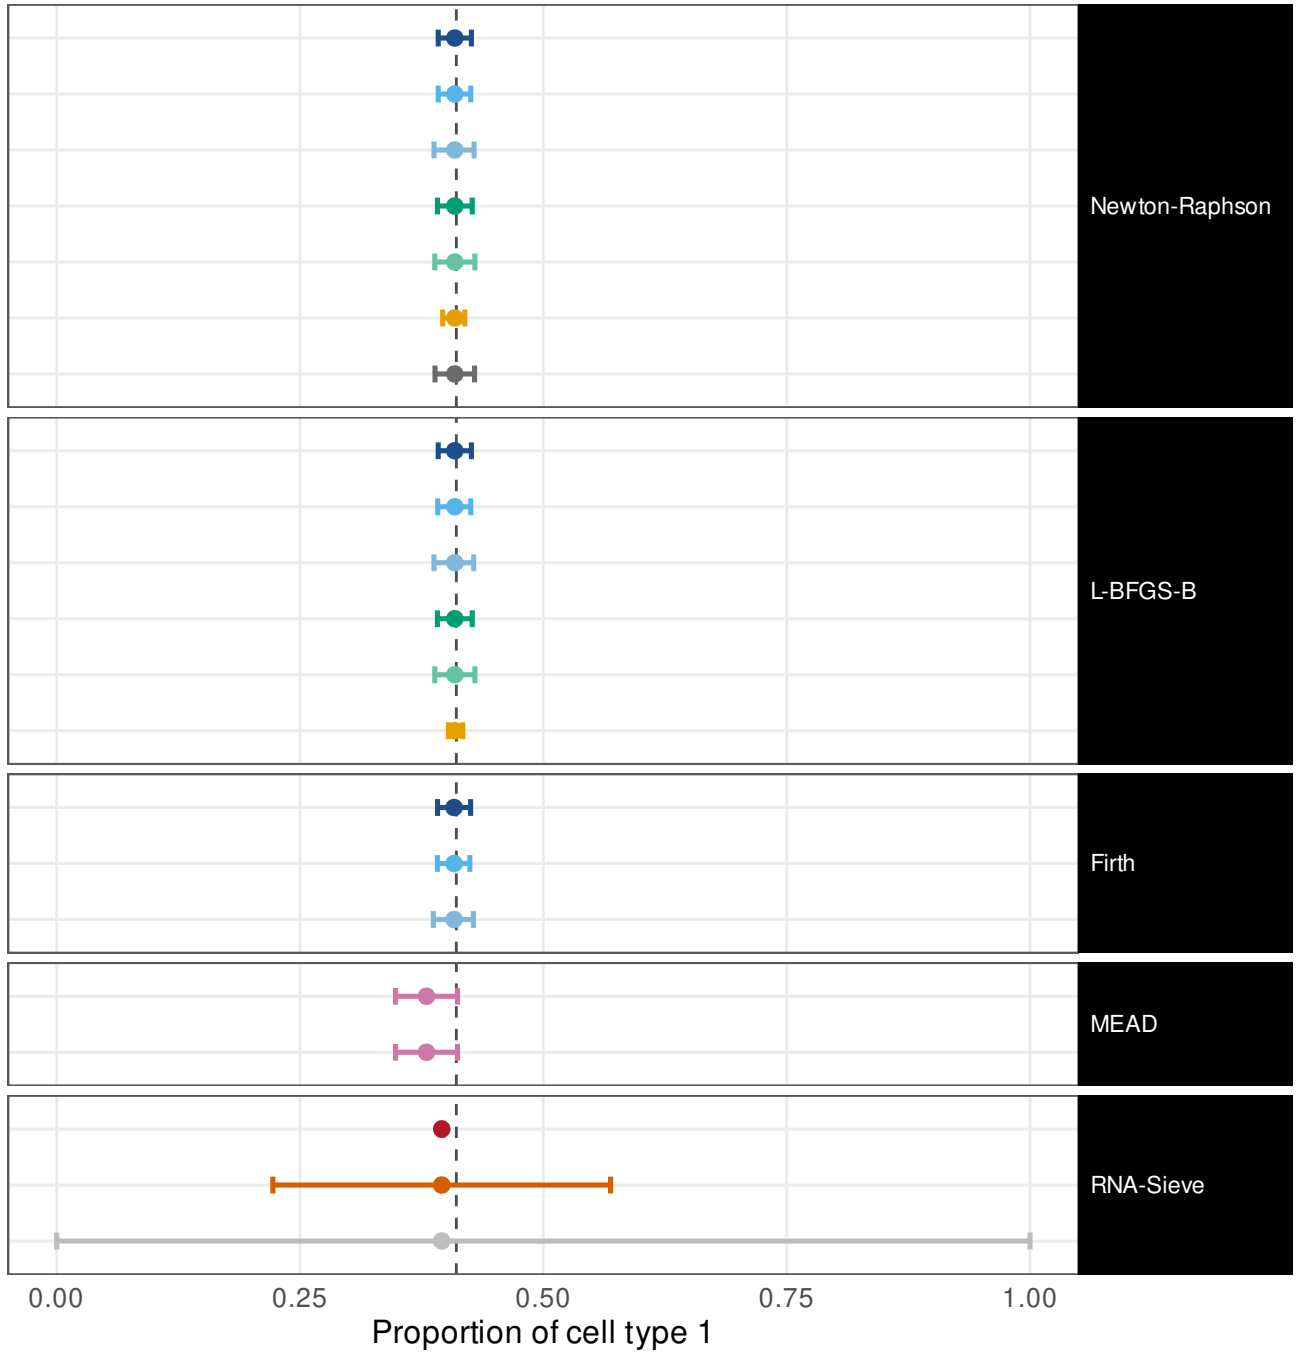


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	0.8	[0.38, 0.96]	w = 0.0344
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0339
ILR, REML	0.8	[0.38, 0.96]	w = 0.0416
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0361
Profile, REML	0.8	[0.38, 0.96]	w = 0.0416
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0225
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0397
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0344
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0341
ILR, REML	0.8	[0.38, 0.96]	w = 0.0416
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0361
Profile, REML	0.8	[0.38, 0.96]	w = 0.0416
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0145
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0342
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0336
ILR, REML	0.8	[0.38, 0.96]	w = 0.0416
Method's own interval	0.8	[0.38, 0.96]	w = 0.0584
Own interval, transcript fractions	0.8	[0.38, 0.96]	w = 0.0584
Fisher information (Wald)	0	[0, 0.43]	w = 0.00173
Godambe sandwich	1	[0.57, 1]	w = 0.297
Released code, as published	1	[0.57, 1]	w = 1

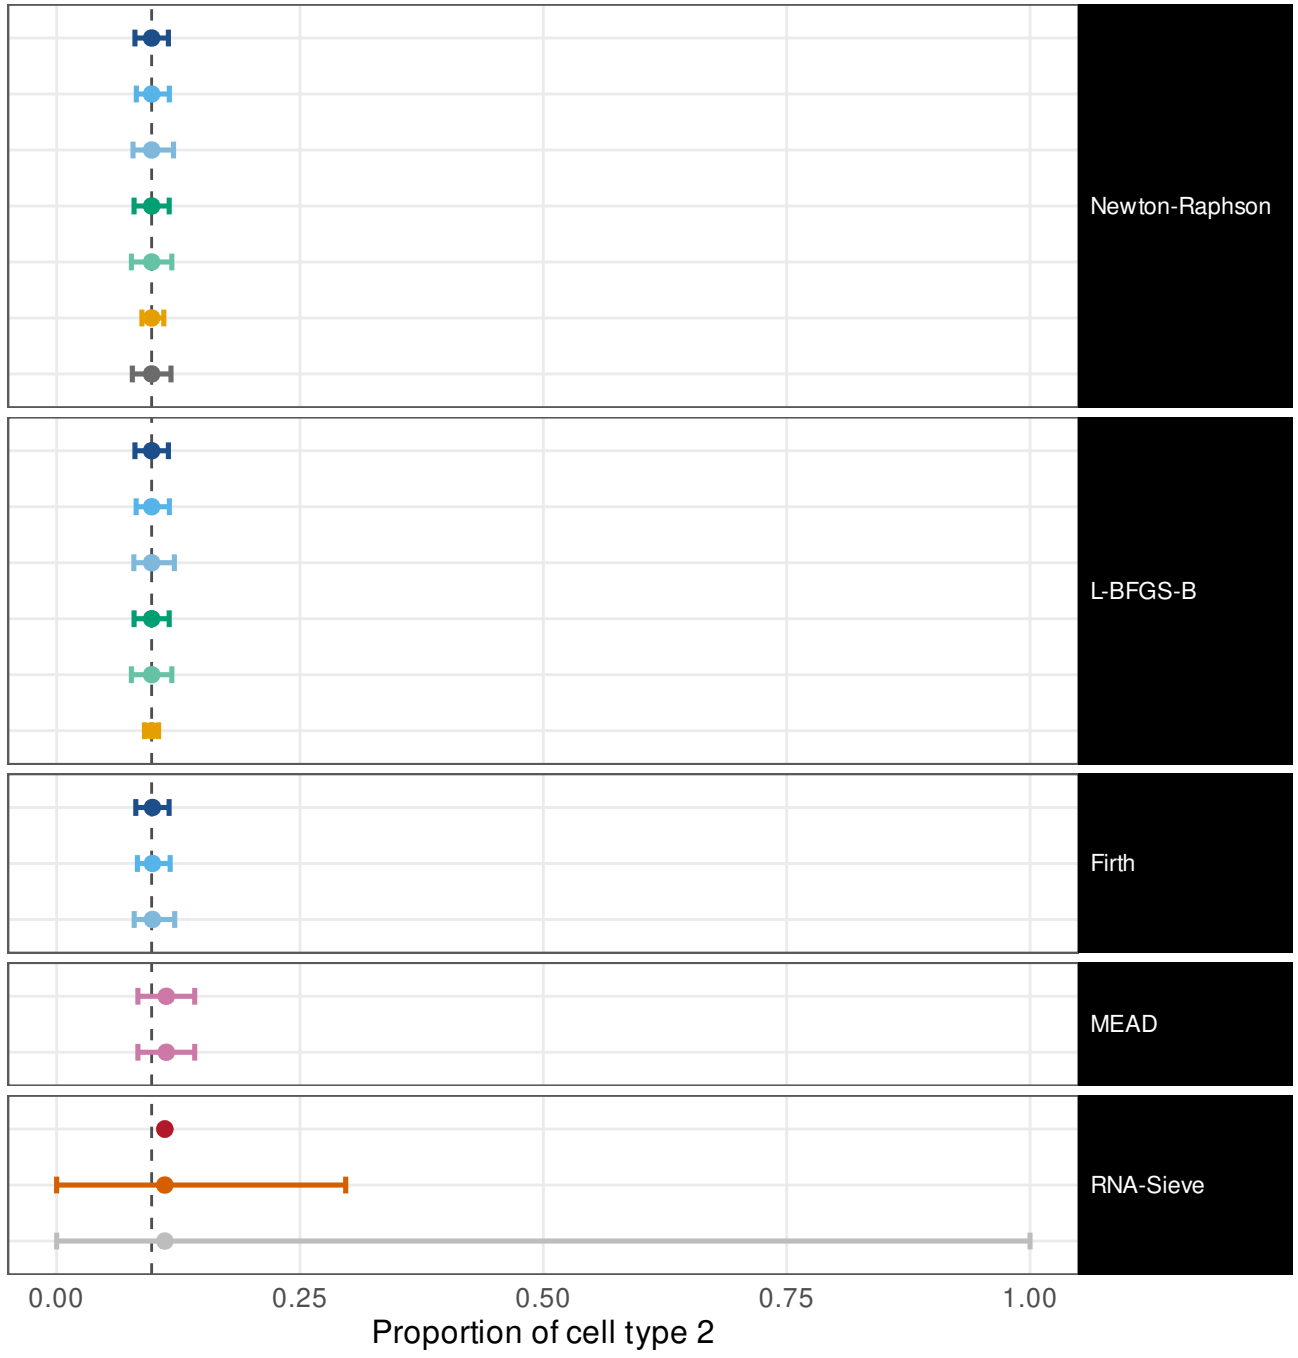


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	0.6	[0.23, 0.88]	w = 0.0296
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.0289
ILR, REML	1	[0.57, 1]	w = 0.0355
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0311
Profile, REML	1	[0.57, 1]	w = 0.0358
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0221
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0359
Wald (delta)	0.6	[0.23, 0.88]	w = 0.0296
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0297
ILR, REML	1	[0.57, 1]	w = 0.0355
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0311
Profile, REML	1	[0.57, 1]	w = 0.0358
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0159
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0296
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.0297
ILR, REML	1	[0.57, 1]	w = 0.0365
Method's own interval	0.2	[0.036, 0.62]	w = 0.121
Own interval, transcript fractions	0.2	[0.036, 0.62]	w = 0.121
Fisher information (Wald)	0	[0, 0.43]	w = 0.00261
Godambe sandwich	1	[0.57, 1]	w = 0.336
Released code, as published	1	[0.57, 1]	w = 1

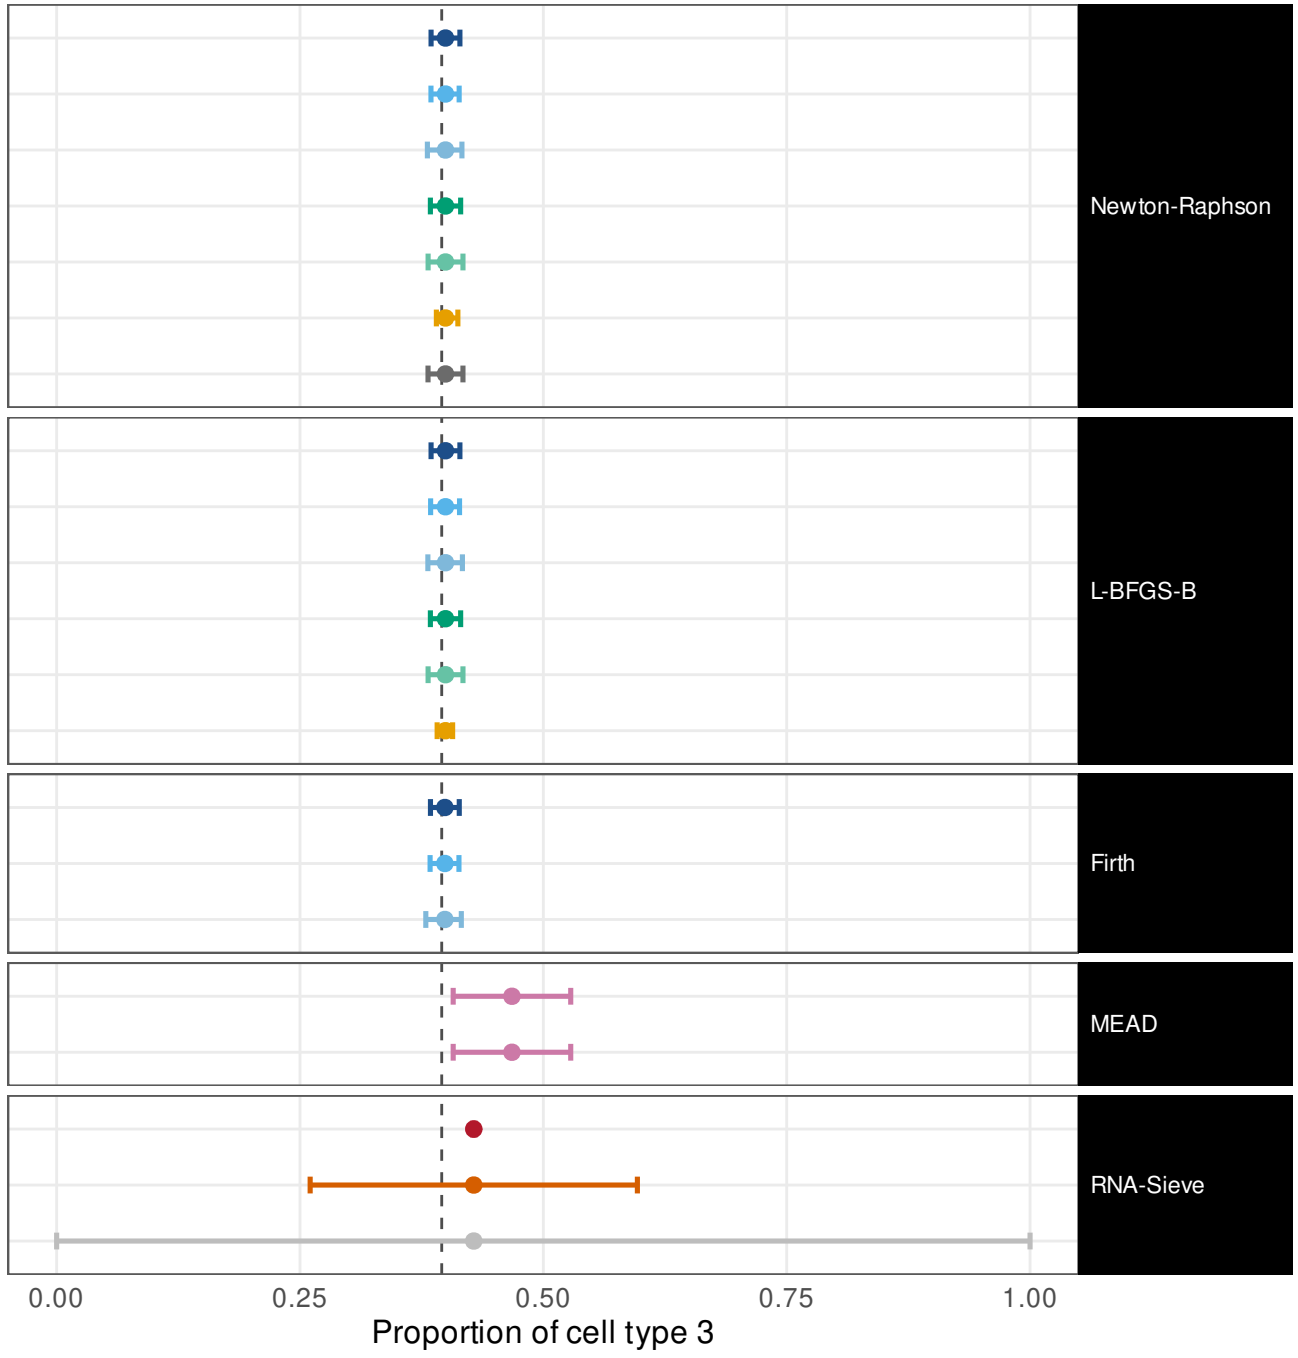

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.03
ILR, mapped back                      1  [0.57,    1]   w = 0.0297
ILR, REML                             1  [0.57,    1]   w = 0.0362
Profile likelihood                    1  [0.57,    1]   w = 0.0315
Profile, REML                         1  [0.57,    1]   w = 0.0363
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.0224
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0359

Wald (delta)                          1  [0.57,    1]   w = 0.03
ILR, mapped back                      1  [0.57,    1]   w = 0.0301
ILR, REML                             1  [0.57,    1]   w = 0.0361
Profile likelihood                    1  [0.57,    1]   w = 0.0315
Profile, REML                         1  [0.57,    1]   w = 0.0363
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.0154

Wald (delta)                          1  [0.57,    1]   w = 0.0299
ILR, mapped back                      1  [0.57,    1]   w = 0.0302
ILR, REML                             1  [0.57,    1]   w = 0.0368

Method's own interval               0.4  [0.12, 0.77]   w =  0.1
Own interval, transcript fractions  0.4  [0.12, 0.77]   w =  0.1

Fisher information (Wald)             0  [   0, 0.43]   w = 0.00181
Godambe sandwich                      1  [0.57,    1]   w = 0.242
Released code, as published           1  [0.57,    1]   w =    1
```

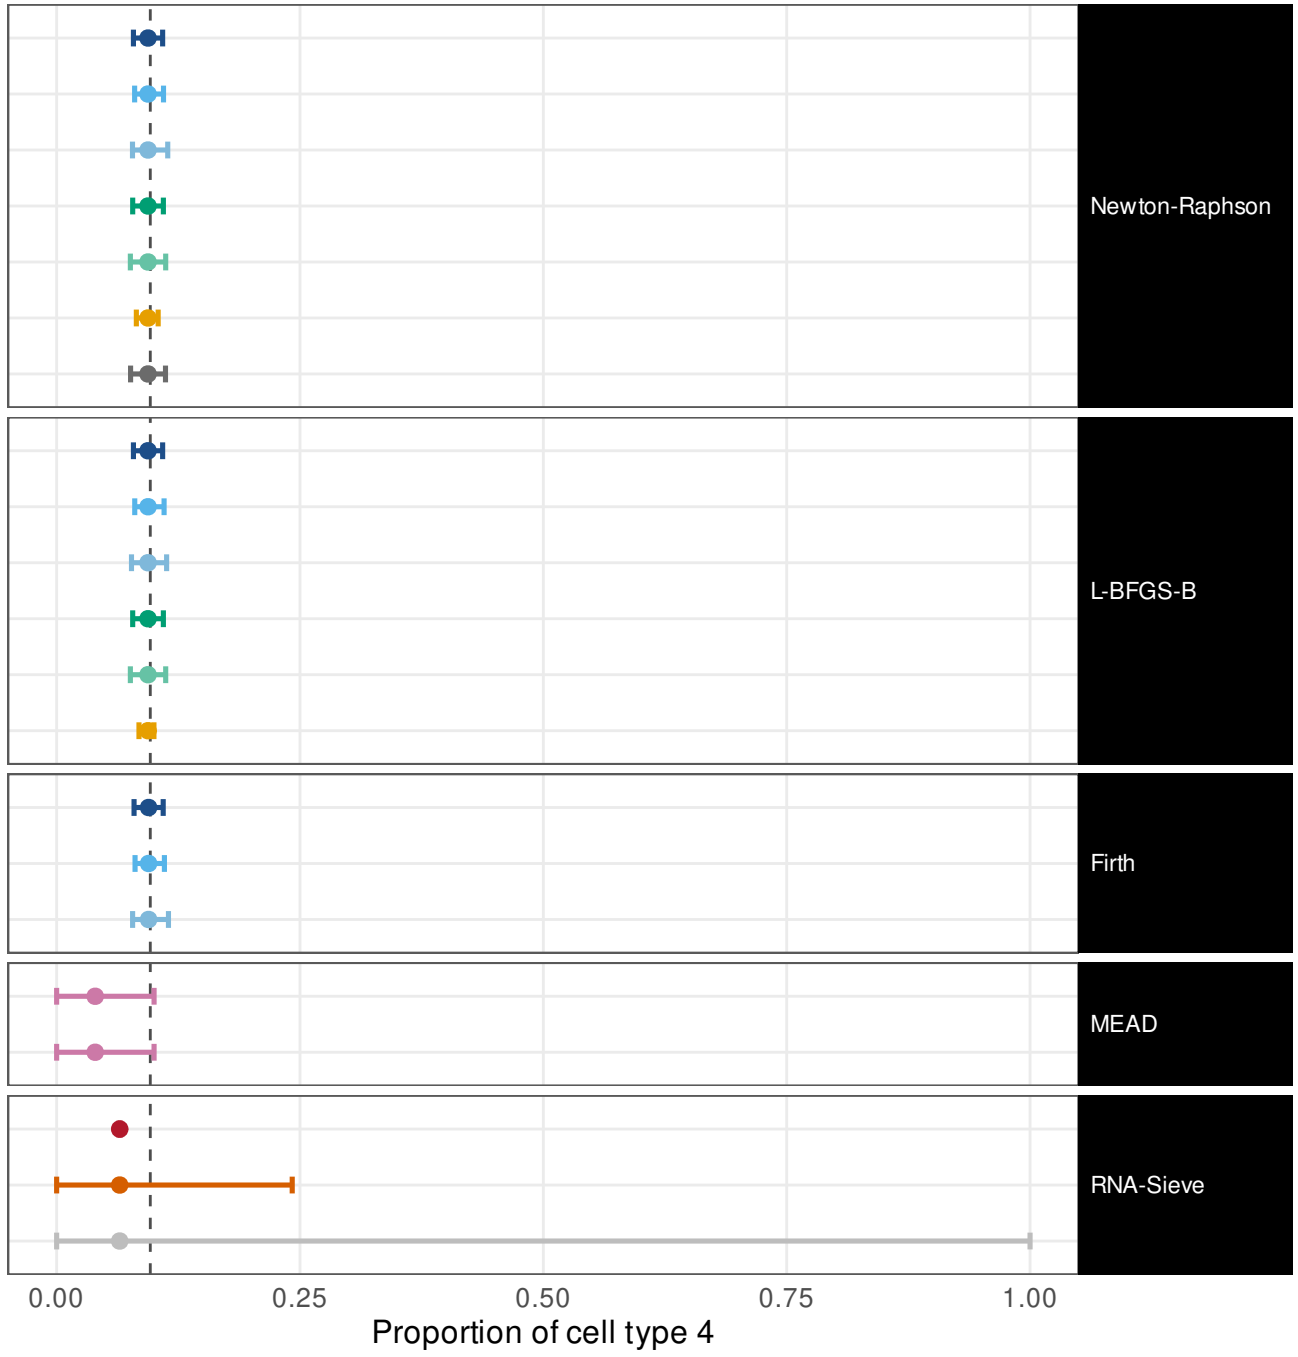


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.119
ILR, mapped back	1	[0.57, 1]	w = 0.118
ILR, REML	1	[0.57, 1]	w = 0.146
Profile likelihood	1	[0.57, 1]	w = 0.125
Profile, REML	1	[0.57, 1]	w = 0.144
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0794
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.194
Wald (delta)	1	[0.57, 1]	w = 0.119
ILR, mapped back	1	[0.57, 1]	w = 0.122
ILR, REML	1	[0.57, 1]	w = 0.145
Profile likelihood	1	[0.57, 1]	w = 0.125
Profile, REML	1	[0.57, 1]	w = 0.144
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0597
Wald (delta)	1	[0.57, 1]	w = 0.111
ILR, mapped back	1	[0.57, 1]	w = 0.112
ILR, REML	1	[0.57, 1]	w = 0.135
Method's own interval	0	[0, 0.43]	w = 0.276
Own interval, transcript fractions	1	[0.57, 1]	w = 0.276
Fisher information (Wald)	0	[0, 0.43]	w = 0.00781
Godambe sandwich	1	[0.57, 1]	w = 1
Released code, as published	1	[0.57, 1]	w = 1

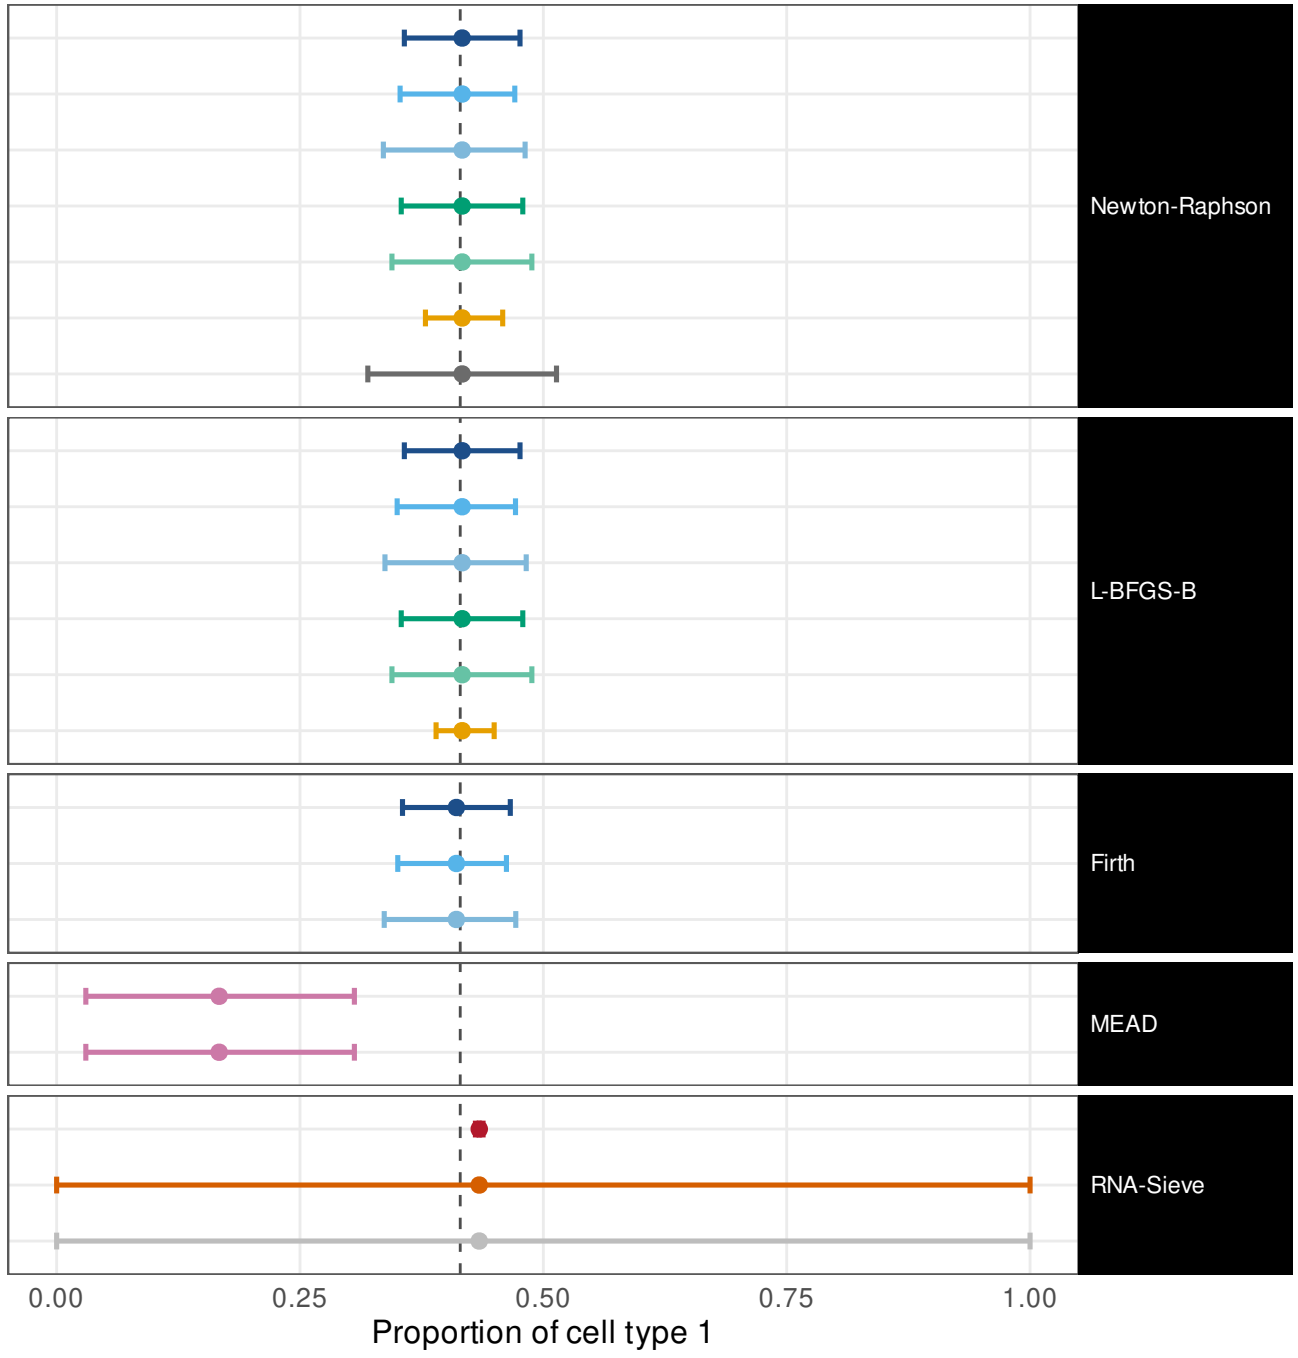


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.123
ILR, mapped back	1	[0.57, 1]	w = 0.126
ILR, REML	1	[0.57, 1]	w = 0.159
Profile likelihood	1	[0.57, 1]	w = 0.129
Profile, REML	1	[0.57, 1]	w = 0.147
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0872
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.211
Wald (delta)	1	[0.57, 1]	w = 0.123
ILR, mapped back	1	[0.57, 1]	w = 0.13
ILR, REML	1	[0.57, 1]	w = 0.158
Profile likelihood	1	[0.57, 1]	w = 0.129
Profile, REML	1	[0.57, 1]	w = 0.147
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0542
Wald (delta)	1	[0.57, 1]	w = 0.113
ILR, mapped back	1	[0.57, 1]	w = 0.116
ILR, REML	1	[0.57, 1]	w = 0.143
Method's own interval	0.6	[0.23, 0.88]	w = 0.119
Own interval, transcript fractions	1	[0.57, 1]	w = 0.119
Fisher information (Wald)	0	[0, 0.43]	w = 0.00543
Godambe sandwich	1	[0.57, 1]	w = 0.904
Released code, as published	1	[0.57, 1]	w = 1

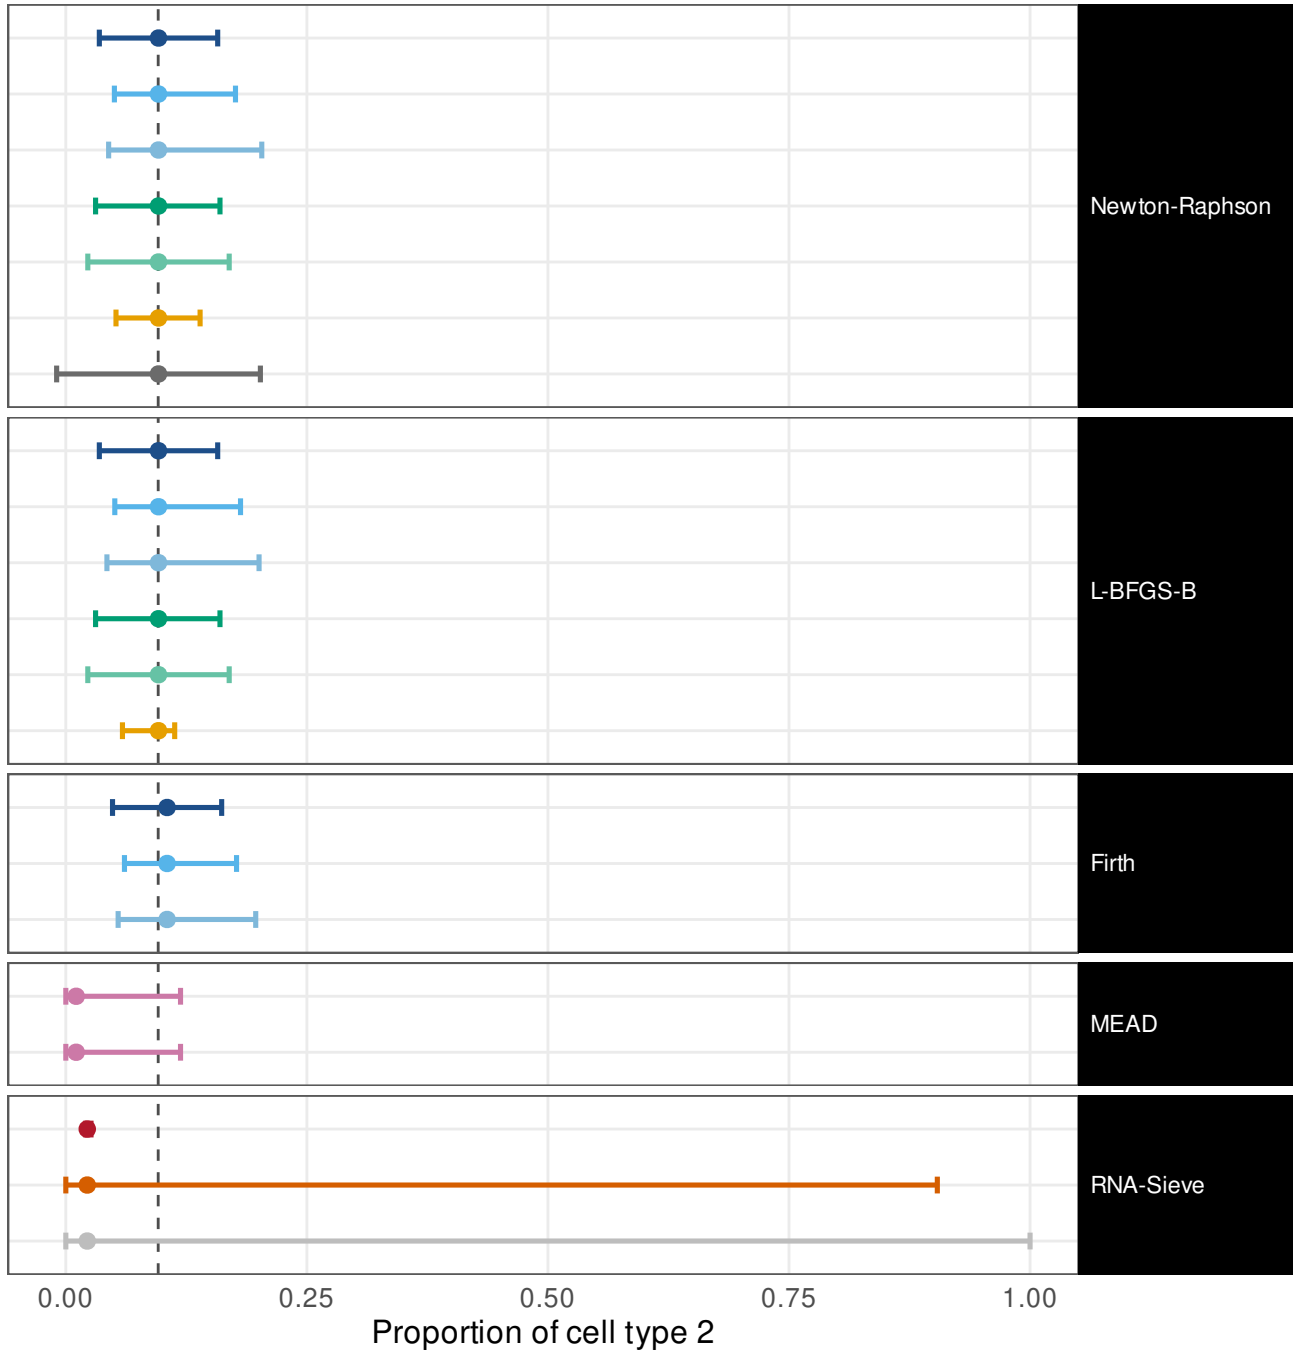


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.0403
ILR, mapped back	1	[0.57, 1]	w = 0.0426
ILR, REML	1	[0.57, 1]	w = 0.0542
Profile likelihood	1	[0.57, 1]	w = 0.0424
Profile, REML	1	[0.57, 1]	w = 0.0488
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.028
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0503
Wald (delta)	1	[0.57, 1]	w = 0.0403
ILR, mapped back	1	[0.57, 1]	w = 0.0439
ILR, REML	1	[0.57, 1]	w = 0.0547
Profile likelihood	1	[0.57, 1]	w = 0.0424
Profile, REML	1	[0.57, 1]	w = 0.0488
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0257
Wald (delta)	1	[0.57, 1]	w = 0.0399
ILR, mapped back	1	[0.57, 1]	w = 0.0421
ILR, REML	1	[0.57, 1]	w = 0.0514
Method's own interval	0	[0, 0.43]	w = 0.212
Own interval, transcript fractions	0.8	[0.38, 0.96]	w = 0.212
Fisher information (Wald)	0.2	[0.036, 0.62]	w = 0.00745
Godambe sandwich	1	[0.57, 1]	w = 0.28
Released code, as published	1	[0.57, 1]	w = 1

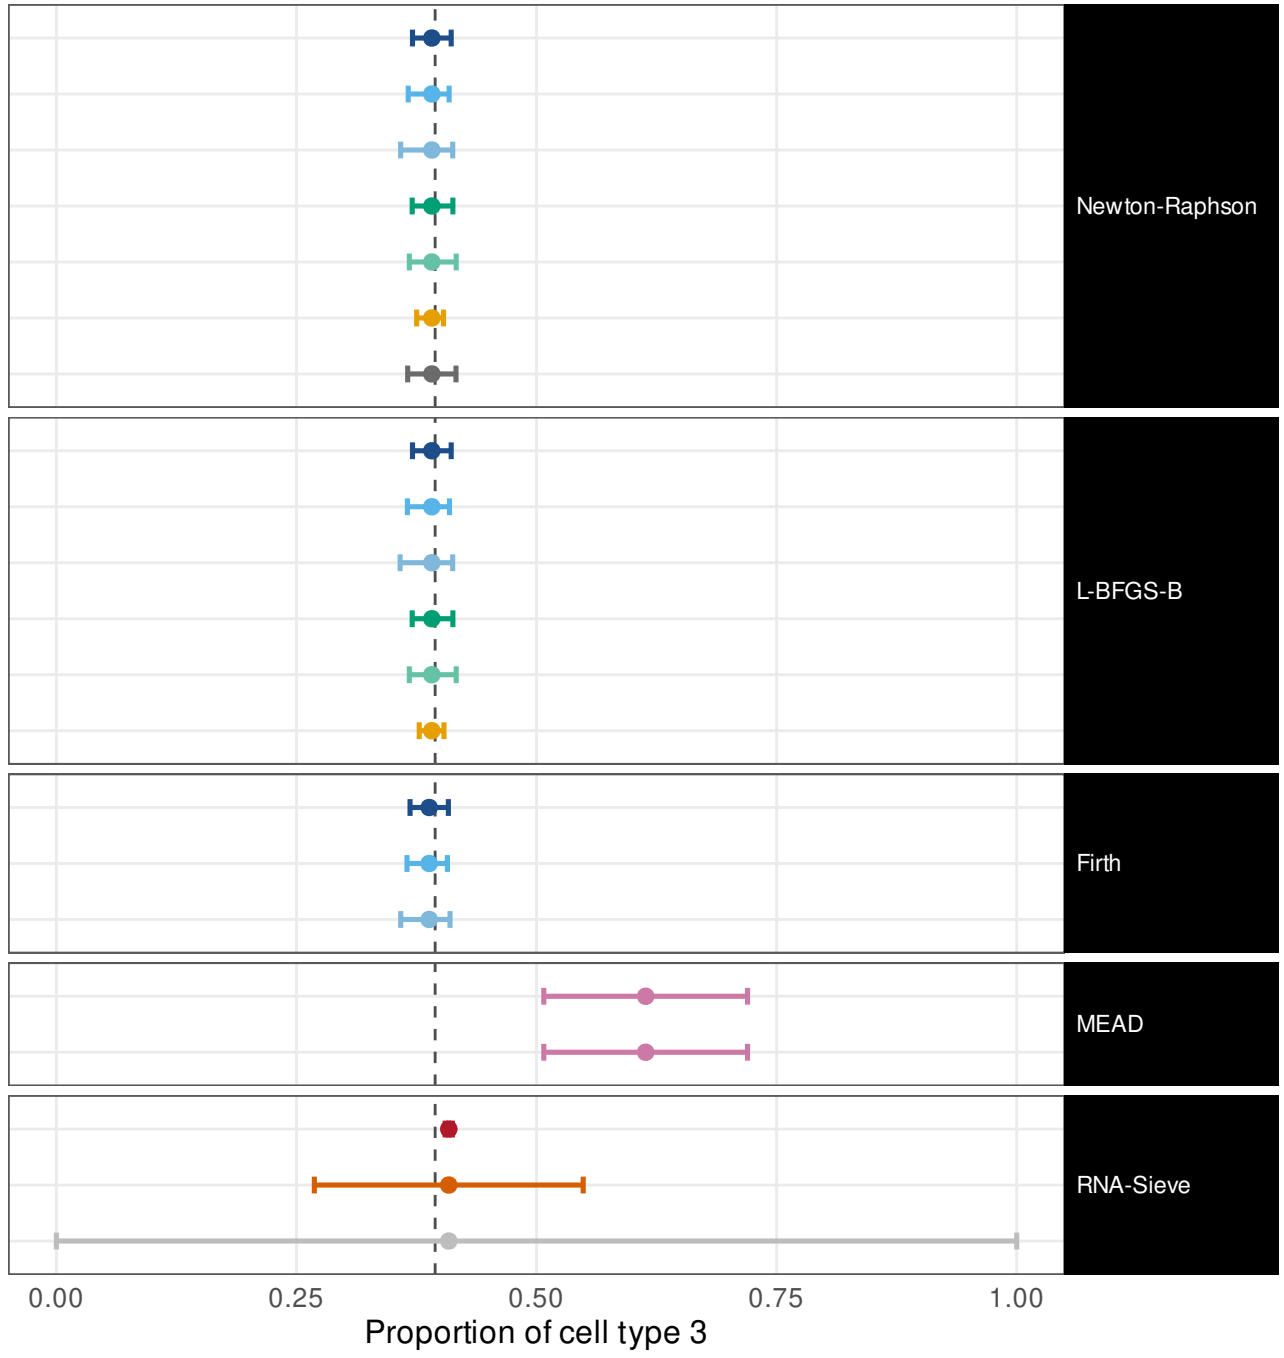


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	0.6	[0.23, 0.88]	w = 0.0277
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.0282
ILR, REML	0.8	[0.38, 0.96]	w = 0.0338
Profile likelihood	0.6	[0.23, 0.88]	w = 0.0291
Profile, REML	0.8	[0.38, 0.96]	w = 0.0336
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0165
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0409
Wald (delta)	0.6	[0.23, 0.88]	w = 0.0277
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.0283
ILR, REML	0.8	[0.38, 0.96]	w = 0.0338
Profile likelihood	0.6	[0.23, 0.88]	w = 0.0291
Profile, REML	0.8	[0.38, 0.96]	w = 0.0336
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0145
Wald (delta)	0.6	[0.23, 0.88]	w = 0.0276
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.0279
ILR, REML	0.8	[0.38, 0.96]	w = 0.0337
Method's own interval	0.4	[0.12, 0.77]	w = 0.204
Own interval, transcript fractions	0.8	[0.38, 0.96]	w = 0.204
Fisher information (Wald)	0	[0, 0.43]	w = 0.00143
Godambe sandwich	1	[0.57, 1]	w = 0.275
Released code, as published	1	[0.57, 1]	w = 1

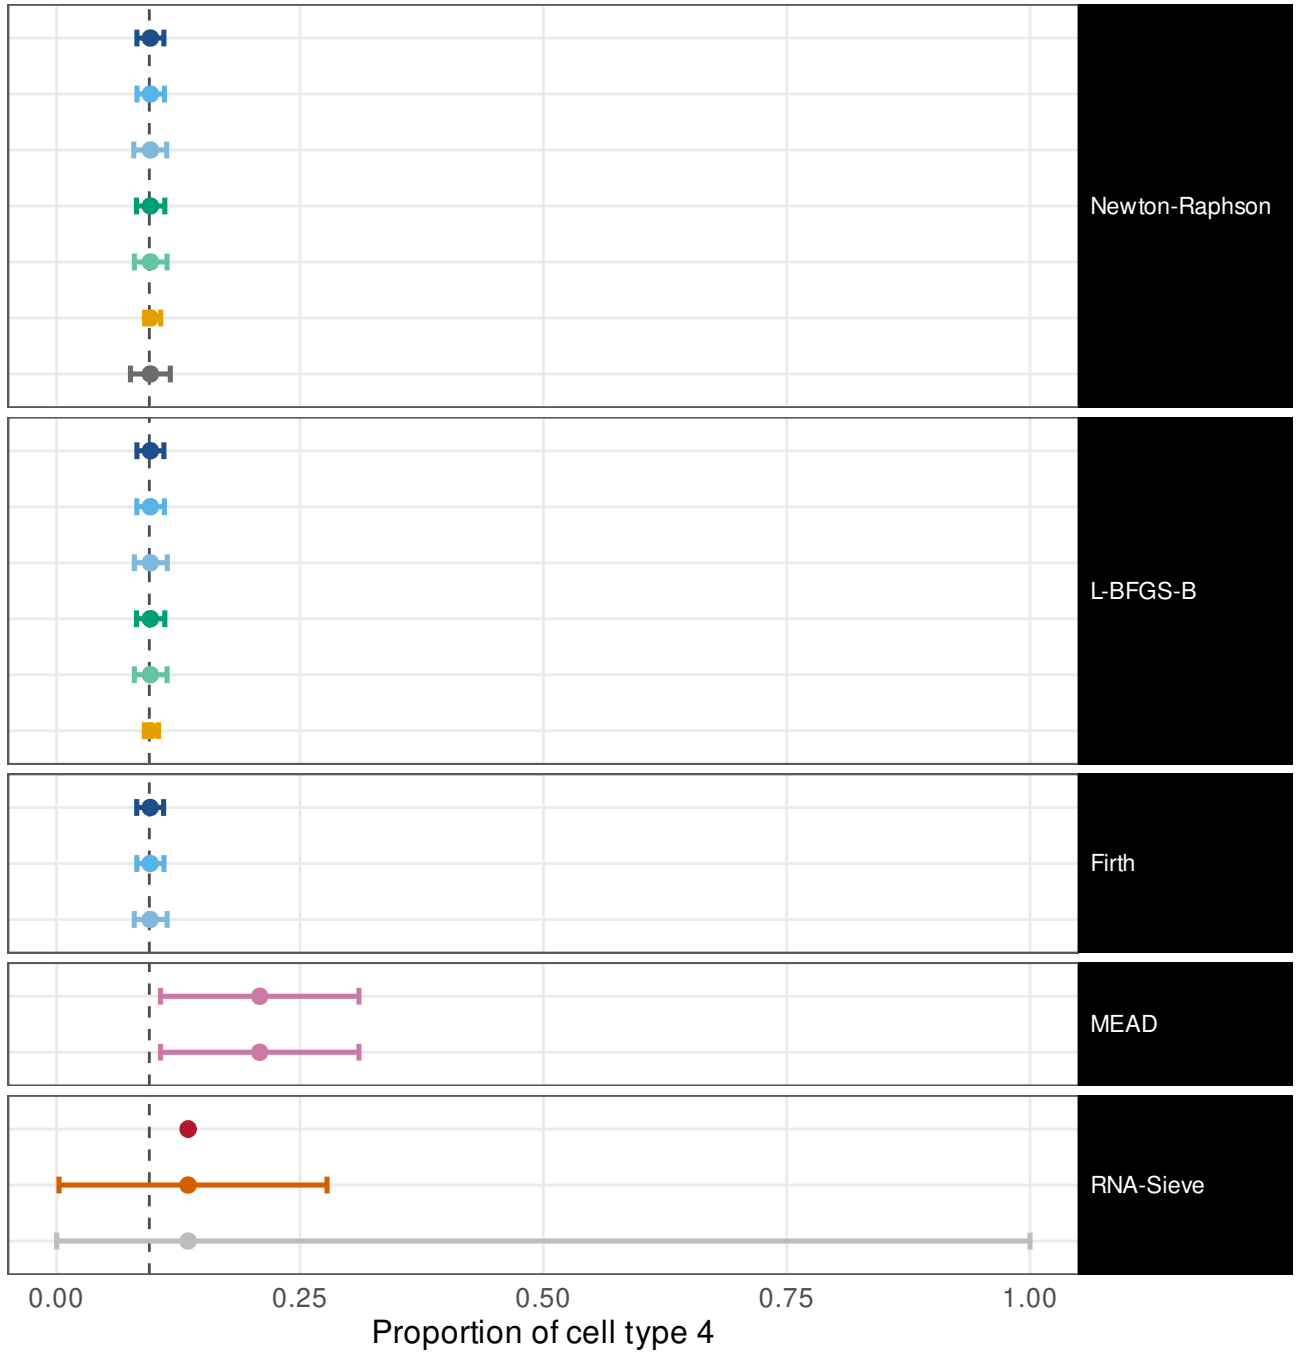

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 1 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.00253
ILR, mapped back                      1  [0.57,    1]   w = 0.00253
ILR, REML                             1  [0.57,    1]   w = 0.00304
Profile likelihood                    1  [0.57,    1]   w = 0.00266
Profile, REML                         1  [0.57,    1]   w = 0.00306
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00154
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.00282

Wald (delta)                          1  [0.57,    1]   w = 0.00253
ILR, mapped back                      1  [0.57,    1]   w = 0.0025
ILR, REML                             1  [0.57,    1]   w = 0.00302
Profile likelihood                    1  [0.57,    1]   w = 0.00266
Profile, REML                         1  [0.57,    1]   w = 0.00306
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00161

Wald (delta)                          1  [0.57,    1]   w = 0.00253
ILR, mapped back                      1  [0.57,    1]   w = 0.00251
ILR, REML                             1  [0.57,    1]   w = 0.0031

Method's own interval                 0.8  [0.38, 0.96]   w = 0.0379
Own interval, transcript fractions    0.8  [0.38, 0.96]   w = 0.0379

Fisher information (Wald)             0  [   0, 0.43]   w = 5.65e-05
Godambe sandwich                      1  [0.57,    1]   w = 0.332
Released code, as published           1  [0.57,    1]   w =    1
```

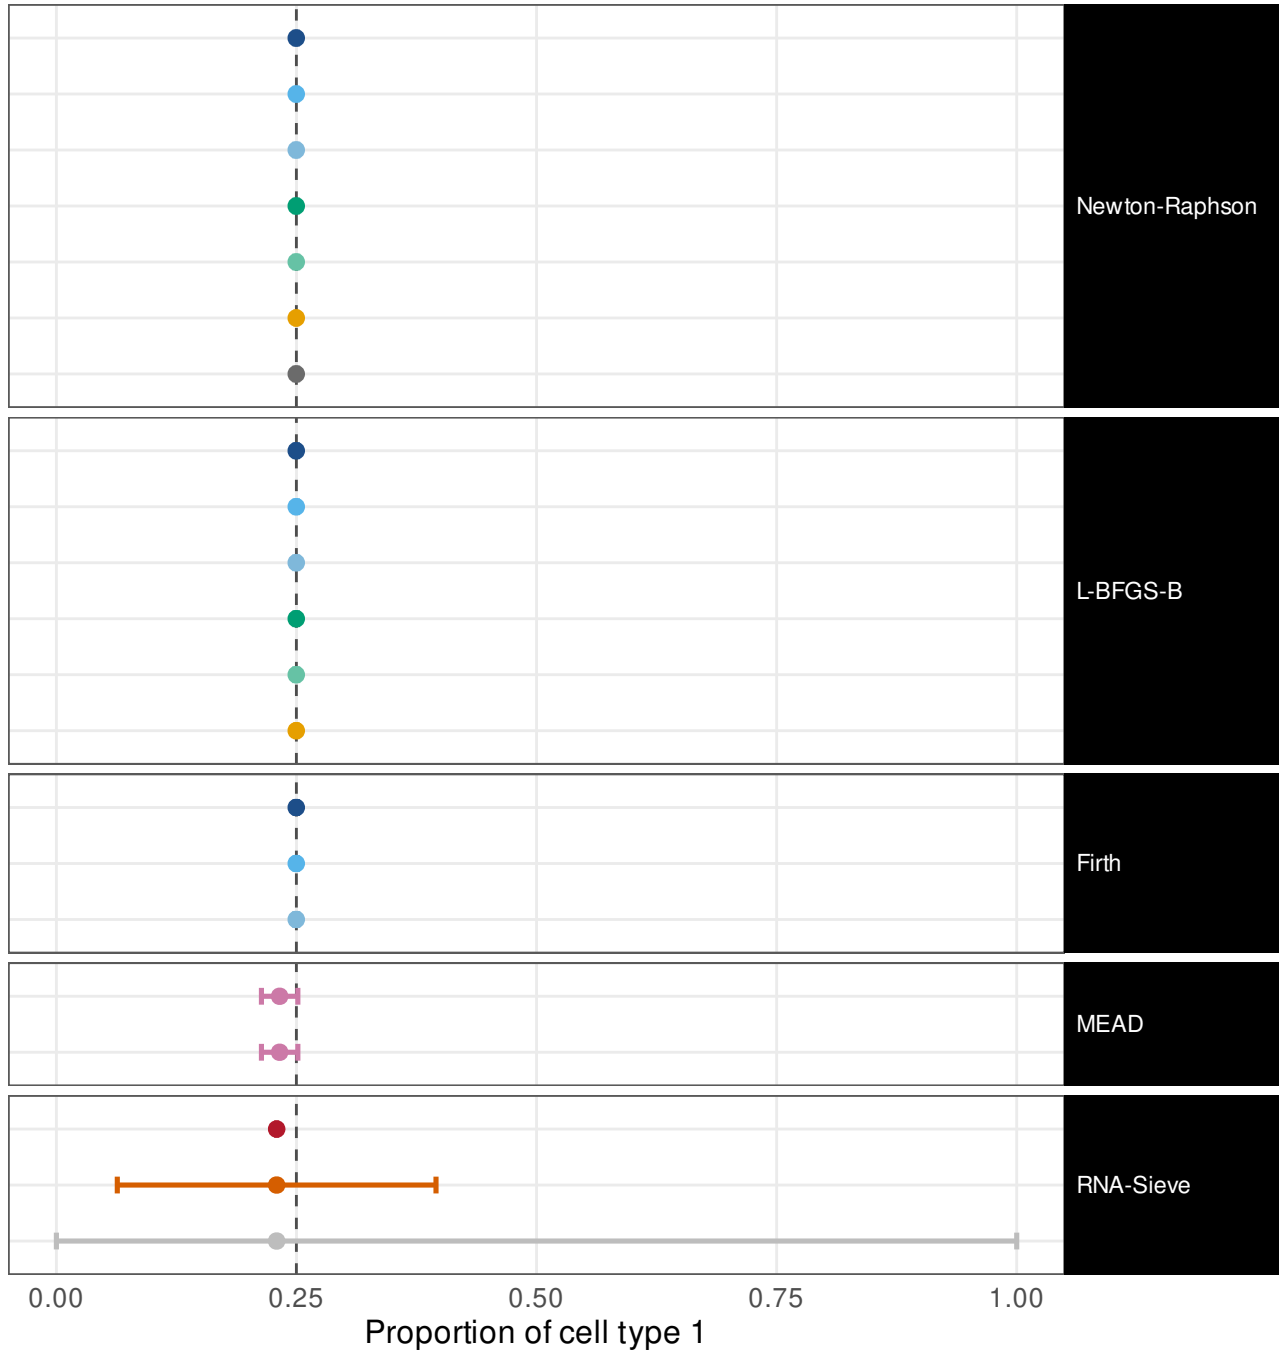


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 1 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00255
ILR, mapped back	1	[0.57, 1]	w = 0.00255
ILR, REML	1	[0.57, 1]	w = 0.0031
Profile likelihood	1	[0.57, 1]	w = 0.00268
Profile, REML	1	[0.57, 1]	w = 0.00308
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00155
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00284
Wald (delta)	1	[0.57, 1]	w = 0.00255
ILR, mapped back	1	[0.57, 1]	w = 0.00253
ILR, REML	1	[0.57, 1]	w = 0.00305
Profile likelihood	1	[0.57, 1]	w = 0.00268
Profile, REML	1	[0.57, 1]	w = 0.00308
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00143
Wald (delta)	1	[0.57, 1]	w = 0.00255
ILR, mapped back	1	[0.57, 1]	w = 0.00255
ILR, REML	1	[0.57, 1]	w = 0.00312
Method's own interval	0.8	[0.38, 0.96]	w = 0.032
Own interval, transcript fractions	0.8	[0.38, 0.96]	w = 0.032
Fisher information (Wald)	0	[0, 0.43]	w = 5.58e-05
Godambe sandwich	1	[0.57, 1]	w = 0.322
Released code, as published	1	[0.57, 1]	w = 1

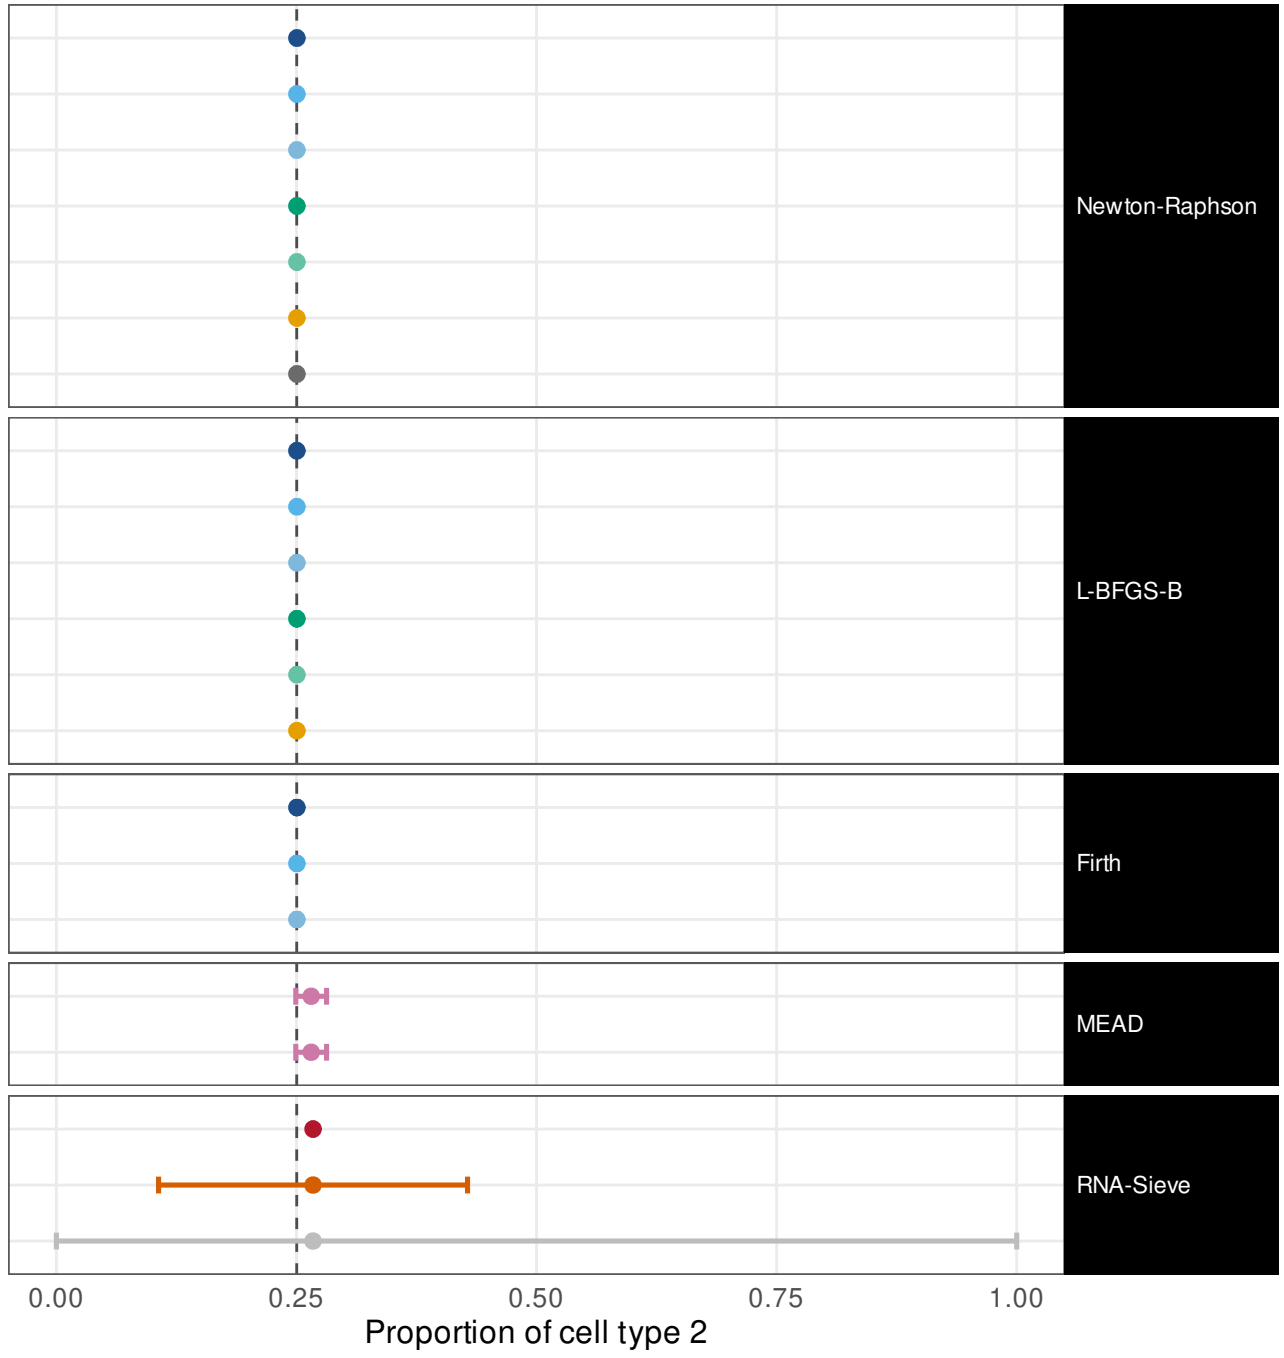


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 1 / equal sizes

Wald (delta)	0.8	[0.38, 0.96]	w = 0.00223
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00222
ILR, REML	0.8	[0.38, 0.96]	w = 0.00265
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00234
Profile, REML	0.8	[0.38, 0.96]	w = 0.0027
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0014
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00284
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00223
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00224
ILR, REML	0.8	[0.38, 0.96]	w = 0.00265
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00234
Profile, REML	0.8	[0.38, 0.96]	w = 0.0027
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.00118
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00223
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00221
ILR, REML	0.8	[0.38, 0.96]	w = 0.0027
Method's own interval	0	[0, 0.43]	w = 0.0237
Own interval, transcript fractions	0	[0, 0.43]	w = 0.0237
Fisher information (Wald)	0	[0, 0.43]	w = 5e-05
Godambe sandwich	1	[0.57, 1]	w = 0.307
Released code, as published	1	[0.57, 1]	w = 1

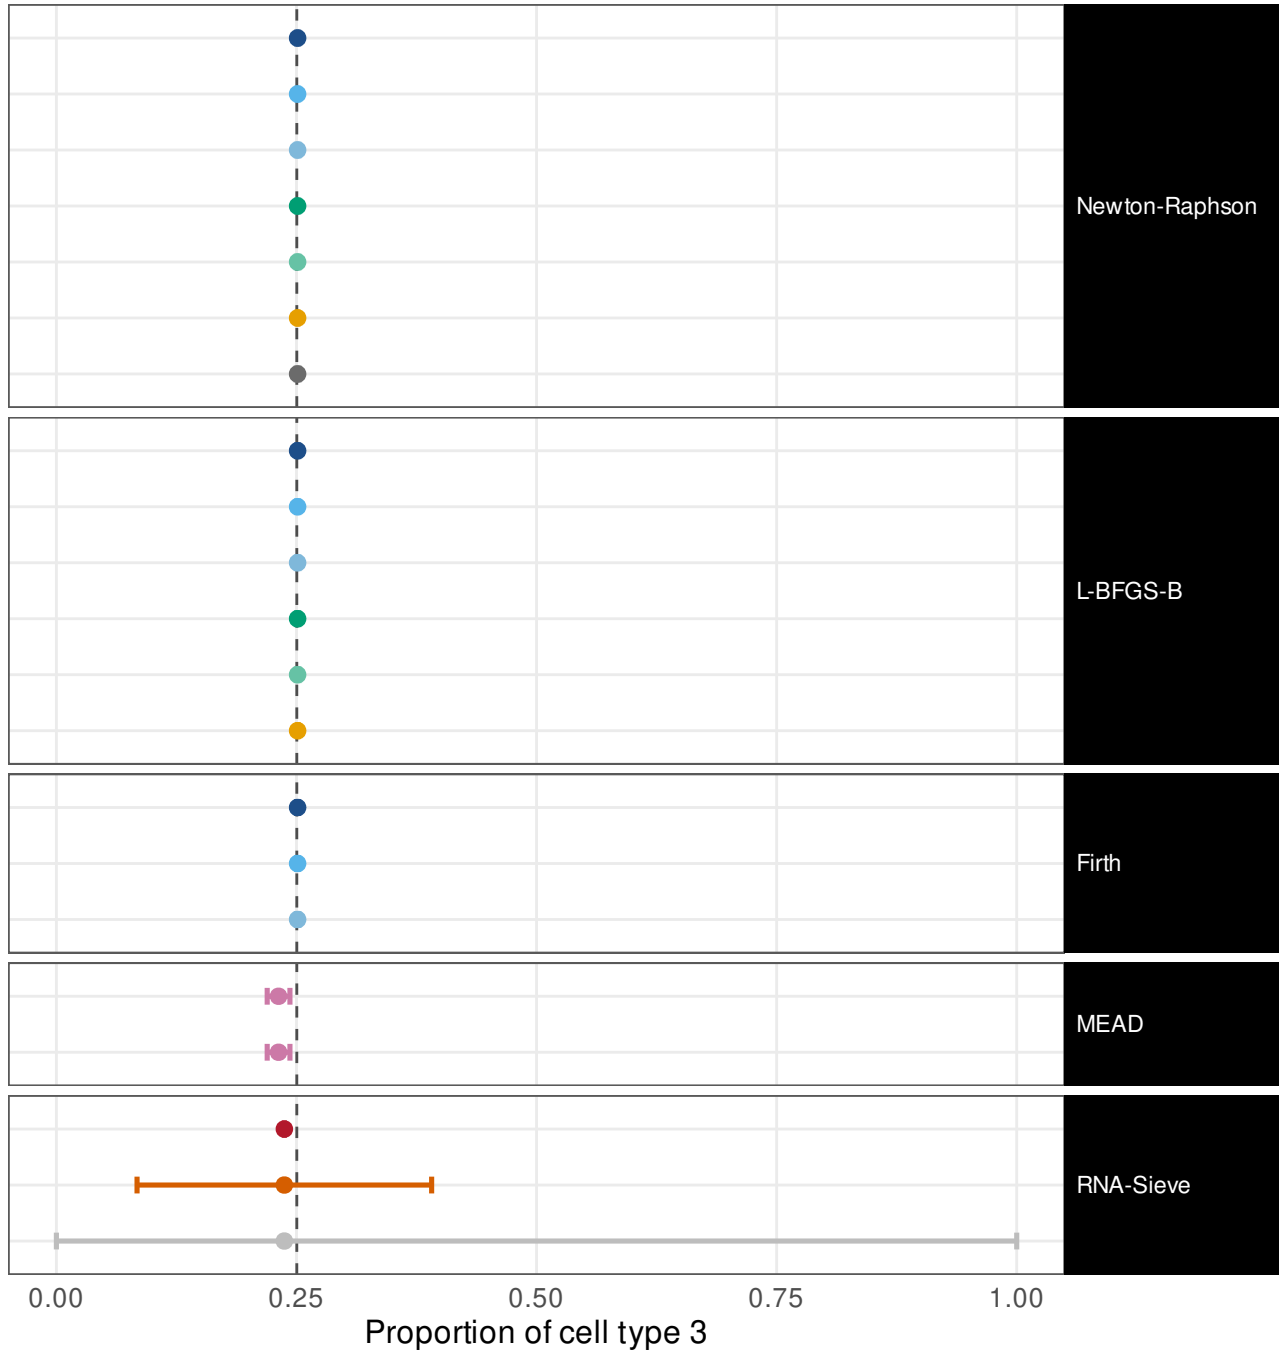


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 1 / equal sizes

Wald (delta)	0.8	[0.38, 0.96]	w = 0.00227
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00223
ILR, REML	0.8	[0.38, 0.96]	w = 0.00276
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00239
Profile, REML	0.8	[0.38, 0.96]	w = 0.00275
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0013
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00284
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00227
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00228
ILR, REML	0.8	[0.38, 0.96]	w = 0.00274
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00239
Profile, REML	0.8	[0.38, 0.96]	w = 0.00275
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.001
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00227
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00226
ILR, REML	0.8	[0.38, 0.96]	w = 0.00278
Method's own interval	0	[0, 0.43]	w = 0.0259
Own interval, transcript fractions	0	[0, 0.43]	w = 0.0259
Fisher information (Wald)	0	[0, 0.43]	w = 5.75e-05
Godambe sandwich	1	[0.57, 1]	w = 0.31
Released code, as published	1	[0.57, 1]	w = 1

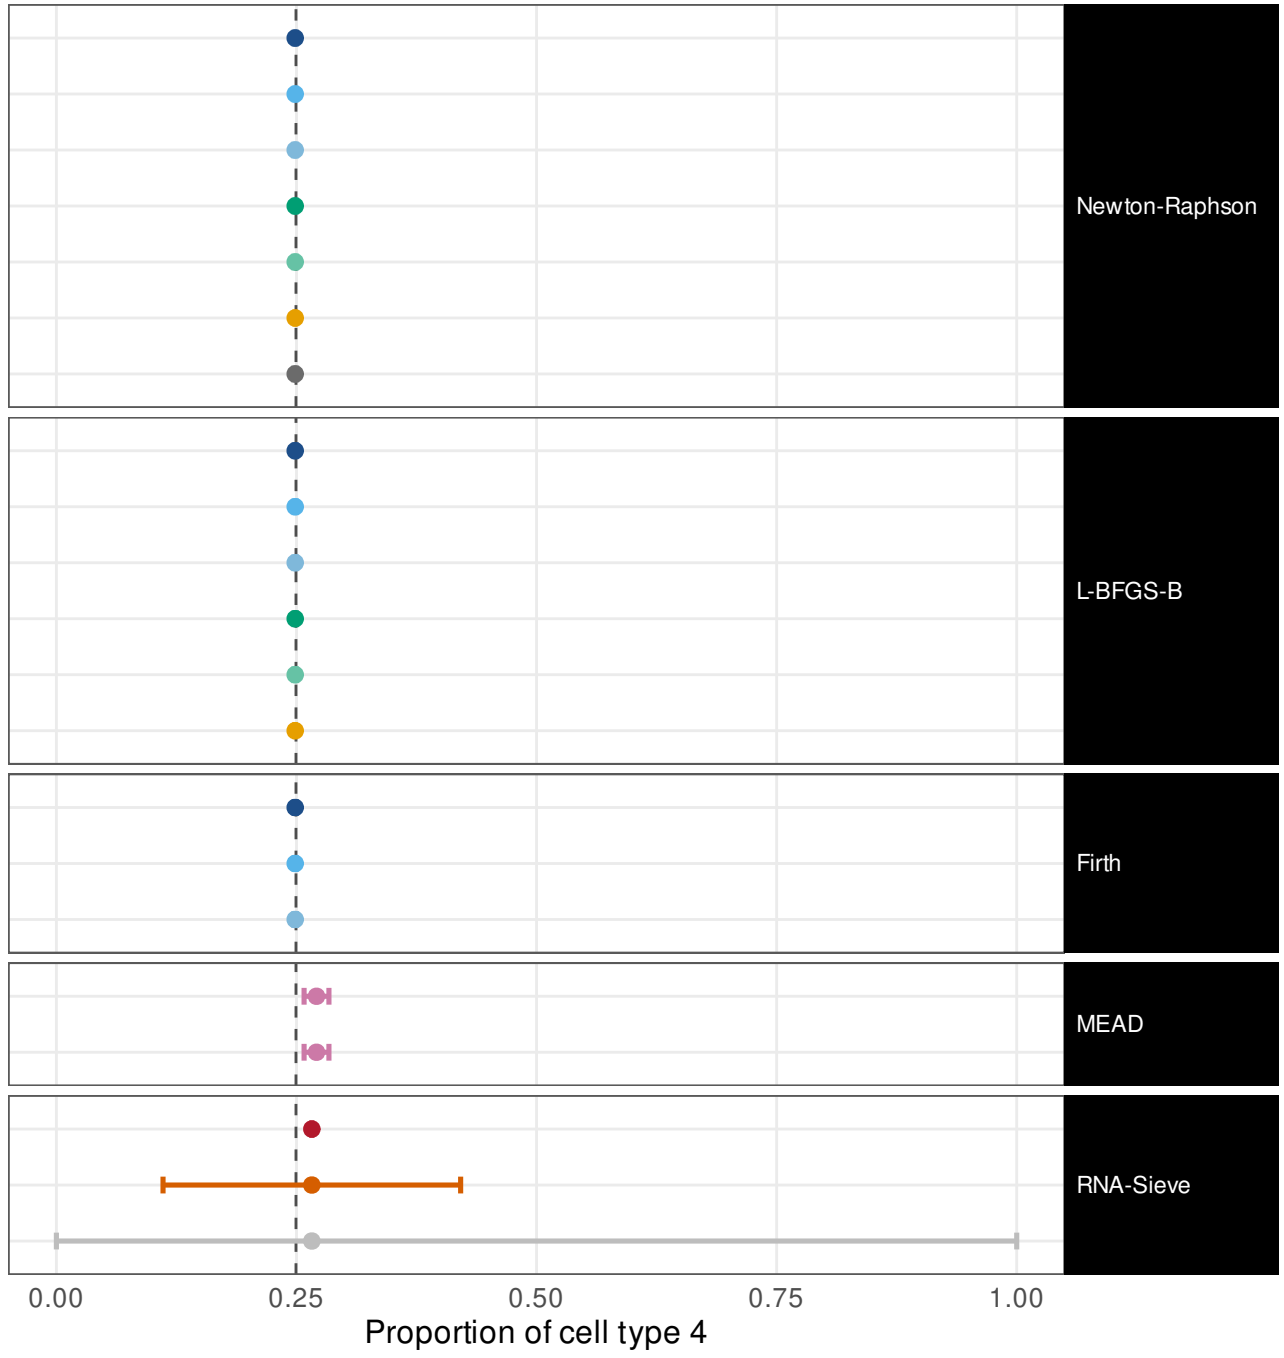

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.00235
ILR, mapped back                      1  [0.57,    1]   w = 0.00237
ILR, REML                             1  [0.57,    1]   w = 0.00289
Profile likelihood                    1  [0.57,    1]   w = 0.00246
Profile, REML                         1  [0.57,    1]   w = 0.00284
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.00149
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0028

Wald (delta)                          1  [0.57,    1]   w = 0.00235
ILR, mapped back                      1  [0.57,    1]   w = 0.00237
ILR, REML                             1  [0.57,    1]   w = 0.00282
Profile likelihood                    1  [0.57,    1]   w = 0.00246
Profile, REML                         1  [0.57,    1]   w = 0.00284
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.00135

Wald (delta)                          1  [0.57,    1]   w = 0.00235
ILR, mapped back                      1  [0.57,    1]   w = 0.00236
ILR, REML                             1  [0.57,    1]   w = 0.00286

Method's own interval                 1  [0.57,    1]   w = 0.0264
Own interval, transcript fractions    1  [0.57,    1]   w = 0.0264

Fisher information (Wald)             0  [   0, 0.43]   w = 1.21e-05
Godambe sandwich                      1  [0.57,    1]   w = 0.319
Released code, as published           1  [0.57,    1]   w =    1
```

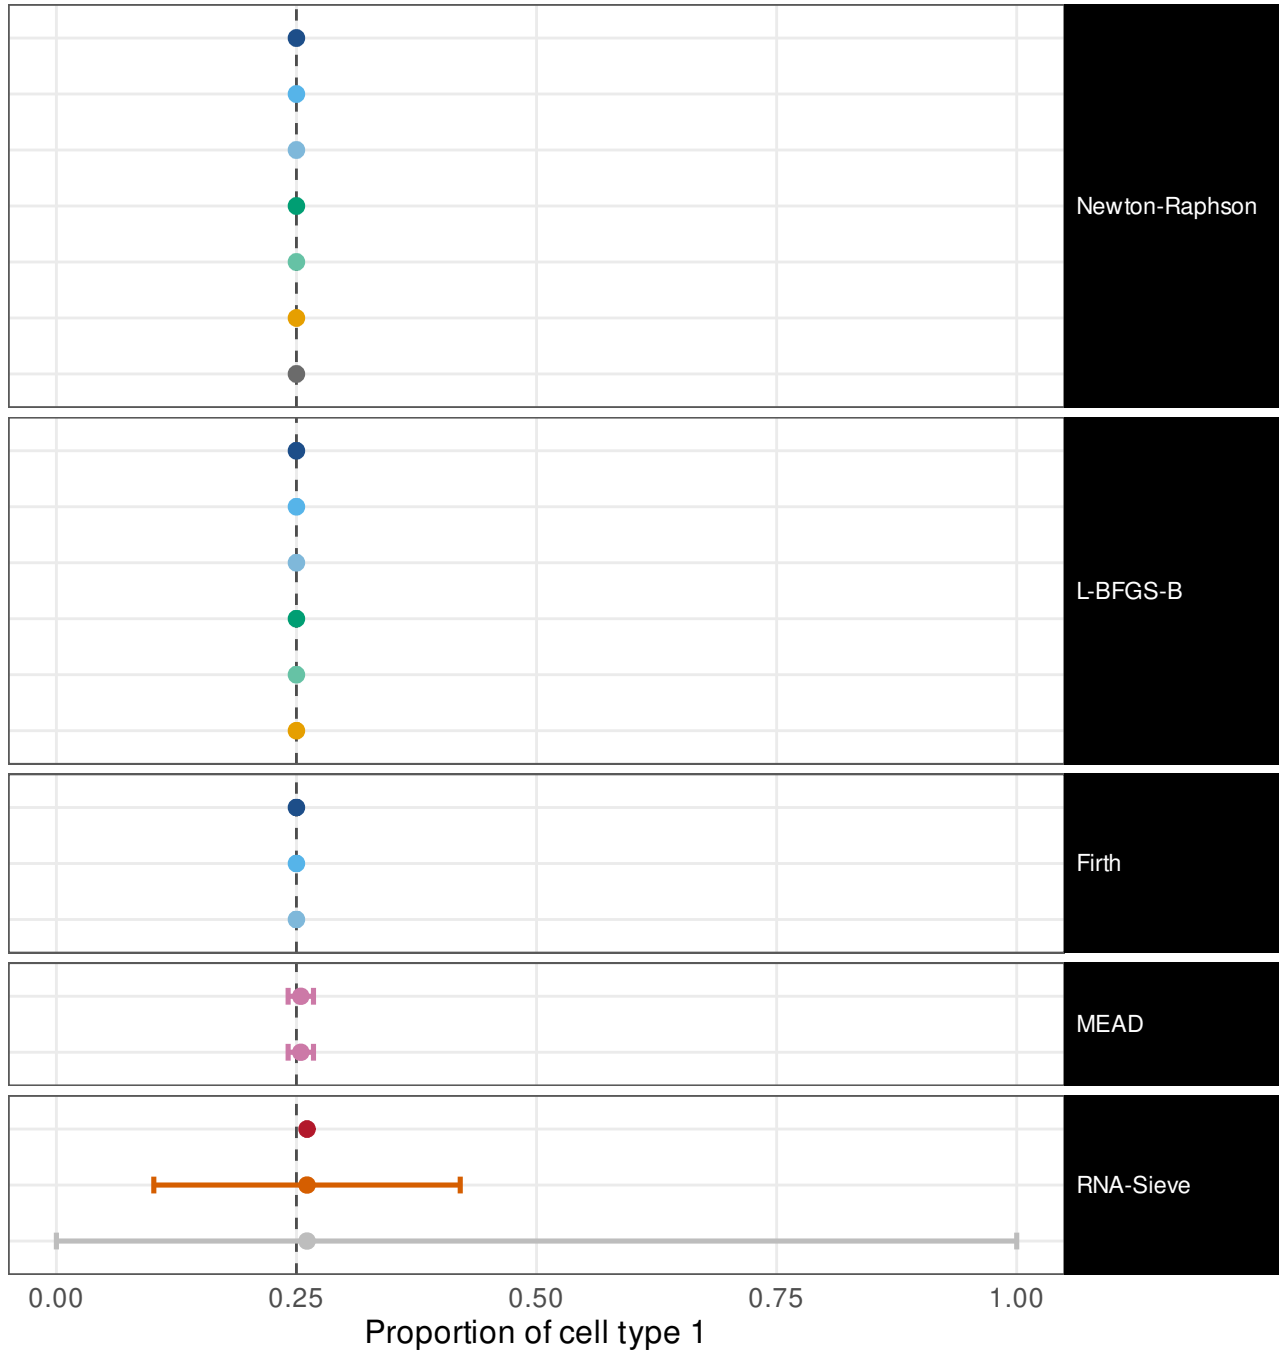


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00237
ILR, mapped back	1	[0.57, 1]	w = 0.00237
ILR, REML	1	[0.57, 1]	w = 0.00288
Profile likelihood	1	[0.57, 1]	w = 0.00248
Profile, REML	1	[0.57, 1]	w = 0.00286
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00139
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00283
Wald (delta)	1	[0.57, 1]	w = 0.00237
ILR, mapped back	1	[0.57, 1]	w = 0.00234
ILR, REML	1	[0.57, 1]	w = 0.0028
Profile likelihood	1	[0.57, 1]	w = 0.00248
Profile, REML	1	[0.57, 1]	w = 0.00286
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00123
Wald (delta)	1	[0.57, 1]	w = 0.00237
ILR, mapped back	1	[0.57, 1]	w = 0.00235
ILR, REML	1	[0.57, 1]	w = 0.00286
Method's own interval	1	[0.57, 1]	w = 0.0322
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0322
Fisher information (Wald)	0	[0, 0.43]	w = 9.98e-06
Godambe sandwich	1	[0.57, 1]	w = 0.321
Released code, as published	1	[0.57, 1]	w = 1

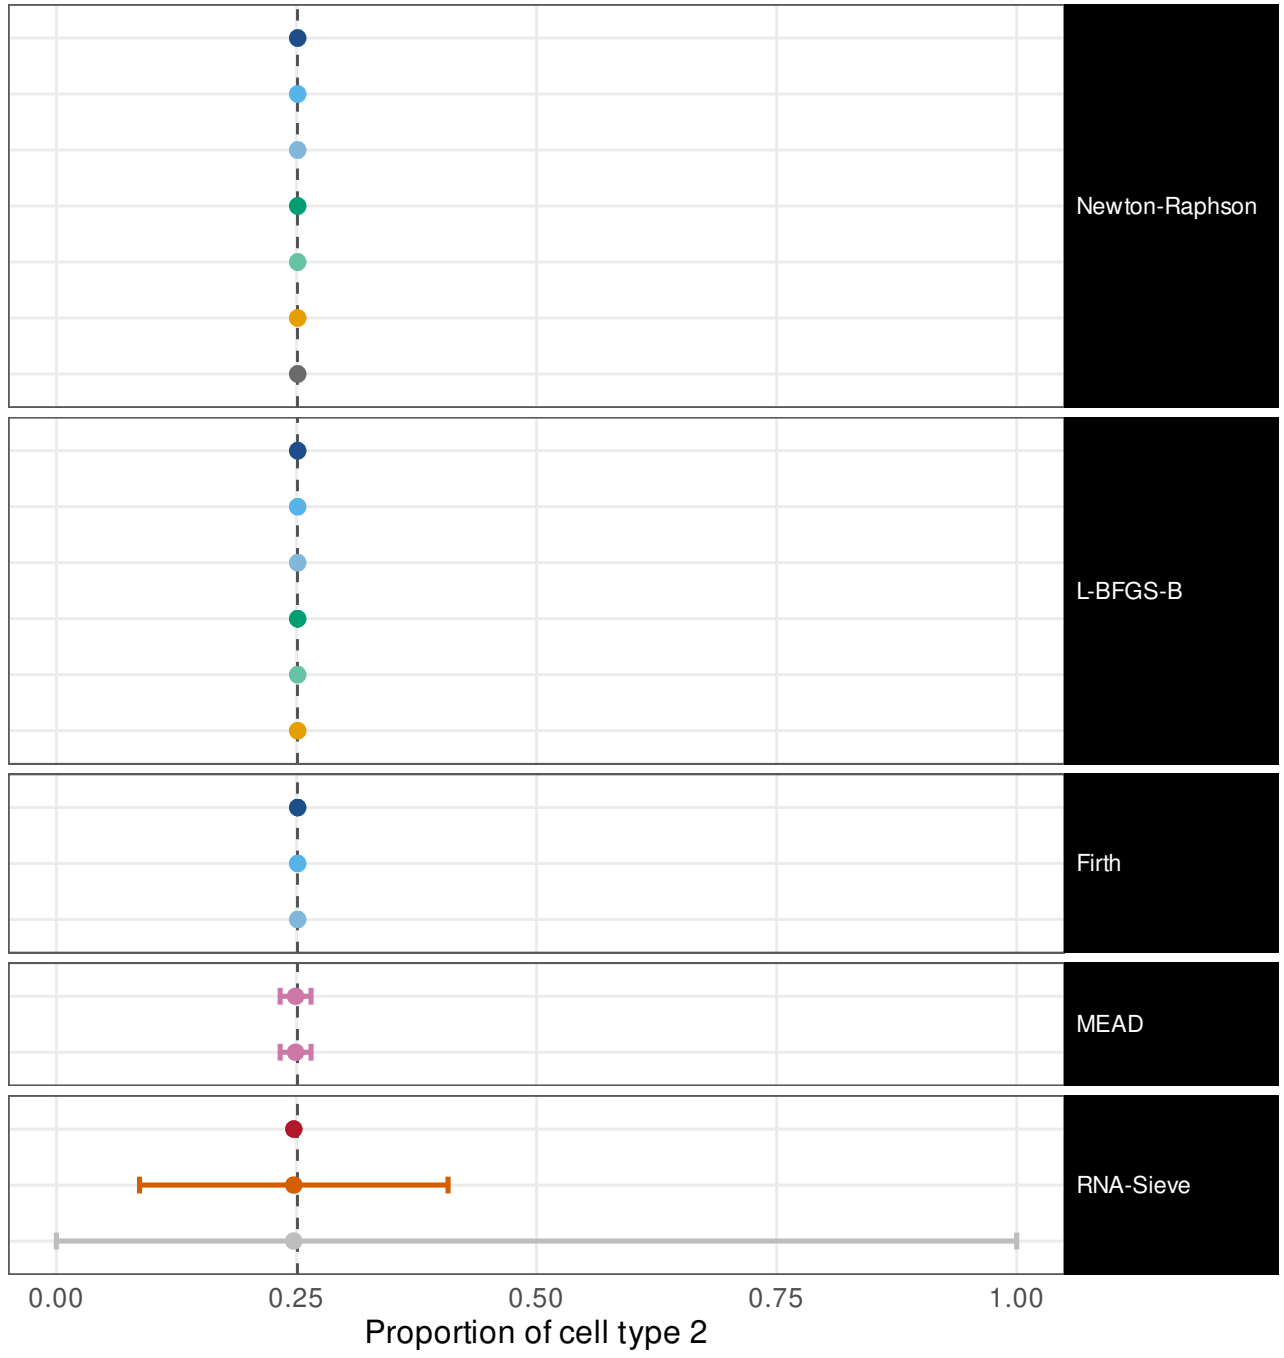


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00207
ILR, mapped back	1	[0.57, 1]	w = 0.00207
ILR, REML	1	[0.57, 1]	w = 0.00248
Profile likelihood	1	[0.57, 1]	w = 0.00217
Profile, REML	1	[0.57, 1]	w = 0.0025
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00139
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00255
Wald (delta)	1	[0.57, 1]	w = 0.00207
ILR, mapped back	1	[0.57, 1]	w = 0.00205
ILR, REML	1	[0.57, 1]	w = 0.00247
Profile likelihood	1	[0.57, 1]	w = 0.00217
Profile, REML	1	[0.57, 1]	w = 0.0025
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.00116
Wald (delta)	1	[0.57, 1]	w = 0.00207
ILR, mapped back	1	[0.57, 1]	w = 0.00205
ILR, REML	1	[0.57, 1]	w = 0.0025
Method's own interval	1	[0.57, 1]	w = 0.0357
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0357
Fisher information (Wald)	0	[0, 0.43]	w = 1.06e-05
Godambe sandwich	1	[0.57, 1]	w = 0.303
Released code, as published	1	[0.57, 1]	w = 1

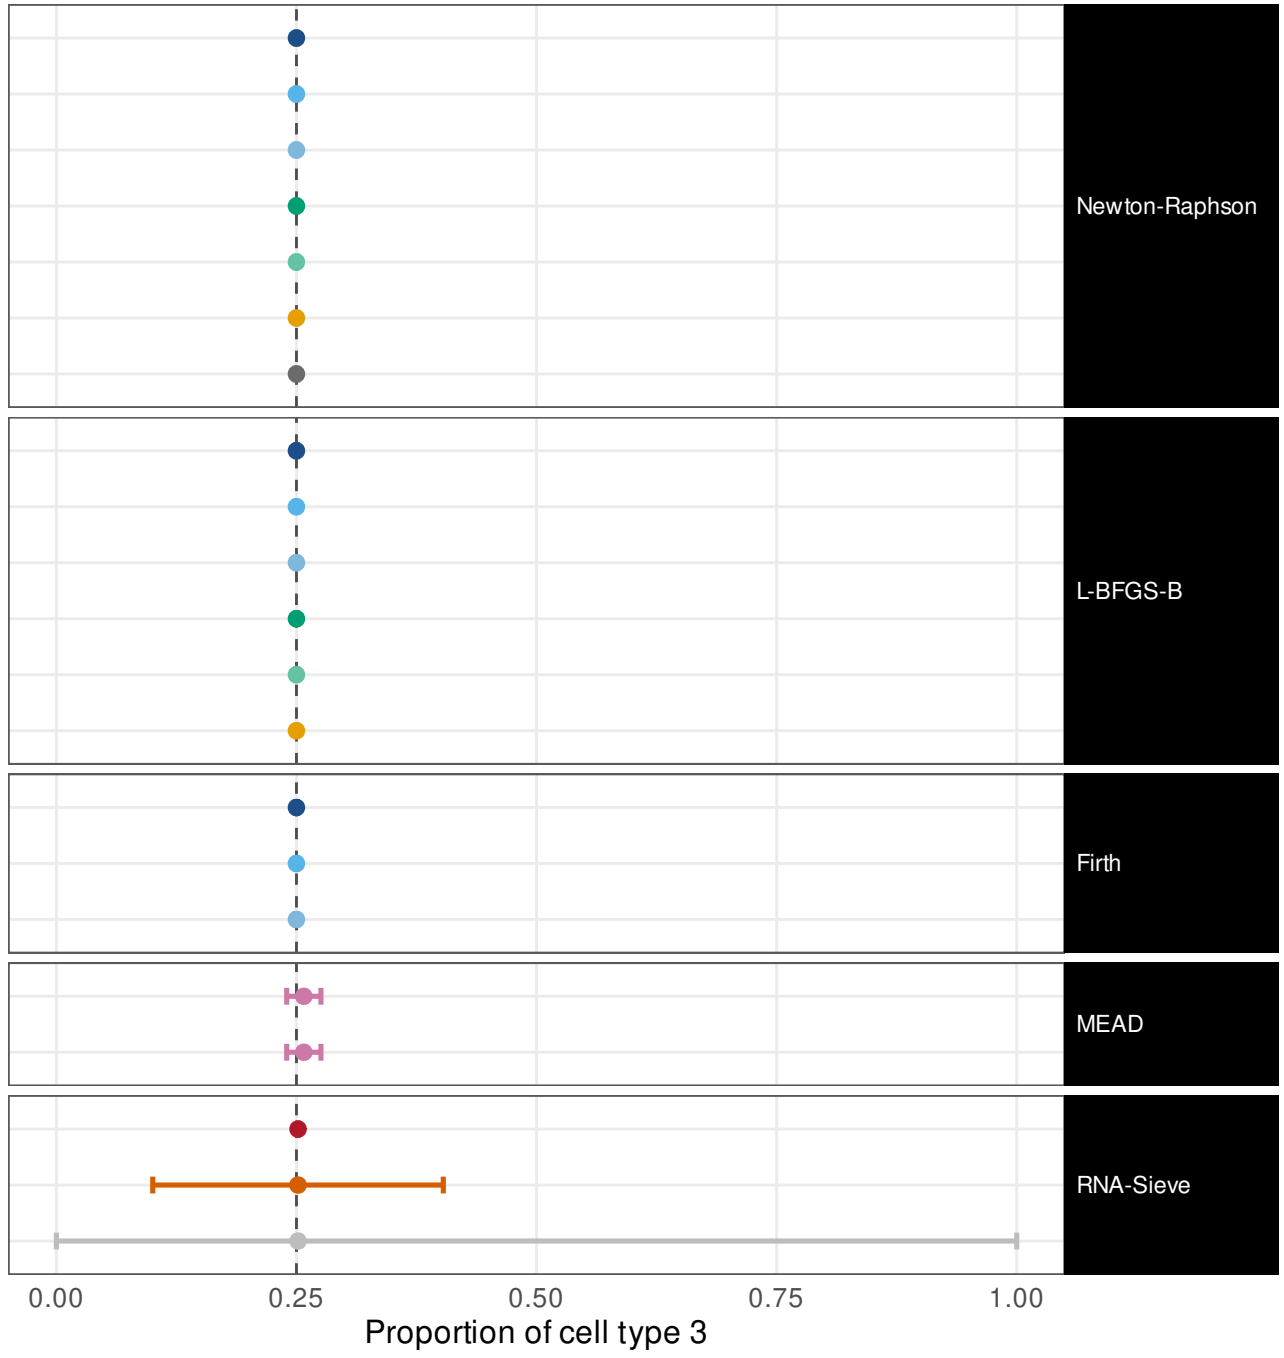


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00211
ILR, mapped back	1	[0.57, 1]	w = 0.00211
ILR, REML	1	[0.57, 1]	w = 0.00253
Profile likelihood	1	[0.57, 1]	w = 0.00221
Profile, REML	1	[0.57, 1]	w = 0.00255
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00155
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00241
Wald (delta)	1	[0.57, 1]	w = 0.00211
ILR, mapped back	1	[0.57, 1]	w = 0.00212
ILR, REML	1	[0.57, 1]	w = 0.00254
Profile likelihood	1	[0.57, 1]	w = 0.00221
Profile, REML	1	[0.57, 1]	w = 0.00255
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00128
Wald (delta)	1	[0.57, 1]	w = 0.00211
ILR, mapped back	1	[0.57, 1]	w = 0.00211
ILR, REML	1	[0.57, 1]	w = 0.00255
Method's own interval	1	[0.57, 1]	w = 0.0308
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0308
Fisher information (Wald)	0	[0, 0.43]	w = 1.06e-05
Godambe sandwich	1	[0.57, 1]	w = 0.303
Released code, as published	1	[0.57, 1]	w = 1

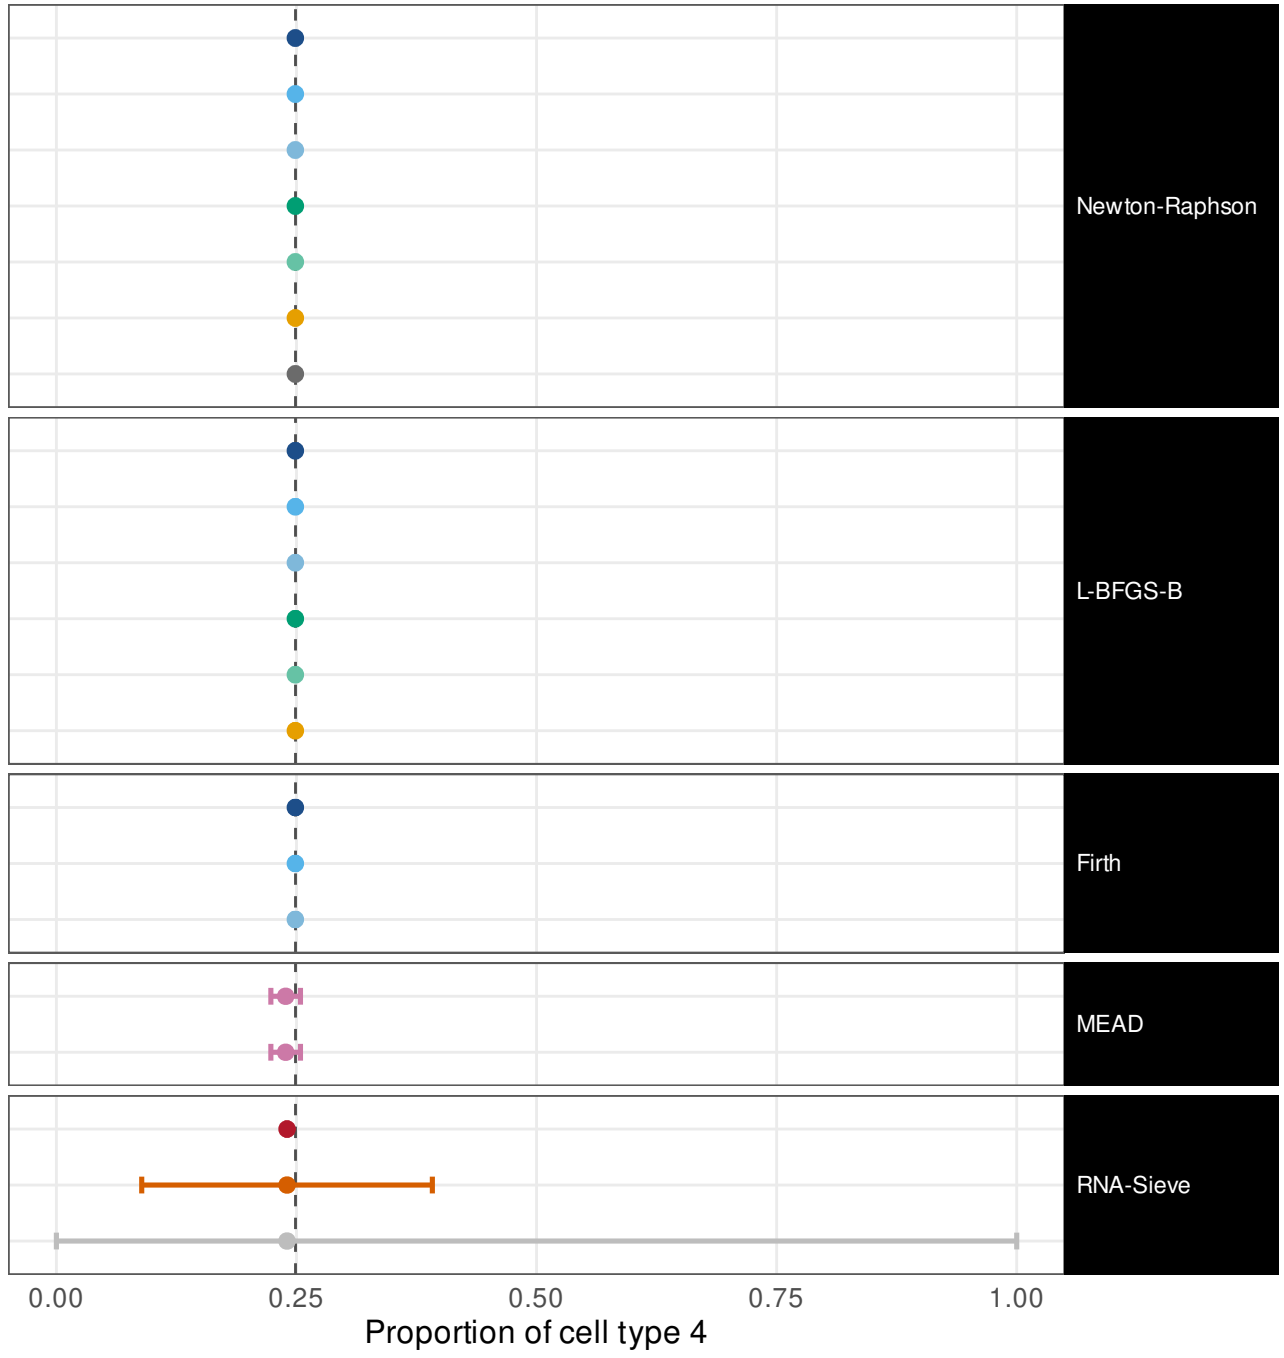


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	0.8	[0.38, 0.96]	w = 0.00615
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00616
ILR, REML	0.8	[0.38, 0.96]	w = 0.00744
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00646
Profile, REML	0.8	[0.38, 0.96]	w = 0.00744
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00357
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00999
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00615
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00614
ILR, REML	0.8	[0.38, 0.96]	w = 0.00738
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00646
Profile, REML	0.8	[0.38, 0.96]	w = 0.00744
Parametric bootstrap	0	[0, 0.43]	w = 0.00307
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00615
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00621
ILR, REML	0.8	[0.38, 0.96]	w = 0.00741
Method's own interval	0	[0, 0.43]	w = 0.0628
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0628
Fisher information (Wald)	0	[0, 0.43]	w = 0.000113
Godambe sandwich	1	[0.57, 1]	w = 0.442
Released code, as published	1	[0.57, 1]	w = 1

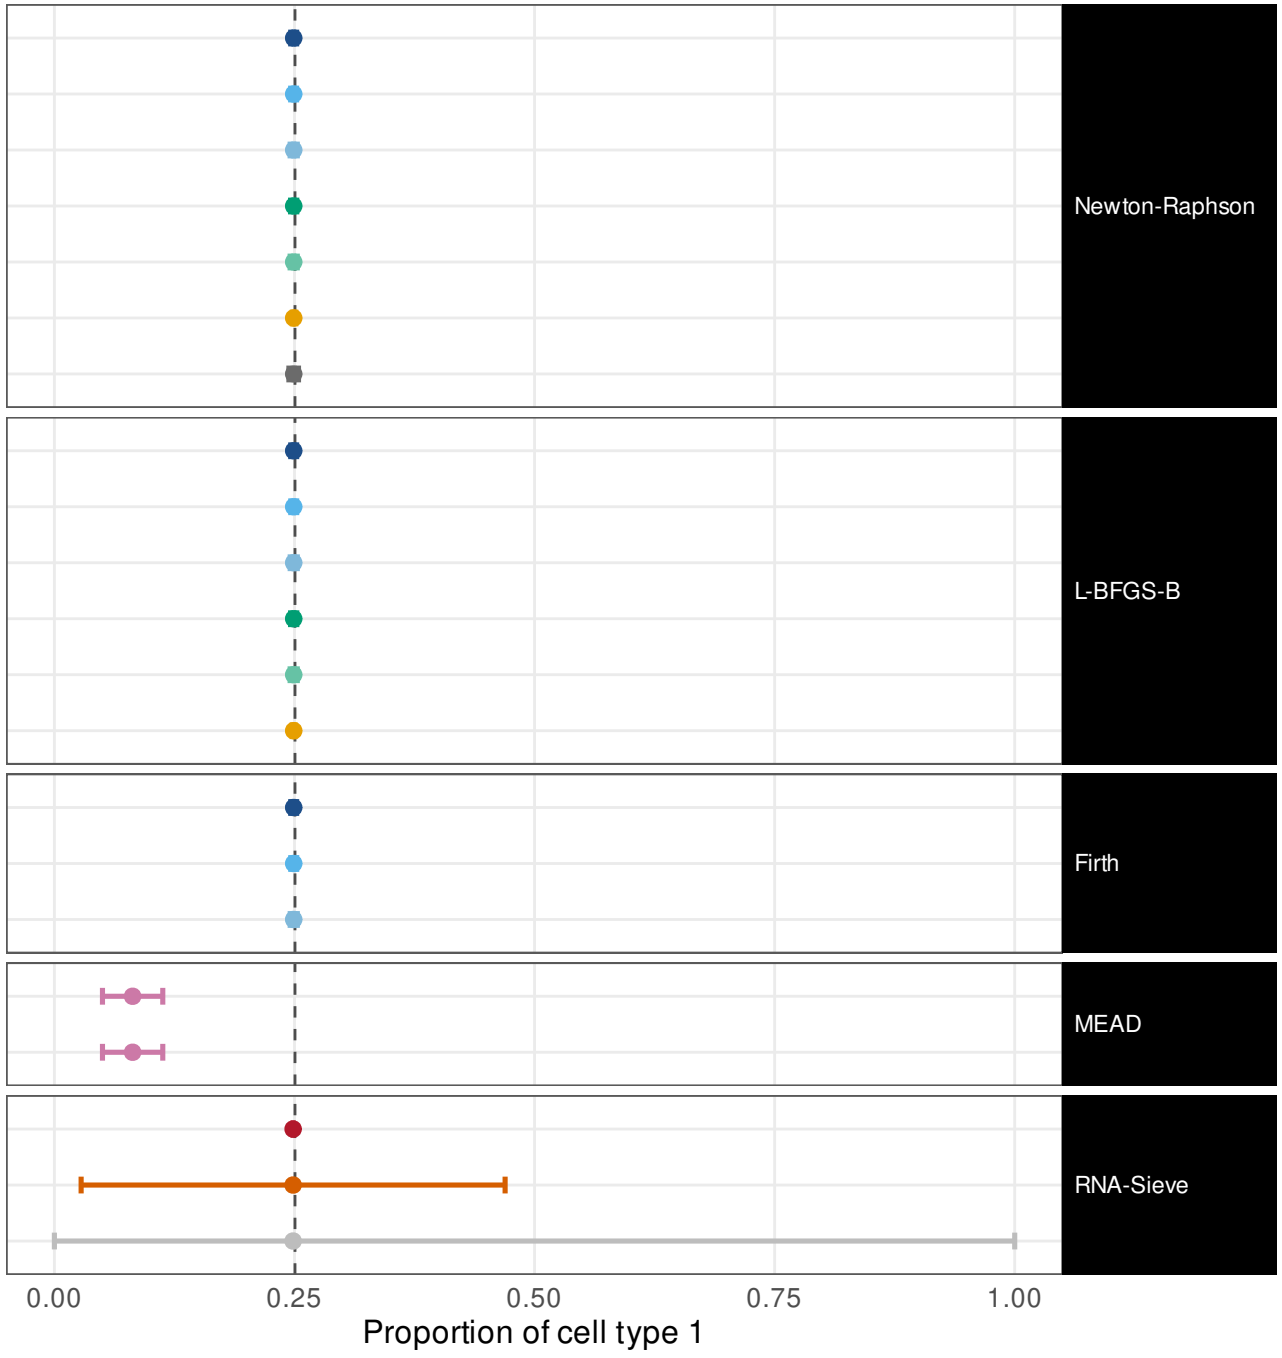


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	0.6	[0.23, 0.88]	w = 0.00623
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.00622
ILR, REML	0.8	[0.38, 0.96]	w = 0.00756
Profile likelihood	0.6	[0.23, 0.88]	w = 0.00654
Profile, REML	0.8	[0.38, 0.96]	w = 0.00753
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.00325
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00979
Wald (delta)	0.6	[0.23, 0.88]	w = 0.00623
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.00624
ILR, REML	0.8	[0.38, 0.96]	w = 0.00746
Profile likelihood	0.6	[0.23, 0.88]	w = 0.00654
Profile, REML	0.8	[0.38, 0.96]	w = 0.00753
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.00314
Wald (delta)	0.6	[0.23, 0.88]	w = 0.00623
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.00636
ILR, REML	0.8	[0.38, 0.96]	w = 0.0075
Method's own interval	0	[0, 0.43]	w = 0.0355
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0355
Fisher information (Wald)	0	[0, 0.43]	w = 0.000131
Godambe sandwich	1	[0.57, 1]	w = 0.435
Released code, as published	1	[0.57, 1]	w = 1

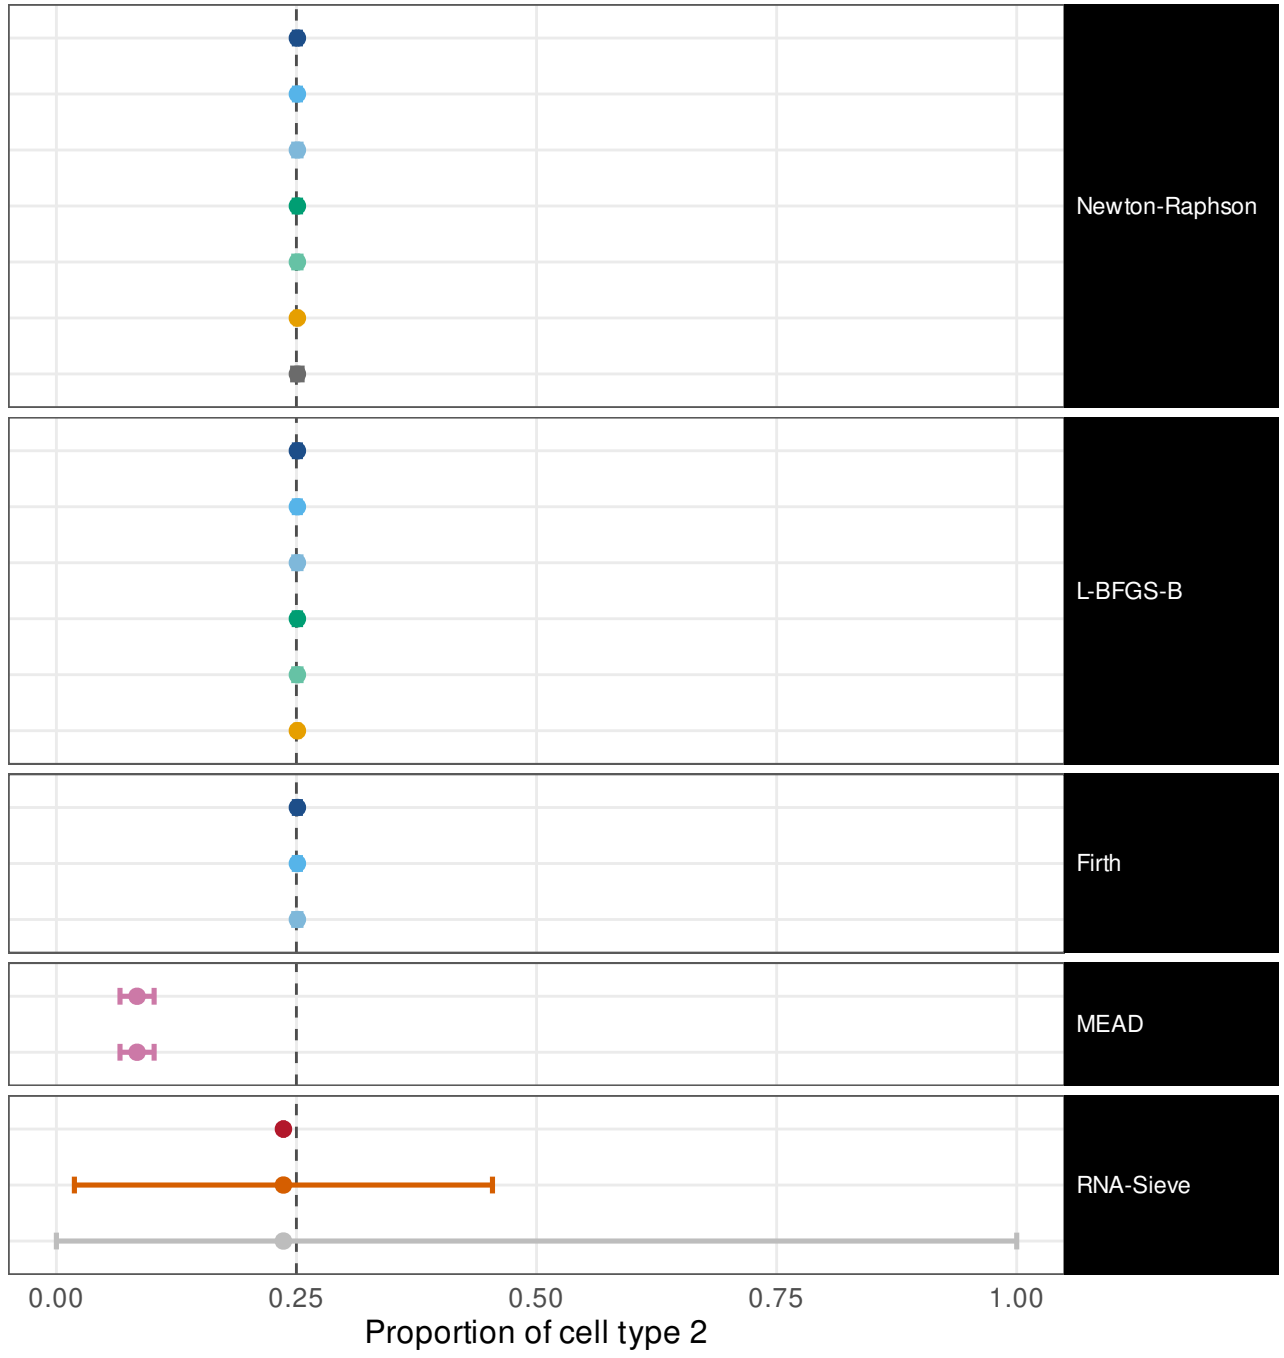


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.00166
ILR, mapped back	1	[0.57, 1]	w = 0.00167
ILR, REML	1	[0.57, 1]	w = 0.00199
Profile likelihood	1	[0.57, 1]	w = 0.00174
Profile, REML	1	[0.57, 1]	w = 0.002
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.000861
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00213
Wald (delta)	1	[0.57, 1]	w = 0.00166
ILR, mapped back	1	[0.57, 1]	w = 0.00164
ILR, REML	1	[0.57, 1]	w = 0.00197
Profile likelihood	1	[0.57, 1]	w = 0.00174
Profile, REML	1	[0.57, 1]	w = 0.002
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.000867
Wald (delta)	1	[0.57, 1]	w = 0.00166
ILR, mapped back	1	[0.57, 1]	w = 0.00167
ILR, REML	1	[0.57, 1]	w = 0.00199
Method's own interval	0	[0, 0.43]	w = 0.0355
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0355
Fisher information (Wald)	0	[0, 0.43]	w = 3.25e-05
Godambe sandwich	1	[0.57, 1]	w = 0.253
Released code, as published	1	[0.57, 1]	w = 1

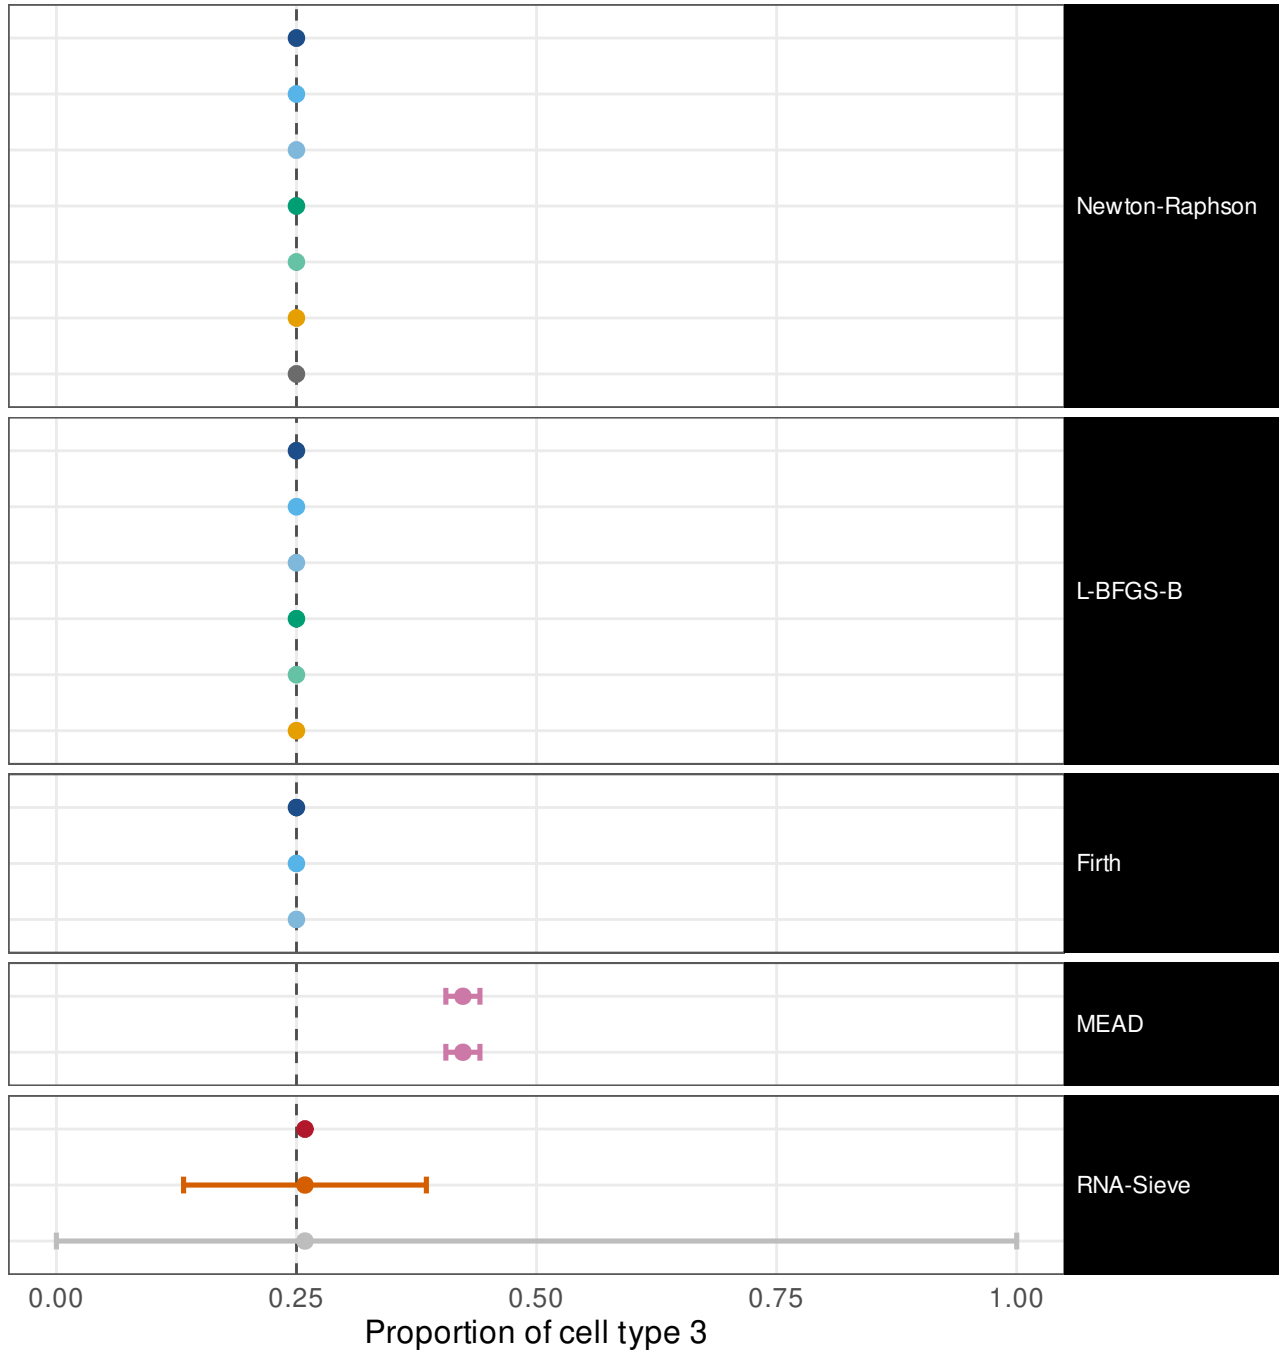

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                      0.8  [0.38, 0.96]   w = 0.0018
ILR, mapped back                  0.6  [0.23, 0.88]   w = 0.0018
ILR, REML                         0.8  [0.38, 0.96]   w = 0.00216
Profile likelihood                0.8  [0.38, 0.96]   w = 0.00189
Profile, REML                     0.8  [0.38, 0.96]   w = 0.00218
Parametric bootstrap              0.2  [0.036, 0.62]   w = 0.00112
Oracle (Fisher at p*)               1  [0.57,    1]   w = 0.00297

Wald (delta)                      0.8  [0.38, 0.96]   w = 0.0018
ILR, mapped back                  0.8  [0.38, 0.96]   w = 0.00178
ILR, REML                         0.8  [0.38, 0.96]   w = 0.00221
Profile likelihood                0.8  [0.38, 0.96]   w = 0.00189
Profile, REML                     0.8  [0.38, 0.96]   w = 0.00218
Parametric bootstrap              0.4  [0.12, 0.77]   w = 0.00107

Wald (delta)                      0.8  [0.38, 0.96]   w = 0.0018
ILR, mapped back                  0.6  [0.23, 0.88]   w = 0.00183
ILR, REML                         0.8  [0.38, 0.96]   w = 0.00217

Method's own interval               0  [   0, 0.43]   w = 0.0412
Own interval, transcript fractions  1  [0.57,    1]   w = 0.0412

Fisher information (Wald)           0  [   0, 0.43]   w = 3.12e-05
Godambe sandwich                    1  [0.57,    1]   w = 0.253
Released code, as published         1  [0.57,    1]   w =    1
```

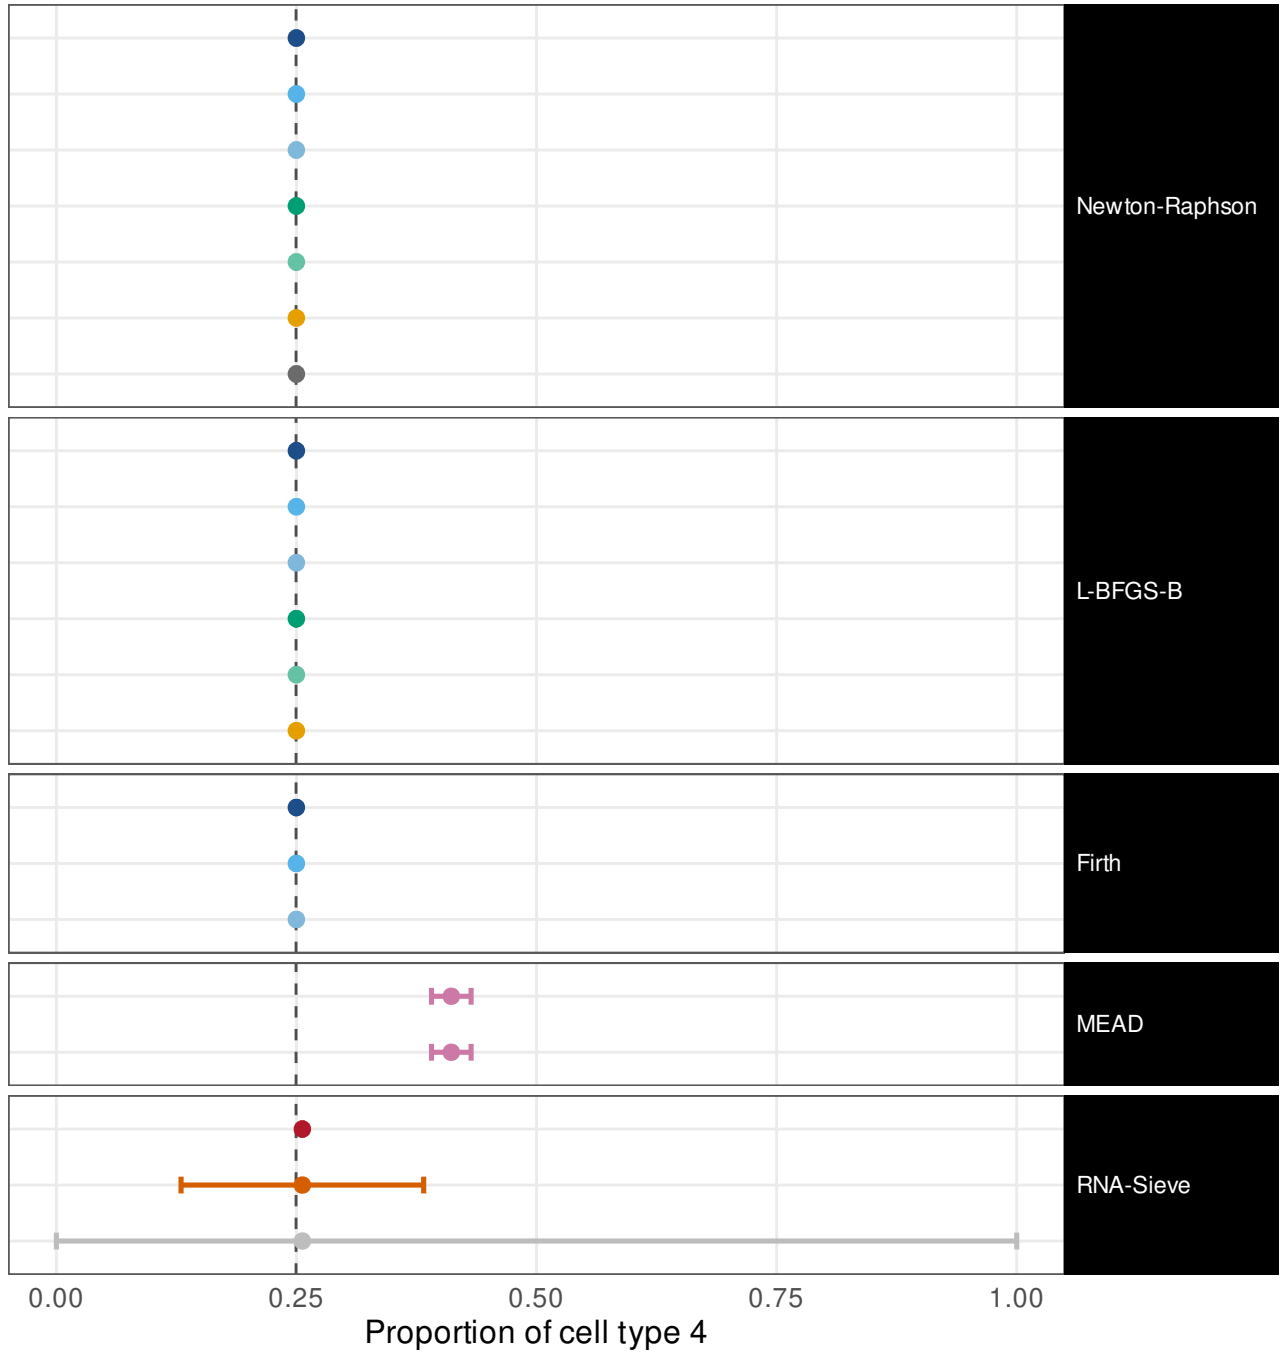


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.0036
ILR, mapped back	1	[0.57, 1]	w = 0.00359
ILR, REML	1	[0.57, 1]	w = 0.00431
Profile likelihood	1	[0.57, 1]	w = 0.00378
Profile, REML	1	[0.57, 1]	w = 0.00435
Parametric bootstrap	1	[0.57, 1]	w = 0.003
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00399
Wald (delta)	1	[0.57, 1]	w = 0.0036
ILR, mapped back	1	[0.57, 1]	w = 0.00363
ILR, REML	1	[0.57, 1]	w = 0.0043
Profile likelihood	1	[0.57, 1]	w = 0.00378
Profile, REML	1	[0.57, 1]	w = 0.00435
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00181
Wald (delta)	1	[0.57, 1]	w = 0.0036
ILR, mapped back	1	[0.57, 1]	w = 0.00362
ILR, REML	1	[0.57, 1]	w = 0.00429
Method's own interval	0	[0, 0.43]	w = 0.0566
Own interval, transcript fractions	0	[0, 0.43]	w = 0.0566
Fisher information (Wald)	0	[0, 0.43]	w = 3.27e-05
Godambe sandwich	1	[0.57, 1]	w = 0.404
Released code, as published	1	[0.57, 1]	w = 1

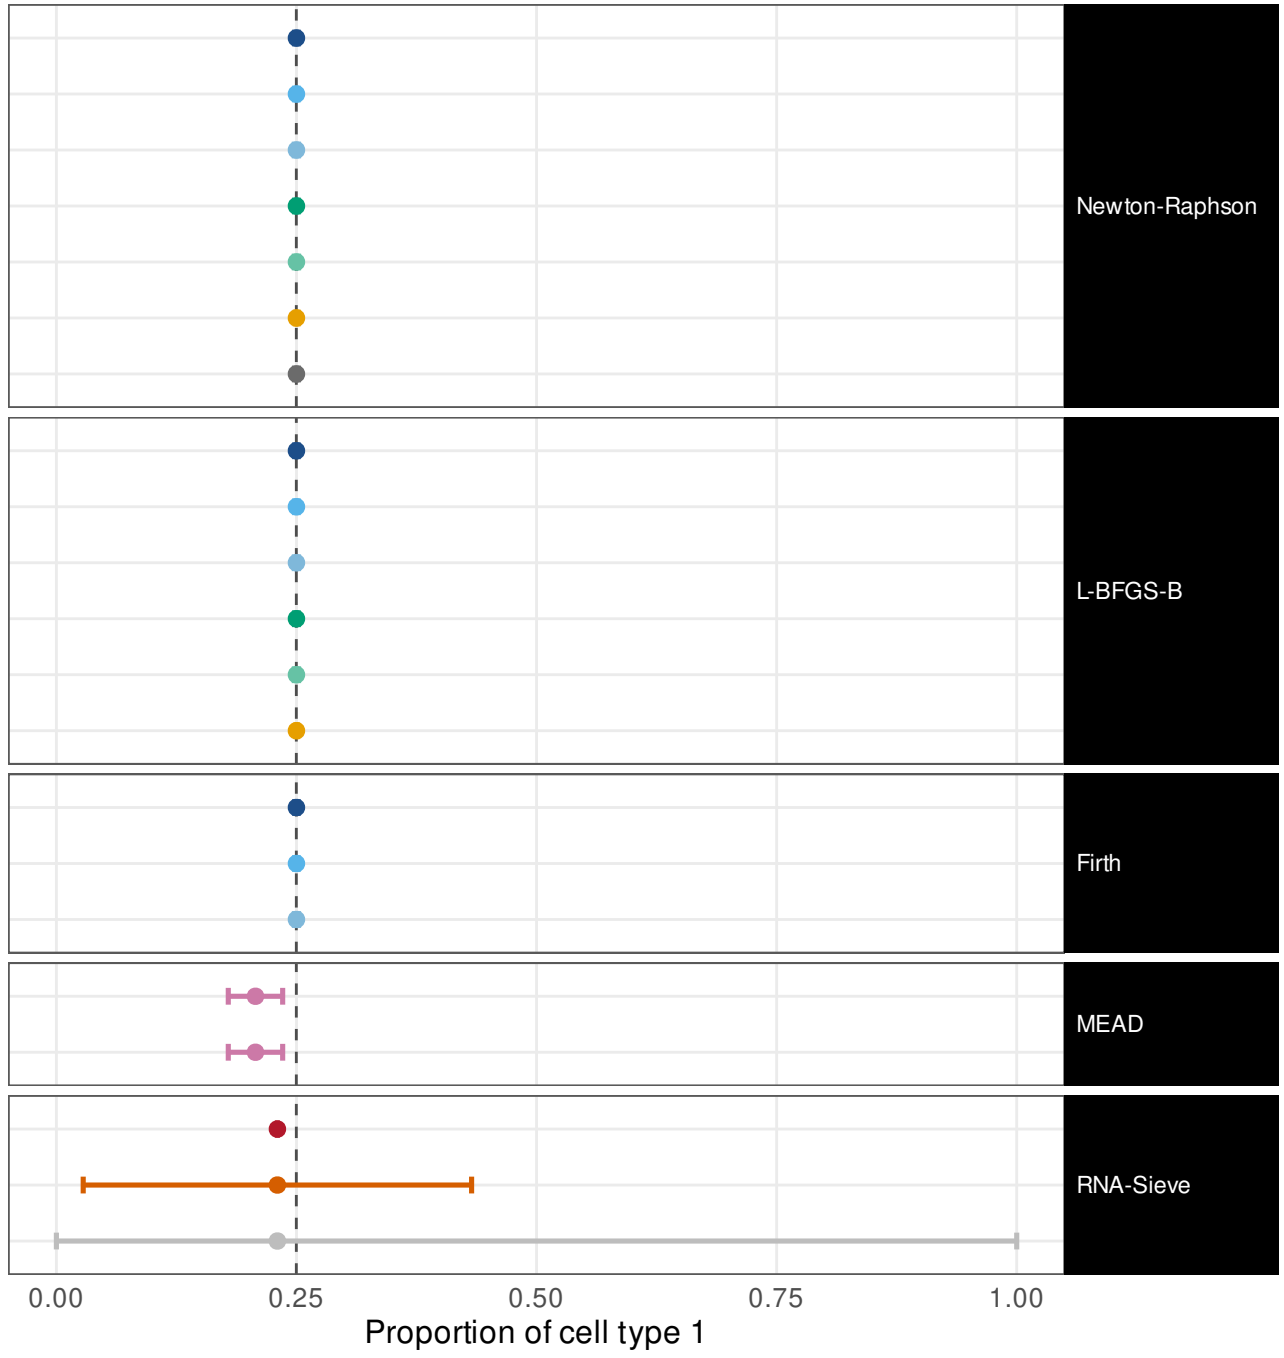

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.00363
ILR, mapped back                      1  [0.57,    1]   w = 0.0036
ILR, REML                             1  [0.57,    1]   w = 0.00436
Profile likelihood                    1  [0.57,    1]   w = 0.00381
Profile, REML                         1  [0.57,    1]   w = 0.00439
Parametric bootstrap                  1  [0.57,    1]   w = 0.00296
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.00412

Wald (delta)                          1  [0.57,    1]   w = 0.00363
ILR, mapped back                      1  [0.57,    1]   w = 0.0037
ILR, REML                             1  [0.57,    1]   w = 0.00445
Profile likelihood                    1  [0.57,    1]   w = 0.00381
Profile, REML                         1  [0.57,    1]   w = 0.00439
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00205

Wald (delta)                          1  [0.57,    1]   w = 0.00363
ILR, mapped back                      1  [0.57,    1]   w = 0.00362
ILR, REML                             1  [0.57,    1]   w = 0.00433

Method's own interval                 1  [0.57,    1]   w = 0.0647
Own interval, transcript fractions    1  [0.57,    1]   w = 0.0647

Fisher information (Wald)             0  [   0, 0.43]   w = 4.04e-05
Godambe sandwich                      1  [0.57,    1]   w = 0.408
Released code, as published           1  [0.57,    1]   w =    1
```

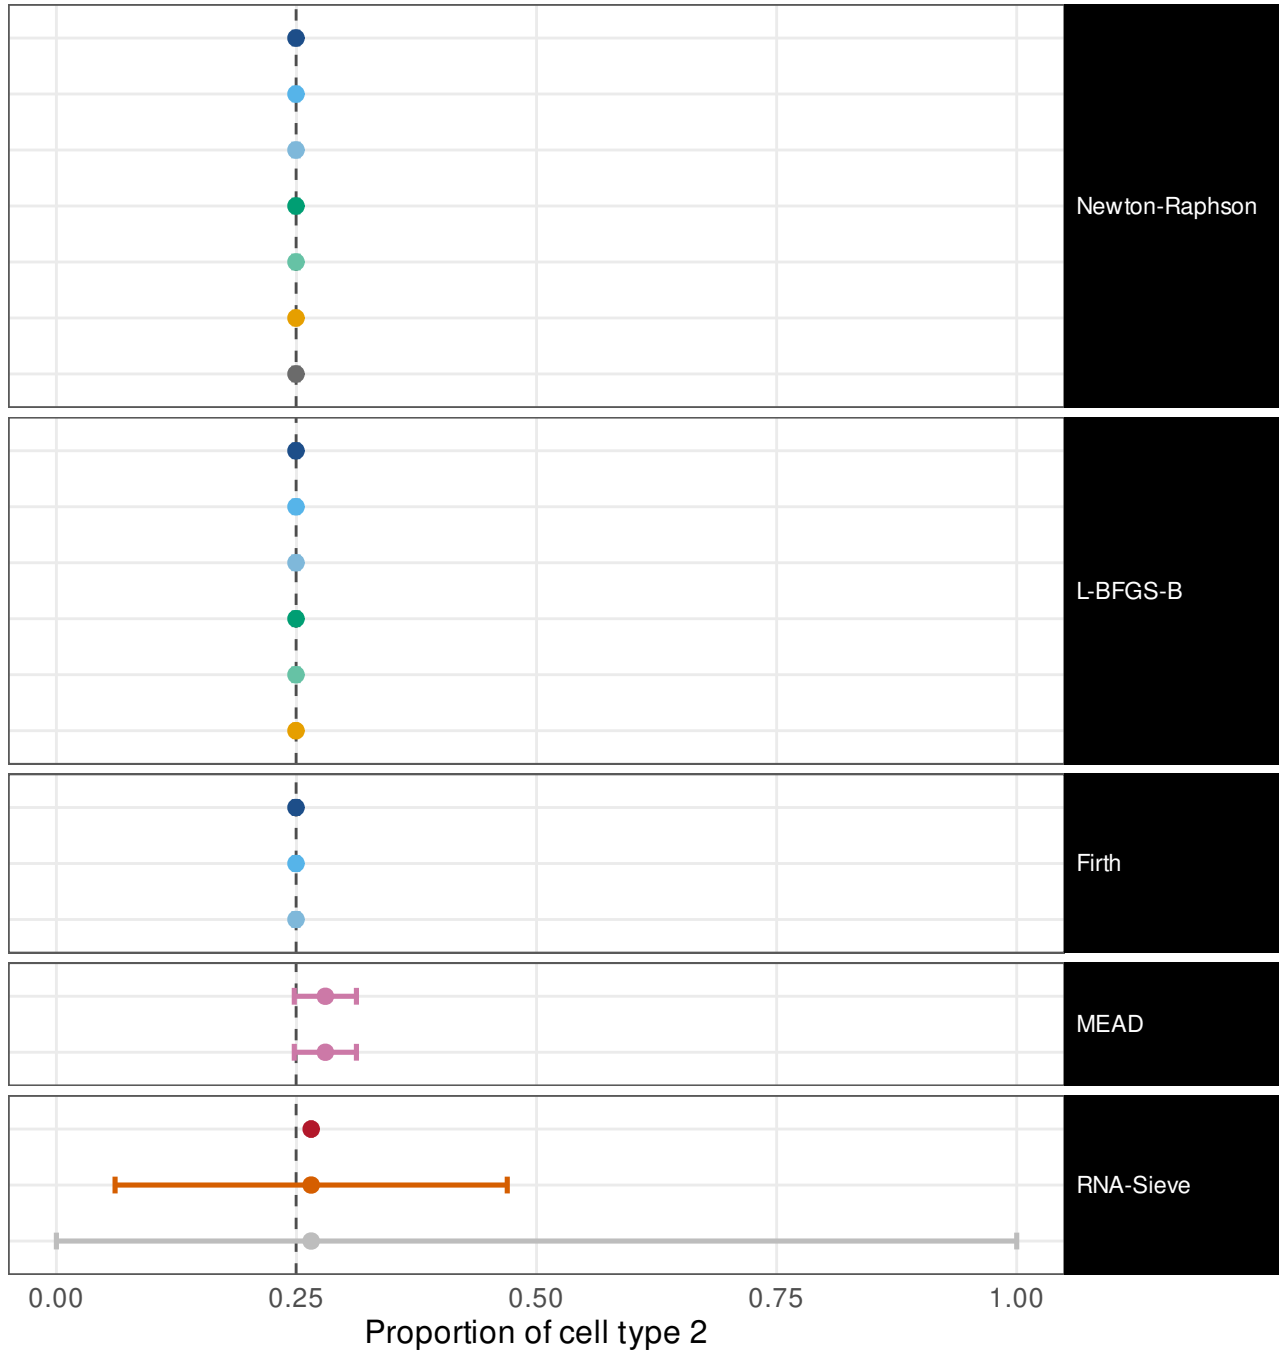


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00317
ILR, mapped back	1	[0.57, 1]	w = 0.0032
ILR, REML	1	[0.57, 1]	w = 0.00381
Profile likelihood	1	[0.57, 1]	w = 0.00333
Profile, REML	1	[0.57, 1]	w = 0.00384
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00151
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00372
Wald (delta)	1	[0.57, 1]	w = 0.00317
ILR, mapped back	1	[0.57, 1]	w = 0.00315
ILR, REML	1	[0.57, 1]	w = 0.00375
Profile likelihood	1	[0.57, 1]	w = 0.00333
Profile, REML	1	[0.57, 1]	w = 0.00384
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00208
Wald (delta)	1	[0.57, 1]	w = 0.00317
ILR, mapped back	1	[0.57, 1]	w = 0.00316
ILR, REML	1	[0.57, 1]	w = 0.00382
Method's own interval	1	[0.57, 1]	w = 0.107
Own interval, transcript fractions	1	[0.57, 1]	w = 0.107
Fisher information (Wald)	0	[0, 0.43]	w = 3.28e-05
Godambe sandwich	1	[0.57, 1]	w = 0.425
Released code, as published	1	[0.57, 1]	w = 1

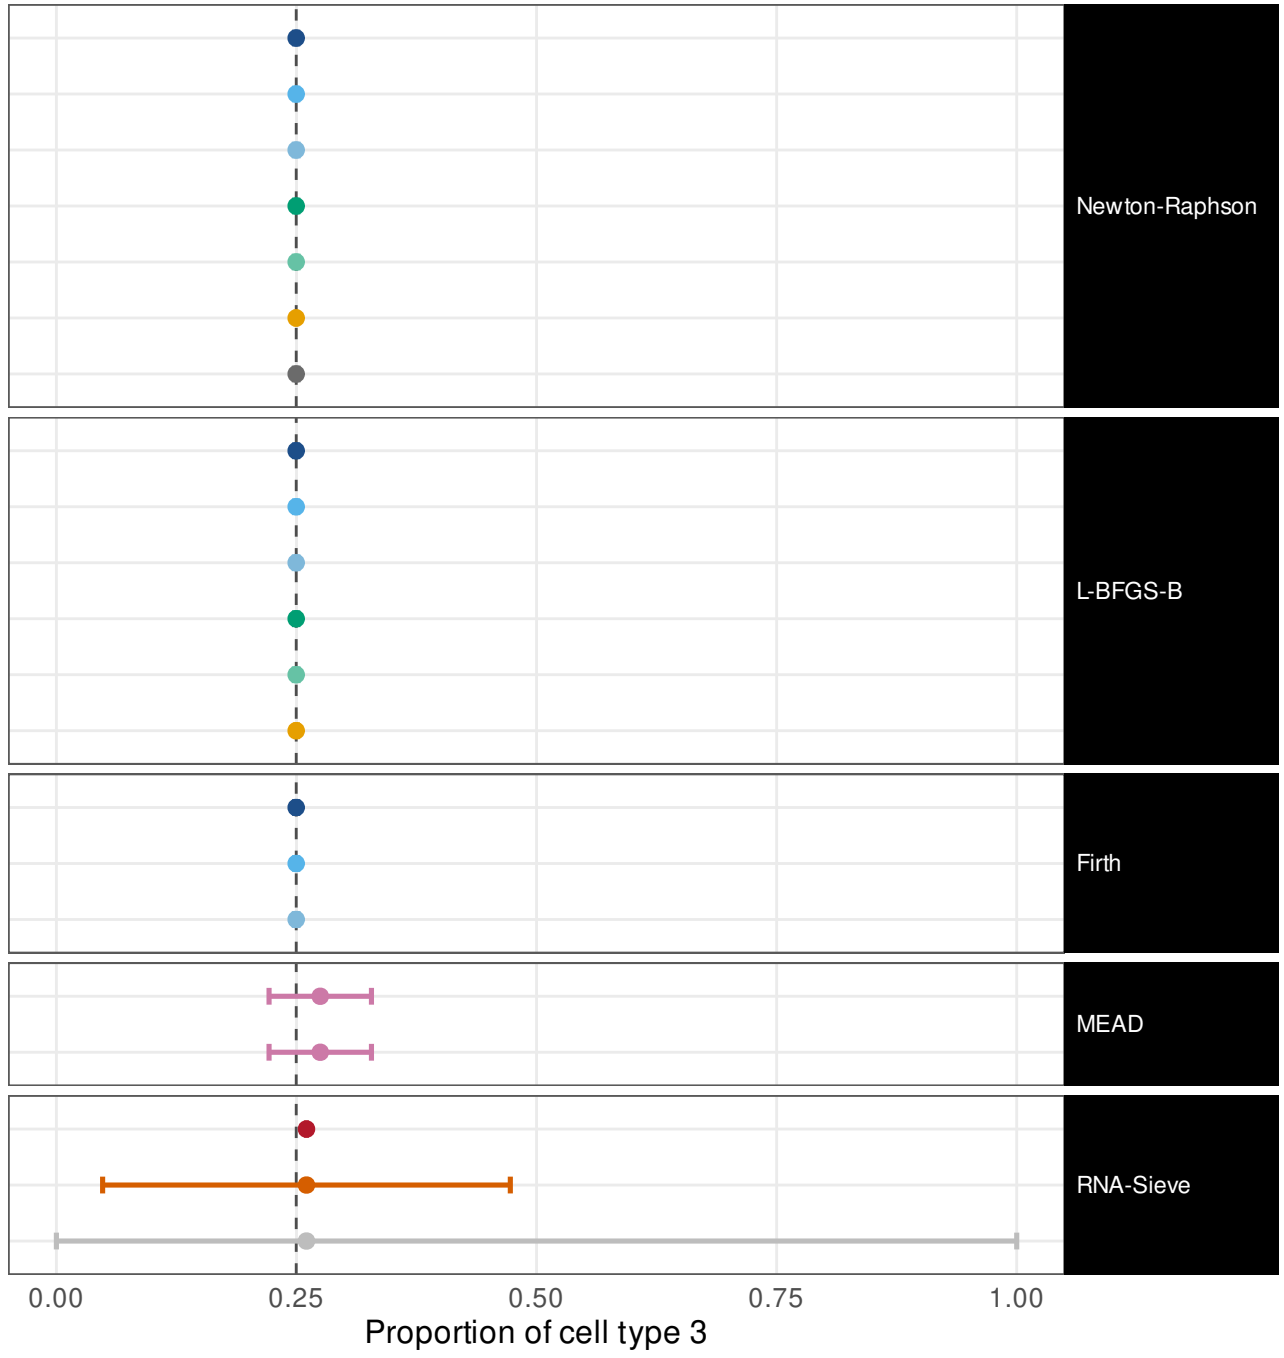


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	0.8	[0.38, 0.96]	w = 0.00324
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0033
ILR, REML	0.8	[0.38, 0.96]	w = 0.0039
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0034
Profile, REML	0.8	[0.38, 0.96]	w = 0.00391
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.00132
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00403
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00324
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00327
ILR, REML	0.8	[0.38, 0.96]	w = 0.00389
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0034
Profile, REML	0.8	[0.38, 0.96]	w = 0.00391
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00197
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00324
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00323
ILR, REML	0.8	[0.38, 0.96]	w = 0.00392
Method's own interval	1	[0.57, 1]	w = 0.14
Own interval, transcript fractions	1	[0.57, 1]	w = 0.14
Fisher information (Wald)	0	[0, 0.43]	w = 4.09e-05
Godambe sandwich	1	[0.57, 1]	w = 0.412
Released code, as published	1	[0.57, 1]	w = 1

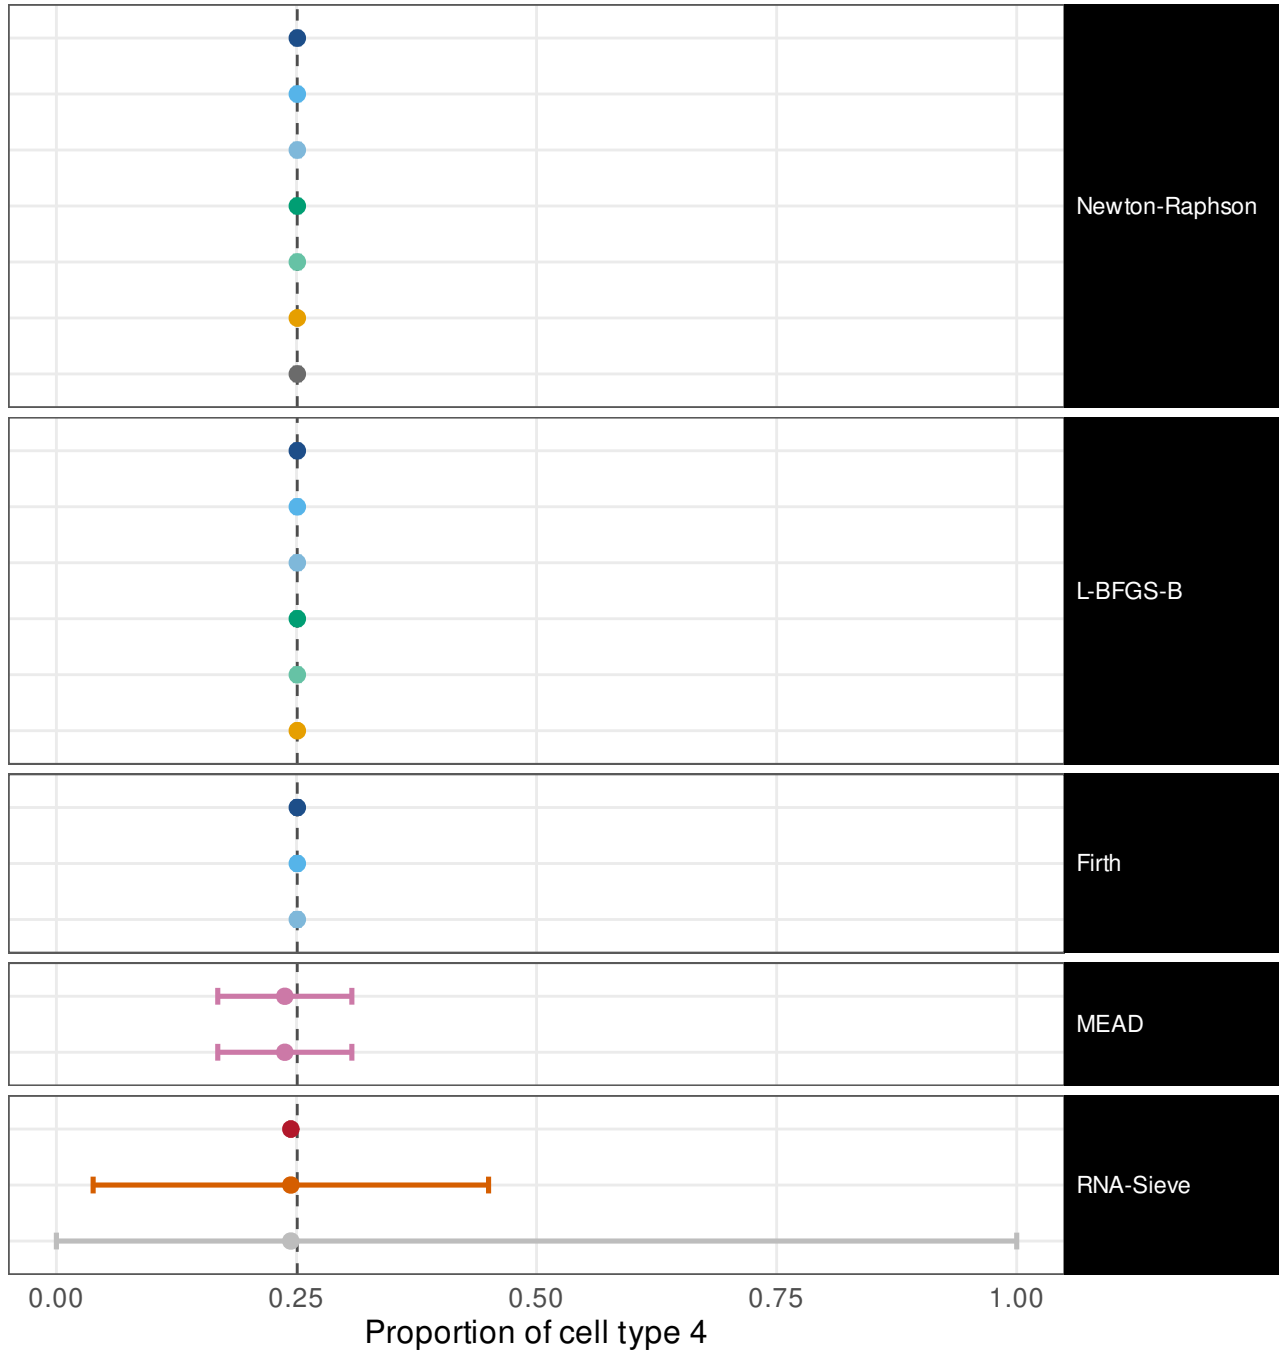

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.0118
ILR, mapped back                      1  [0.57,    1]   w = 0.0118
ILR, REML                             1  [0.57,    1]   w = 0.0143
Profile likelihood                    1  [0.57,    1]   w = 0.0124
Profile, REML                         1  [0.57,    1]   w = 0.0143
Parametric bootstrap                  1  [0.57,    1]   w = 0.00635
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0123

Wald (delta)                          1  [0.57,    1]   w = 0.0118
ILR, mapped back                      1  [0.57,    1]   w = 0.0117
ILR, REML                             1  [0.57,    1]   w = 0.0142
Profile likelihood                    1  [0.57,    1]   w = 0.0124
Profile, REML                         1  [0.57,    1]   w = 0.0143
Parametric bootstrap                  1  [0.57,    1]   w = 0.0079

Wald (delta)                          1  [0.57,    1]   w = 0.0118
ILR, mapped back                      1  [0.57,    1]   w = 0.0118
ILR, REML                             1  [0.57,    1]   w = 0.0144

Method's own interval                 0  [   0, 0.43]   w = 0.0812
Own interval, transcript fractions    1  [0.57,    1]   w = 0.0812

Fisher information (Wald)             0  [   0, 0.43]   w = 0.000209
Godambe sandwich                      1  [0.57,    1]   w = 0.955
Released code, as published           1  [0.57,    1]   w =    1
```

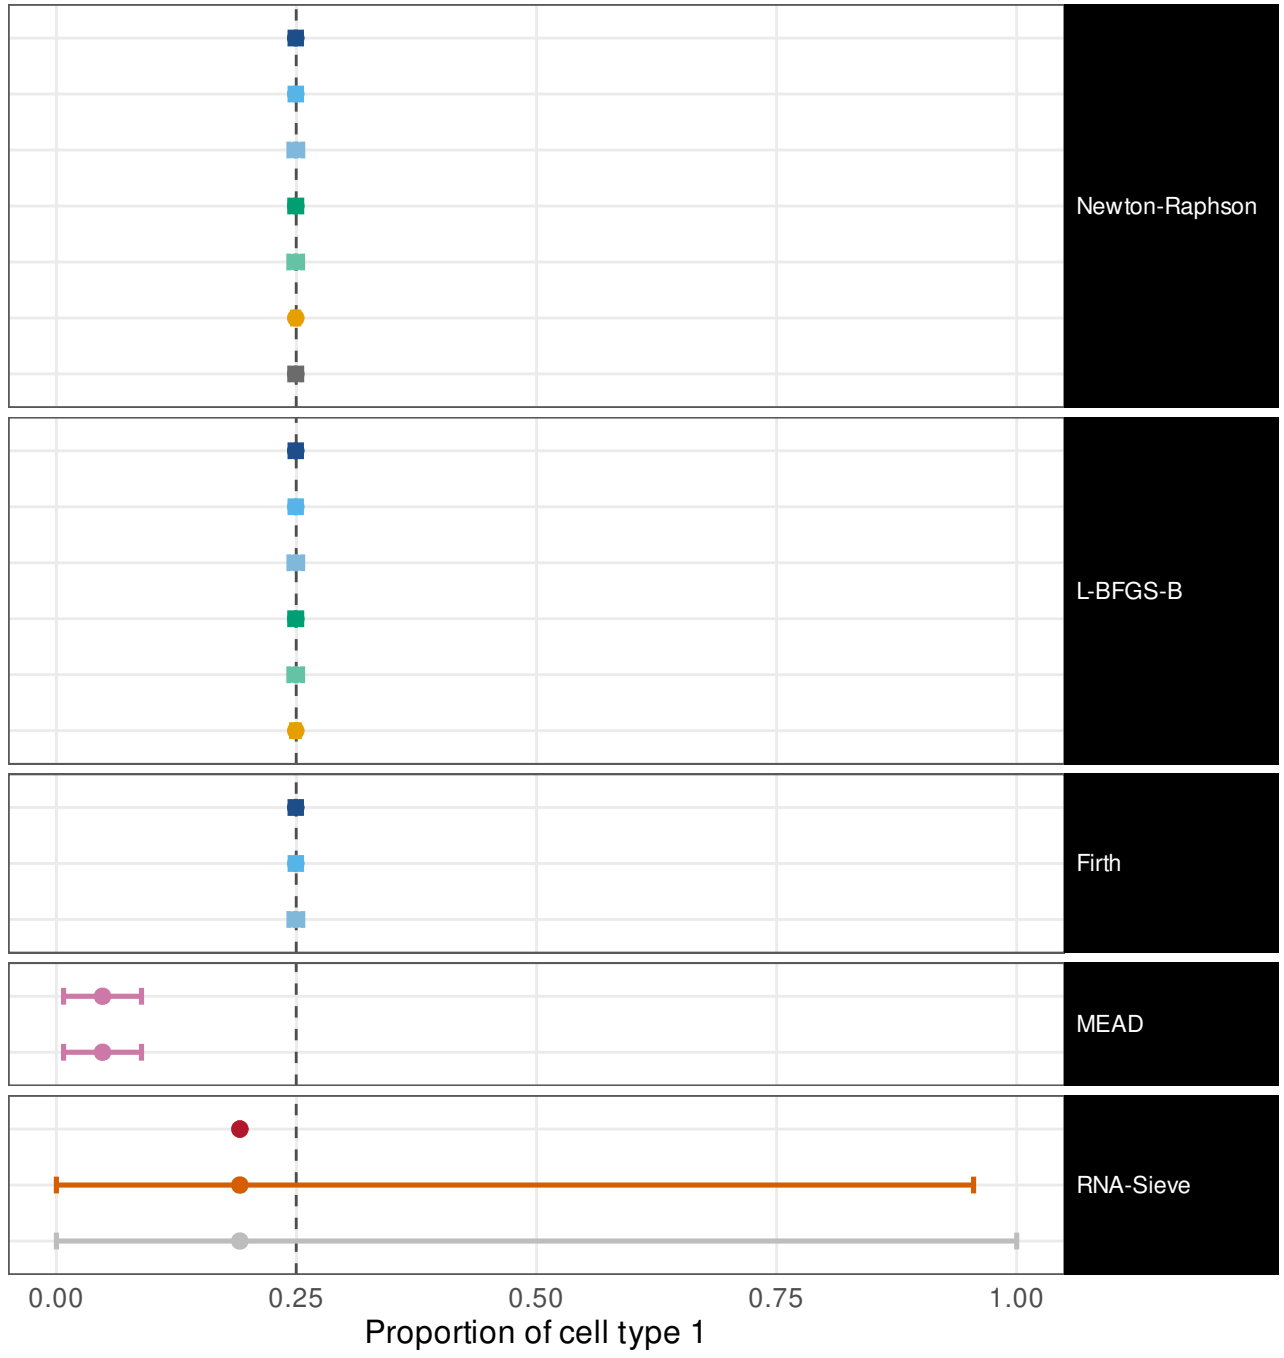

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.0119
ILR, mapped back                      1  [0.57,    1]   w = 0.0121
ILR, REML                             1  [0.57,    1]   w = 0.0144
Profile likelihood                    1  [0.57,    1]   w = 0.0125
Profile, REML                         1  [0.57,    1]   w = 0.0144
Parametric bootstrap                  1  [0.57,    1]   w = 0.00616
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0125

Wald (delta)                          1  [0.57,    1]   w = 0.0119
ILR, mapped back                      1  [0.57,    1]   w = 0.012
ILR, REML                             1  [0.57,    1]   w = 0.0143
Profile likelihood                    1  [0.57,    1]   w = 0.0125
Profile, REML                         1  [0.57,    1]   w = 0.0144
Parametric bootstrap                  1  [0.57,    1]   w = 0.00739

Wald (delta)                          1  [0.57,    1]   w = 0.0119
ILR, mapped back                      1  [0.57,    1]   w = 0.0119
ILR, REML                             1  [0.57,    1]   w = 0.0146

Method's own interval                 0  [   0, 0.43]   w = 0.122
Own interval, transcript fractions    1  [0.57,    1]   w = 0.122

Fisher information (Wald)             0  [   0, 0.43]   w = 0.000202
Godambe sandwich                      1  [0.57,    1]   w =    1
Released code, as published           1  [0.57,    1]   w =    1
```

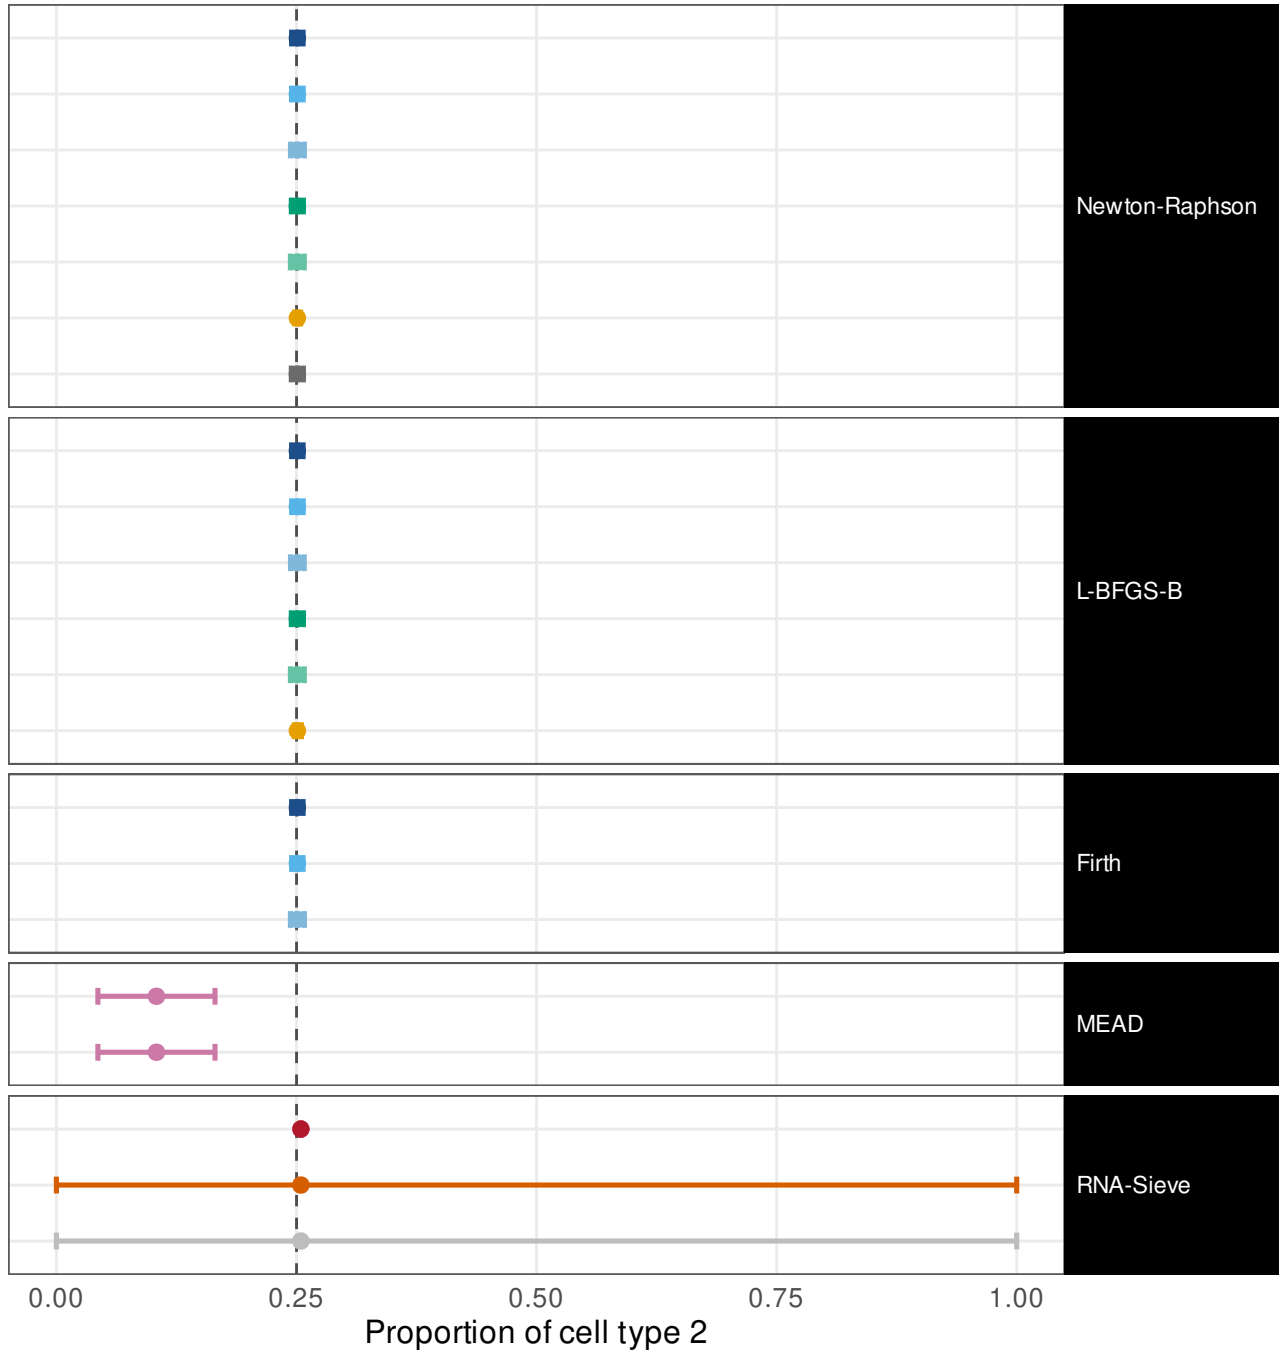


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.00317
ILR, mapped back	1	[0.57, 1]	w = 0.00314
ILR, REML	1	[0.57, 1]	w = 0.00389
Profile likelihood	1	[0.57, 1]	w = 0.00333
Profile, REML	1	[0.57, 1]	w = 0.00383
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00172
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00343
Wald (delta)	1	[0.57, 1]	w = 0.00317
ILR, mapped back	1	[0.57, 1]	w = 0.00312
ILR, REML	1	[0.57, 1]	w = 0.00381
Profile likelihood	1	[0.57, 1]	w = 0.00333
Profile, REML	1	[0.57, 1]	w = 0.00383
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00121
Wald (delta)	1	[0.57, 1]	w = 0.00317
ILR, mapped back	1	[0.57, 1]	w = 0.00316
ILR, REML	1	[0.57, 1]	w = 0.00382
Method's own interval	0	[0, 0.43]	w = 0.118
Own interval, transcript fractions	1	[0.57, 1]	w = 0.118
Fisher information (Wald)	0	[0, 0.43]	w = 7.95e-05
Godambe sandwich	1	[0.57, 1]	w = 0.331
Released code, as published	1	[0.57, 1]	w = 1

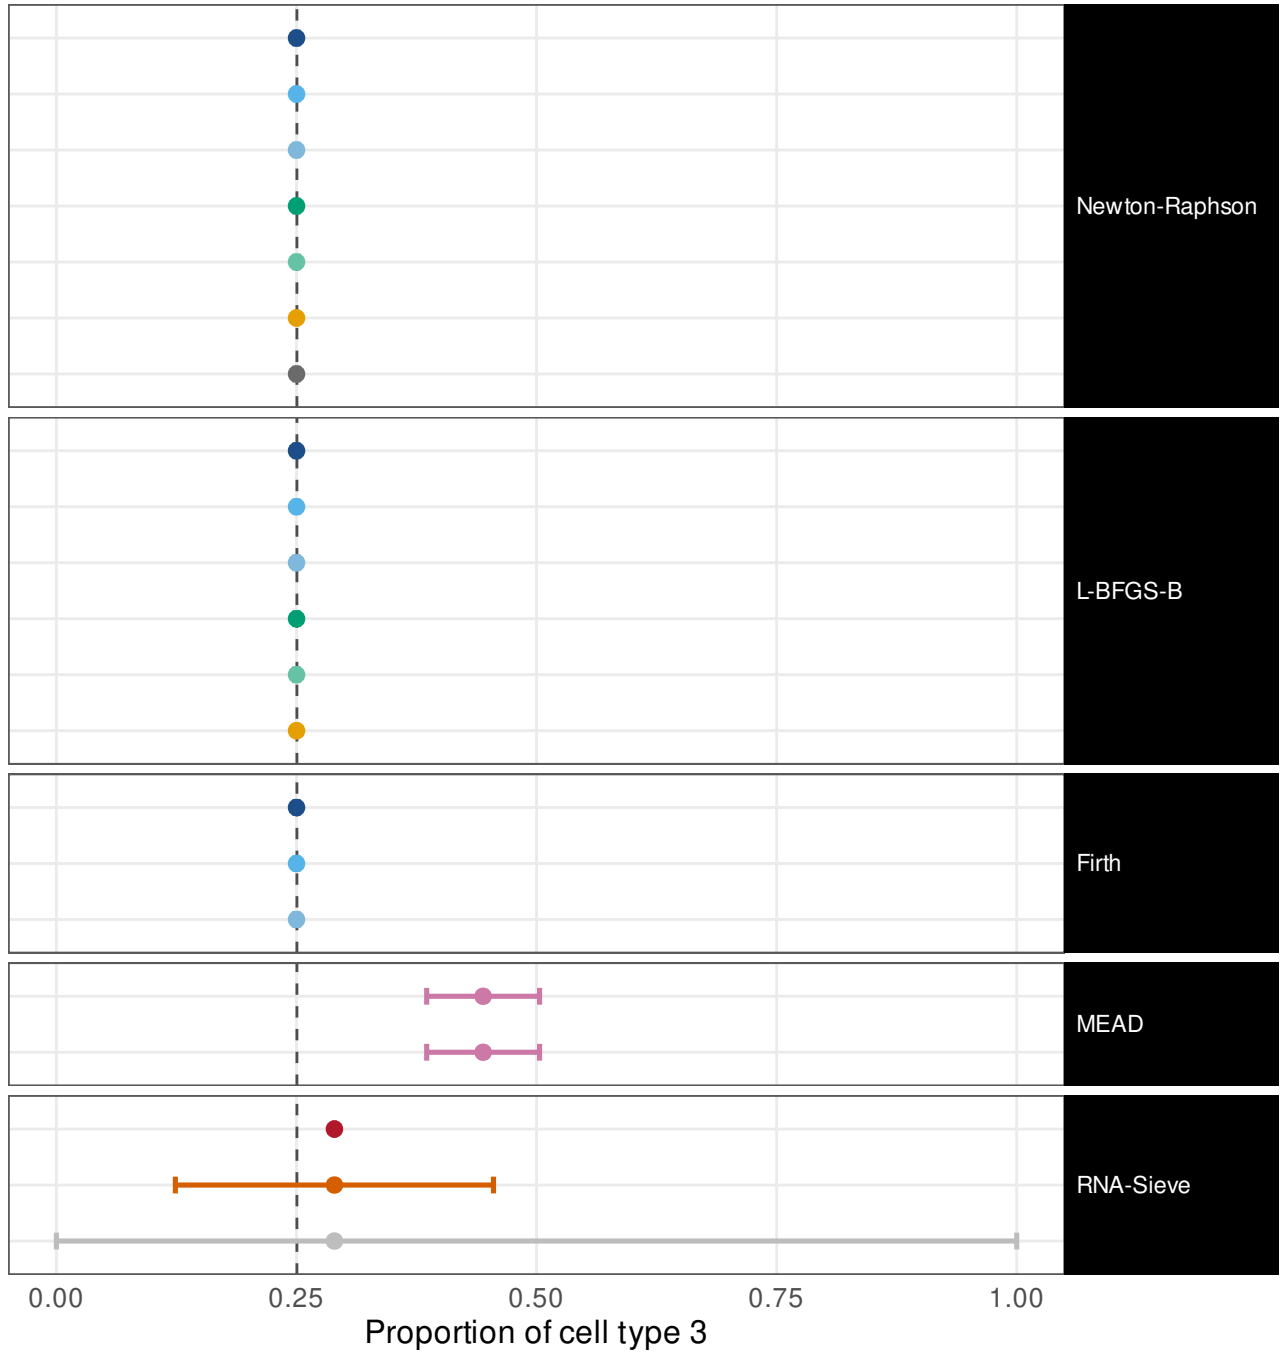


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.00345
ILR, mapped back	1	[0.57, 1]	w = 0.00347
ILR, REML	1	[0.57, 1]	w = 0.00419
Profile likelihood	1	[0.57, 1]	w = 0.00362
Profile, REML	1	[0.57, 1]	w = 0.00417
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00181
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0037
Wald (delta)	1	[0.57, 1]	w = 0.00345
ILR, mapped back	1	[0.57, 1]	w = 0.00339
ILR, REML	1	[0.57, 1]	w = 0.00411
Profile likelihood	1	[0.57, 1]	w = 0.00362
Profile, REML	1	[0.57, 1]	w = 0.00417
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00189
Wald (delta)	1	[0.57, 1]	w = 0.00345
ILR, mapped back	1	[0.57, 1]	w = 0.0034
ILR, REML	1	[0.57, 1]	w = 0.00423
Method's own interval	0	[0, 0.43]	w = 0.129
Own interval, transcript fractions	1	[0.57, 1]	w = 0.129
Fisher information (Wald)	0	[0, 0.43]	w = 7.72e-05
Godambe sandwich	1	[0.57, 1]	w = 0.326
Released code, as published	1	[0.57, 1]	w = 1

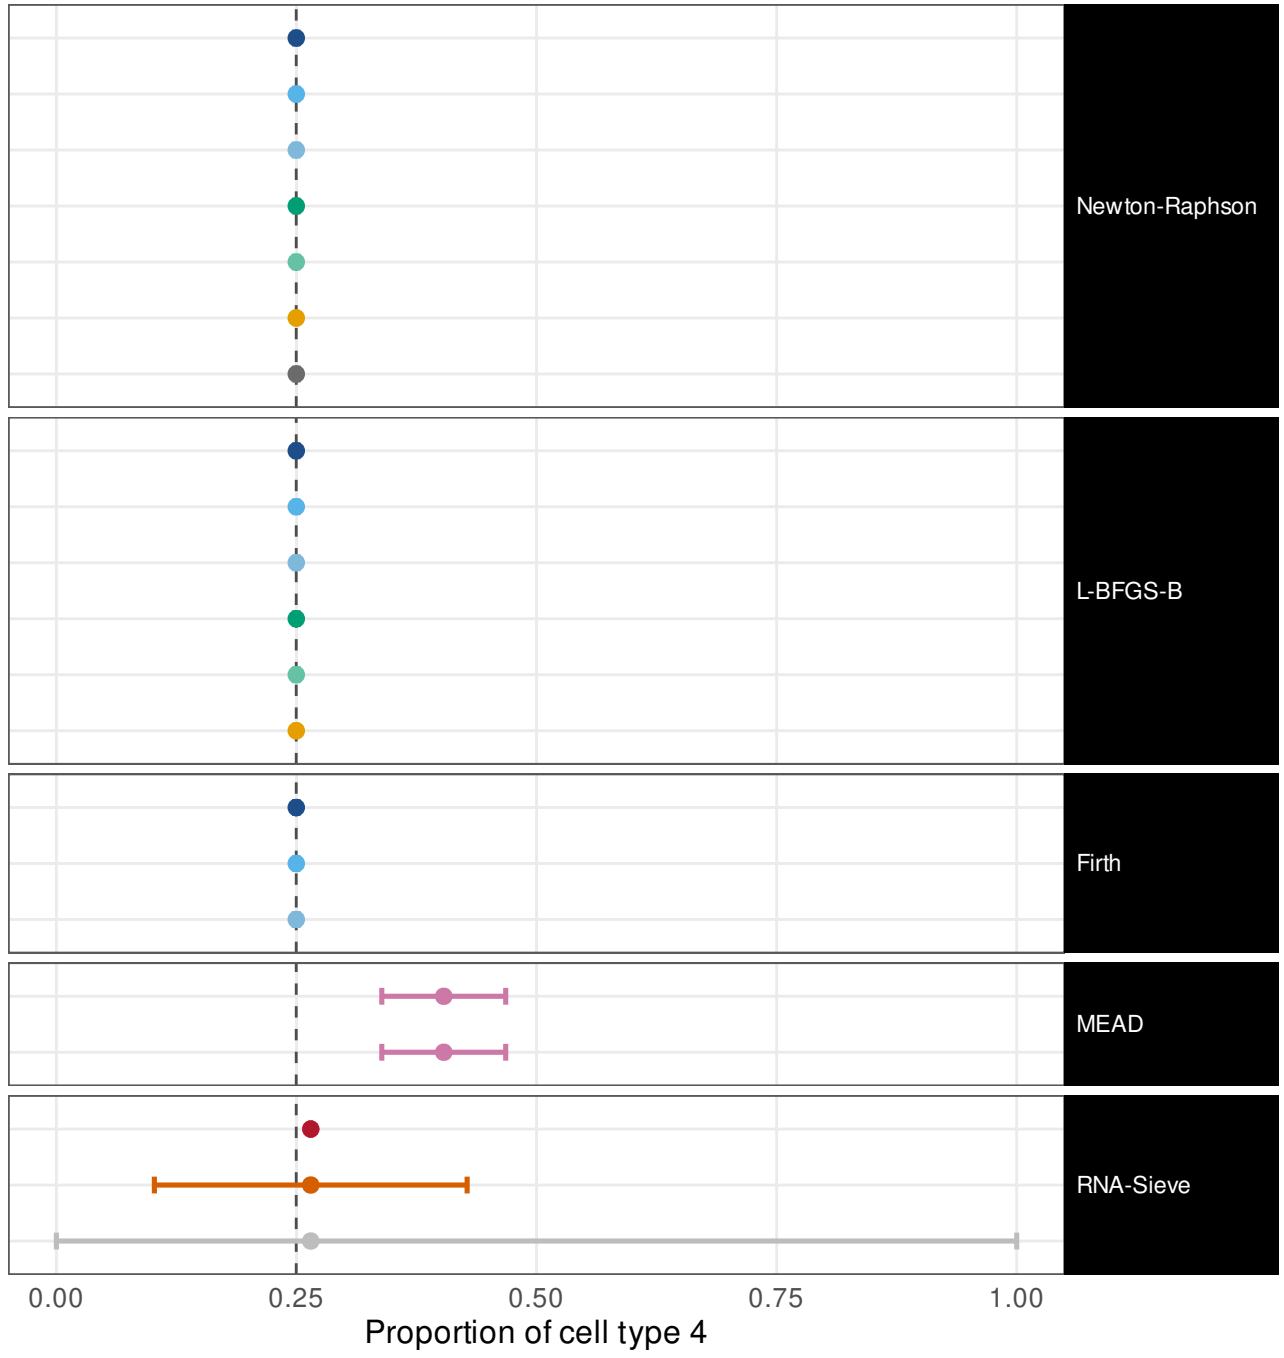


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00251
ILR, mapped back	1	[0.57, 1]	w = 0.00251
ILR, REML	1	[0.57, 1]	w = 0.00303
Profile likelihood	1	[0.57, 1]	w = 0.00263
Profile, REML	1	[0.57, 1]	w = 0.00303
Parametric bootstrap	1	[0.57, 1]	w = 0.00116
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00277
Wald (delta)	1	[0.57, 1]	w = 0.00251
ILR, mapped back	1	[0.57, 1]	w = 0.00246
ILR, REML	1	[0.57, 1]	w = 0.00299
Profile likelihood	1	[0.57, 1]	w = 0.00263
Profile, REML	1	[0.57, 1]	w = 0.00303
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00118
Wald (delta)	1	[0.57, 1]	w = 0.00251
ILR, mapped back	1	[0.57, 1]	w = 0.00251
ILR, REML	1	[0.57, 1]	w = 0.00301
Method's own interval	0.4	[0.12, 0.77]	w = 0.0727
Own interval, transcript fractions	0.4	[0.12, 0.77]	w = 0.0727
Fisher information (Wald)	0	[0, 0.43]	w = 2.14e-05
Godambe sandwich	1	[0.57, 1]	w = 0.258
Released code, as published	1	[0.57, 1]	w = 1

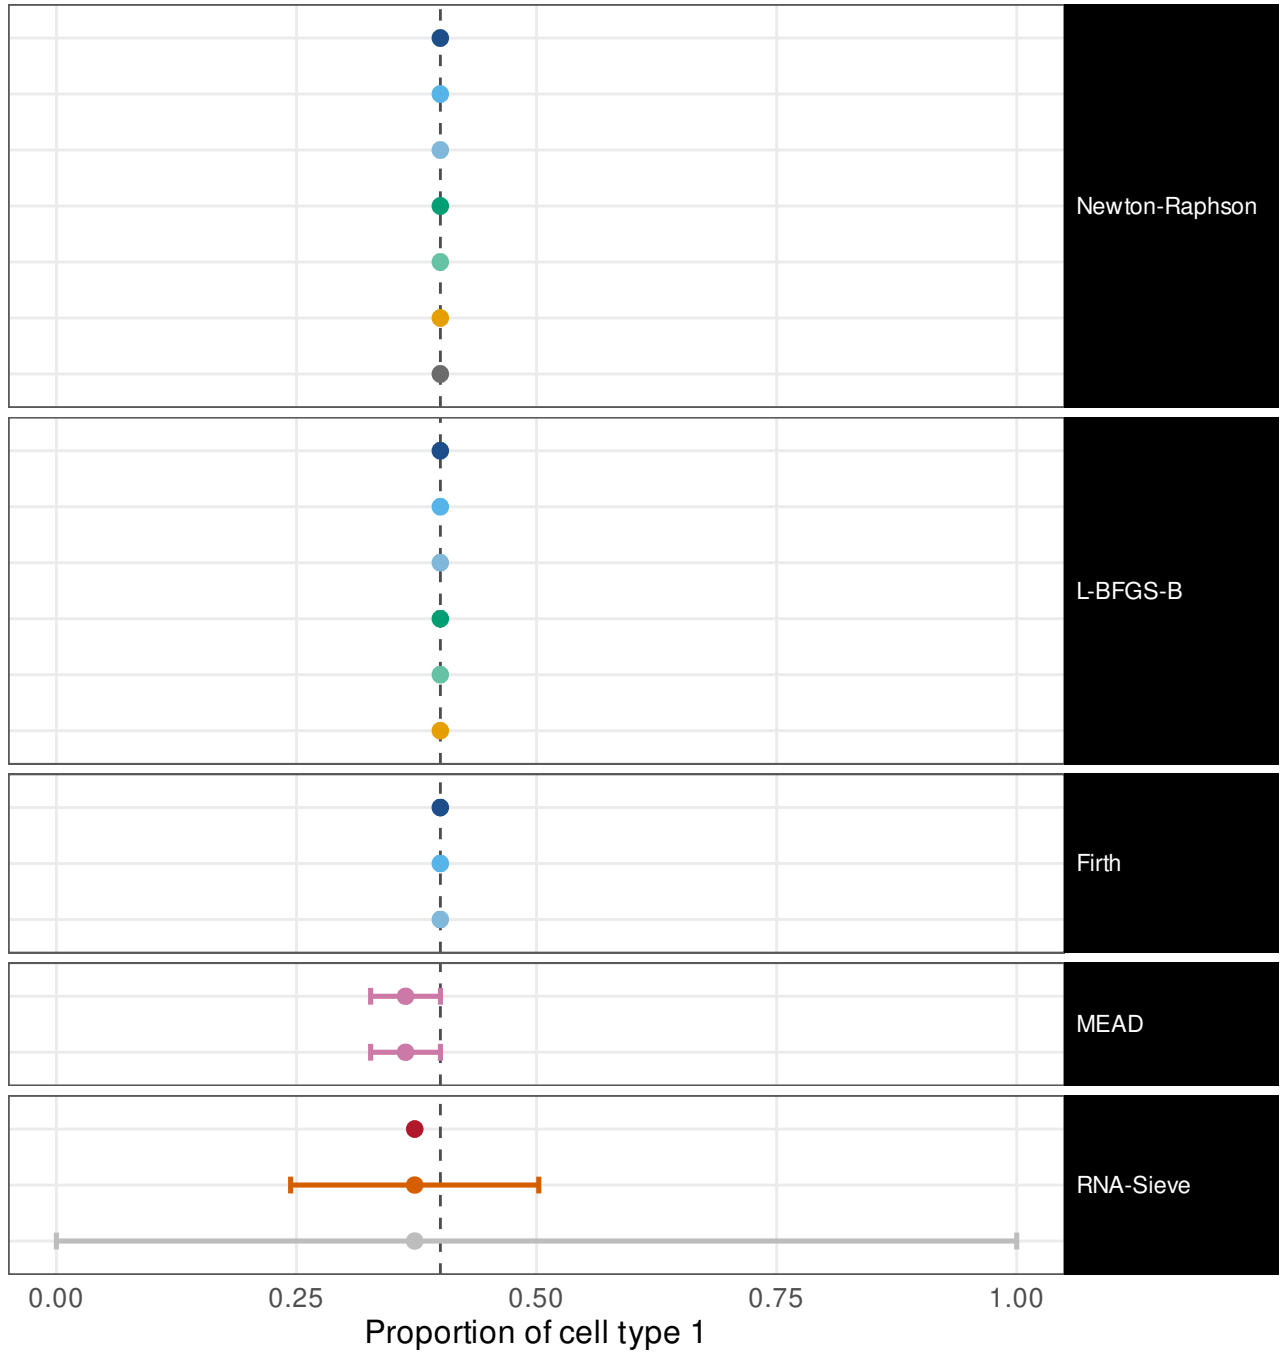


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00253
ILR, mapped back	1	[0.57, 1]	w = 0.00252
ILR, REML	1	[0.57, 1]	w = 0.00305
Profile likelihood	1	[0.57, 1]	w = 0.00265
Profile, REML	1	[0.57, 1]	w = 0.00306
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00156
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00283
Wald (delta)	1	[0.57, 1]	w = 0.00253
ILR, mapped back	1	[0.57, 1]	w = 0.00247
ILR, REML	1	[0.57, 1]	w = 0.003
Profile likelihood	1	[0.57, 1]	w = 0.00265
Profile, REML	1	[0.57, 1]	w = 0.00306
Parametric bootstrap	1	[0.57, 1]	w = 0.00141
Wald (delta)	1	[0.57, 1]	w = 0.00253
ILR, mapped back	1	[0.57, 1]	w = 0.0025
ILR, REML	1	[0.57, 1]	w = 0.00303
Method's own interval	1	[0.57, 1]	w = 0.0602
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0602
Fisher information (Wald)	0	[0, 0.43]	w = 6.83e-06
Godambe sandwich	1	[0.57, 1]	w = 0.253
Released code, as published	1	[0.57, 1]	w = 1

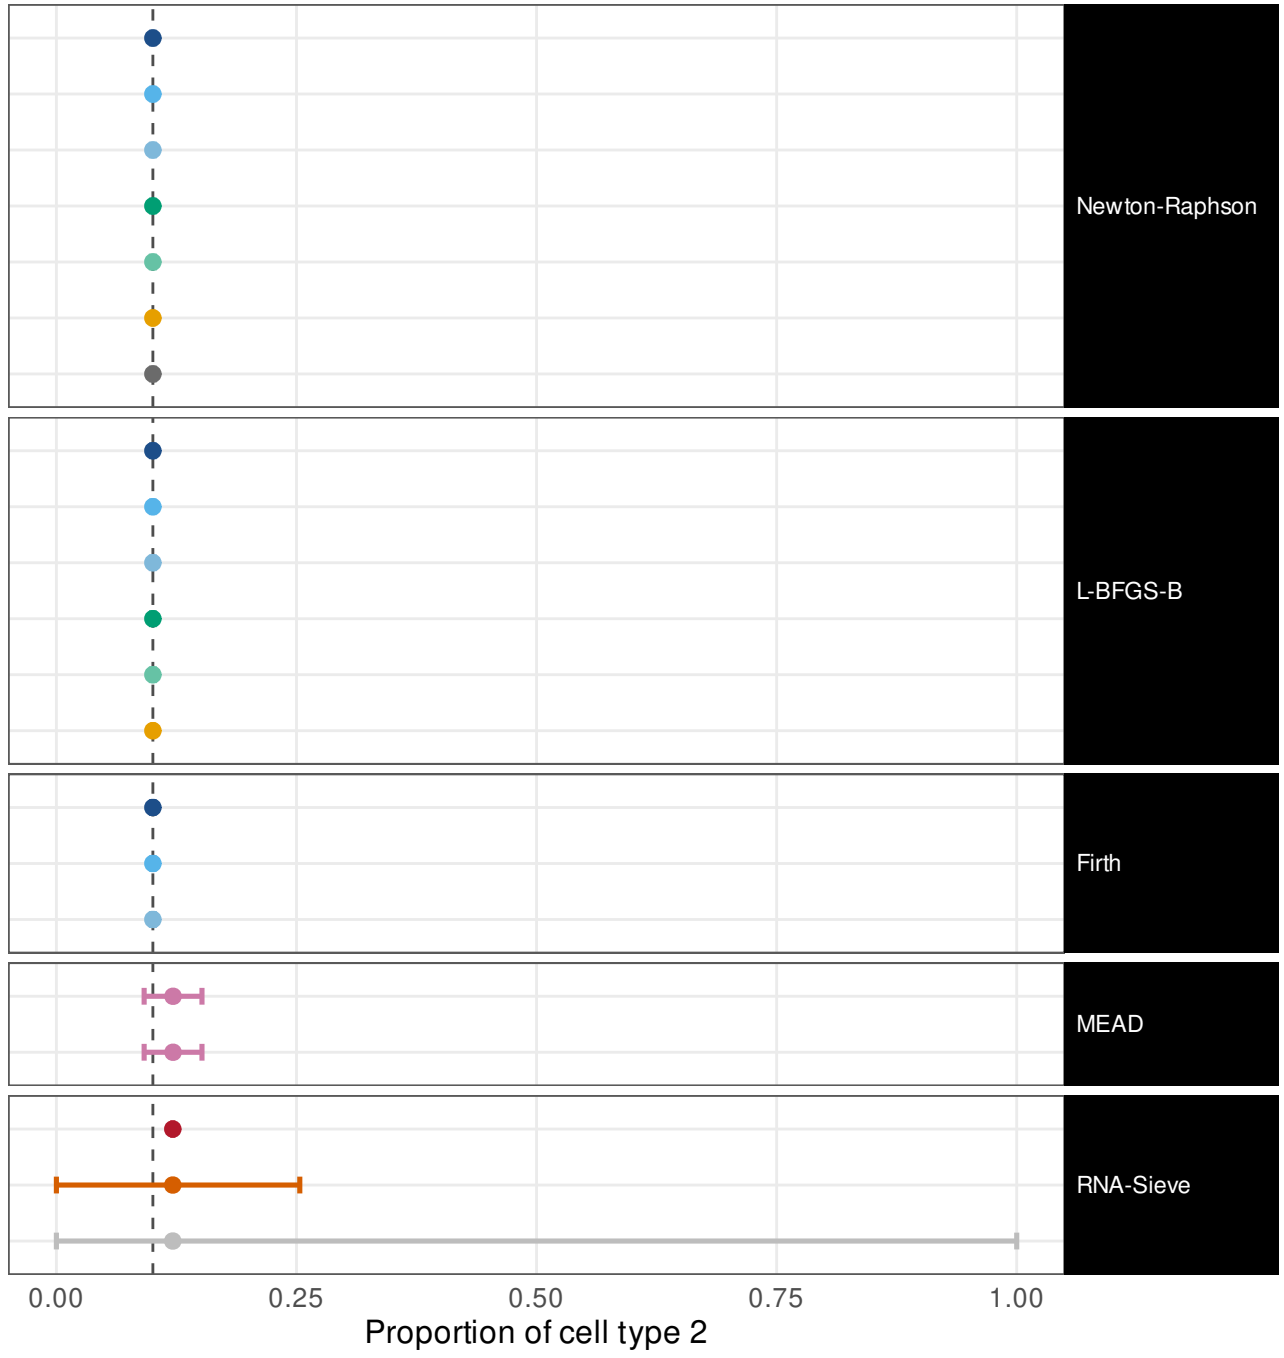


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes


Wald (delta)	0.8	[0.38, 0.96]	w = 0.00218
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.00219
ILR, REML	0.8	[0.38, 0.96]	w = 0.00263
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00229
Profile, REML	0.8	[0.38, 0.96]	w = 0.00264
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.00124
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00271
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00218
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00223
ILR, REML	1	[0.57, 1]	w = 0.00273
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00229
Profile, REML	0.8	[0.38, 0.96]	w = 0.00264
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.00126
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00218
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00216
ILR, REML	0.8	[0.38, 0.96]	w = 0.0026
Method's own interval	1	[0.57, 1]	w = 0.069
Own interval, transcript fractions	1	[0.57, 1]	w = 0.069
Fisher information (Wald)	0	[0, 0.43]	w = 2.07e-05
Godambe sandwich	1	[0.57, 1]	w = 0.262
Released code, as published	1	[0.57, 1]	w = 1

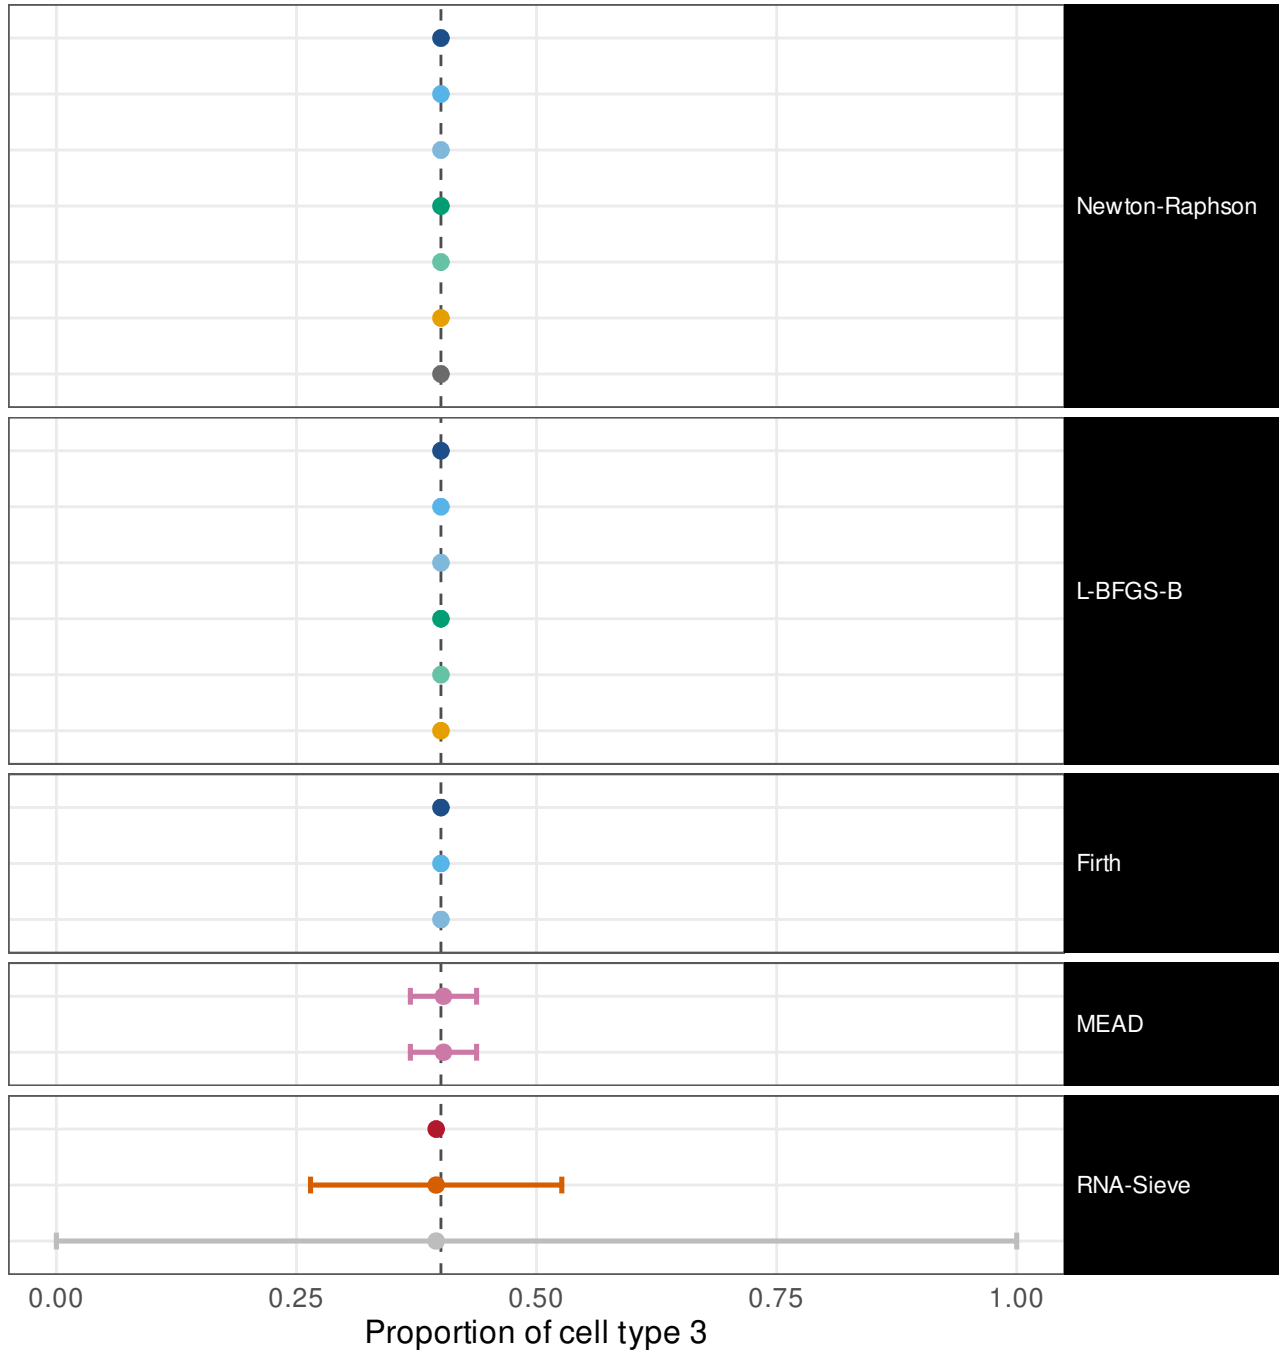

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes

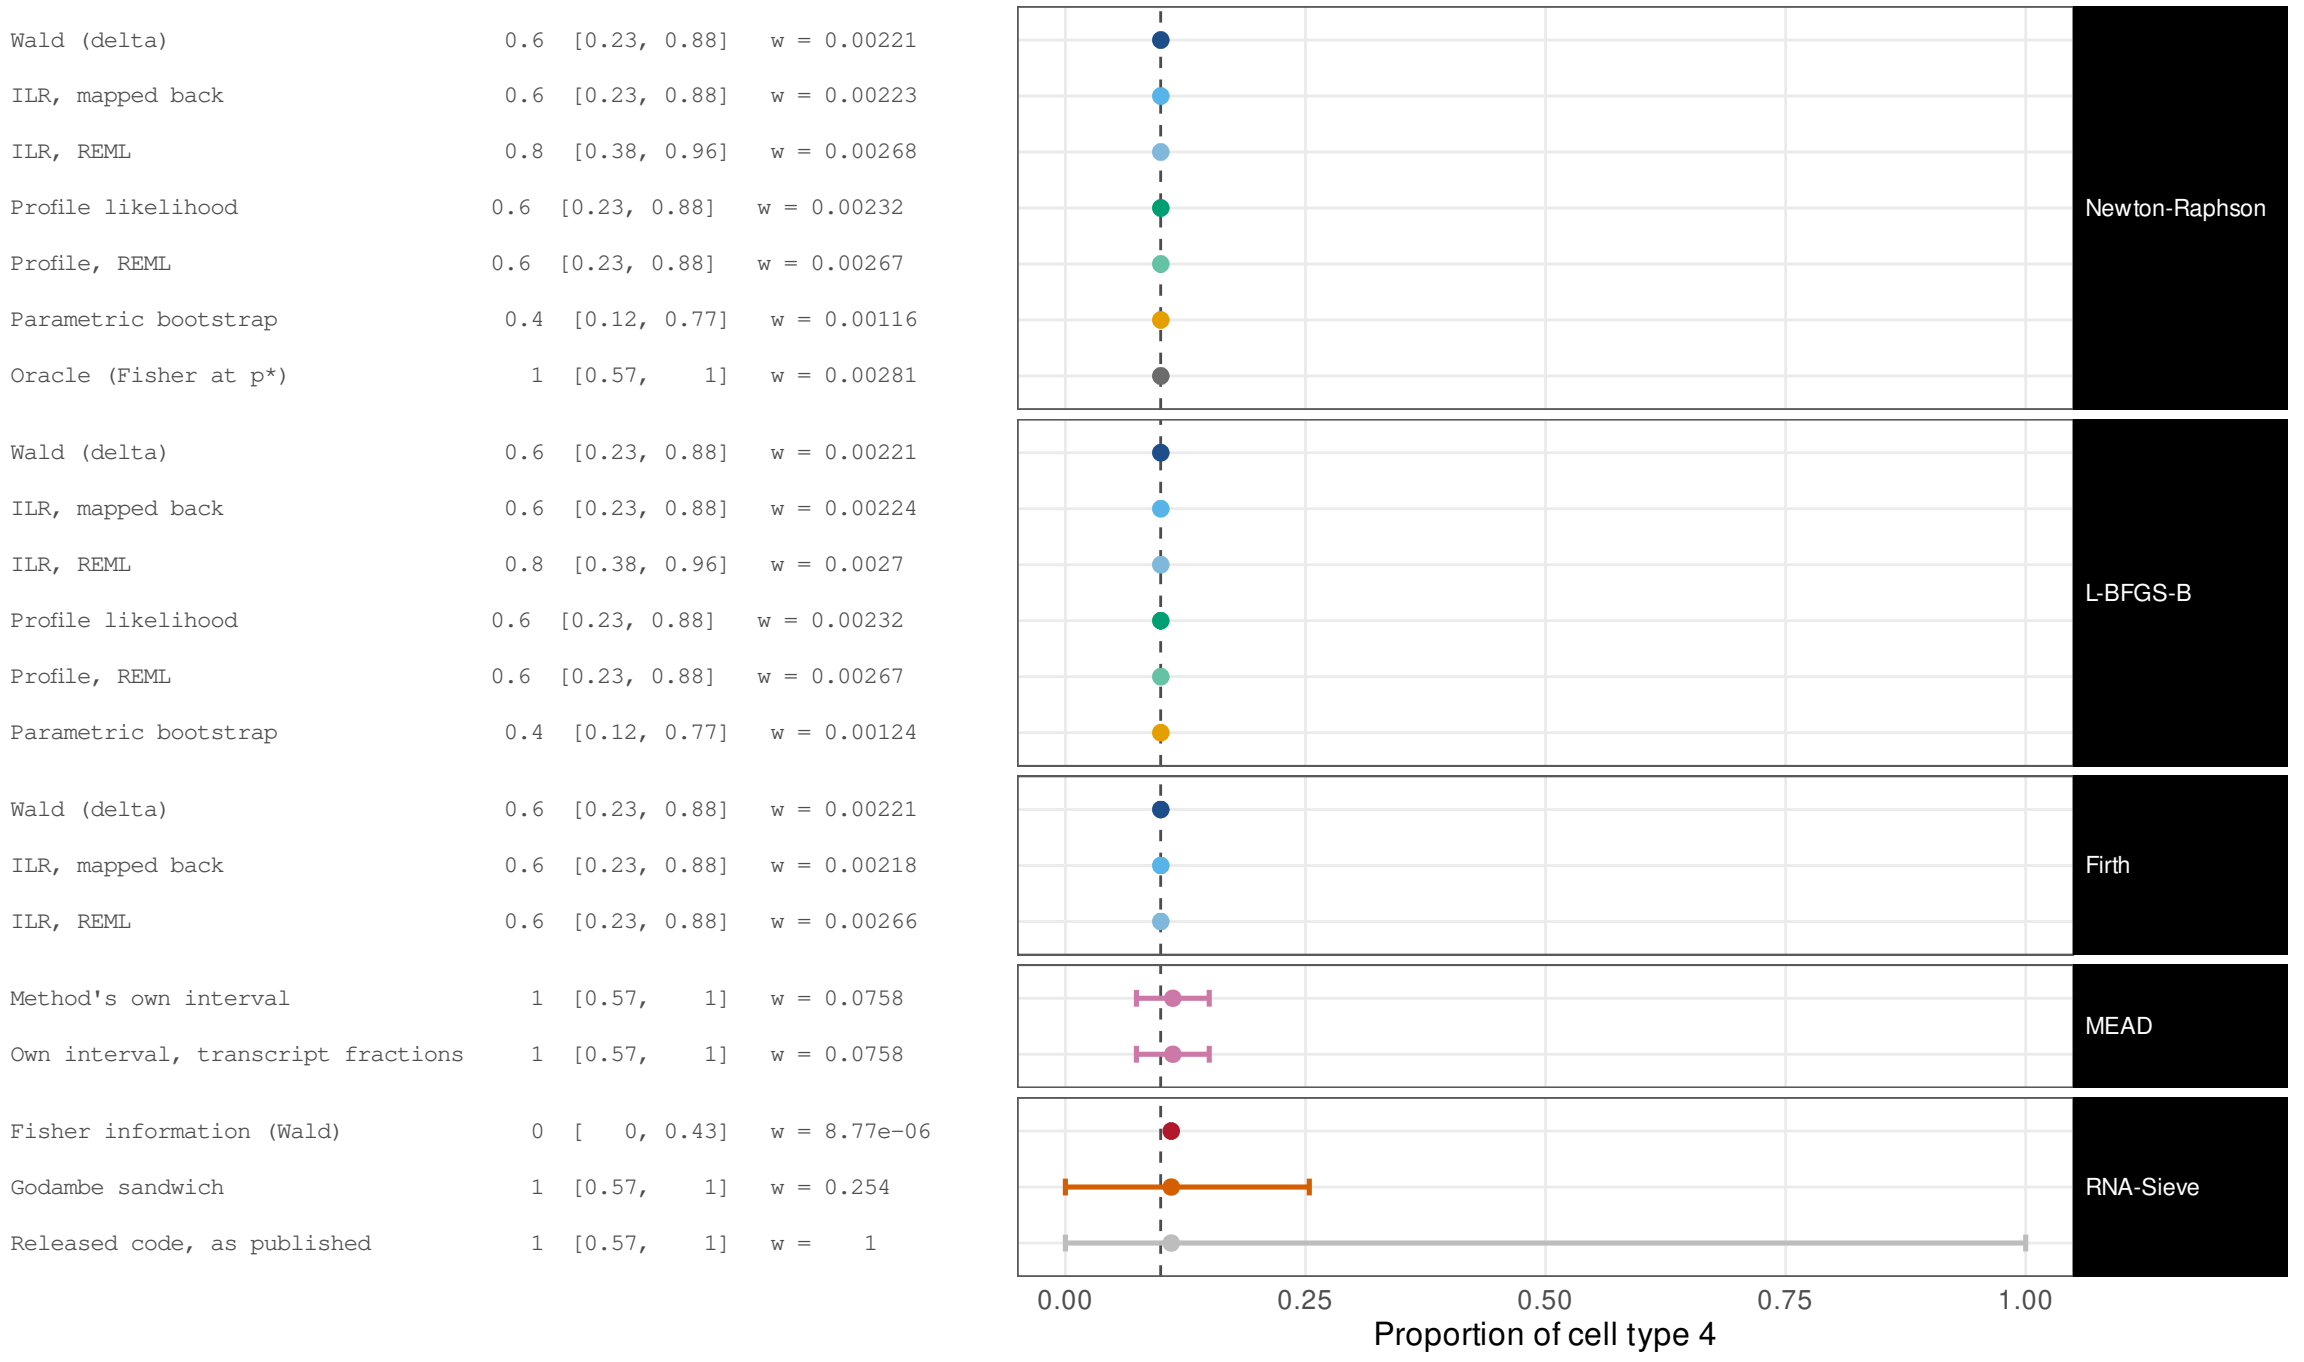

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.00794
ILR, mapped back                      1  [0.57,    1]   w = 0.0079
ILR, REML                             1  [0.57,    1]   w = 0.00967
Profile likelihood                    1  [0.57,    1]   w = 0.00834
Profile, REML                         1  [0.57,    1]   w = 0.0096
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.00394
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.00902

Wald (delta)                          1  [0.57,    1]   w = 0.00794
ILR, mapped back                      1  [0.57,    1]   w = 0.00804
ILR, REML                             1  [0.57,    1]   w = 0.00958
Profile likelihood                    1  [0.57,    1]   w = 0.00834
Profile, REML                         1  [0.57,    1]   w = 0.0096
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.00463

Wald (delta)                          1  [0.57,    1]   w = 0.00794
ILR, mapped back                      1  [0.57,    1]   w = 0.00788
ILR, REML                             1  [0.57,    1]   w = 0.0096

Method's own interval                 0  [   0, 0.43]   w = 0.067
Own interval, transcript fractions    1  [0.57,    1]   w = 0.067

Fisher information (Wald)             0  [   0, 0.43]   w = 0.000105
Godambe sandwich                      1  [0.57,    1]   w = 0.481
Released code, as published           1  [0.57,    1]   w =     1
```

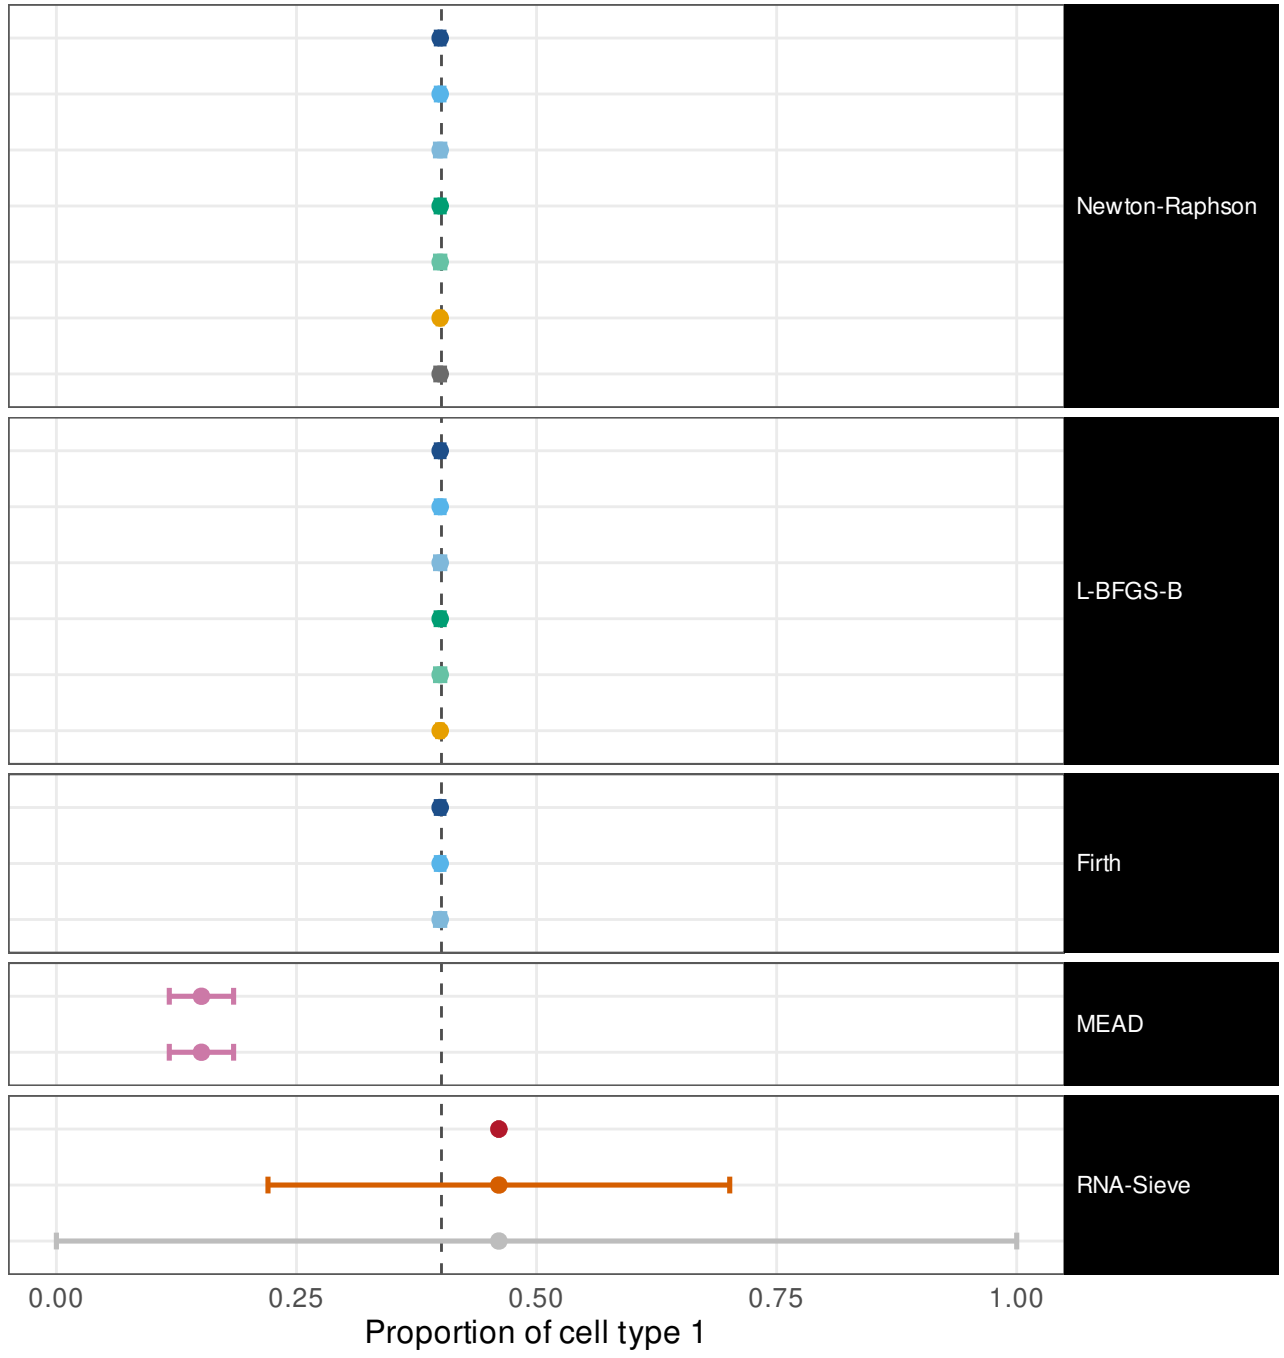


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.00819
ILR, mapped back	1	[0.57, 1]	w = 0.00813
ILR, REML	1	[0.57, 1]	w = 0.00978
Profile likelihood	1	[0.57, 1]	w = 0.0086
Profile, REML	1	[0.57, 1]	w = 0.00991
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00437
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00937
Wald (delta)	1	[0.57, 1]	w = 0.00819
ILR, mapped back	1	[0.57, 1]	w = 0.0082
ILR, REML	1	[0.57, 1]	w = 0.00991
Profile likelihood	1	[0.57, 1]	w = 0.0086
Profile, REML	1	[0.57, 1]	w = 0.00991
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.00574
Wald (delta)	1	[0.57, 1]	w = 0.00819
ILR, mapped back	1	[0.57, 1]	w = 0.00813
ILR, REML	1	[0.57, 1]	w = 0.00978
Method's own interval	0	[0, 0.43]	w = 0.0598
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0598
Fisher information (Wald)	0	[0, 0.43]	w = 0.000108
Godambe sandwich	1	[0.57, 1]	w = 0.269
Released code, as published	1	[0.57, 1]	w = 1

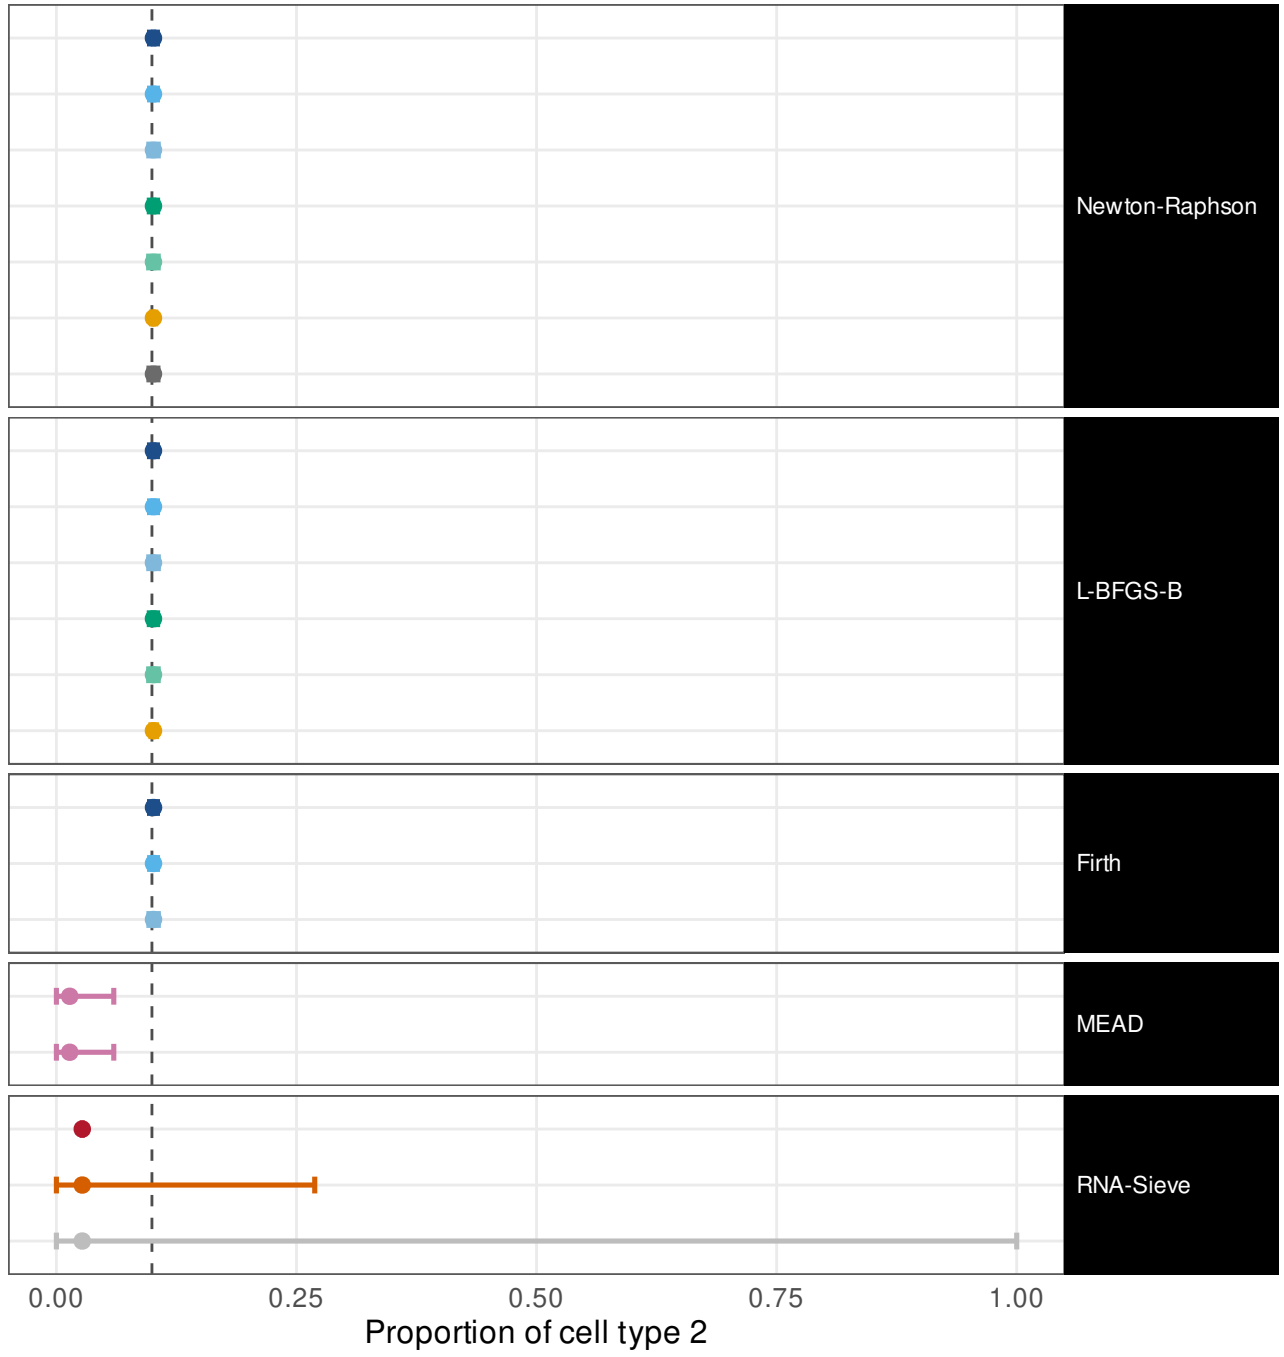

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                      0.8  [0.38, 0.96]   w = 0.00274
ILR, mapped back                  0.8  [0.38, 0.96]   w = 0.00274
ILR, REML                         0.8  [0.38, 0.96]   w = 0.00331
Profile likelihood                0.8  [0.38, 0.96]   w = 0.00287
Profile, REML                     0.8  [0.38, 0.96]   w = 0.00331
Parametric bootstrap              0.8  [0.38, 0.96]   w = 0.00182
Oracle (Fisher at p*)               1  [0.57,    1]   w = 0.00314

Wald (delta)                      0.8  [0.38, 0.96]   w = 0.00274
ILR, mapped back                  0.8  [0.38, 0.96]   w = 0.00274
ILR, REML                         0.8  [0.38, 0.96]   w = 0.00323
Profile likelihood                0.8  [0.38, 0.96]   w = 0.00287
Profile, REML                     0.8  [0.38, 0.96]   w = 0.00331
Parametric bootstrap              0.6  [0.23, 0.88]   w = 0.00153

Wald (delta)                      0.8  [0.38, 0.96]   w = 0.00274
ILR, mapped back                  0.8  [0.38, 0.96]   w = 0.00275
ILR, REML                         0.8  [0.38, 0.96]   w = 0.00333

Method's own interval               0  [   0, 0.43]   w = 0.0344
Own interval, transcript fractions  1  [0.57,    1]   w = 0.0344

Fisher information (Wald)           0  [   0, 0.43]   w = 3.18e-05
Godambe sandwich                    1  [0.57,    1]   w = 0.235
Released code, as published         1  [0.57,    1]   w =     1
```

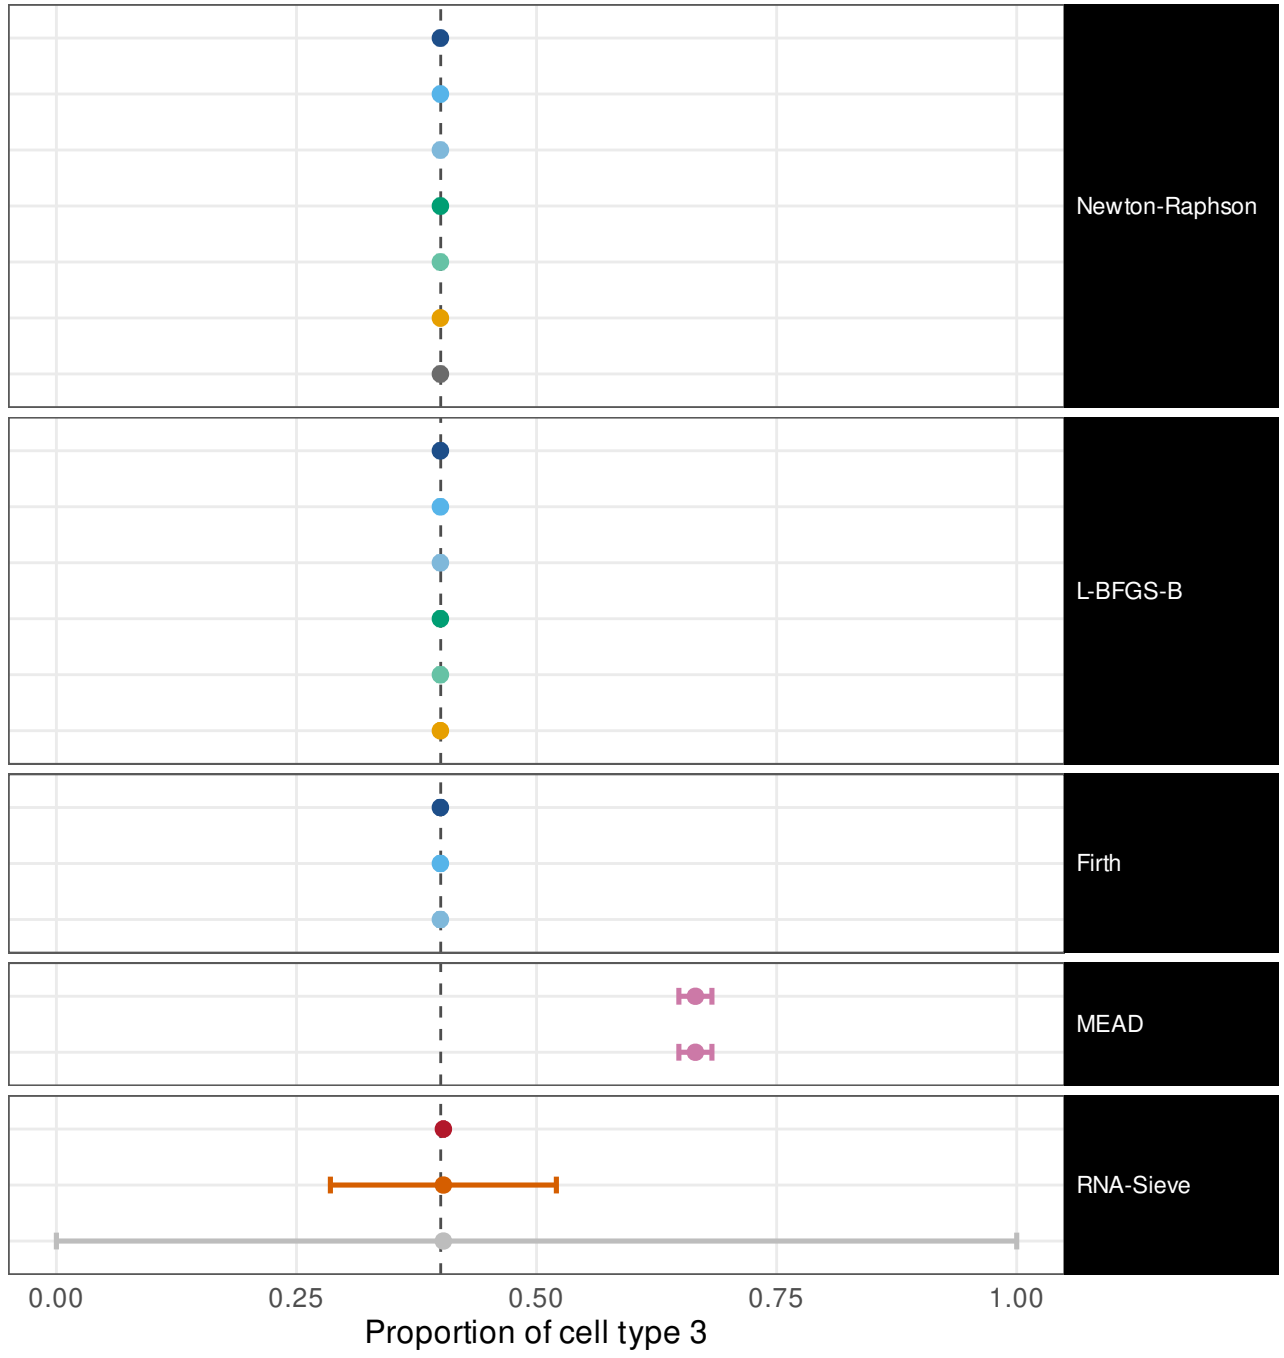

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.00186
ILR, mapped back                    0.8  [0.38, 0.96]   w = 0.00186
ILR, REML                             1  [0.57,    1]   w = 0.00227
Profile likelihood                    1  [0.57,    1]   w = 0.00195
Profile, REML                         1  [0.57,    1]   w = 0.00225
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.000848
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.00213

Wald (delta)                          1  [0.57,    1]   w = 0.00186
ILR, mapped back                      1  [0.57,    1]   w = 0.00187
ILR, REML                             1  [0.57,    1]   w = 0.00226
Profile likelihood                    1  [0.57,    1]   w = 0.00195
Profile, REML                         1  [0.57,    1]   w = 0.00225
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00148

Wald (delta)                          1  [0.57,    1]   w = 0.00186
ILR, mapped back                      1  [0.57,    1]   w = 0.00185
ILR, REML                             1  [0.57,    1]   w = 0.00223

Method's own interval                 0  [   0, 0.43]   w = 0.0214
Own interval, transcript fractions    1  [0.57,    1]   w = 0.0214

Fisher information (Wald)             0  [   0, 0.43]   w = 7.38e-06
Godambe sandwich                      1  [0.57,    1]   w = 0.219
Released code, as published           1  [0.57,    1]   w =    1
```

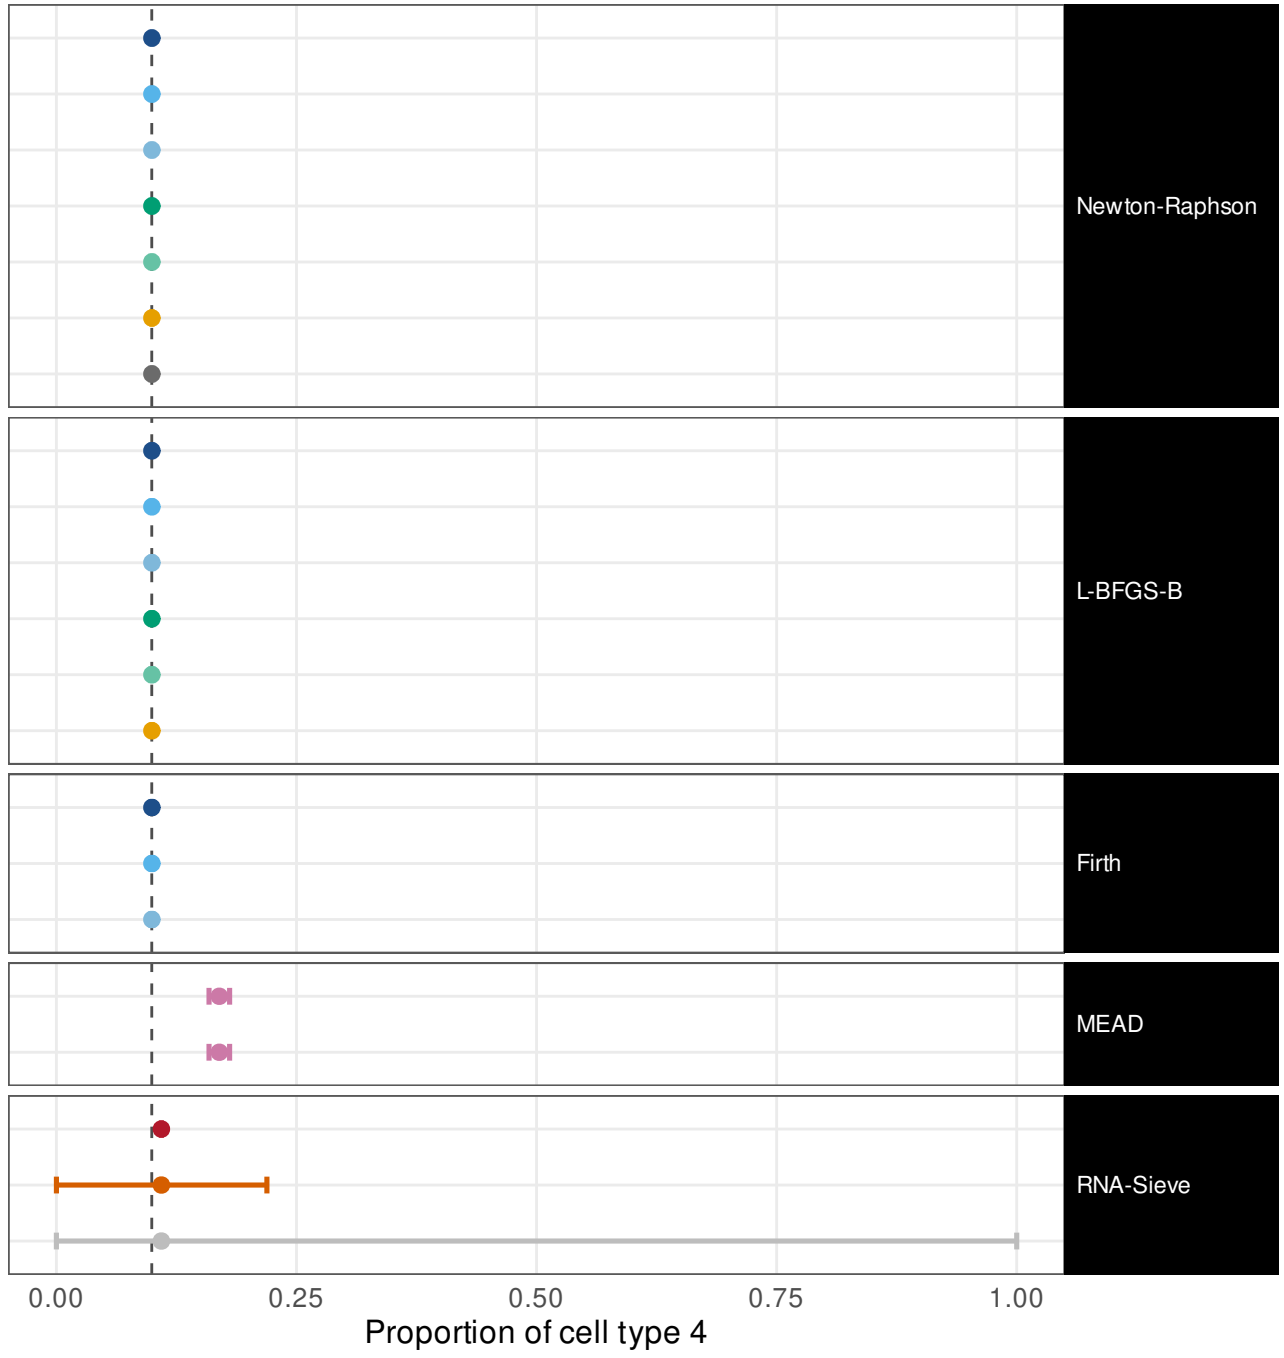


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00391
ILR, mapped back	1	[0.57, 1]	w = 0.00394
ILR, REML	1	[0.57, 1]	w = 0.00471
Profile likelihood	1	[0.57, 1]	w = 0.00411
Profile, REML	1	[0.57, 1]	w = 0.00473
Parametric bootstrap	1	[0.57, 1]	w = 0.00203
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0044
Wald (delta)	1	[0.57, 1]	w = 0.00391
ILR, mapped back	1	[0.57, 1]	w = 0.00393
ILR, REML	1	[0.57, 1]	w = 0.00472
Profile likelihood	1	[0.57, 1]	w = 0.00411
Profile, REML	1	[0.57, 1]	w = 0.00473
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00203
Wald (delta)	1	[0.57, 1]	w = 0.00391
ILR, mapped back	1	[0.57, 1]	w = 0.00394
ILR, REML	1	[0.57, 1]	w = 0.00469
Method's own interval	1	[0.57, 1]	w = 0.107
Own interval, transcript fractions	1	[0.57, 1]	w = 0.107
Fisher information (Wald)	0	[0, 0.43]	w = 4.2e-05
Godambe sandwich	1	[0.57, 1]	w = 0.385
Released code, as published	1	[0.57, 1]	w = 1

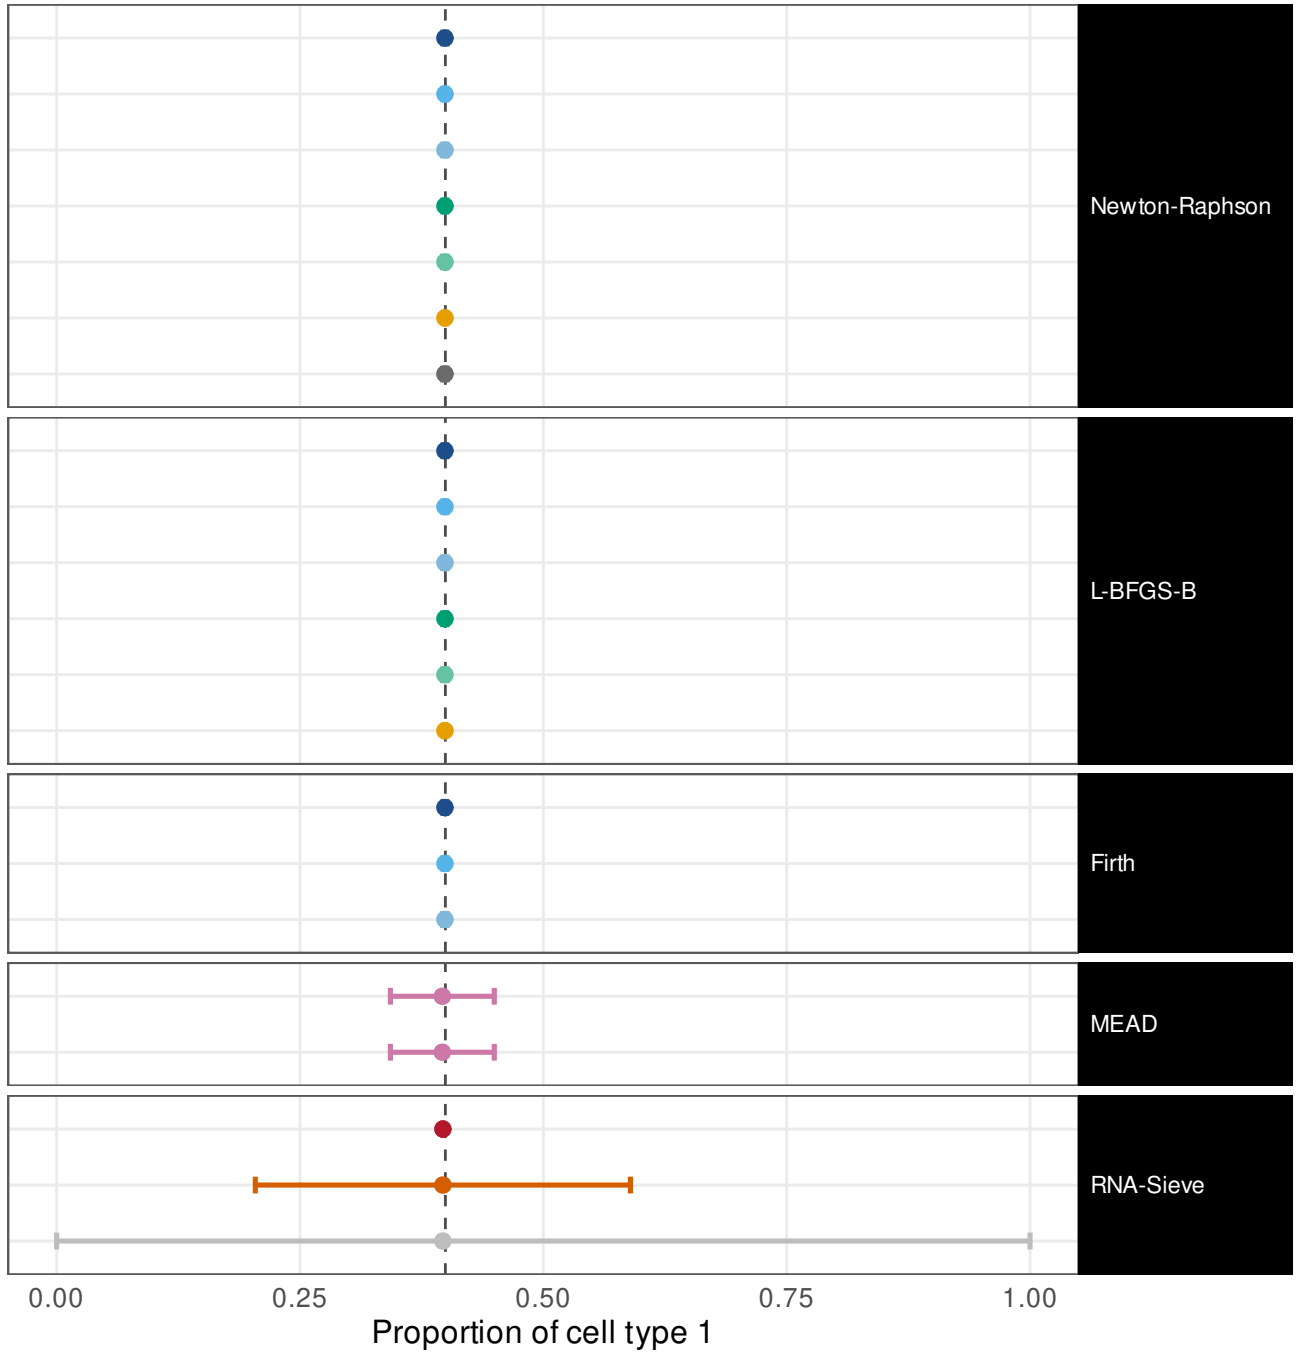

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.00394
ILR, mapped back                      1  [0.57,    1]   w = 0.00391
ILR, REML                             1  [0.57,    1]   w = 0.00471
Profile likelihood                    1  [0.57,    1]   w = 0.00414
Profile, REML                         1  [0.57,    1]   w = 0.00477
Parametric bootstrap                  1  [0.57,    1]   w = 0.00194
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.00439

Wald (delta)                          1  [0.57,    1]   w = 0.00394
ILR, mapped back                      1  [0.57,    1]   w = 0.00395
ILR, REML                             1  [0.57,    1]   w = 0.00485
Profile likelihood                    1  [0.57,    1]   w = 0.00414
Profile, REML                         1  [0.57,    1]   w = 0.00477
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00241

Wald (delta)                          1  [0.57,    1]   w = 0.00394
ILR, mapped back                      1  [0.57,    1]   w = 0.00397
ILR, REML                             1  [0.57,    1]   w = 0.0047

Method's own interval                 1  [0.57,    1]   w = 0.101
Own interval, transcript fractions    1  [0.57,    1]   w = 0.101

Fisher information (Wald)             0  [   0, 0.43]   w = 2.04e-05
Godambe sandwich                      1  [0.57,    1]   w = 0.299
Released code, as published           1  [0.57,    1]   w =    1
```

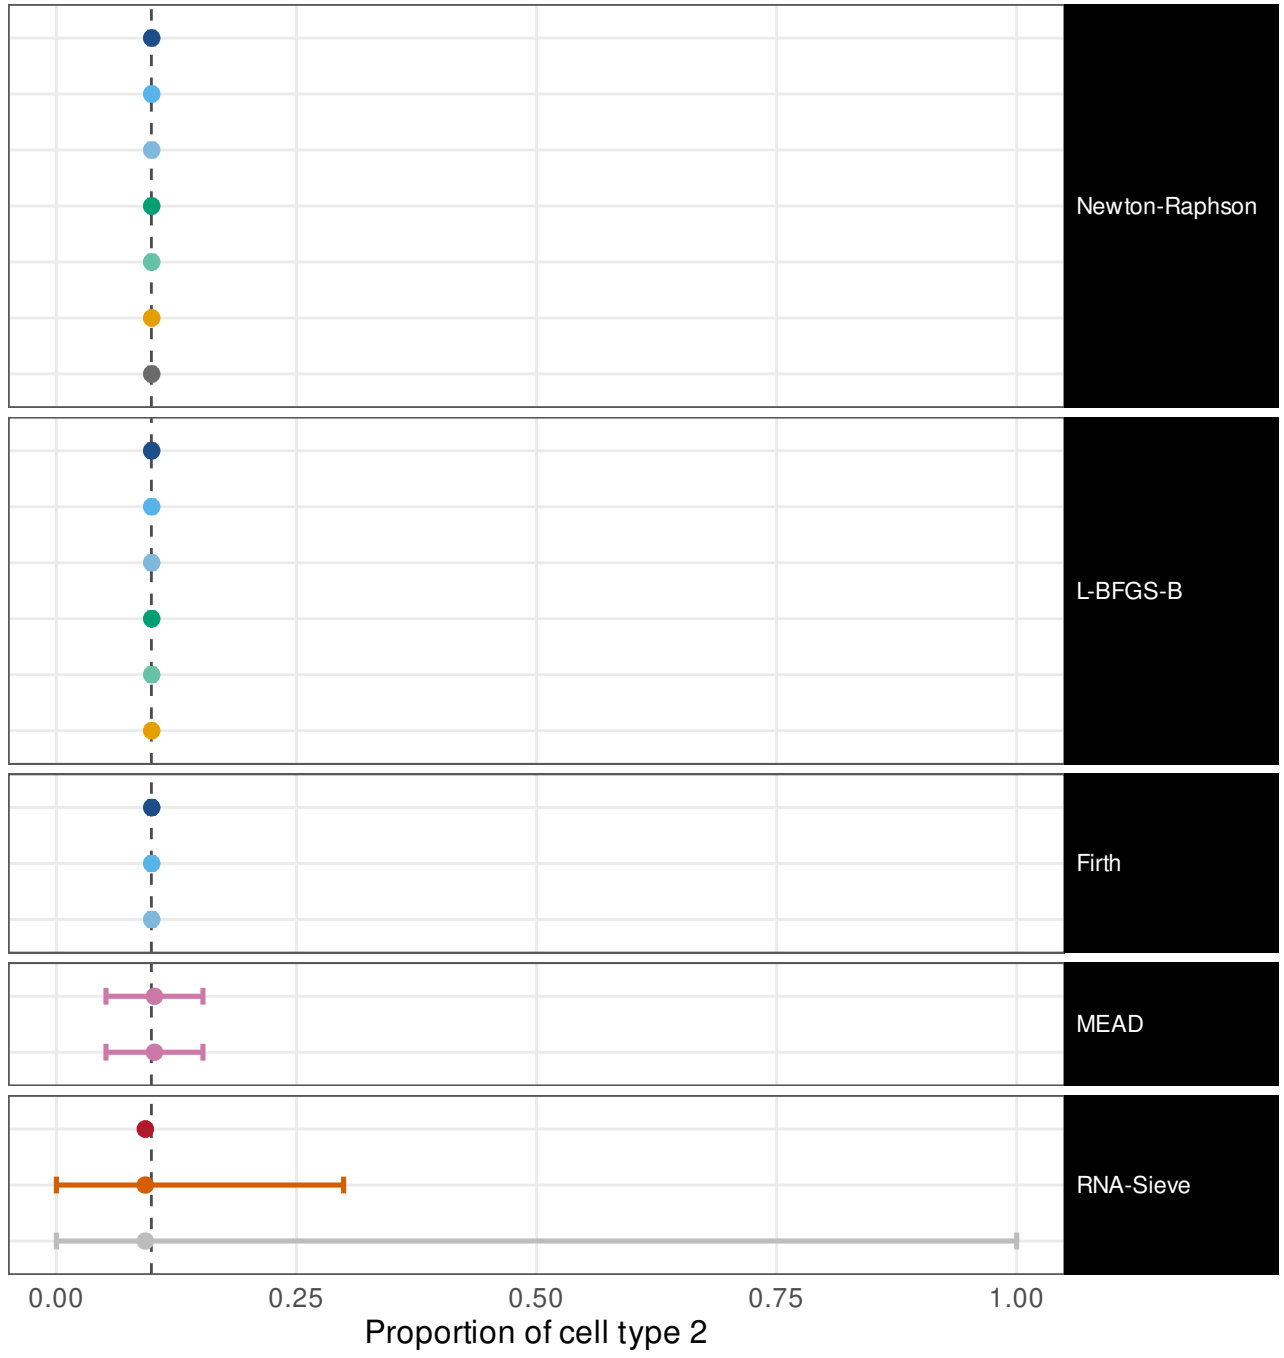


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	0.6	[0.23, 0.88]	w = 0.00341
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.00333
ILR, REML	0.8	[0.38, 0.96]	w = 0.0041
Profile likelihood	0.6	[0.23, 0.88]	w = 0.00358
Profile, REML	0.8	[0.38, 0.96]	w = 0.00412
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0019
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00432
Wald (delta)	0.6	[0.23, 0.88]	w = 0.00341
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.00341
ILR, REML	0.8	[0.38, 0.96]	w = 0.00418
Profile likelihood	0.6	[0.23, 0.88]	w = 0.00358
Profile, REML	0.8	[0.38, 0.96]	w = 0.00412
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00171
Wald (delta)	0.6	[0.23, 0.88]	w = 0.00341
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.00338
ILR, REML	0.6	[0.23, 0.88]	w = 0.00401
Method's own interval	1	[0.57, 1]	w = 0.0772
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0772
Fisher information (Wald)	0	[0, 0.43]	w = 4.46e-05
Godambe sandwich	1	[0.57, 1]	w = 0.315
Released code, as published	1	[0.57, 1]	w = 1

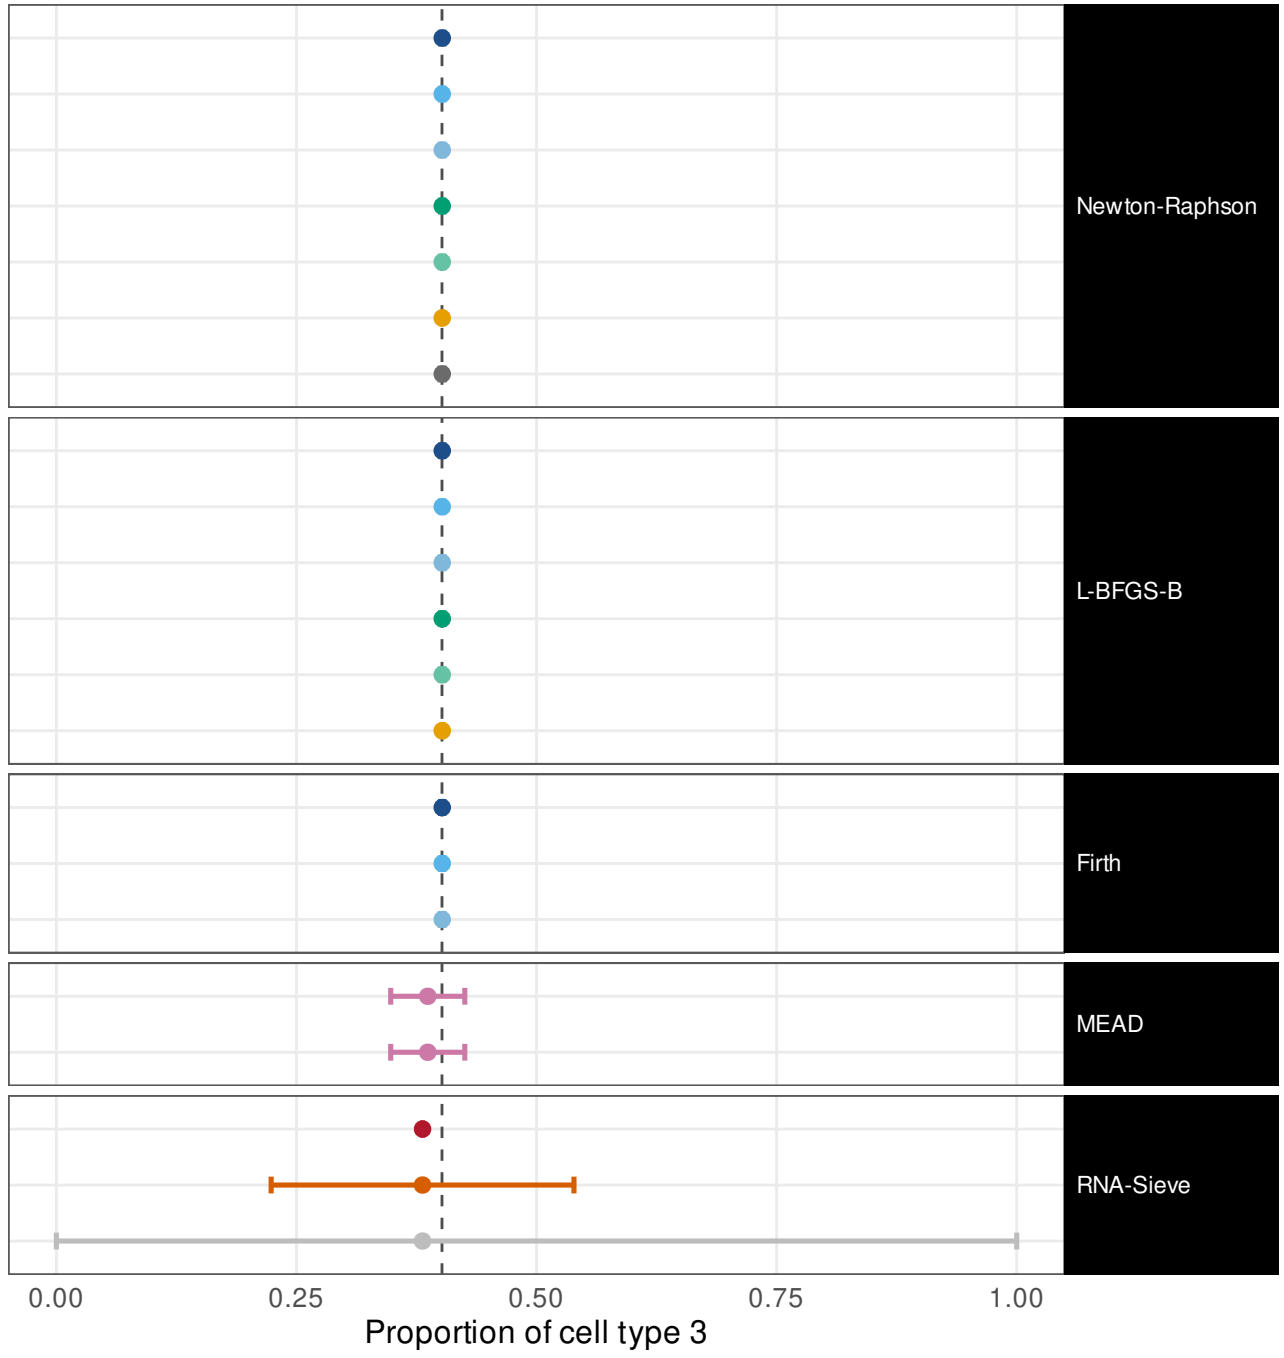


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	0.6	[0.23, 0.88]	w = 0.00345
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.00343
ILR, REML	0.6	[0.23, 0.88]	w = 0.00408
Profile likelihood	0.6	[0.23, 0.88]	w = 0.00362
Profile, REML	0.6	[0.23, 0.88]	w = 0.00417
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00218
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00448
Wald (delta)	0.6	[0.23, 0.88]	w = 0.00345
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.00343
ILR, REML	0.6	[0.23, 0.88]	w = 0.00421
Profile likelihood	0.6	[0.23, 0.88]	w = 0.00362
Profile, REML	0.6	[0.23, 0.88]	w = 0.00417
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.00165
Wald (delta)	0.6	[0.23, 0.88]	w = 0.00345
ILR, mapped back	0.6	[0.23, 0.88]	w = 0.00343
ILR, REML	0.6	[0.23, 0.88]	w = 0.00412
Method's own interval	1	[0.57, 1]	w = 0.0736
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0736
Fisher information (Wald)	0	[0, 0.43]	w = 2.17e-05
Godambe sandwich	1	[0.57, 1]	w = 0.317
Released code, as published	1	[0.57, 1]	w = 1

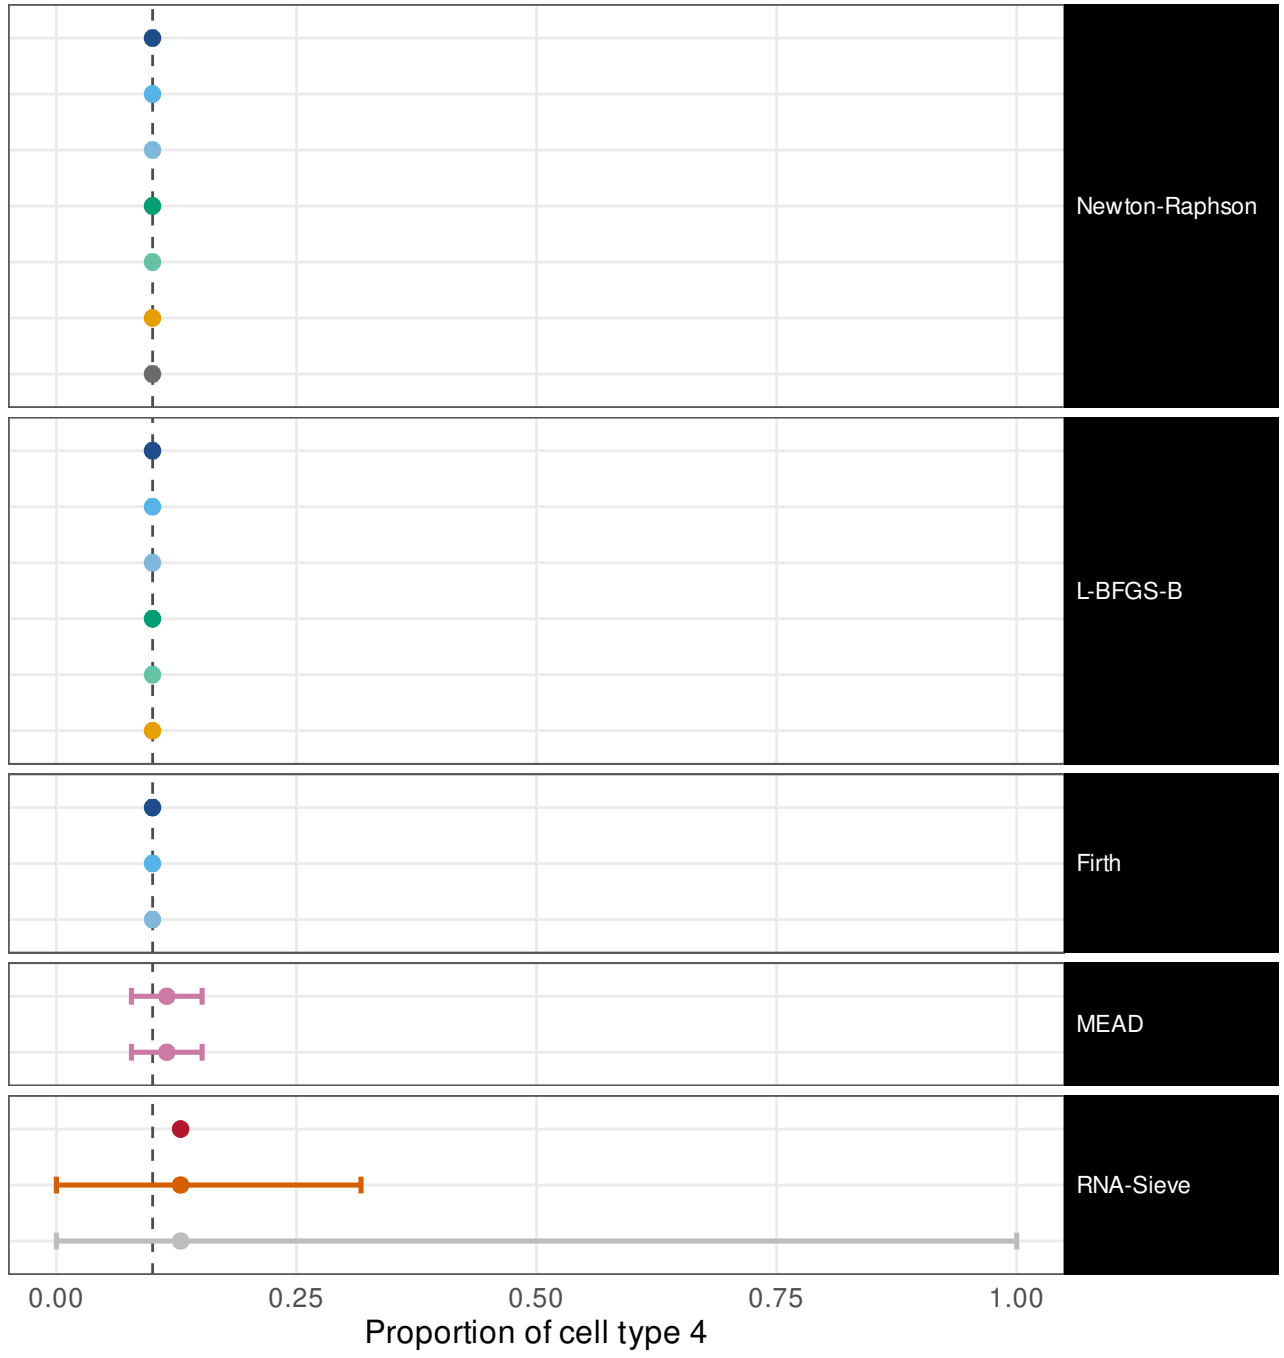

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.0125
ILR, mapped back                      1  [0.57,    1]   w = 0.0123
ILR, REML                             1  [0.57,    1]   w = 0.0149
Profile likelihood                    1  [0.57,    1]   w = 0.0132
Profile, REML                         1  [0.57,    1]   w = 0.0152
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.00492
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0135

Wald (delta)                          1  [0.57,    1]   w = 0.0125
ILR, mapped back                      1  [0.57,    1]   w = 0.0123
ILR, REML                             1  [0.57,    1]   w = 0.0148
Profile likelihood                    1  [0.57,    1]   w = 0.0132
Profile, REML                         1  [0.57,    1]   w = 0.0152
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00751

Wald (delta)                          1  [0.57,    1]   w = 0.0125
ILR, mapped back                      1  [0.57,    1]   w = 0.0125
ILR, REML                             1  [0.57,    1]   w = 0.0153

Method's own interval                 0  [   0, 0.43]   w = 0.0968
Own interval, transcript fractions    1  [0.57,    1]   w = 0.0968

Fisher information (Wald)             0  [   0, 0.43]   w = 0.00013
Godambe sandwich                      1  [0.57,    1]   w =     1
Released code, as published           1  [0.57,    1]   w =     1
```

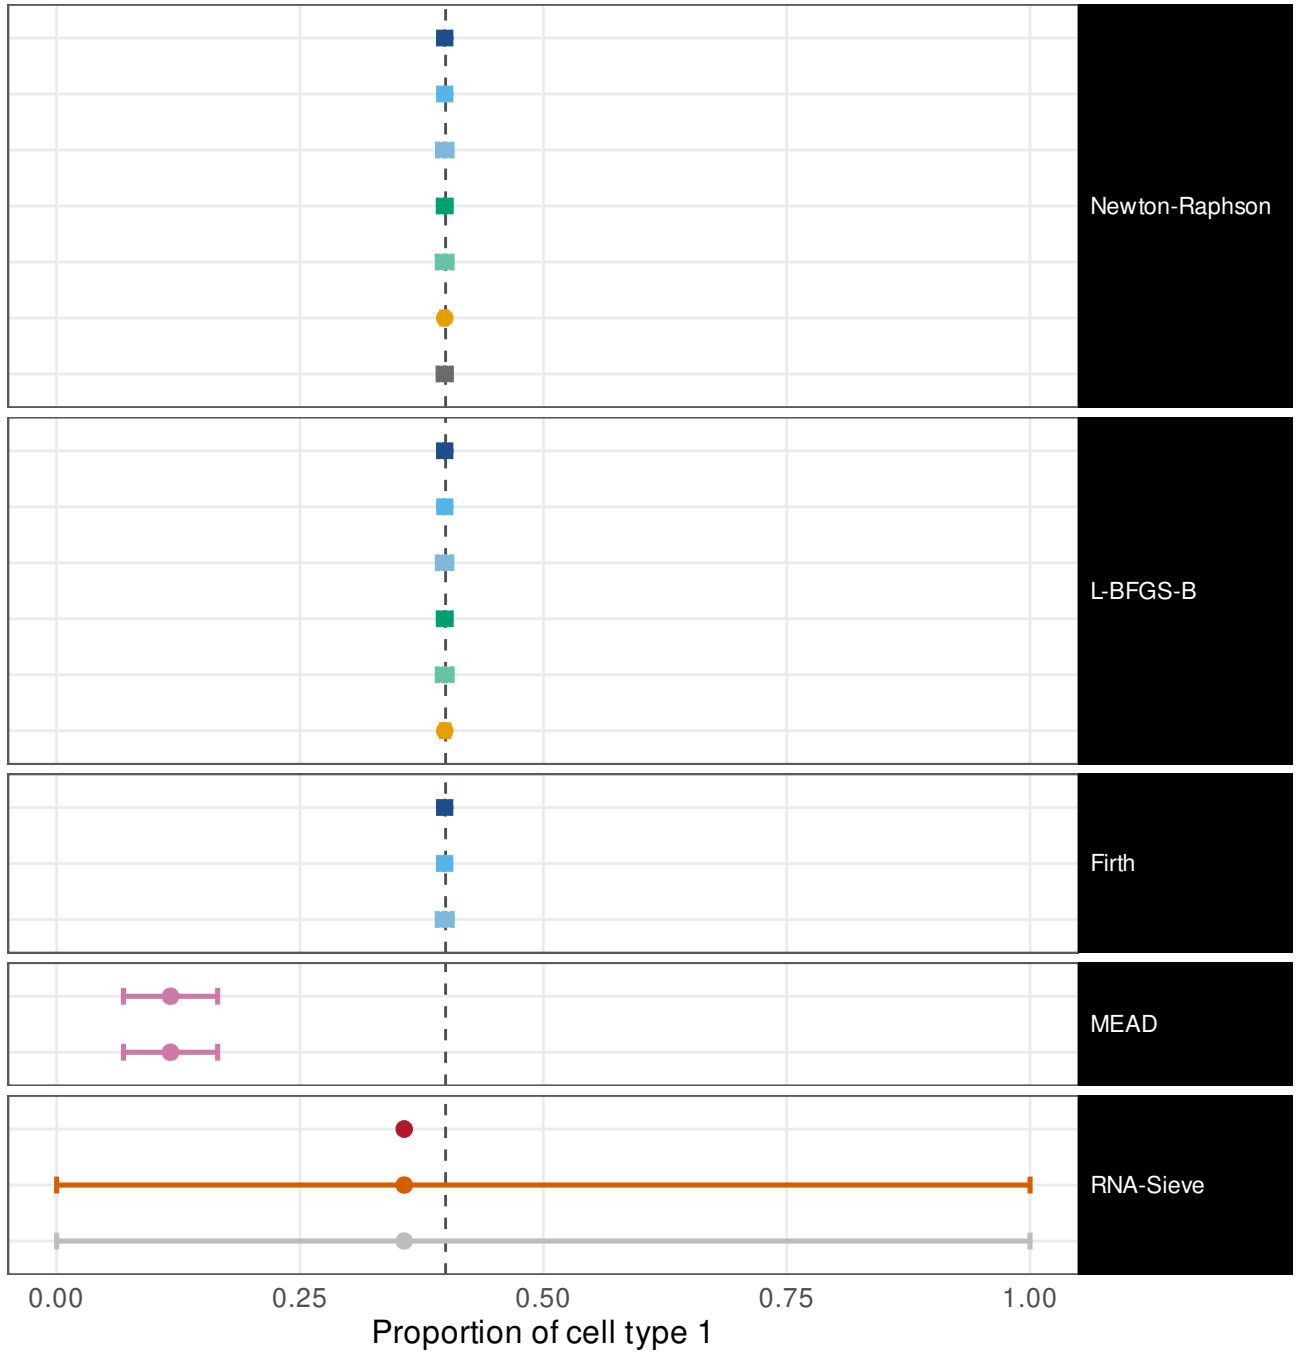

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.013
ILR, mapped back                      1  [0.57,    1]   w = 0.0129
ILR, REML                             1  [0.57,    1]   w = 0.0156
Profile likelihood                    1  [0.57,    1]   w = 0.0136
Profile, REML                         1  [0.57,    1]   w = 0.0157
Parametric bootstrap                0.4  [0.12, 0.77]   w = 0.00551
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0141

Wald (delta)                          1  [0.57,    1]   w = 0.013
ILR, mapped back                      1  [0.57,    1]   w = 0.0128
ILR, REML                             1  [0.57,    1]   w = 0.0156
Profile likelihood                    1  [0.57,    1]   w = 0.0136
Profile, REML                         1  [0.57,    1]   w = 0.0157
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00749

Wald (delta)                          1  [0.57,    1]   w = 0.0129
ILR, mapped back                      1  [0.57,    1]   w = 0.0131
ILR, REML                             1  [0.57,    1]   w = 0.0156

Method's own interval                 1  [0.57,    1]   w = 0.124
Own interval, transcript fractions    1  [0.57,    1]   w = 0.124

Fisher information (Wald)             0  [   0, 0.43]   w = 0.00013
Godambe sandwich                      1  [0.57,    1]   w =     1
Released code, as published           1  [0.57,    1]   w =     1
```

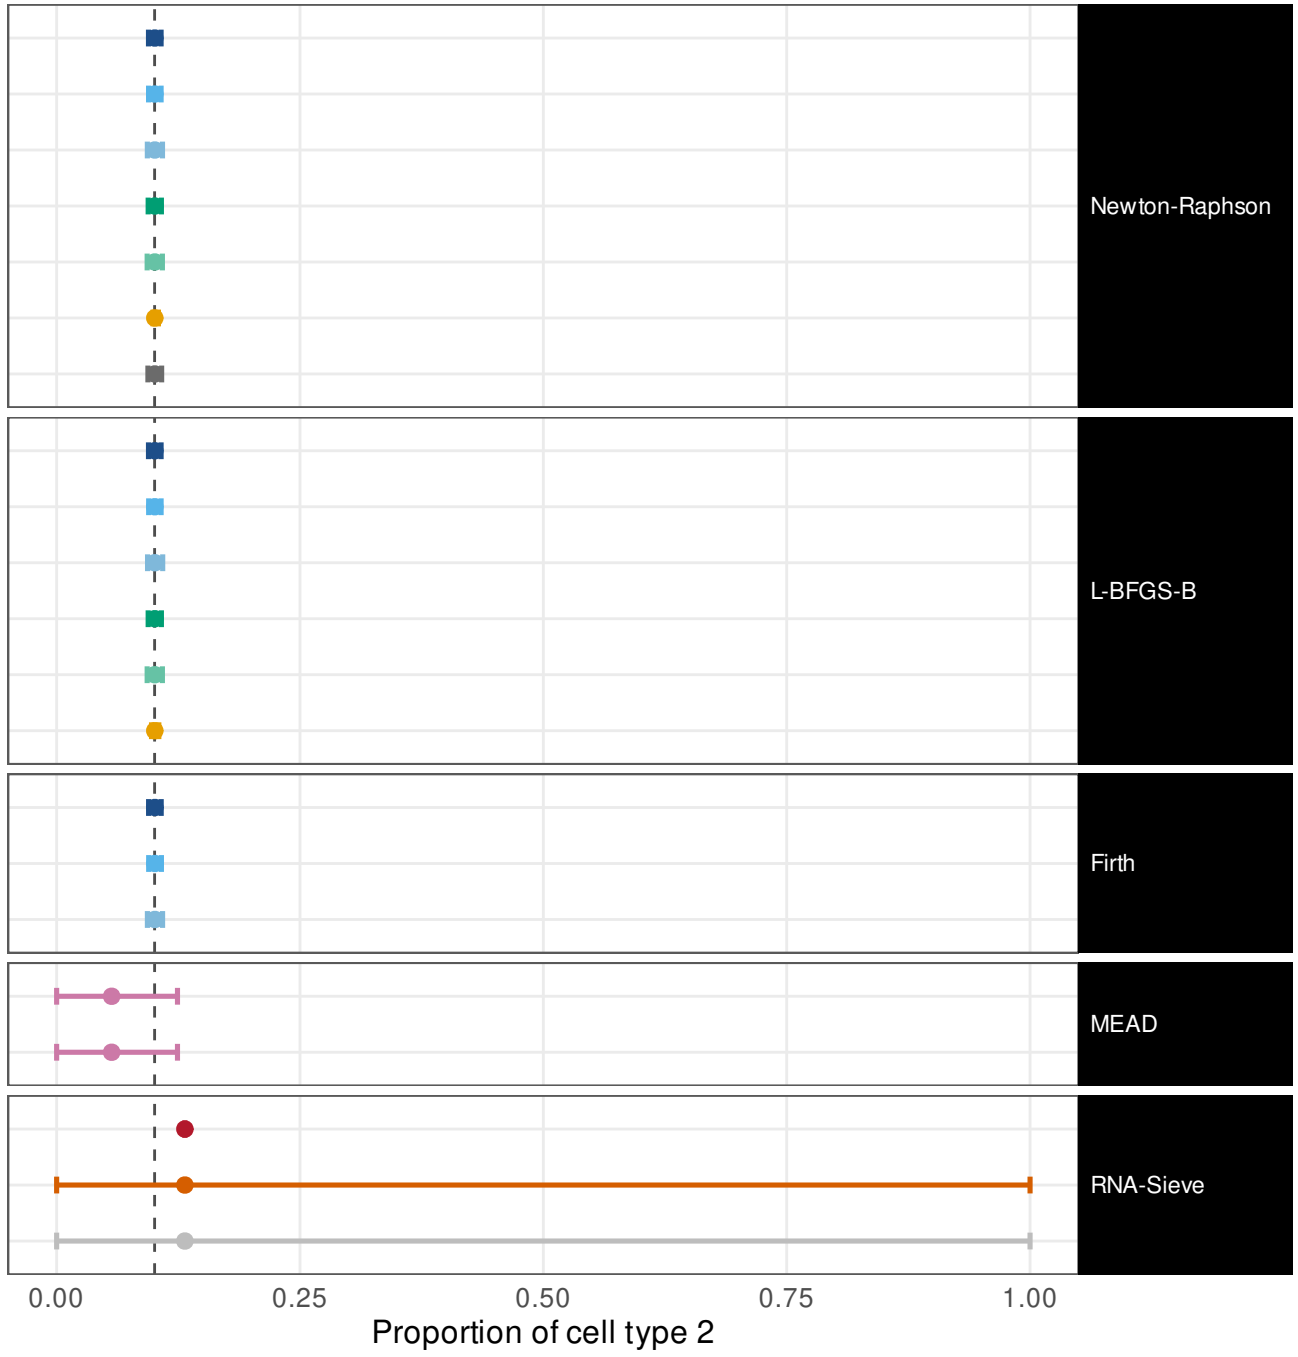


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	0.8	[0.38, 0.96]	w = 0.00433
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00425
ILR, REML	1	[0.57, 1]	w = 0.00531
Profile likelihood	1	[0.57, 1]	w = 0.00455
Profile, REML	1	[0.57, 1]	w = 0.00524
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.00242
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00492
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00433
ILR, mapped back	1	[0.57, 1]	w = 0.00437
ILR, REML	1	[0.57, 1]	w = 0.00526
Profile likelihood	1	[0.57, 1]	w = 0.00455
Profile, REML	1	[0.57, 1]	w = 0.00524
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00217
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00433
ILR, mapped back	1	[0.57, 1]	w = 0.00435
ILR, REML	1	[0.57, 1]	w = 0.0052
Method's own interval	0	[0, 0.43]	w = 0.0207
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0207
Fisher information (Wald)	0	[0, 0.43]	w = 0.000103
Godambe sandwich	1	[0.57, 1]	w = 0.302
Released code, as published	1	[0.57, 1]	w = 1

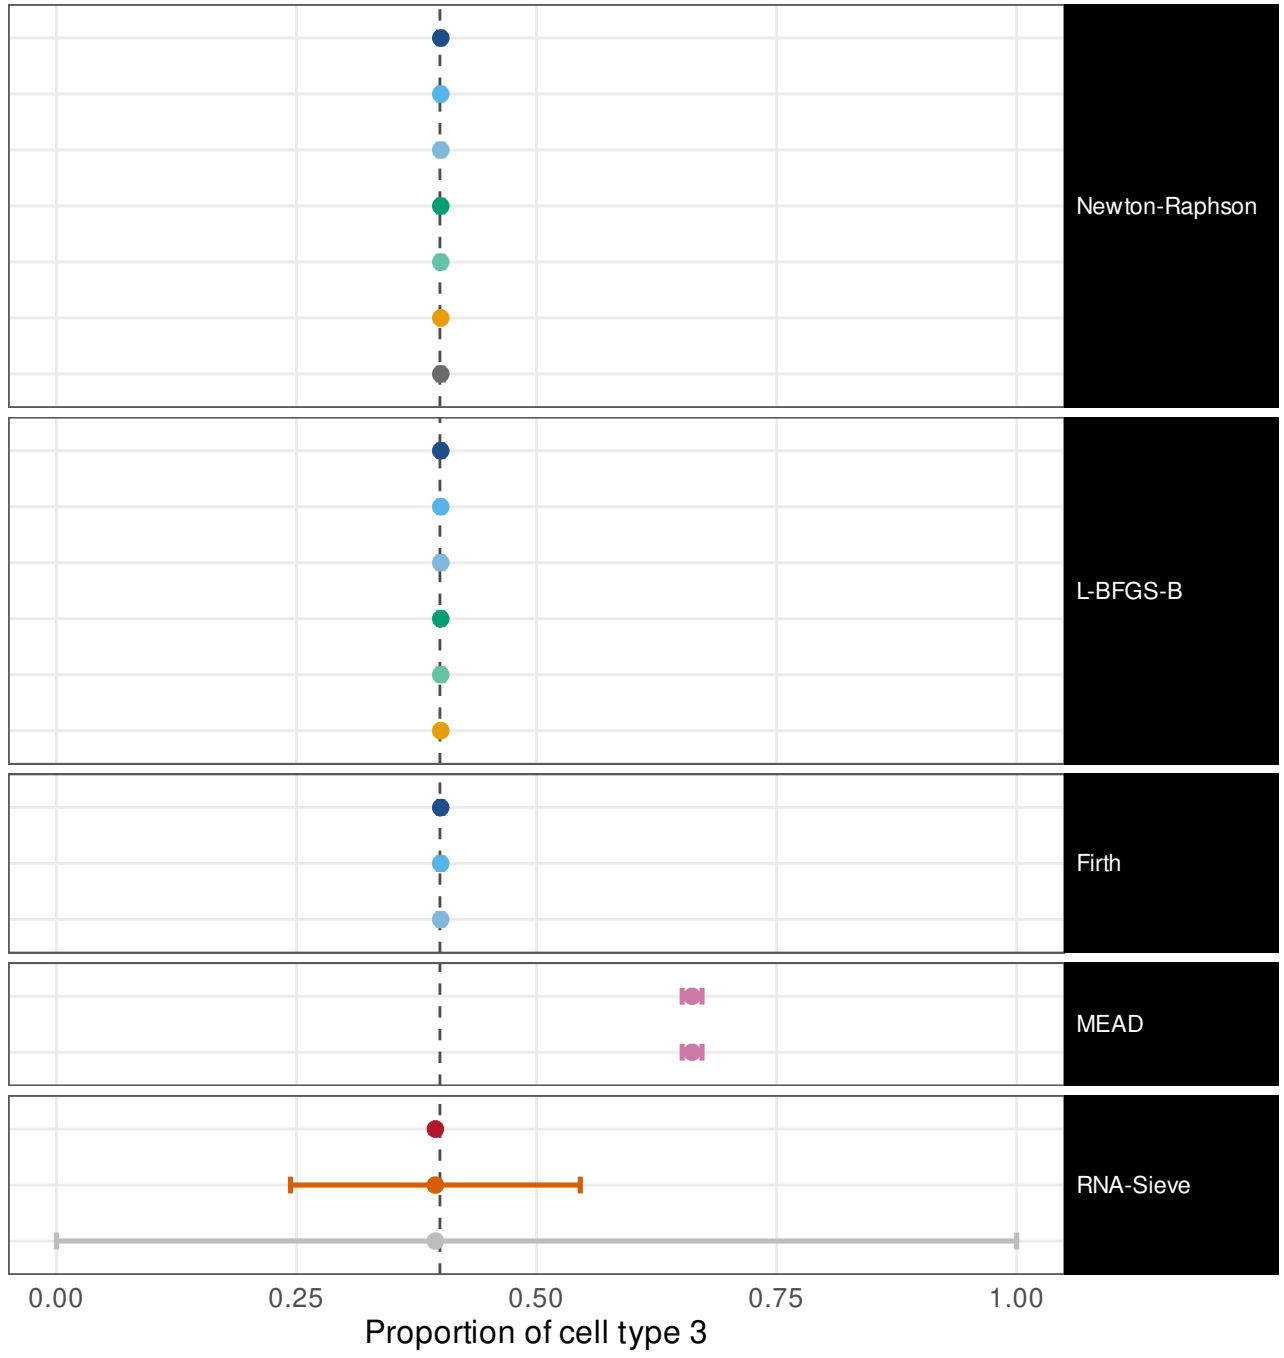

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 20 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.00294
ILR, mapped back                      1  [0.57,    1]   w = 0.00291
ILR, REML                             1  [0.57,    1]   w = 0.00357
Profile likelihood                    1  [0.57,    1]   w = 0.00309
Profile, REML                         1  [0.57,    1]   w = 0.00355
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00122
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.00314

Wald (delta)                          1  [0.57,    1]   w = 0.00294
ILR, mapped back                      1  [0.57,    1]   w = 0.00296
ILR, REML                             1  [0.57,    1]   w = 0.00352
Profile likelihood                    1  [0.57,    1]   w = 0.00309
Profile, REML                         1  [0.57,    1]   w = 0.00355
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00169

Wald (delta)                          1  [0.57,    1]   w = 0.00294
ILR, mapped back                      1  [0.57,    1]   w = 0.00286
ILR, REML                             1  [0.57,    1]   w = 0.0035

Method's own interval                 0  [   0, 0.43]   w = 0.0538
Own interval, transcript fractions    1  [0.57,    1]   w = 0.0538

Fisher information (Wald)             0  [   0, 0.43]   w = 1.75e-05
Godambe sandwich                      1  [0.57,    1]   w = 0.272
Released code, as published           1  [0.57,    1]   w =    1
```

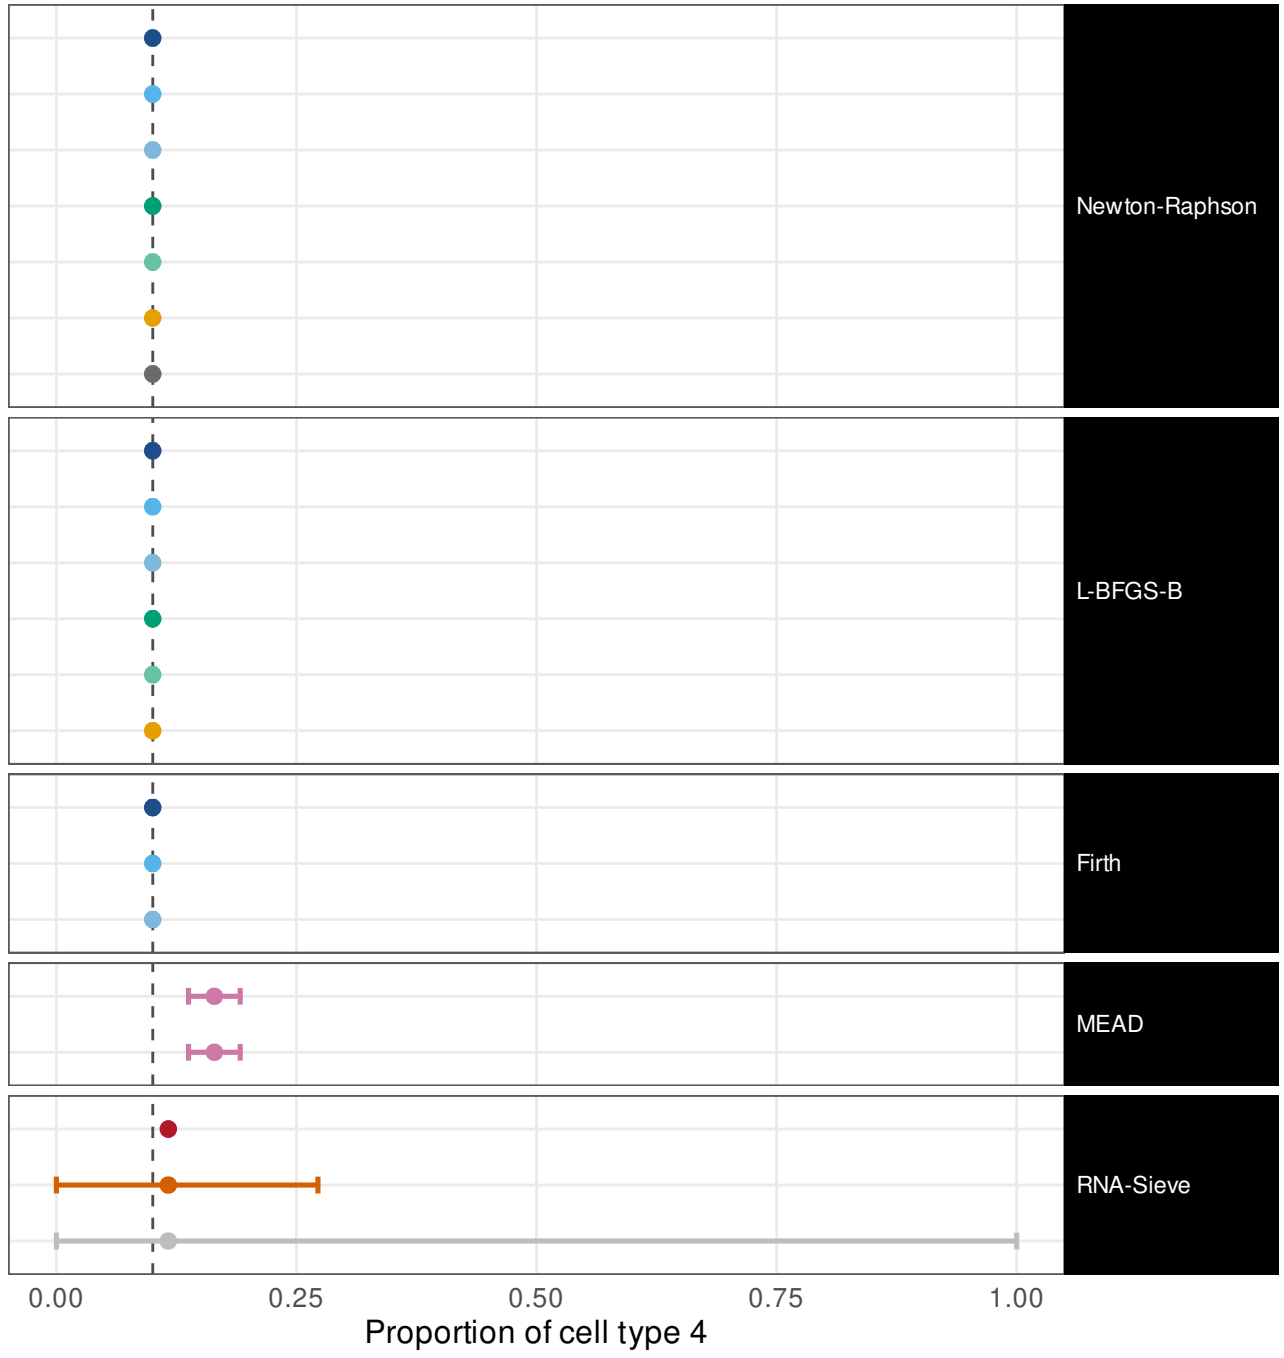


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.029
ILR, mapped back	1	[0.57, 1]	w = 0.0288
ILR, REML	1	[0.57, 1]	w = 0.0298
Profile likelihood	1	[0.57, 1]	w = 0.0291
Profile, REML	1	[0.57, 1]	w = 0.0295
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0148
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0288
Wald (delta)	1	[0.57, 1]	w = 0.029
ILR, mapped back	1	[0.57, 1]	w = 0.0286
ILR, REML	1	[0.57, 1]	w = 0.029
Profile likelihood	1	[0.57, 1]	w = 0.0291
Profile, REML	1	[0.57, 1]	w = 0.0295
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0162
Wald (delta)	1	[0.57, 1]	w = 0.029
ILR, mapped back	1	[0.57, 1]	w = 0.029
ILR, REML	1	[0.57, 1]	w = 0.0296
Method's own interval	0.8	[0.38, 0.96]	w = 0.0578
Own interval, transcript fractions	0.8	[0.38, 0.96]	w = 0.0578
Fisher information (Wald)	0	[0, 0.43]	w = 0.000285
Godambe sandwich	1	[0.57, 1]	w = 0.217
Released code, as published	1	[0.57, 1]	w = 0.217

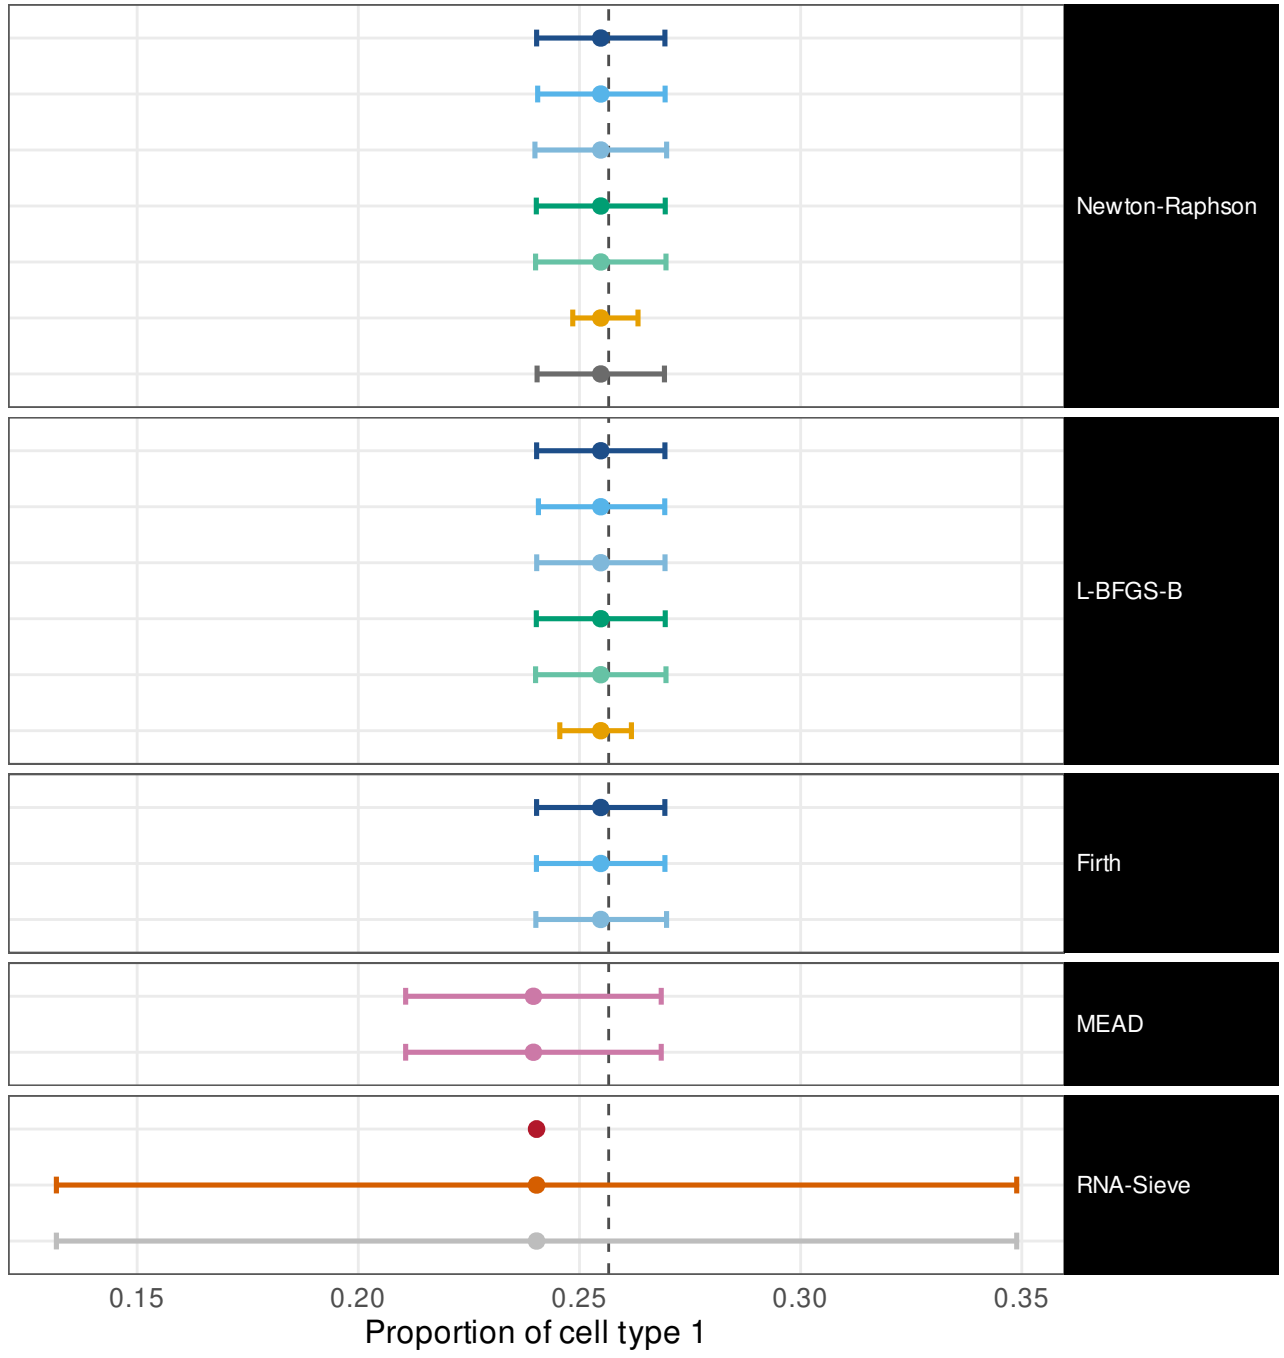


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.0287
ILR, mapped back	1	[0.57, 1]	w = 0.0291
ILR, REML	1	[0.57, 1]	w = 0.0297
Profile likelihood	1	[0.57, 1]	w = 0.0289
Profile, REML	1	[0.57, 1]	w = 0.0292
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0155
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0285
Wald (delta)	1	[0.57, 1]	w = 0.0287
ILR, mapped back	1	[0.57, 1]	w = 0.0285
ILR, REML	1	[0.57, 1]	w = 0.0289
Profile likelihood	1	[0.57, 1]	w = 0.0289
Profile, REML	1	[0.57, 1]	w = 0.0292
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0164
Wald (delta)	1	[0.57, 1]	w = 0.0287
ILR, mapped back	1	[0.57, 1]	w = 0.0284
ILR, REML	1	[0.57, 1]	w = 0.0294
Method's own interval	1	[0.57, 1]	w = 0.0633
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0633
Fisher information (Wald)	0	[0, 0.43]	w = 0.000271
Godambe sandwich	1	[0.57, 1]	w = 0.227
Released code, as published	1	[0.57, 1]	w = 0.227

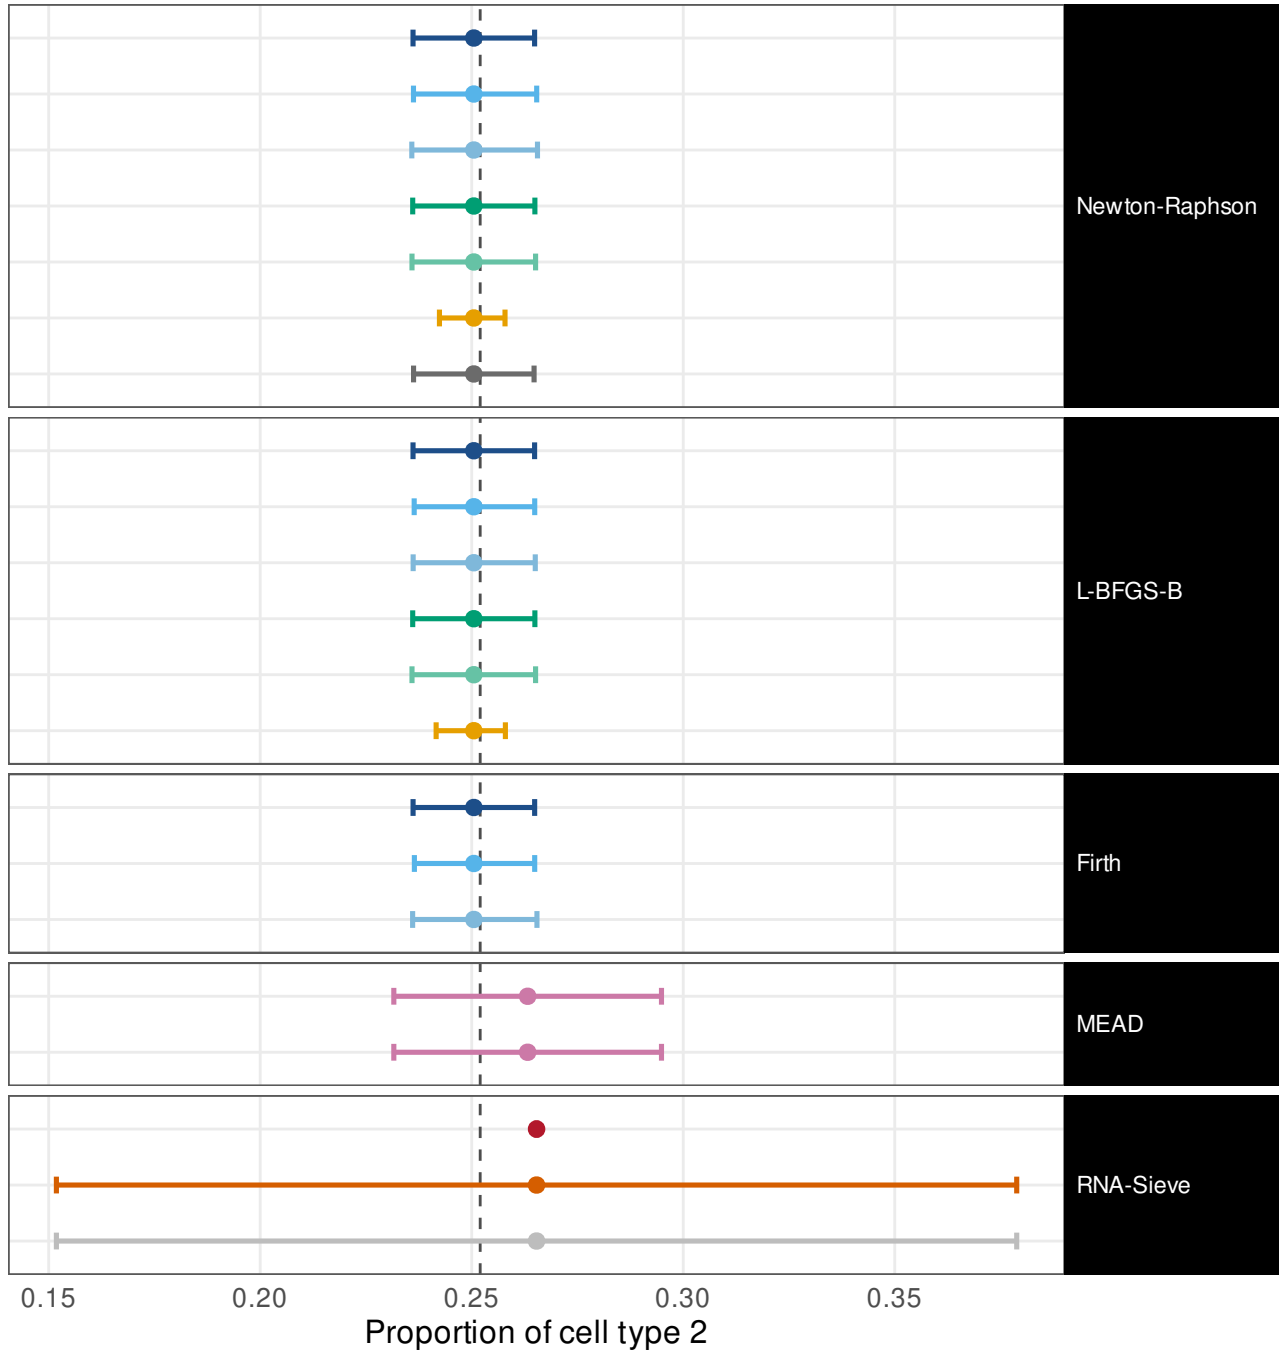


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.0286
ILR, mapped back	1	[0.57, 1]	w = 0.0286
ILR, REML	1	[0.57, 1]	w = 0.0289
Profile likelihood	1	[0.57, 1]	w = 0.0288
Profile, REML	1	[0.57, 1]	w = 0.0291
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0137
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0295
Wald (delta)	1	[0.57, 1]	w = 0.0286
ILR, mapped back	1	[0.57, 1]	w = 0.0283
ILR, REML	1	[0.57, 1]	w = 0.0287
Profile likelihood	1	[0.57, 1]	w = 0.0288
Profile, REML	1	[0.57, 1]	w = 0.0291
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.014
Wald (delta)	1	[0.57, 1]	w = 0.0286
ILR, mapped back	1	[0.57, 1]	w = 0.0285
ILR, REML	1	[0.57, 1]	w = 0.0288
Method's own interval	1	[0.57, 1]	w = 0.0605
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0605
Fisher information (Wald)	0	[0, 0.43]	w = 0.00021
Godambe sandwich	1	[0.57, 1]	w = 0.137
Released code, as published	1	[0.57, 1]	w = 0.137

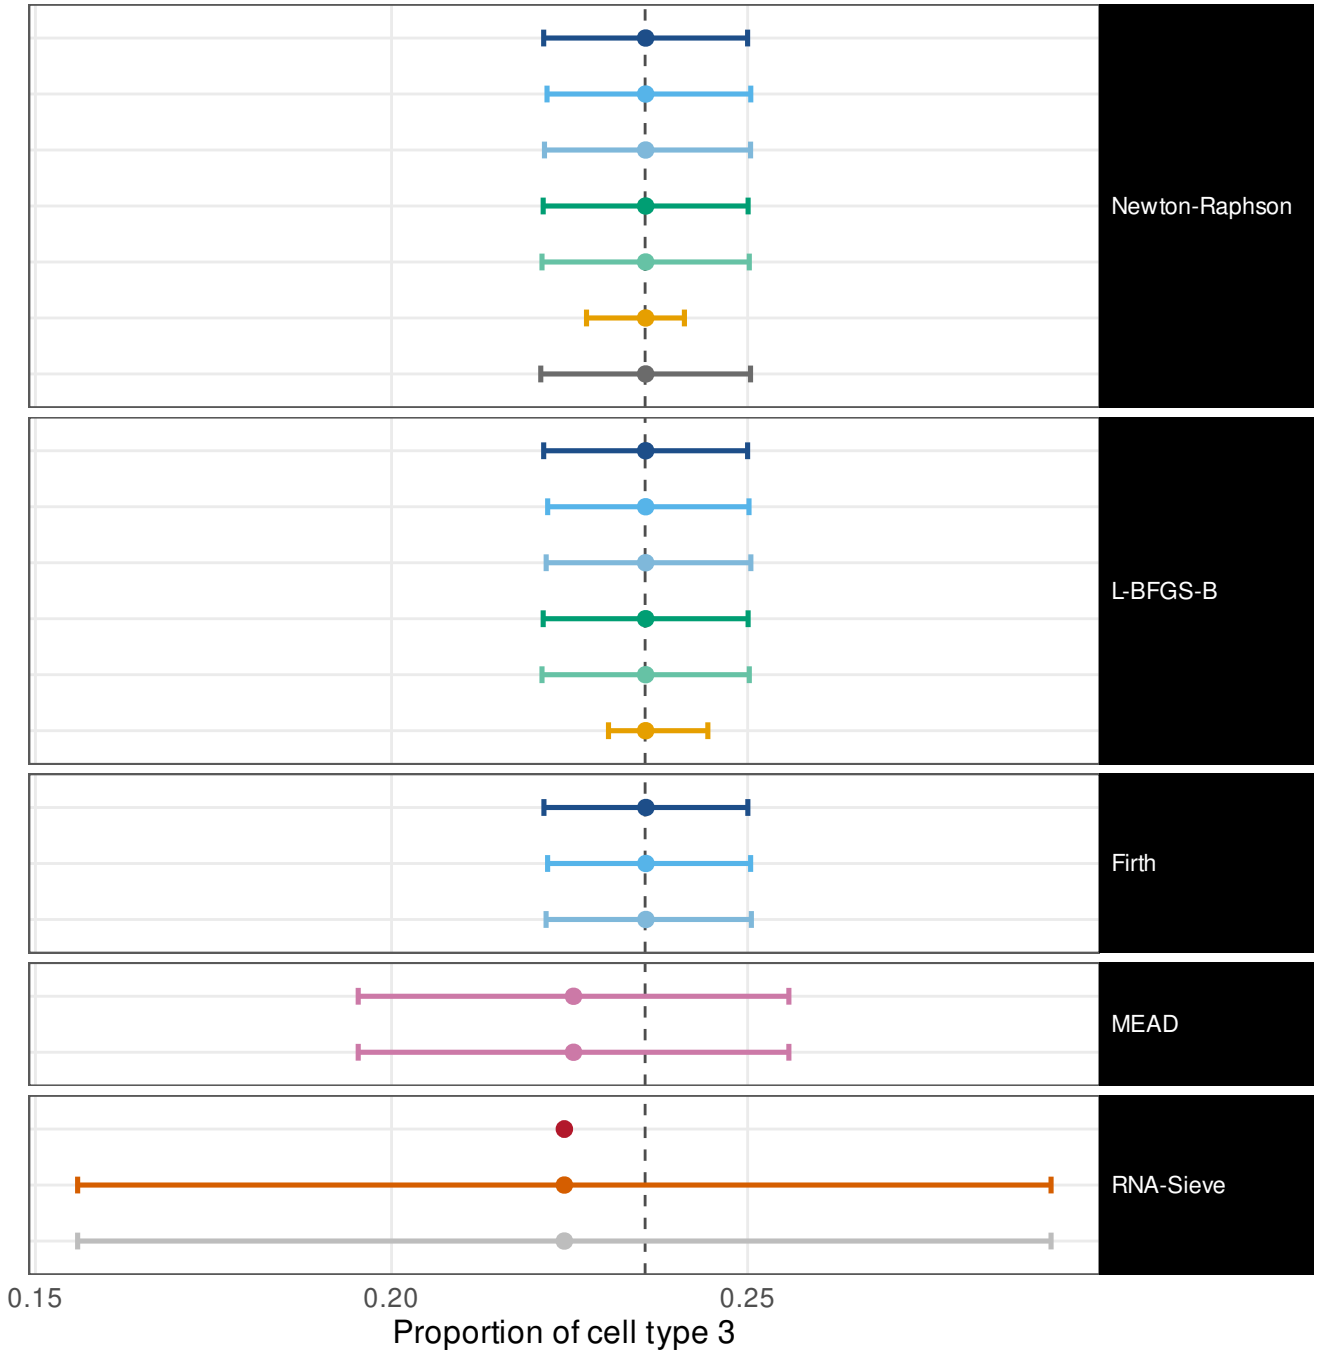


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.0288
ILR, mapped back	1	[0.57, 1]	w = 0.0286
ILR, REML	1	[0.57, 1]	w = 0.0296
Profile likelihood	1	[0.57, 1]	w = 0.0289
Profile, REML	1	[0.57, 1]	w = 0.0293
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0128
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0296
Wald (delta)	1	[0.57, 1]	w = 0.0288
ILR, mapped back	1	[0.57, 1]	w = 0.0283
ILR, REML	1	[0.57, 1]	w = 0.0295
Profile likelihood	1	[0.57, 1]	w = 0.0289
Profile, REML	1	[0.57, 1]	w = 0.0293
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00972
Wald (delta)	1	[0.57, 1]	w = 0.0288
ILR, mapped back	1	[0.57, 1]	w = 0.0285
ILR, REML	1	[0.57, 1]	w = 0.0289
Method's own interval	1	[0.57, 1]	w = 0.0586
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0586
Fisher information (Wald)	0	[0, 0.43]	w = 0.000205
Godambe sandwich	1	[0.57, 1]	w = 0.156
Released code, as published	1	[0.57, 1]	w = 0.156

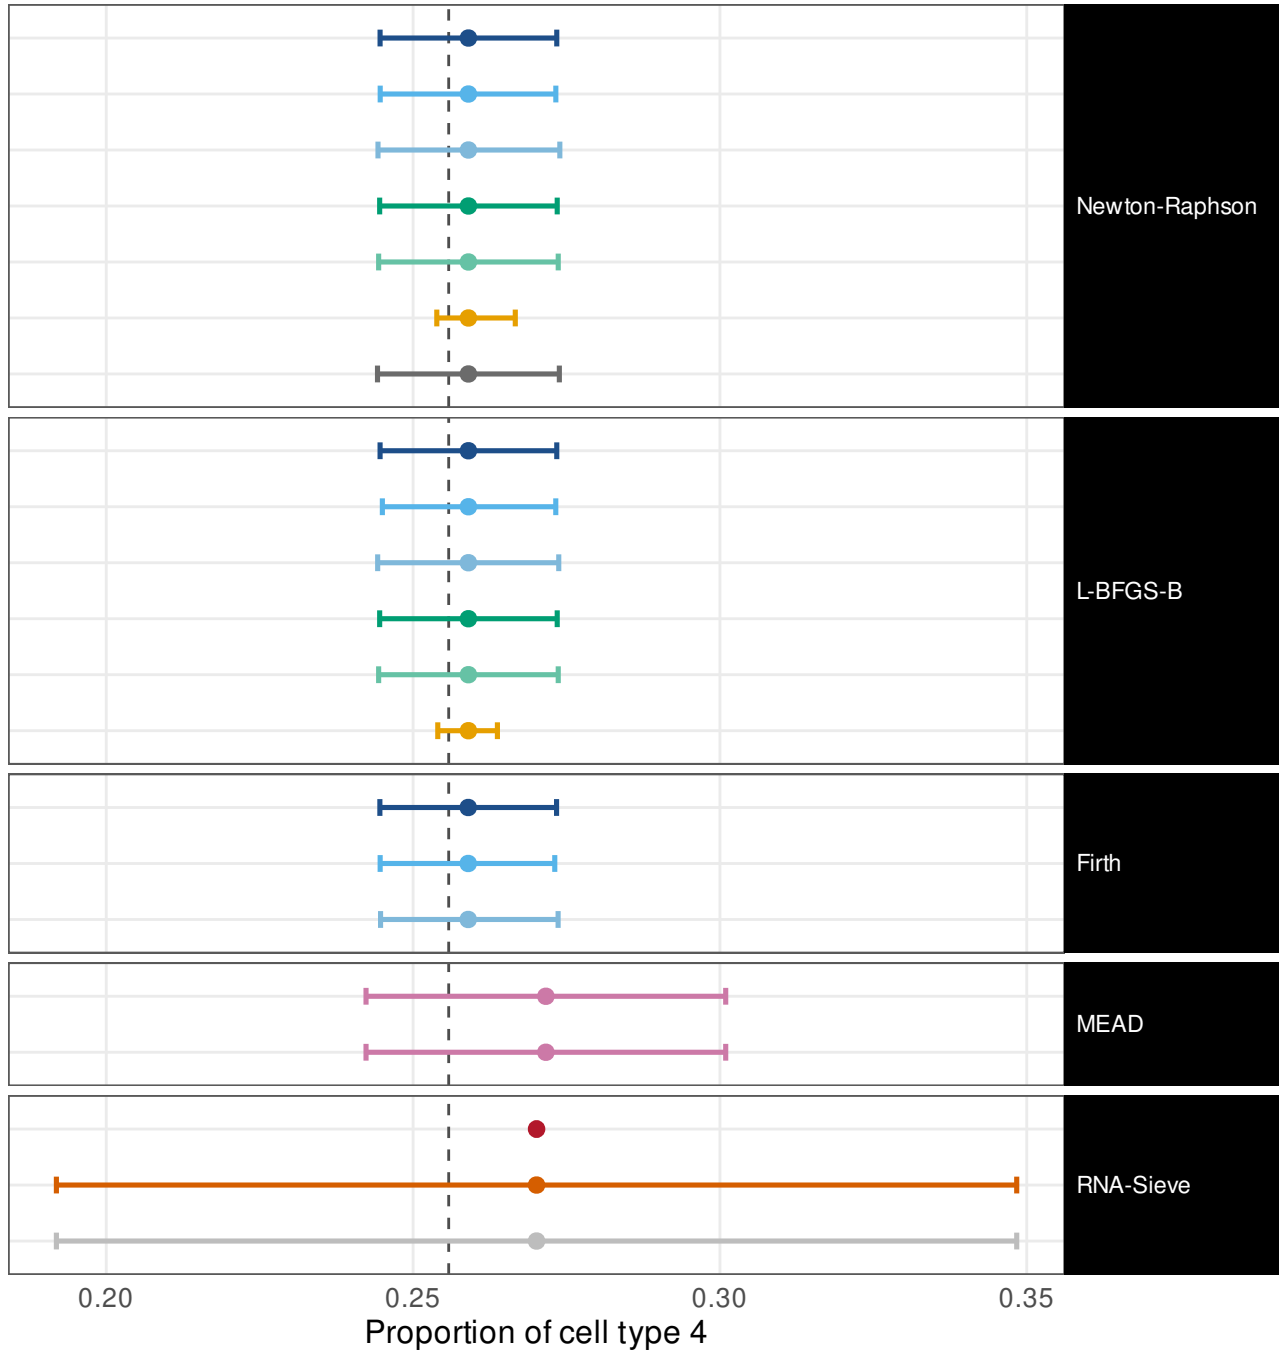

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.107
ILR, mapped back                      1  [0.57,    1]   w = 0.108
ILR, REML                             1  [0.57,    1]   w = 0.107
Profile likelihood                    1  [0.57,    1]   w = 0.107
Profile, REML                         1  [0.57,    1]   w = 0.109
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.0538
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.112

Wald (delta)                          1  [0.57,    1]   w = 0.107
ILR, mapped back                      1  [0.57,    1]   w = 0.107
ILR, REML                             1  [0.57,    1]   w = 0.107
Profile likelihood                    1  [0.57,    1]   w = 0.107
Profile, REML                         1  [0.57,    1]   w = 0.109
Parametric bootstrap                  1  [0.57,    1]   w = 0.0551

Wald (delta)                          1  [0.57,    1]   w = 0.103
ILR, mapped back                      1  [0.57,    1]   w = 0.102
ILR, REML                             1  [0.57,    1]   w = 0.105

Method's own interval                 0  [   0, 0.43]   w = 0.0811
Own interval, transcript fractions    1  [0.57,    1]   w = 0.0811

Fisher information (Wald)           0.2  [0.036, 0.62]   w = 0.00286
Godambe sandwich                      1  [0.57,    1]   w = 0.549
Released code, as published           1  [0.57,    1]   w =     1
```

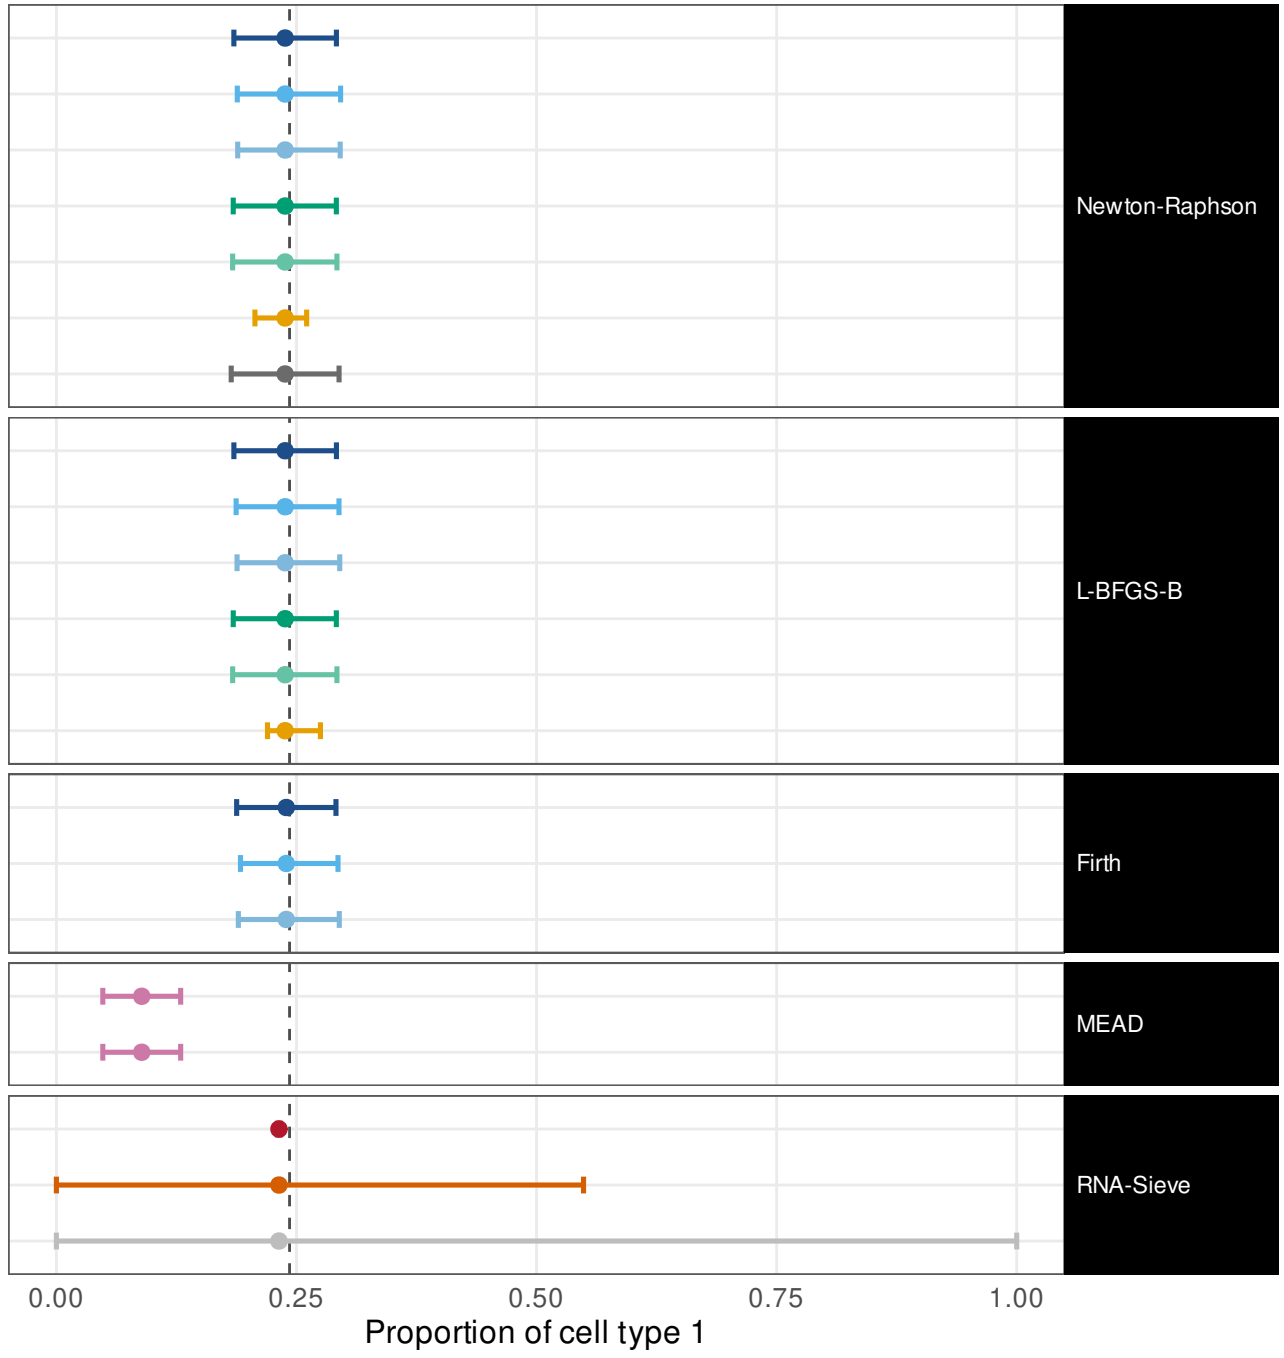

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.107
ILR, mapped back                      1  [0.57,    1]   w = 0.106
ILR, REML                             1  [0.57,    1]   w = 0.107
Profile likelihood                    1  [0.57,    1]   w = 0.107
Profile, REML                         1  [0.57,    1]   w = 0.109
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.0591
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.113

Wald (delta)                          1  [0.57,    1]   w = 0.107
ILR, mapped back                      1  [0.57,    1]   w = 0.107
ILR, REML                             1  [0.57,    1]   w = 0.108
Profile likelihood                    1  [0.57,    1]   w = 0.107
Profile, REML                         1  [0.57,    1]   w = 0.109
Parametric bootstrap                  1  [0.57,    1]   w = 0.0513

Wald (delta)                          1  [0.57,    1]   w = 0.103
ILR, mapped back                      1  [0.57,    1]   w = 0.102
ILR, REML                             1  [0.57,    1]   w = 0.105

Method's own interval                 0  [   0, 0.43]   w = 0.078
Own interval, transcript fractions    1  [0.57,    1]   w = 0.078

Fisher information (Wald)             0  [   0, 0.43]   w = 0.00192
Godambe sandwich                      1  [0.57,    1]   w = 0.549
Released code, as published           1  [0.57,    1]   w =    1
```

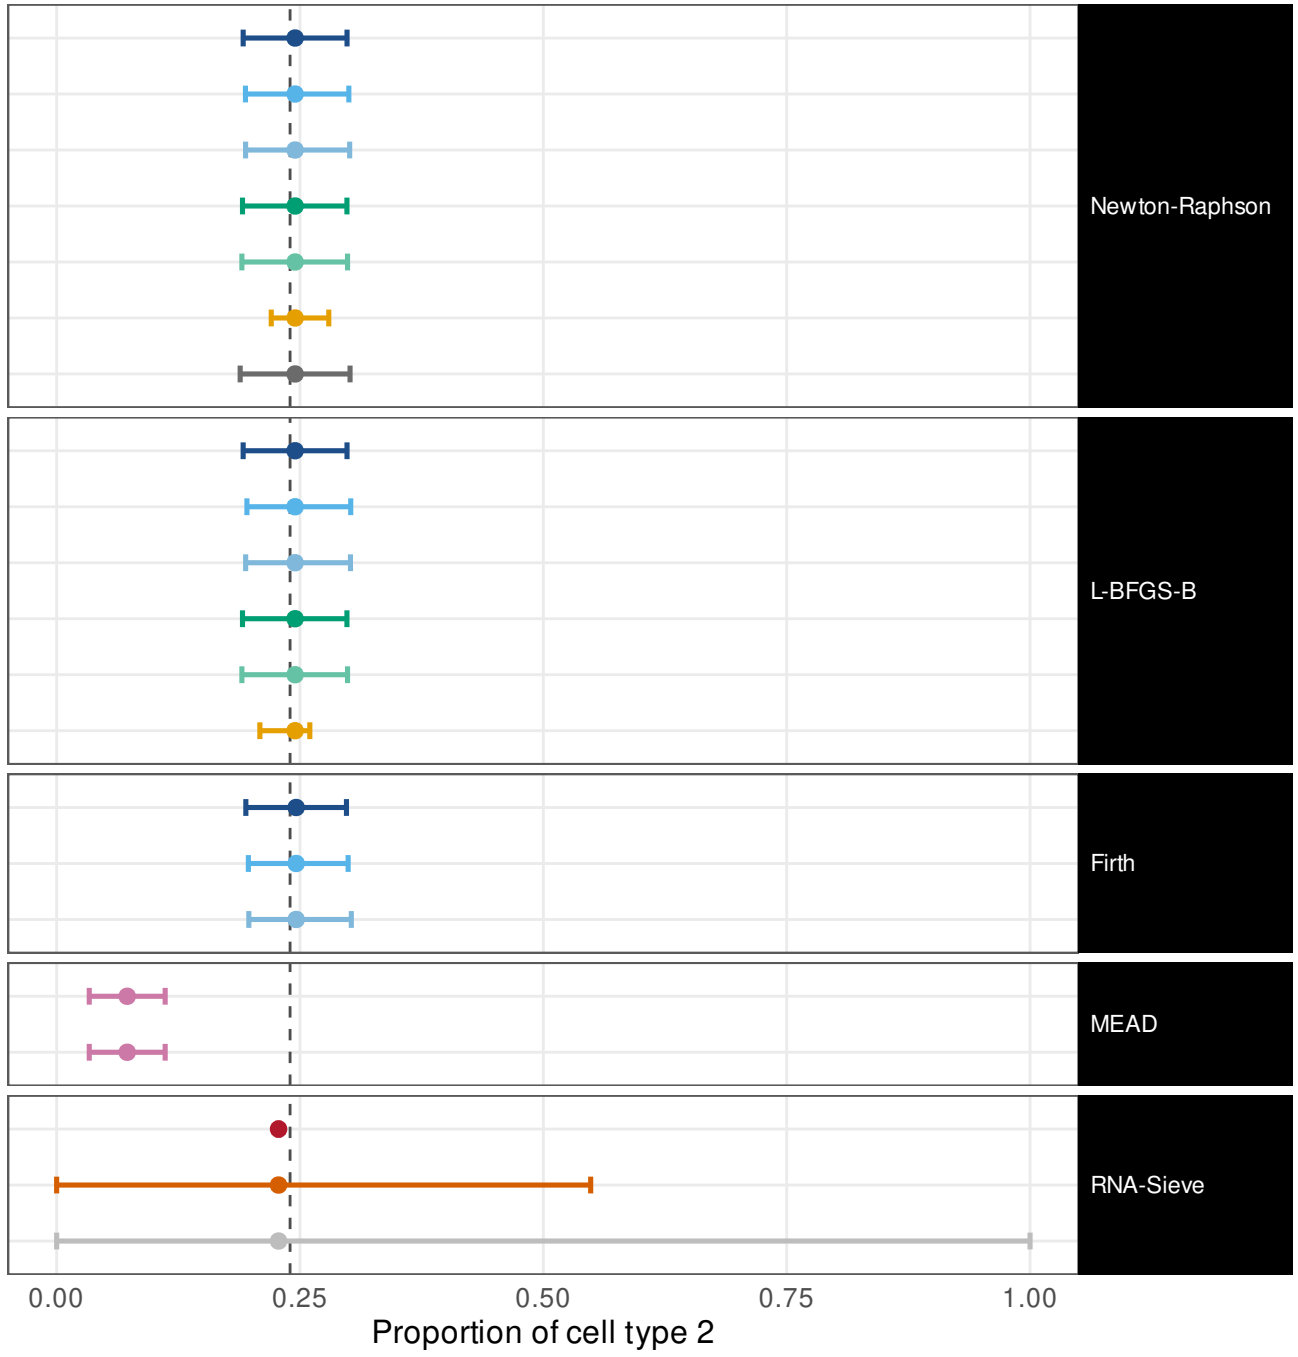


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.0299
ILR, mapped back	1	[0.57, 1]	w = 0.0306
ILR, REML	0.8	[0.38, 0.96]	w = 0.0305
Profile likelihood	1	[0.57, 1]	w = 0.0301
Profile, REML	1	[0.57, 1]	w = 0.0304
Parametric bootstrap	1	[0.57, 1]	w = 0.0213
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0305
Wald (delta)	1	[0.57, 1]	w = 0.0299
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0304
ILR, REML	1	[0.57, 1]	w = 0.0311
Profile likelihood	1	[0.57, 1]	w = 0.0301
Profile, REML	1	[0.57, 1]	w = 0.0304
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0148
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0297
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0297
ILR, REML	0.8	[0.38, 0.96]	w = 0.0302
Method's own interval	0	[0, 0.43]	w = 0.071
Own interval, transcript fractions	1	[0.57, 1]	w = 0.071
Fisher information (Wald)	0	[0, 0.43]	w = 0.00138
Godambe sandwich	1	[0.57, 1]	w = 0.196
Released code, as published	1	[0.57, 1]	w = 1

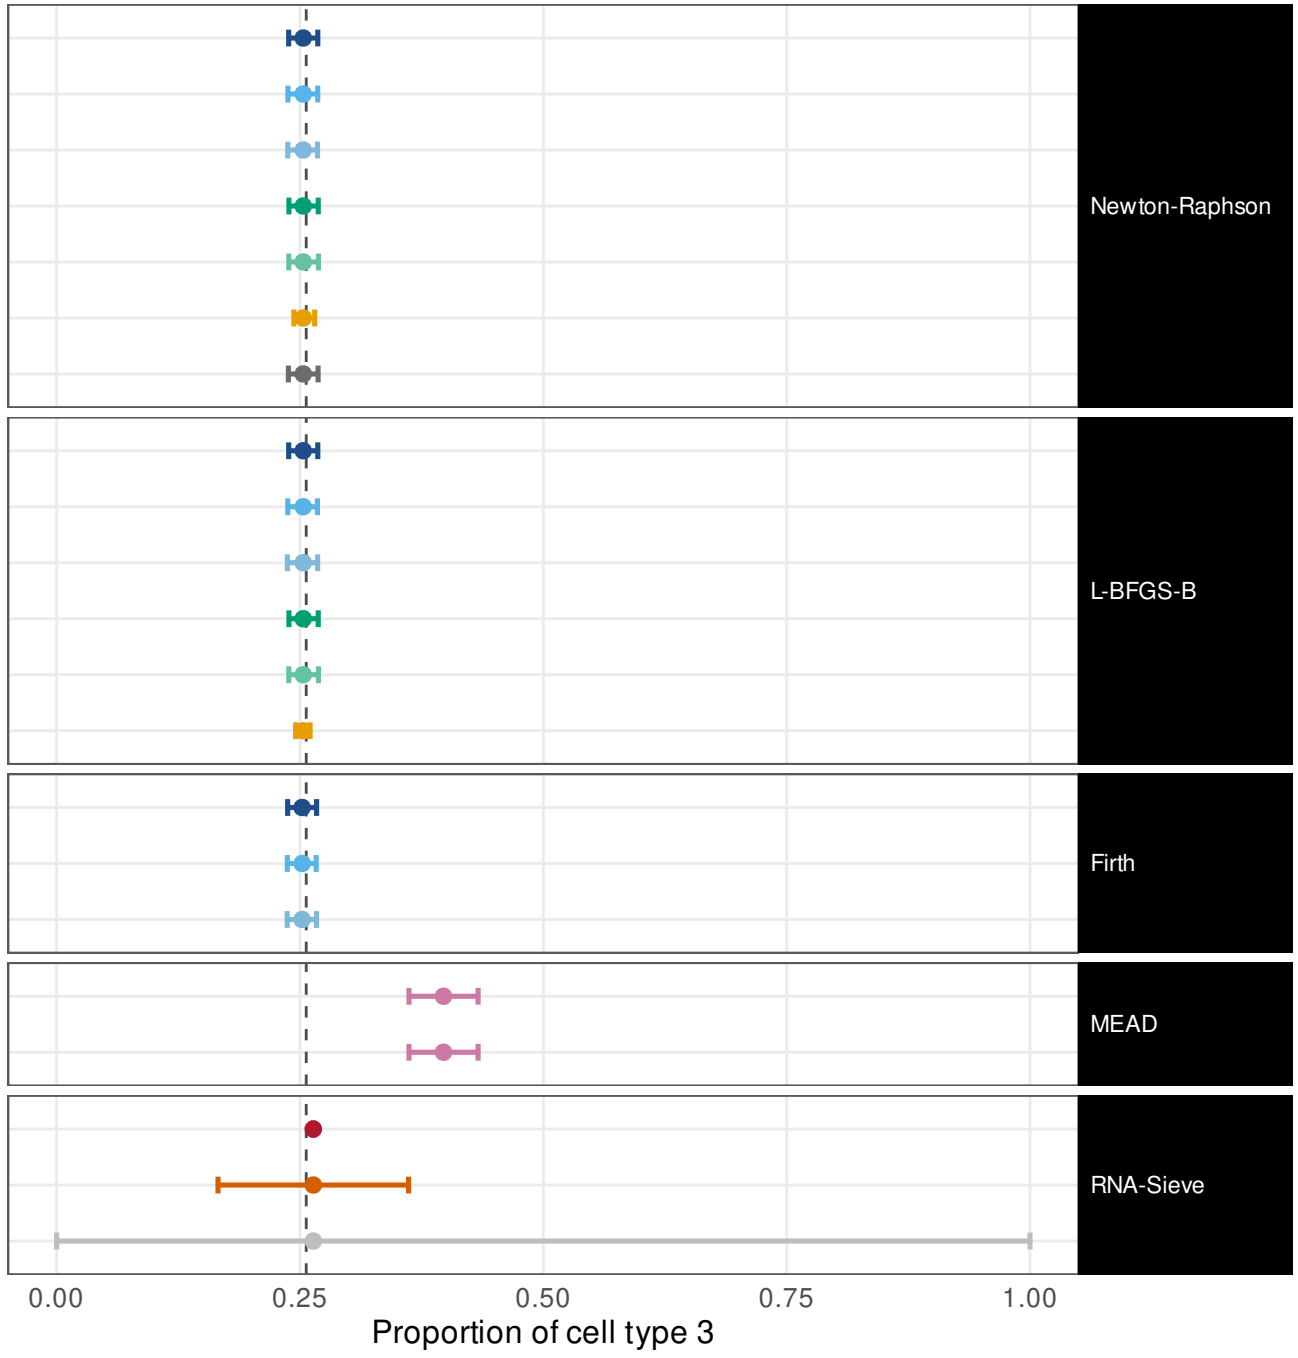


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5


Wald (delta)	1	[0.57, 1]	w = 0.0303
ILR, mapped back	1	[0.57, 1]	w = 0.0303
ILR, REML	1	[0.57, 1]	w = 0.0309
Profile likelihood	1	[0.57, 1]	w = 0.0305
Profile, REML	1	[0.57, 1]	w = 0.0309
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0121
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0306
Wald (delta)	1	[0.57, 1]	w = 0.0303
ILR, mapped back	1	[0.57, 1]	w = 0.0306
ILR, REML	1	[0.57, 1]	w = 0.0312
Profile likelihood	1	[0.57, 1]	w = 0.0305
Profile, REML	1	[0.57, 1]	w = 0.0309
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0144
Wald (delta)	1	[0.57, 1]	w = 0.0301
ILR, mapped back	1	[0.57, 1]	w = 0.03
ILR, REML	1	[0.57, 1]	w = 0.031
Method's own interval	0	[0, 0.43]	w = 0.0827
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0827
Fisher information (Wald)	0	[0, 0.43]	w = 0.00139
Godambe sandwich	1	[0.57, 1]	w = 0.186
Released code, as published	1	[0.57, 1]	w = 1

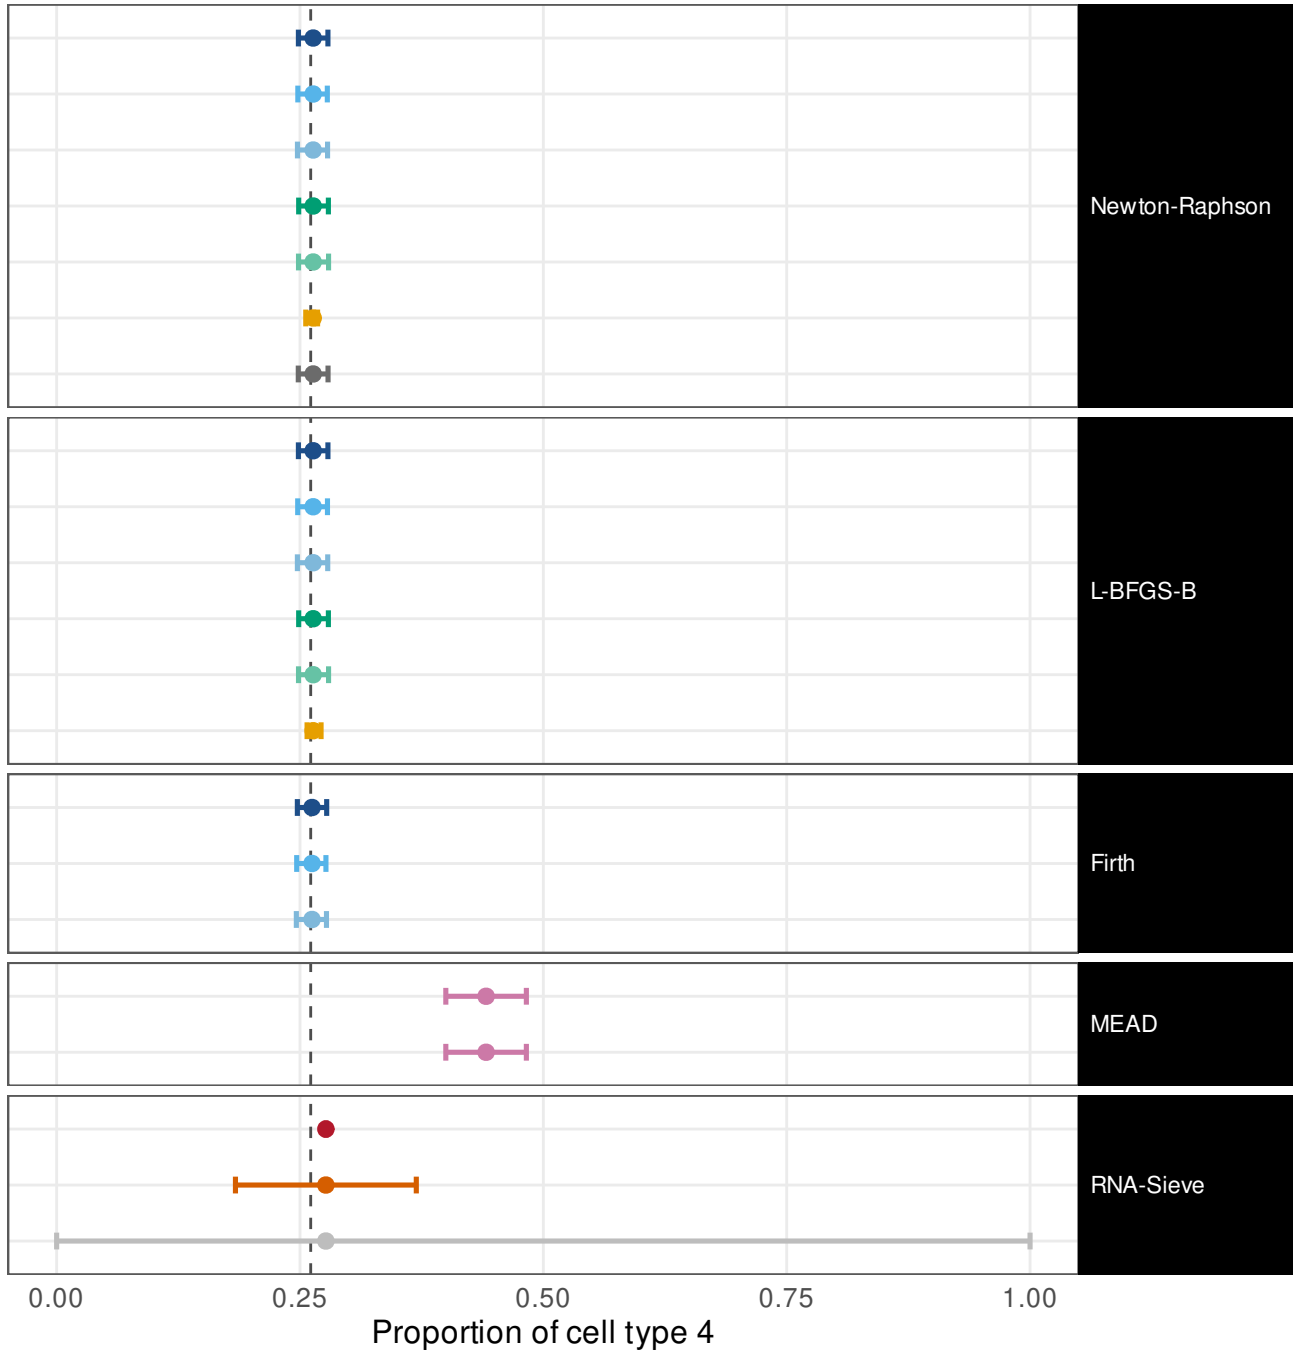

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes

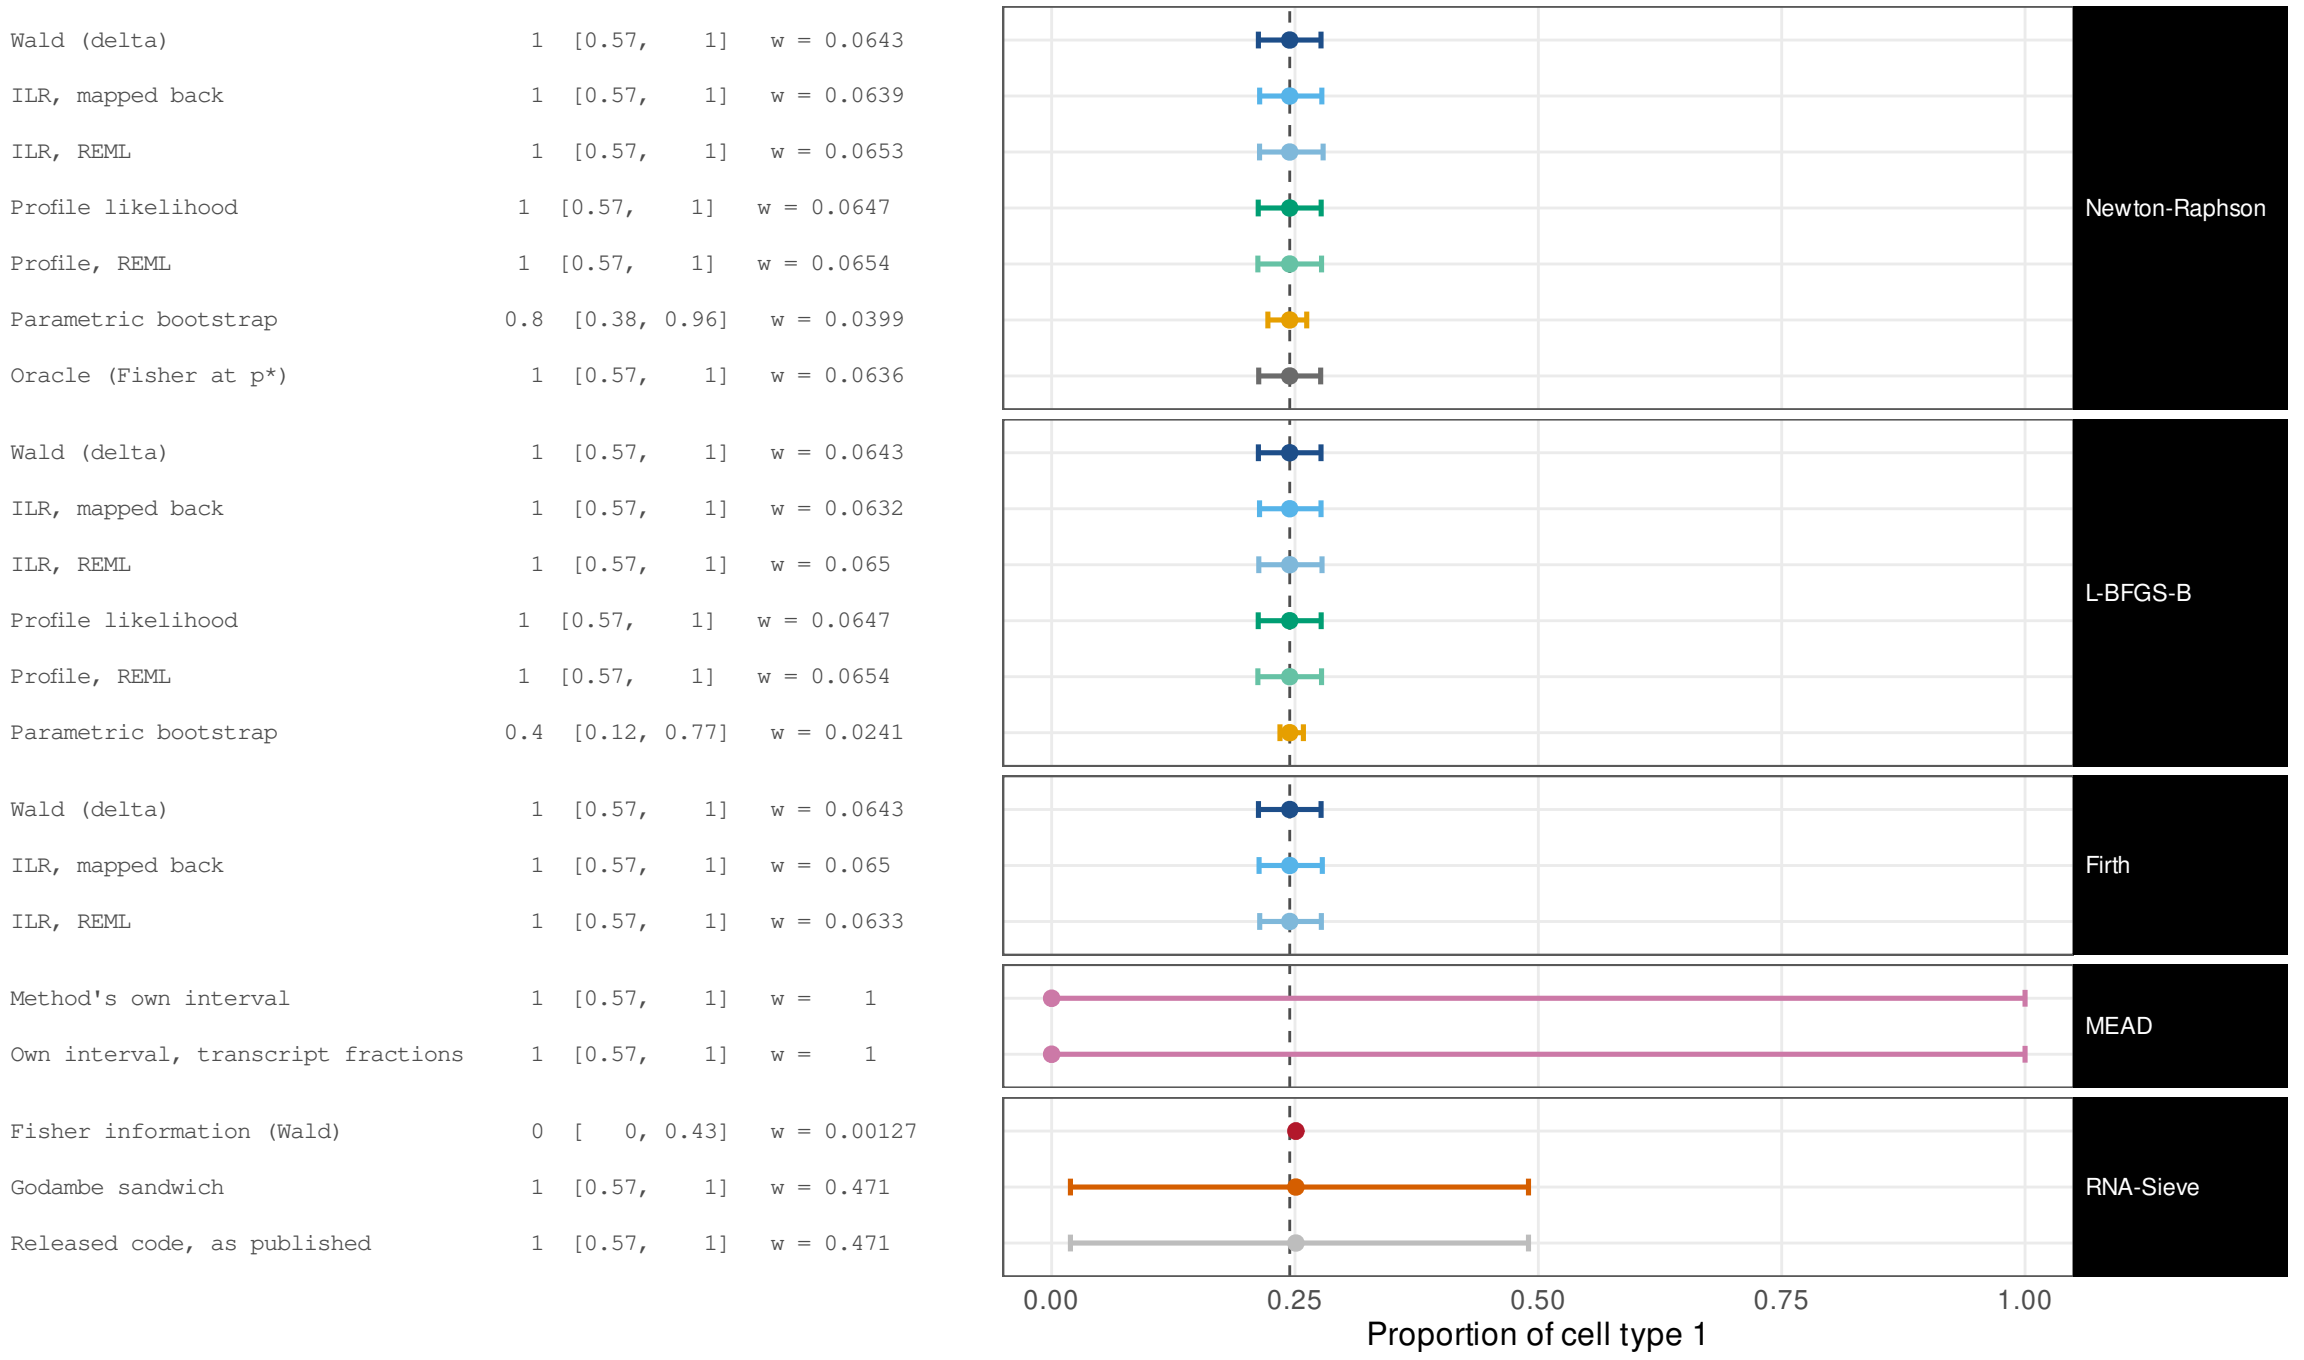

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.0638
ILR, mapped back                      1  [0.57,    1]   w = 0.0637
ILR, REML                             1  [0.57,    1]   w = 0.064
Profile likelihood                    1  [0.57,    1]   w = 0.0641
Profile, REML                         1  [0.57,    1]   w = 0.0648
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.0382
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.063

Wald (delta)                          1  [0.57,    1]   w = 0.0638
ILR, mapped back                      1  [0.57,    1]   w = 0.0631
ILR, REML                             1  [0.57,    1]   w = 0.0651
Profile likelihood                    1  [0.57,    1]   w = 0.0641
Profile, REML                         1  [0.57,    1]   w = 0.0648
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.0279

Wald (delta)                          1  [0.57,    1]   w = 0.0637
ILR, mapped back                      1  [0.57,    1]   w = 0.0646
ILR, REML                             1  [0.57,    1]   w = 0.0633

Method's own interval                 1  [0.57,    1]   w =    1
Own interval, transcript fractions    1  [0.57,    1]   w =    1


Fisher information (Wald)             0  [   0, 0.43]   w = 0.00128
Godambe sandwich                      1  [0.57,    1]   w = 0.435
Released code, as published           1  [0.57,    1]   w = 0.435
```

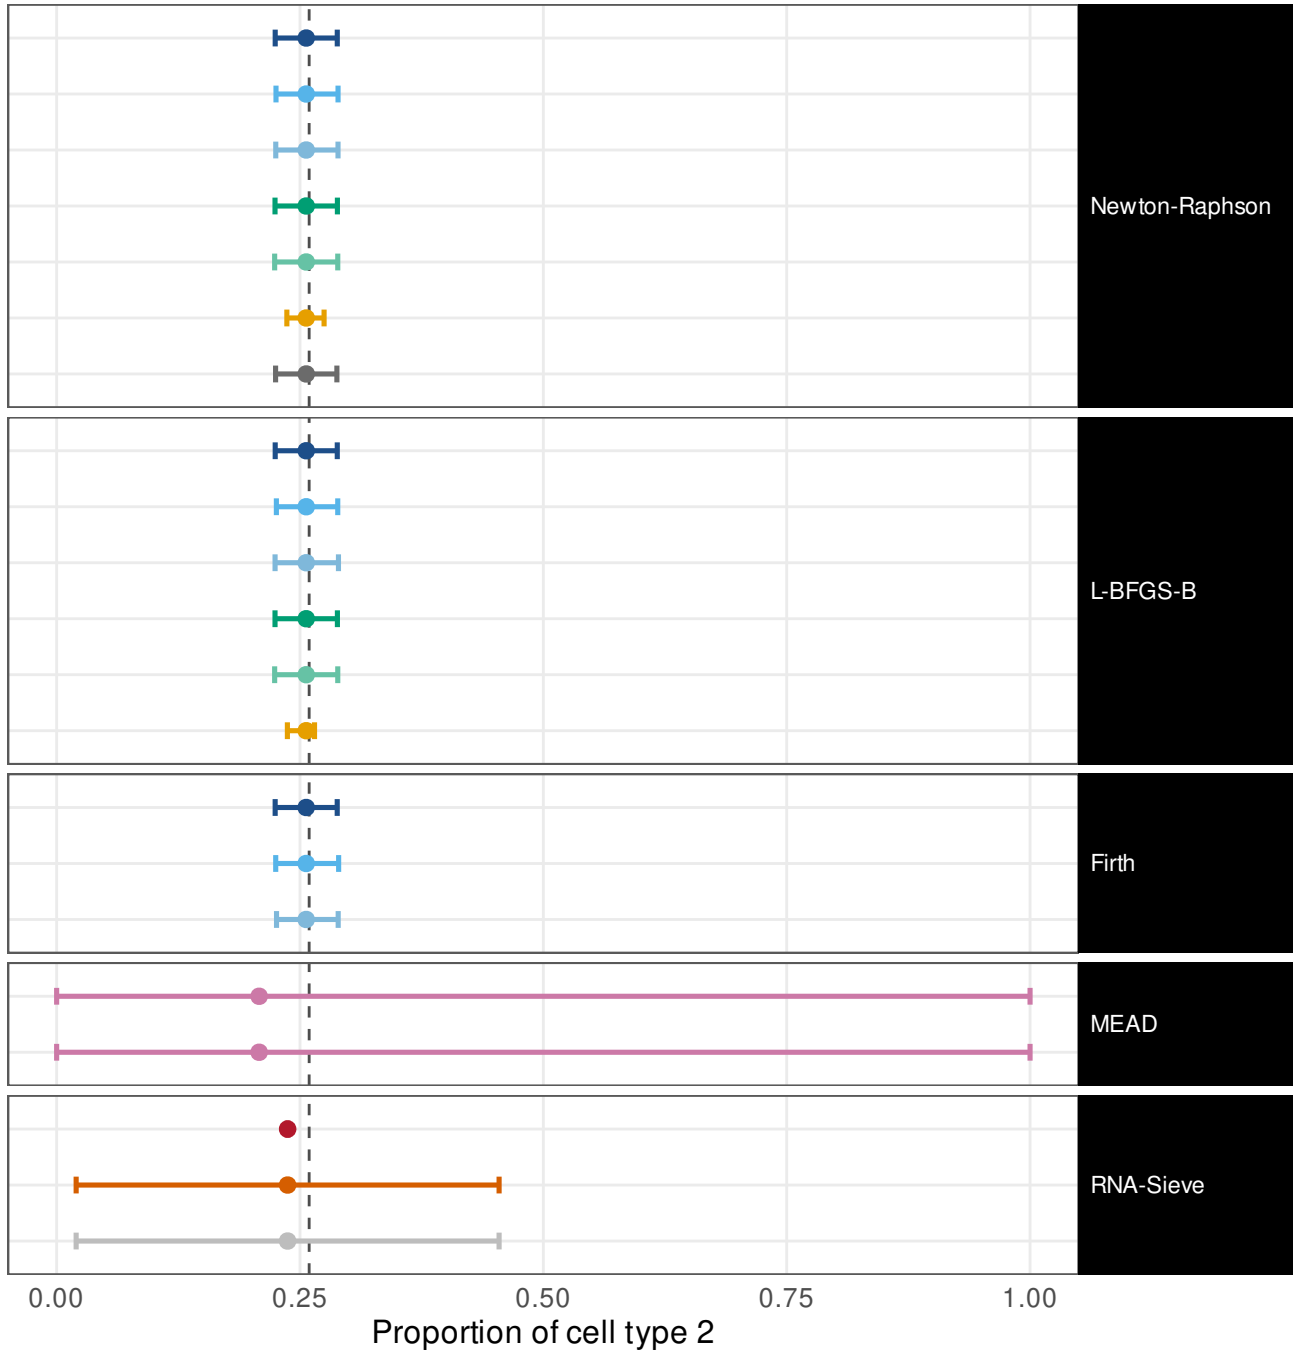

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes

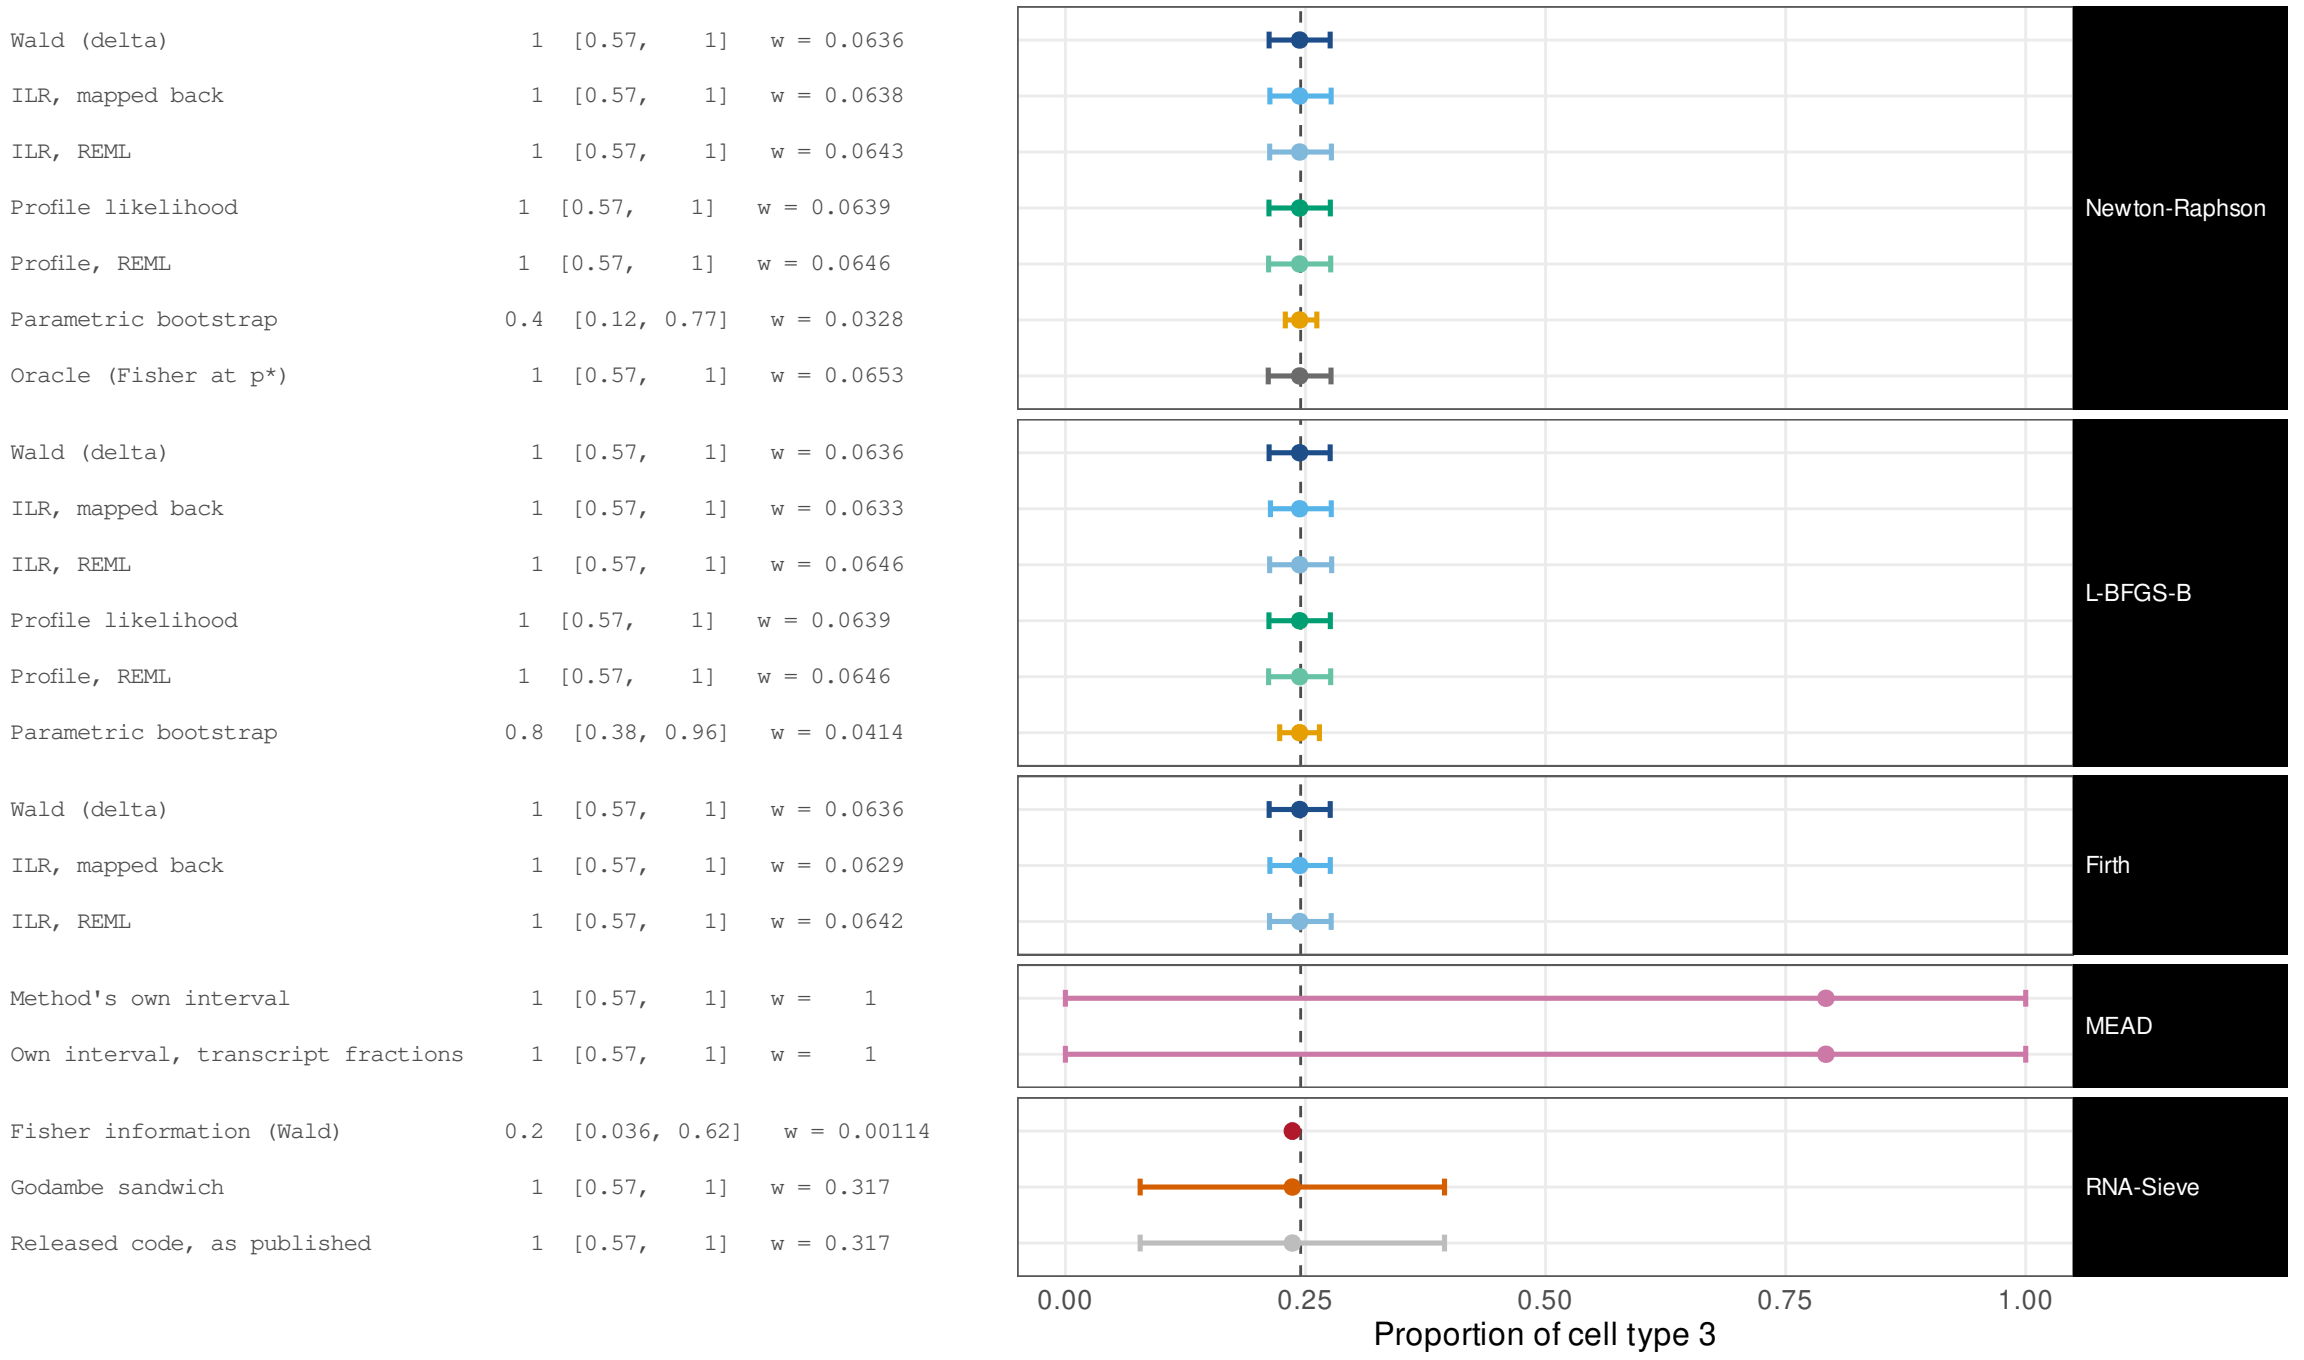


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.064
ILR, mapped back	1	[0.57, 1]	w = 0.0648
ILR, REML	1	[0.57, 1]	w = 0.0652
Profile likelihood	1	[0.57, 1]	w = 0.0643
Profile, REML	1	[0.57, 1]	w = 0.065
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0349
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0659
Wald (delta)	1	[0.57, 1]	w = 0.064
ILR, mapped back	1	[0.57, 1]	w = 0.064
ILR, REML	1	[0.57, 1]	w = 0.0646
Profile likelihood	1	[0.57, 1]	w = 0.0643
Profile, REML	1	[0.57, 1]	w = 0.065
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0399
Wald (delta)	1	[0.57, 1]	w = 0.064
ILR, mapped back	1	[0.57, 1]	w = 0.0635
ILR, REML	1	[0.57, 1]	w = 0.065
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0	[0, 0.43]	w = 0.00116
Godambe sandwich	1	[0.57, 1]	w = 0.248
Released code, as published	1	[0.57, 1]	w = 0.248

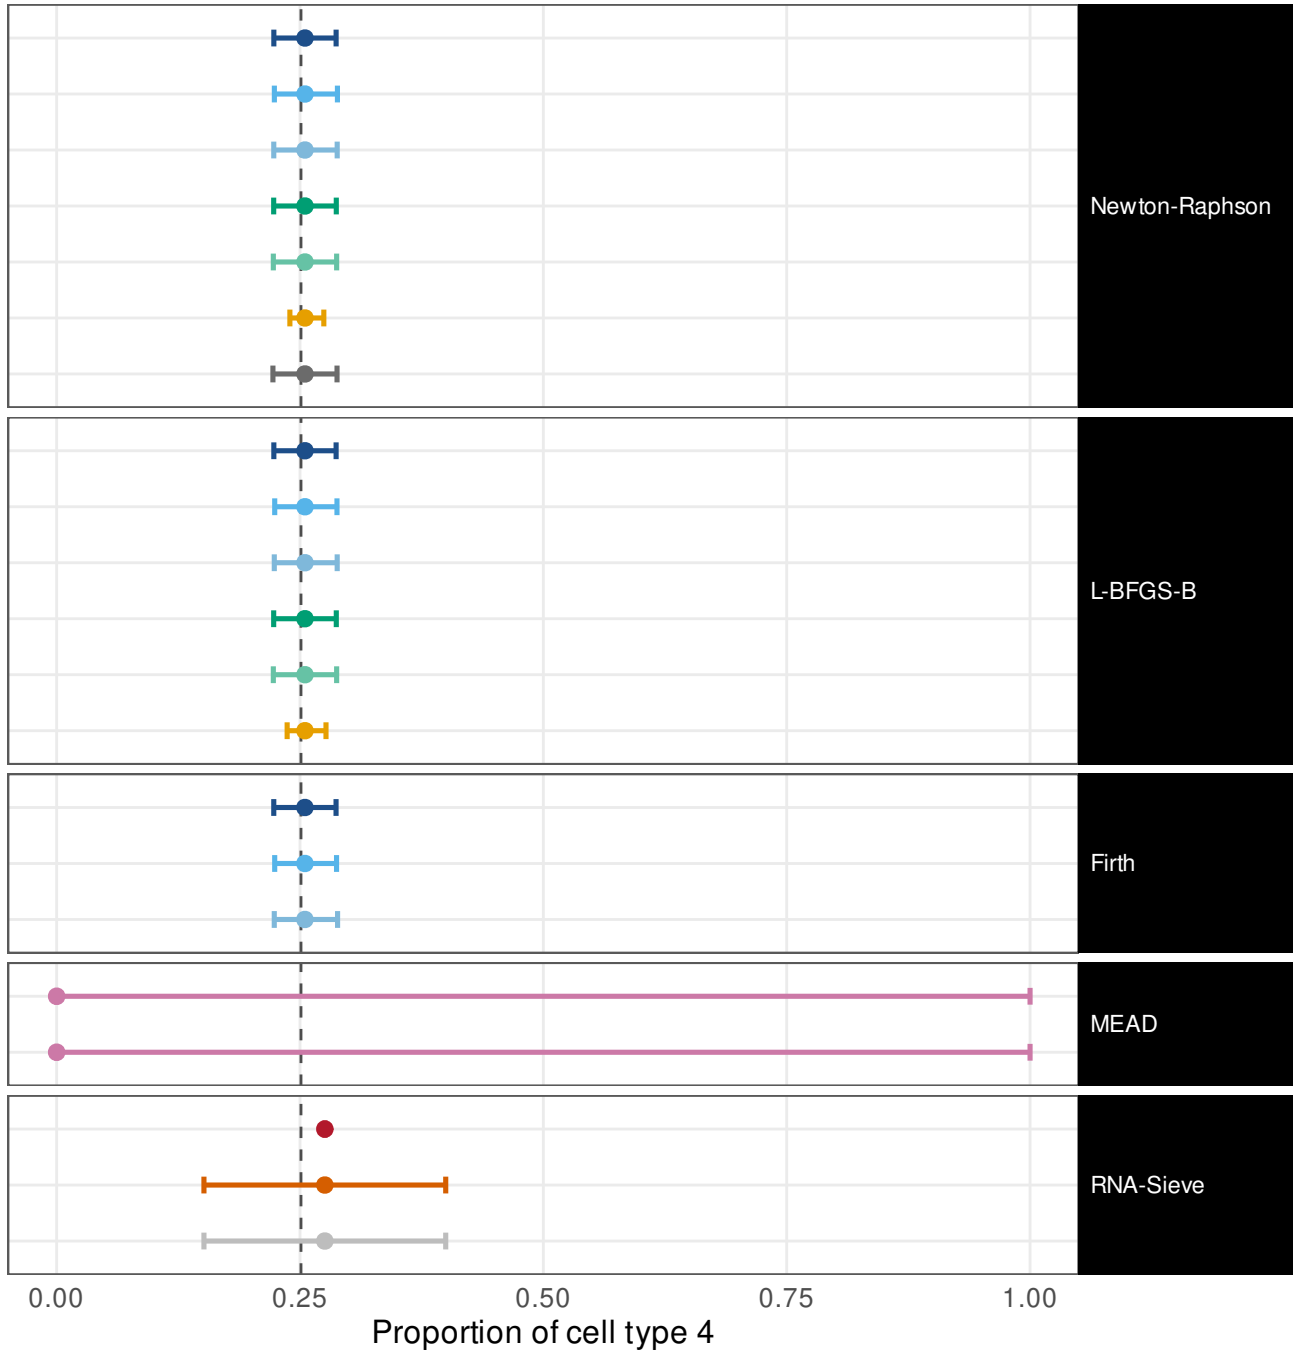


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.24
ILR, mapped back	1	[0.57, 1]	w = 0.239
ILR, REML	1	[0.57, 1]	w = 0.24
Profile likelihood	1	[0.57, 1]	w = 0.242
Profile, REML	1	[0.57, 1]	w = 0.245
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.157
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.445
Wald (delta)	1	[0.57, 1]	w = 0.24
ILR, mapped back	1	[0.57, 1]	w = 0.241
ILR, REML	1	[0.57, 1]	w = 0.24
Profile likelihood	1	[0.57, 1]	w = 0.242
Profile, REML	1	[0.57, 1]	w = 0.245
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.103
Wald (delta)	1	[0.57, 1]	w = 0.21
ILR, mapped back	1	[0.57, 1]	w = 0.208
ILR, REML	1	[0.57, 1]	w = 0.21
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0.4	[0.12, 0.77]	w = 0.0203
Godambe sandwich	1	[0.57, 1]	w = 0.257
Released code, as published	1	[0.57, 1]	w = 1

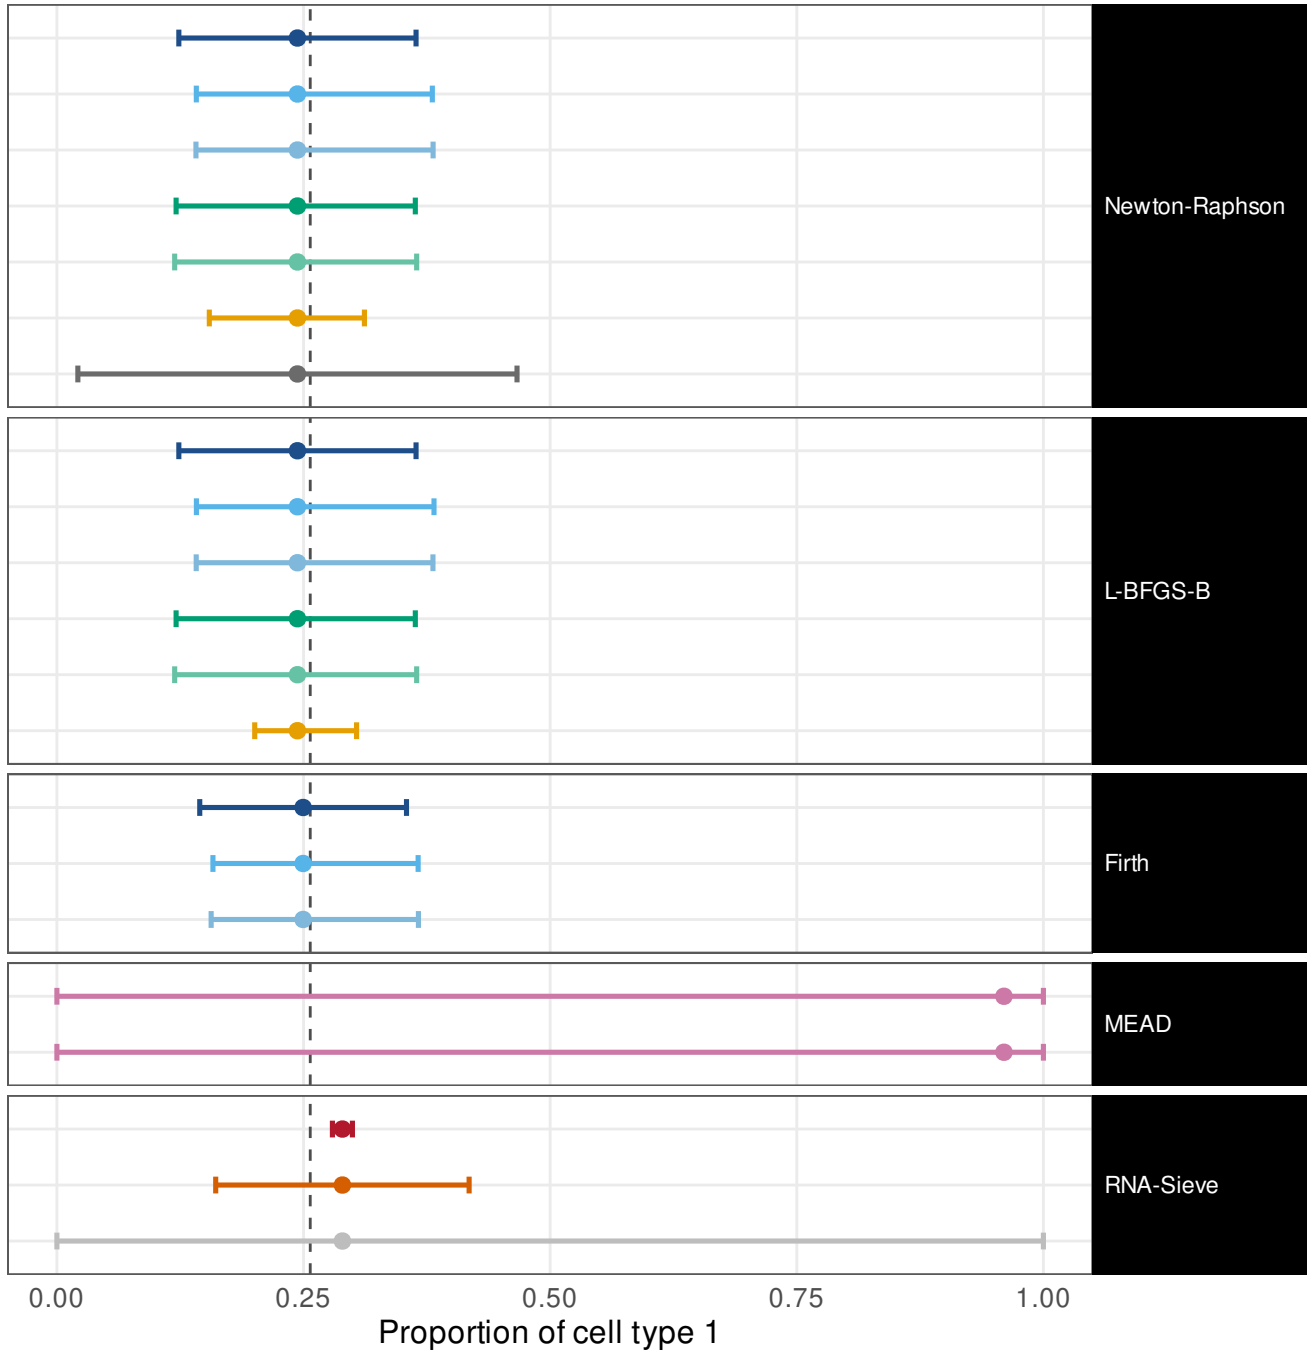


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	0.8	[0.38, 0.96]	w = 0.24
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.239
ILR, REML	0.8	[0.38, 0.96]	w = 0.241
Profile likelihood	0.8	[0.38, 0.96]	w = 0.242
Profile, REML	0.8	[0.38, 0.96]	w = 0.245
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.14
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.453
Wald (delta)	0.8	[0.38, 0.96]	w = 0.24
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.24
ILR, REML	0.8	[0.38, 0.96]	w = 0.24
Profile likelihood	0.8	[0.38, 0.96]	w = 0.242
Profile, REML	0.8	[0.38, 0.96]	w = 0.245
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.125
Wald (delta)	0.8	[0.38, 0.96]	w = 0.21
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.207
ILR, REML	0.8	[0.38, 0.96]	w = 0.21
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0	[0, 0.43]	w = 0.0231
Godambe sandwich	1	[0.57, 1]	w = 0.258
Released code, as published	1	[0.57, 1]	w = 1

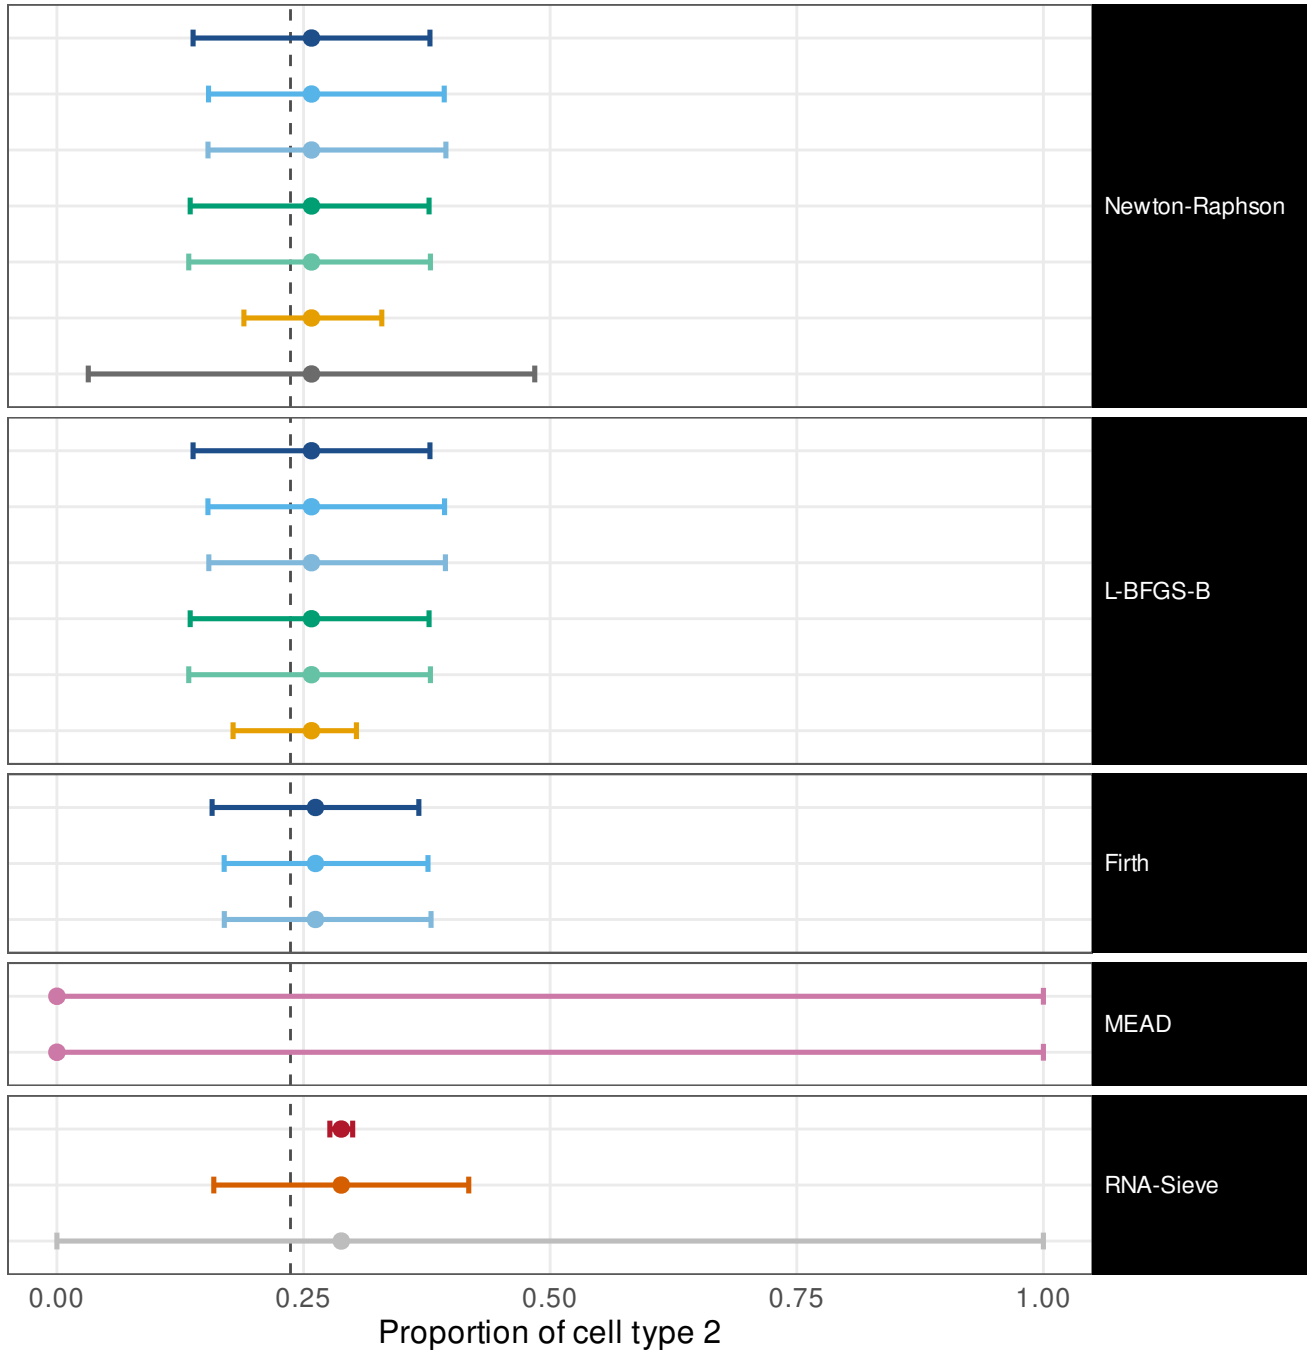

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.0672
ILR, mapped back                      1  [0.57,    1]   w = 0.0705
ILR, REML                             1  [0.57,    1]   w = 0.0721
Profile likelihood                    1  [0.57,    1]   w = 0.0679
Profile, REML                         1  [0.57,    1]   w = 0.0687
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.0438
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0716

Wald (delta)                          1  [0.57,    1]   w = 0.0672
ILR, mapped back                      1  [0.57,    1]   w = 0.0719
ILR, REML                             1  [0.57,    1]   w = 0.0725
Profile likelihood                    1  [0.57,    1]   w = 0.0679
Profile, REML                         1  [0.57,    1]   w = 0.0687
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.0447

Wald (delta)                          1  [0.57,    1]   w = 0.0653
ILR, mapped back                      1  [0.57,    1]   w = 0.0661
ILR, REML                             1  [0.57,    1]   w = 0.0665

Method's own interval                 1  [0.57,    1]   w =    1
Own interval, transcript fractions    1  [0.57,    1]   w =    1

Fisher information (Wald)             0  [   0, 0.43]   w = 0.00896
Godambe sandwich                      1  [0.57,    1]   w = 0.272
Released code, as published           1  [0.57,    1]   w =    1
```

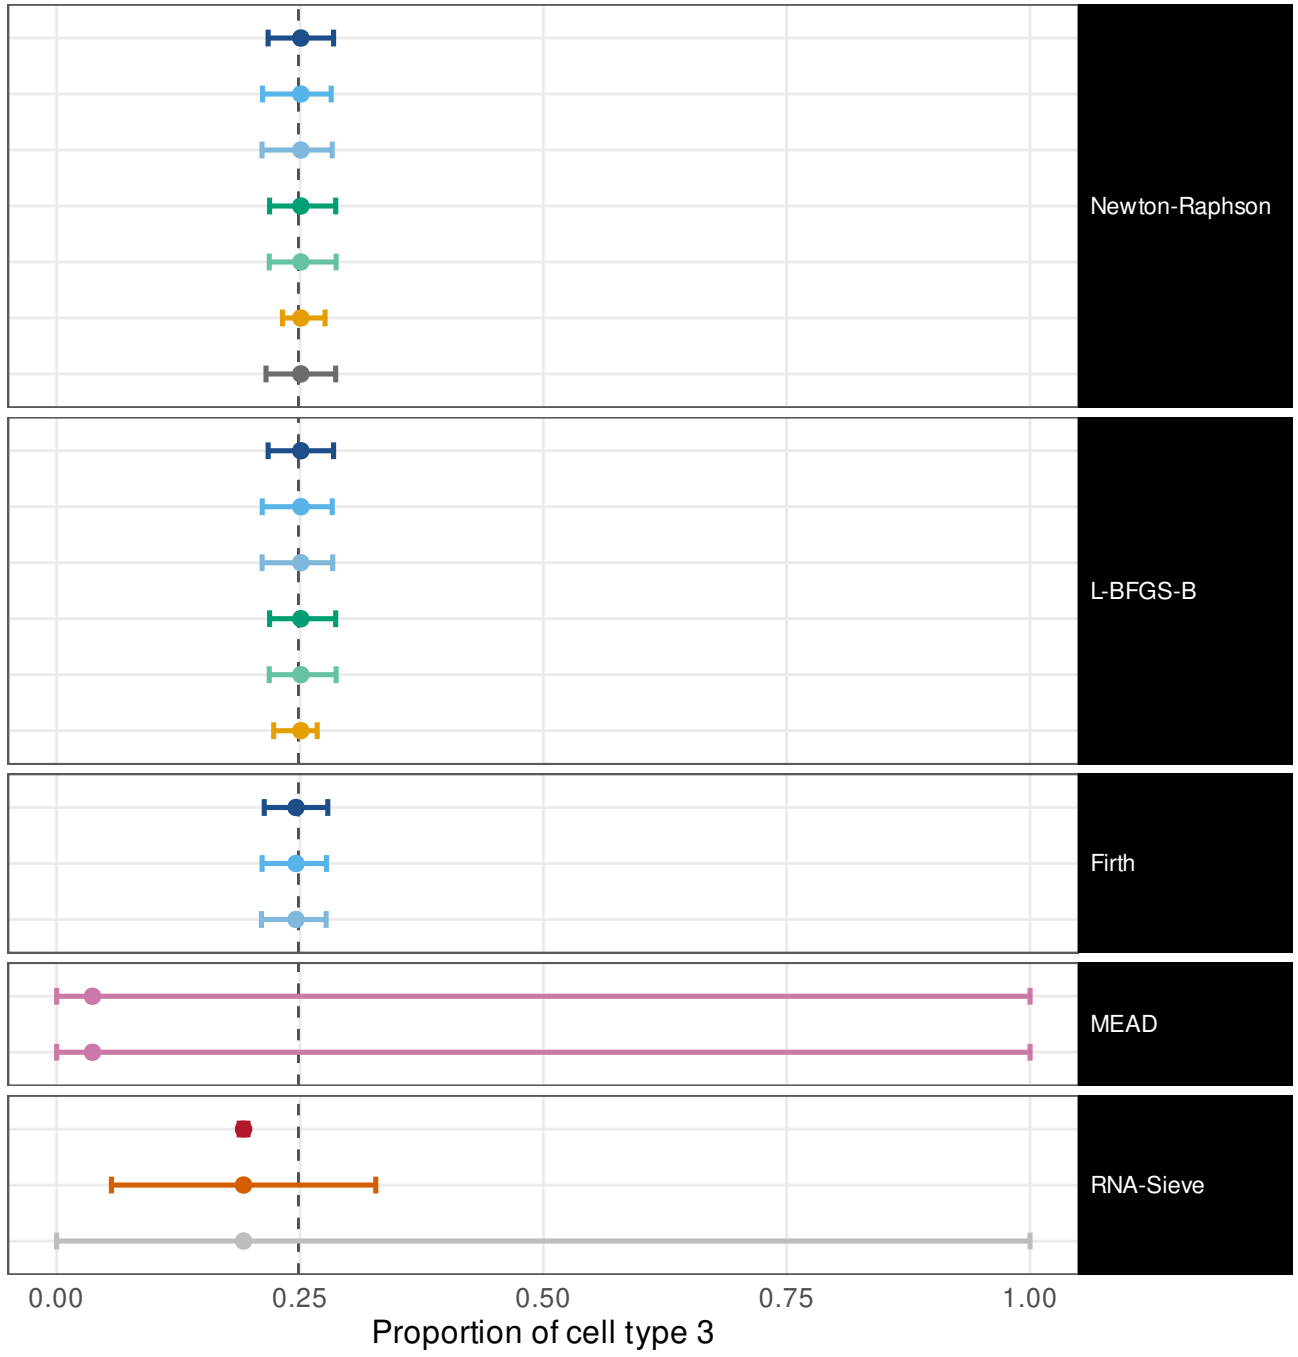

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.0666
ILR, mapped back                      1  [0.57,    1]   w = 0.0694
ILR, REML                             1  [0.57,    1]   w = 0.0709
Profile likelihood                    1  [0.57,    1]   w = 0.0673
Profile, REML                         1  [0.57,    1]   w = 0.068
Parametric bootstrap                  1  [0.57,    1]   w = 0.0483
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0724

Wald (delta)                          1  [0.57,    1]   w = 0.0666
ILR, mapped back                      1  [0.57,    1]   w = 0.0706
ILR, REML                             1  [0.57,    1]   w = 0.0698
Profile likelihood                    1  [0.57,    1]   w = 0.0673
Profile, REML                         1  [0.57,    1]   w = 0.068
Parametric bootstrap                  1  [0.57,    1]   w = 0.038

Wald (delta)                          1  [0.57,    1]   w = 0.0647
ILR, mapped back                      1  [0.57,    1]   w = 0.066
ILR, REML                             1  [0.57,    1]   w = 0.0674

Method's own interval                 1  [0.57,    1]   w =    1
Own interval, transcript fractions    1  [0.57,    1]   w =    1

Fisher information (Wald)             0  [   0, 0.43]   w = 0.0102
Godambe sandwich                      1  [0.57,    1]   w = 0.27
Released code, as published           1  [0.57,    1]   w =    1
```

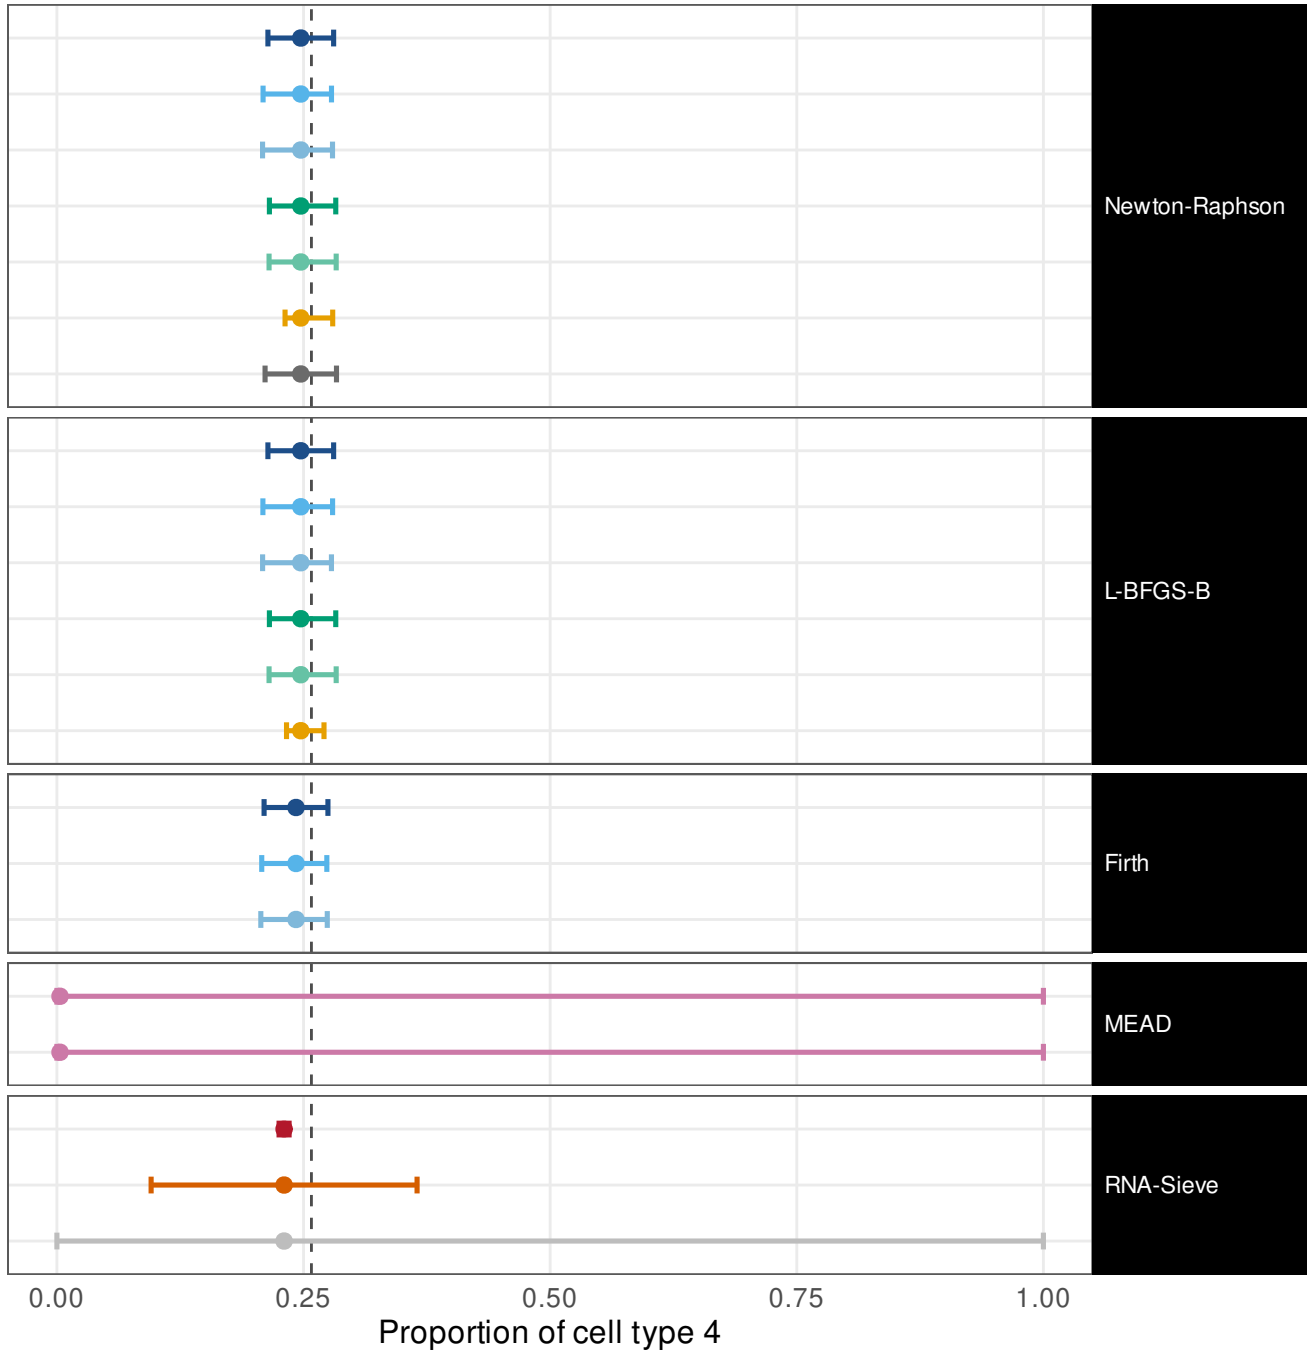


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.0286
ILR, mapped back	1	[0.57, 1]	w = 0.0283
ILR, REML	1	[0.57, 1]	w = 0.0286
Profile likelihood	1	[0.57, 1]	w = 0.0288
Profile, REML	1	[0.57, 1]	w = 0.0291
Parametric bootstrap	1	[0.57, 1]	w = 0.0168
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0293
Wald (delta)	1	[0.57, 1]	w = 0.0286
ILR, mapped back	1	[0.57, 1]	w = 0.029
ILR, REML	1	[0.57, 1]	w = 0.0289
Profile likelihood	1	[0.57, 1]	w = 0.0288
Profile, REML	1	[0.57, 1]	w = 0.0291
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0125
Wald (delta)	1	[0.57, 1]	w = 0.0286
ILR, mapped back	1	[0.57, 1]	w = 0.0286
ILR, REML	1	[0.57, 1]	w = 0.0288
Method's own interval	0.8	[0.38, 0.96]	w = 0.068
Own interval, transcript fractions	0.8	[0.38, 0.96]	w = 0.068
Fisher information (Wald)	0	[0, 0.43]	w = 0.00106
Godambe sandwich	1	[0.57, 1]	w = 0.312
Released code, as published	1	[0.57, 1]	w = 0.312

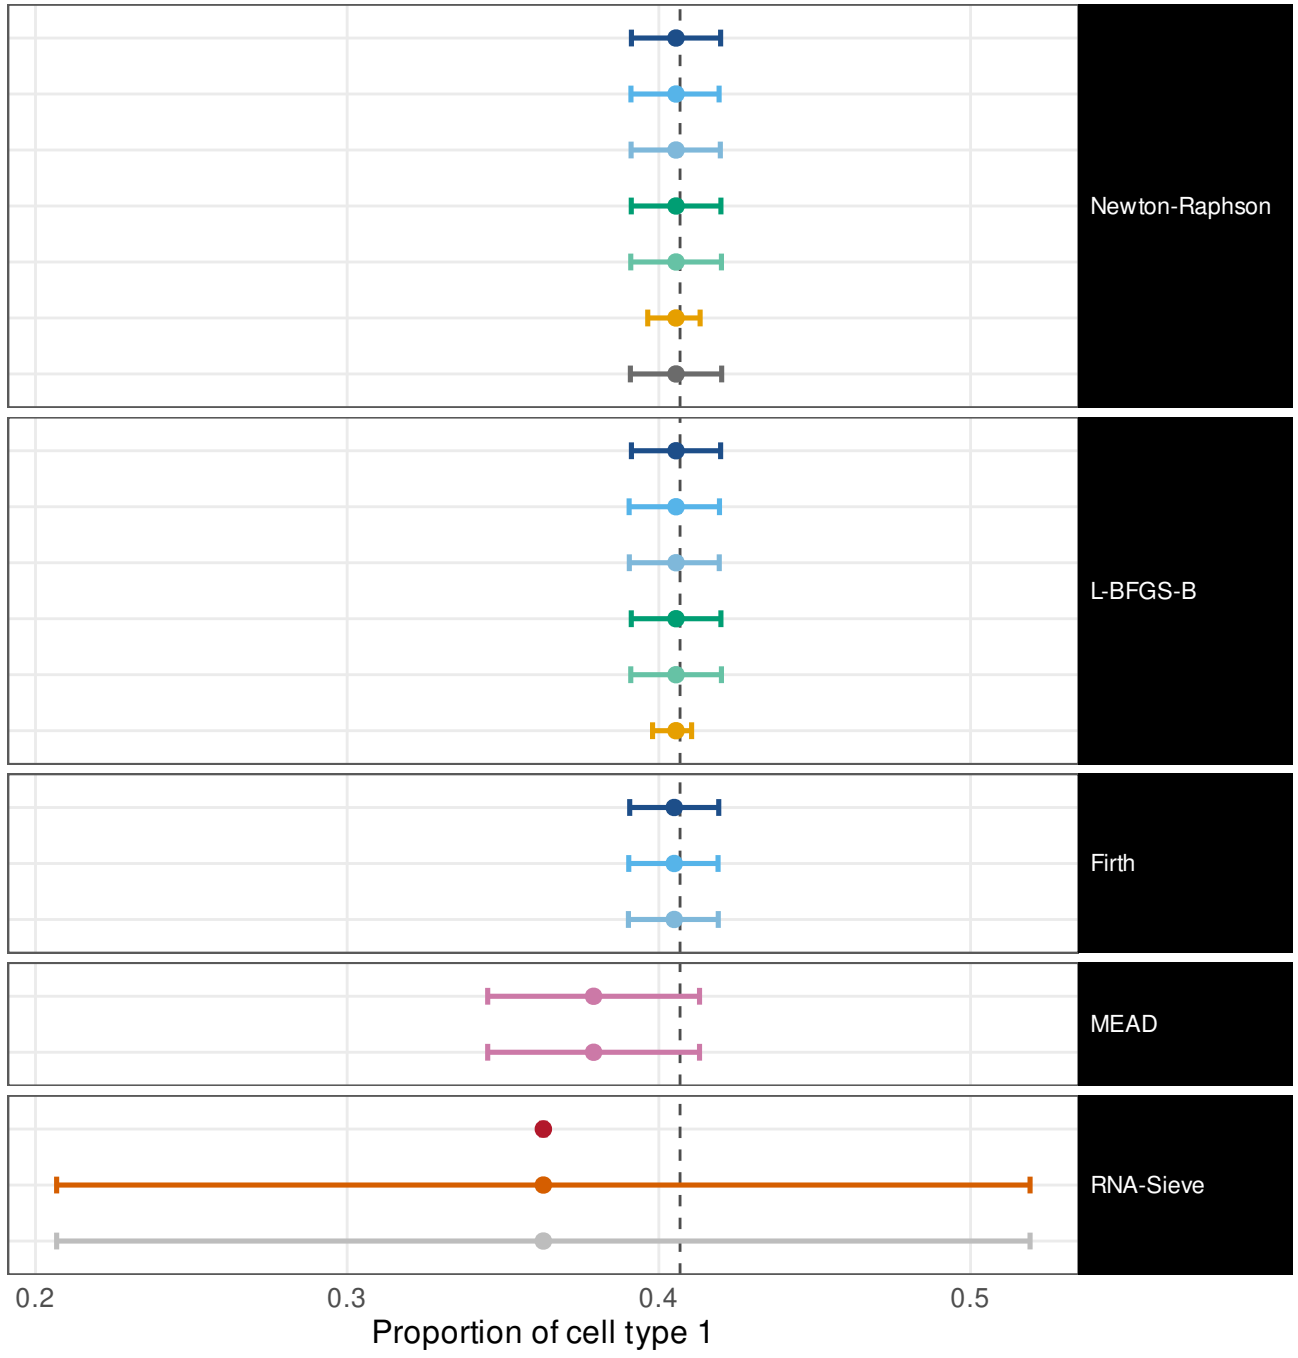


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.0284
ILR, mapped back	1	[0.57, 1]	w = 0.0284
ILR, REML	1	[0.57, 1]	w = 0.0289
Profile likelihood	1	[0.57, 1]	w = 0.0285
Profile, REML	1	[0.57, 1]	w = 0.0289
Parametric bootstrap	1	[0.57, 1]	w = 0.0179
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0291
Wald (delta)	1	[0.57, 1]	w = 0.0284
ILR, mapped back	1	[0.57, 1]	w = 0.0287
ILR, REML	1	[0.57, 1]	w = 0.0288
Profile likelihood	1	[0.57, 1]	w = 0.0285
Profile, REML	1	[0.57, 1]	w = 0.0289
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0129
Wald (delta)	1	[0.57, 1]	w = 0.0283
ILR, mapped back	1	[0.57, 1]	w = 0.0288
ILR, REML	1	[0.57, 1]	w = 0.0285
Method's own interval	1	[0.57, 1]	w = 0.0776
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0776
Fisher information (Wald)	0	[0, 0.43]	w = 0.00055
Godambe sandwich	1	[0.57, 1]	w = 0.127
Released code, as published	1	[0.57, 1]	w = 0.127

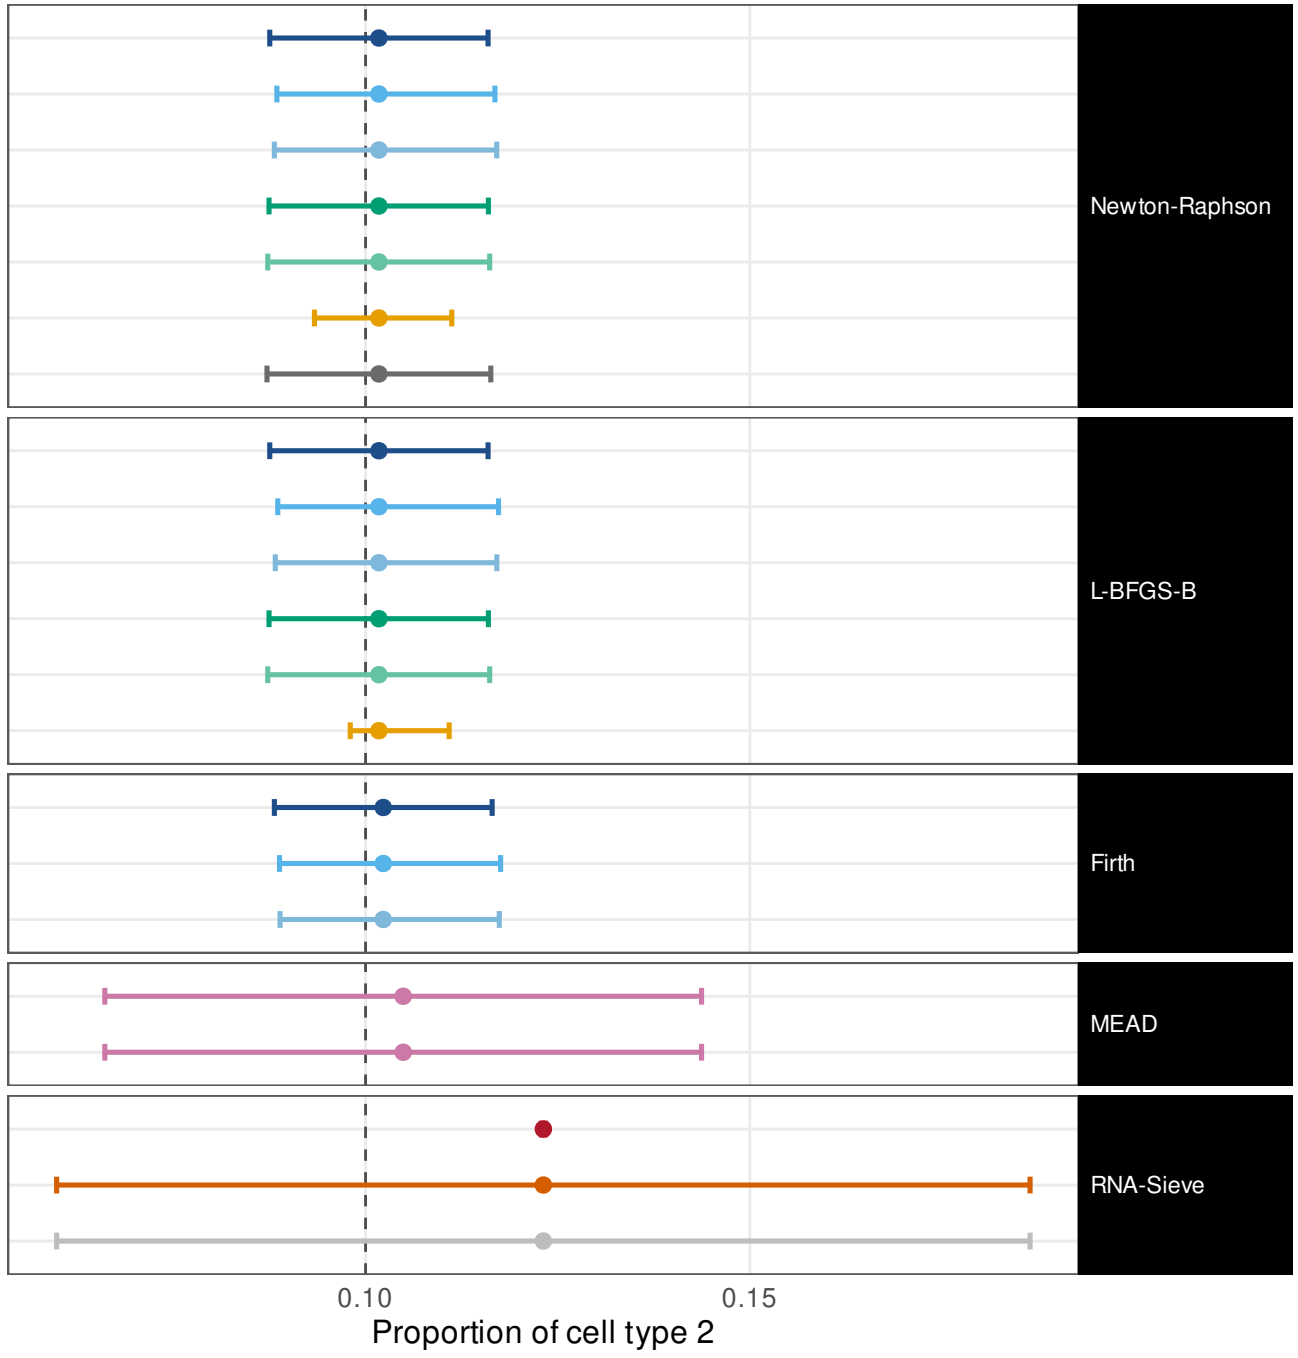

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.0282
ILR, mapped back                      1  [0.57,    1]   w = 0.028
ILR, REML                             1  [0.57,    1]   w = 0.0289
Profile likelihood                    1  [0.57,    1]   w = 0.0284
Profile, REML                         1  [0.57,    1]   w = 0.0287
Parametric bootstrap                  1  [0.57,    1]   w = 0.0132
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0287

Wald (delta)                          1  [0.57,    1]   w = 0.0282
ILR, mapped back                      1  [0.57,    1]   w = 0.0285
ILR, REML                             1  [0.57,    1]   w = 0.0284
Profile likelihood                    1  [0.57,    1]   w = 0.0284
Profile, REML                         1  [0.57,    1]   w = 0.0287
Parametric bootstrap                  1  [0.57,    1]   w = 0.0187

Wald (delta)                          1  [0.57,    1]   w = 0.0282
ILR, mapped back                      1  [0.57,    1]   w = 0.0283
ILR, REML                             1  [0.57,    1]   w = 0.0282

Method's own interval                 1  [0.57,    1]   w = 0.0821
Own interval, transcript fractions    1  [0.57,    1]   w = 0.0821

Fisher information (Wald)             0  [   0, 0.43]   w = 0.00103
Godambe sandwich                      1  [0.57,    1]   w = 0.312
Released code, as published           1  [0.57,    1]   w = 0.312
```

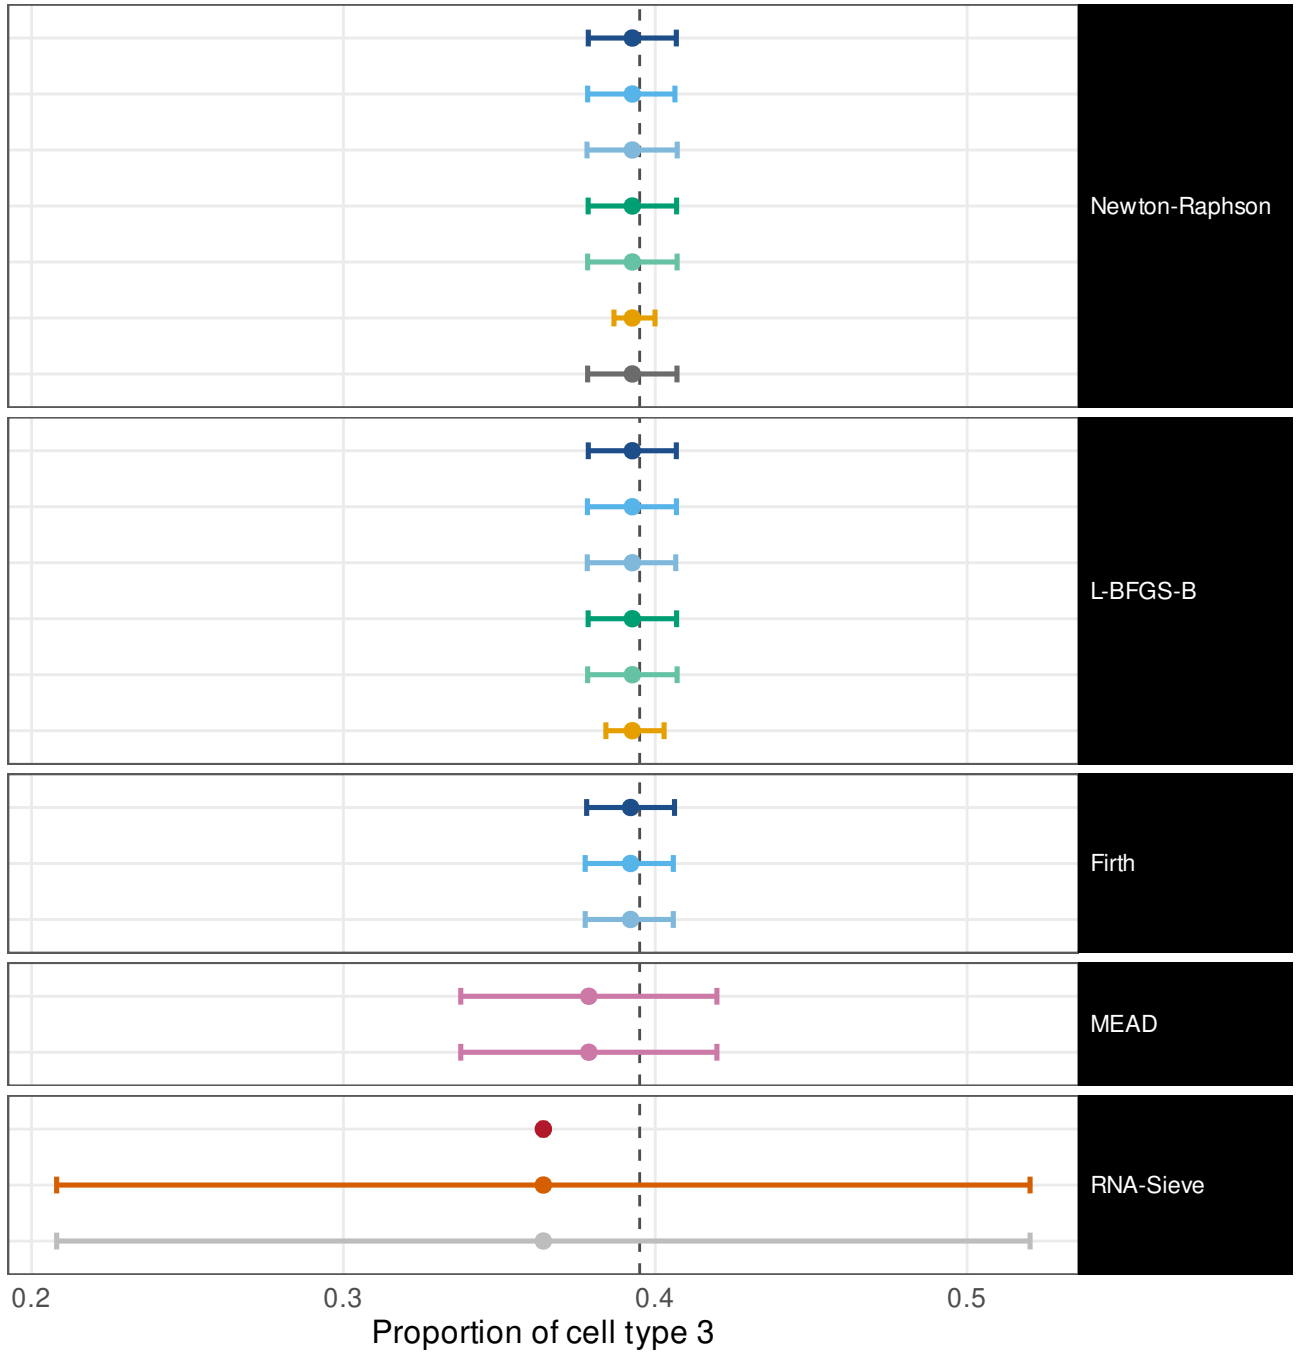

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.0284
ILR, mapped back                      1  [0.57,    1]   w = 0.0283
ILR, REML                             1  [0.57,    1]   w = 0.0292
Profile likelihood                    1  [0.57,    1]   w = 0.0285
Profile, REML                         1  [0.57,    1]   w = 0.0289
Parametric bootstrap                  1  [0.57,    1]   w = 0.0144
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0289

Wald (delta)                          1  [0.57,    1]   w = 0.0284
ILR, mapped back                      1  [0.57,    1]   w = 0.0284
ILR, REML                             1  [0.57,    1]   w = 0.0288
Profile likelihood                    1  [0.57,    1]   w = 0.0285
Profile, REML                         1  [0.57,    1]   w = 0.0289
Parametric bootstrap                  1  [0.57,    1]   w = 0.0169

Wald (delta)                          1  [0.57,    1]   w = 0.0283
ILR, mapped back                      1  [0.57,    1]   w = 0.0285
ILR, REML                             1  [0.57,    1]   w = 0.0285

Method's own interval               0.4  [0.12, 0.77]   w = 0.0803
Own interval, transcript fractions  0.4  [0.12, 0.77]   w = 0.0803

Fisher information (Wald)             0  [   0, 0.43]   w = 0.000686
Godambe sandwich                      1  [0.57,    1]   w = 0.16
Released code, as published           1  [0.57,    1]   w = 0.16
```

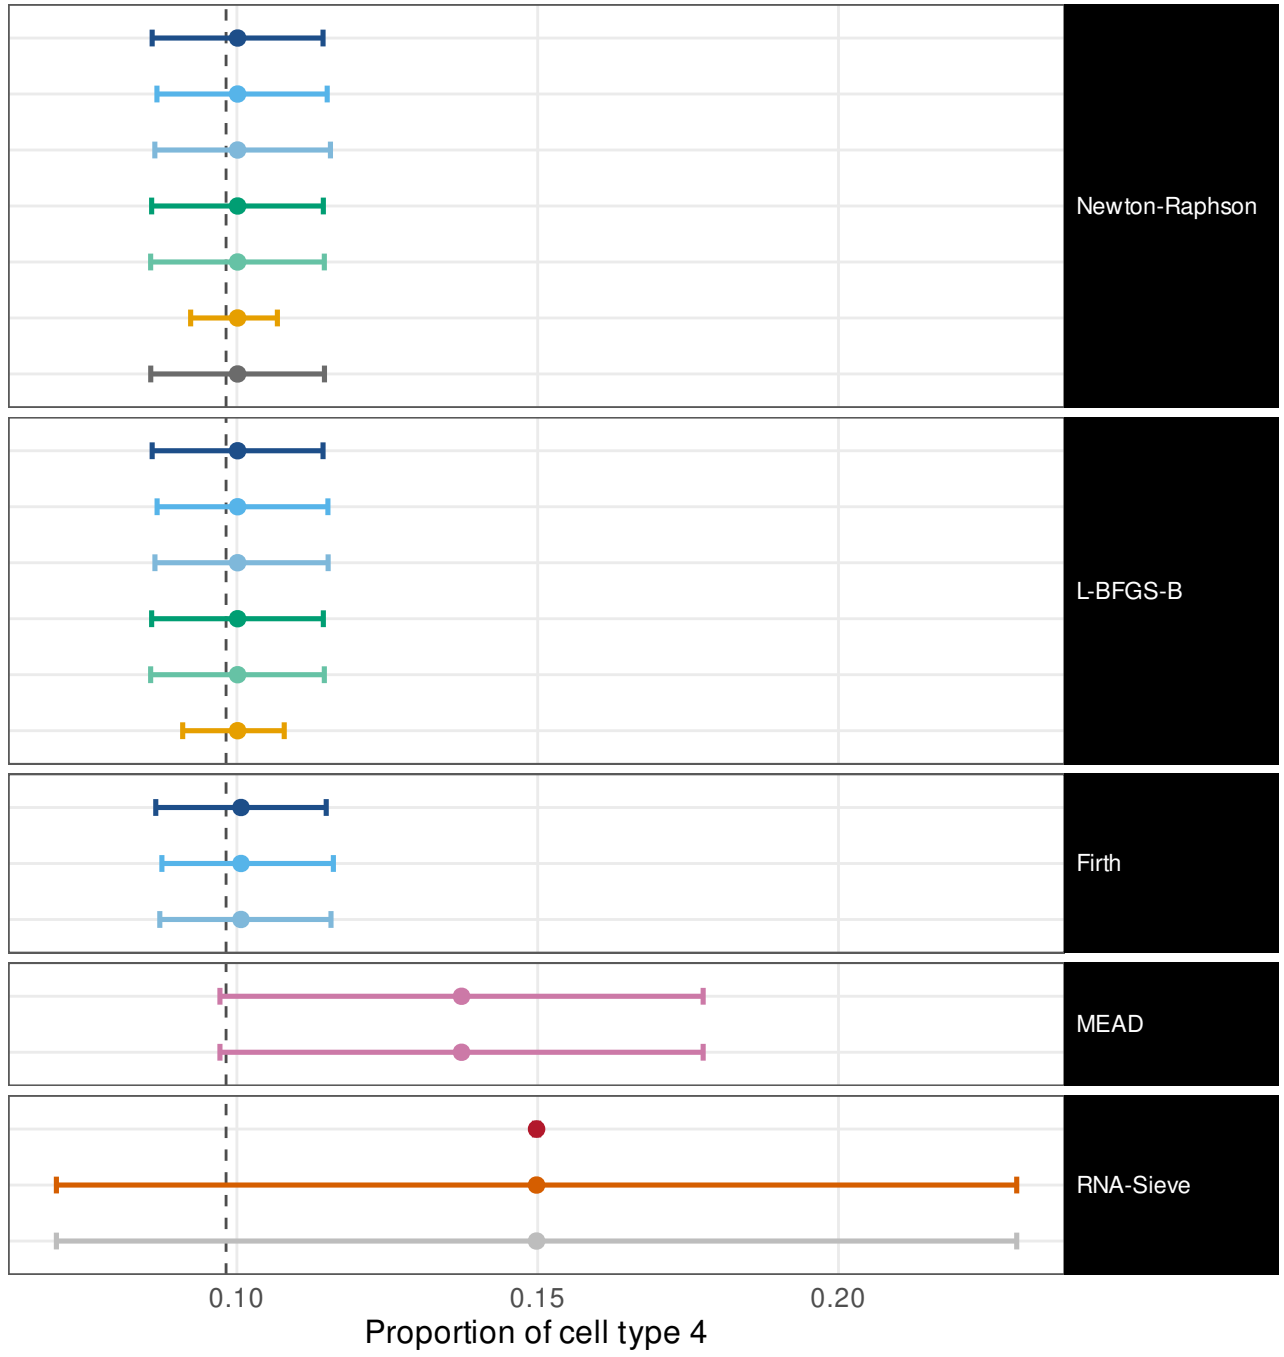

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.0992
ILR, mapped back                      1  [0.57,    1]   w = 0.0998
ILR, REML                             1  [0.57,    1]   w = 0.103
Profile likelihood                    1  [0.57,    1]   w = 0.0997
Profile, REML                         1  [0.57,    1]   w = 0.101
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.0534
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.123

Wald (delta)                          1  [0.57,    1]   w = 0.0992
ILR, mapped back                      1  [0.57,    1]   w = 0.0984
ILR, REML                             1  [0.57,    1]   w = 0.0995
Profile likelihood                    1  [0.57,    1]   w = 0.0997
Profile, REML                         1  [0.57,    1]   w = 0.101
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.0616

Wald (delta)                          1  [0.57,    1]   w = 0.0939
ILR, mapped back                      1  [0.57,    1]   w = 0.0912
ILR, REML                             1  [0.57,    1]   w = 0.0965

Method's own interval                 0  [   0, 0.43]   w = 0.0986
Own interval, transcript fractions    0  [   0, 0.43]   w = 0.0986

Fisher information (Wald)             0  [   0, 0.43]   w = 0.0058
Godambe sandwich                    0.2  [0.036, 0.62]   w = 0.0872
Released code, as published           1  [0.57,    1]   w =    1
```

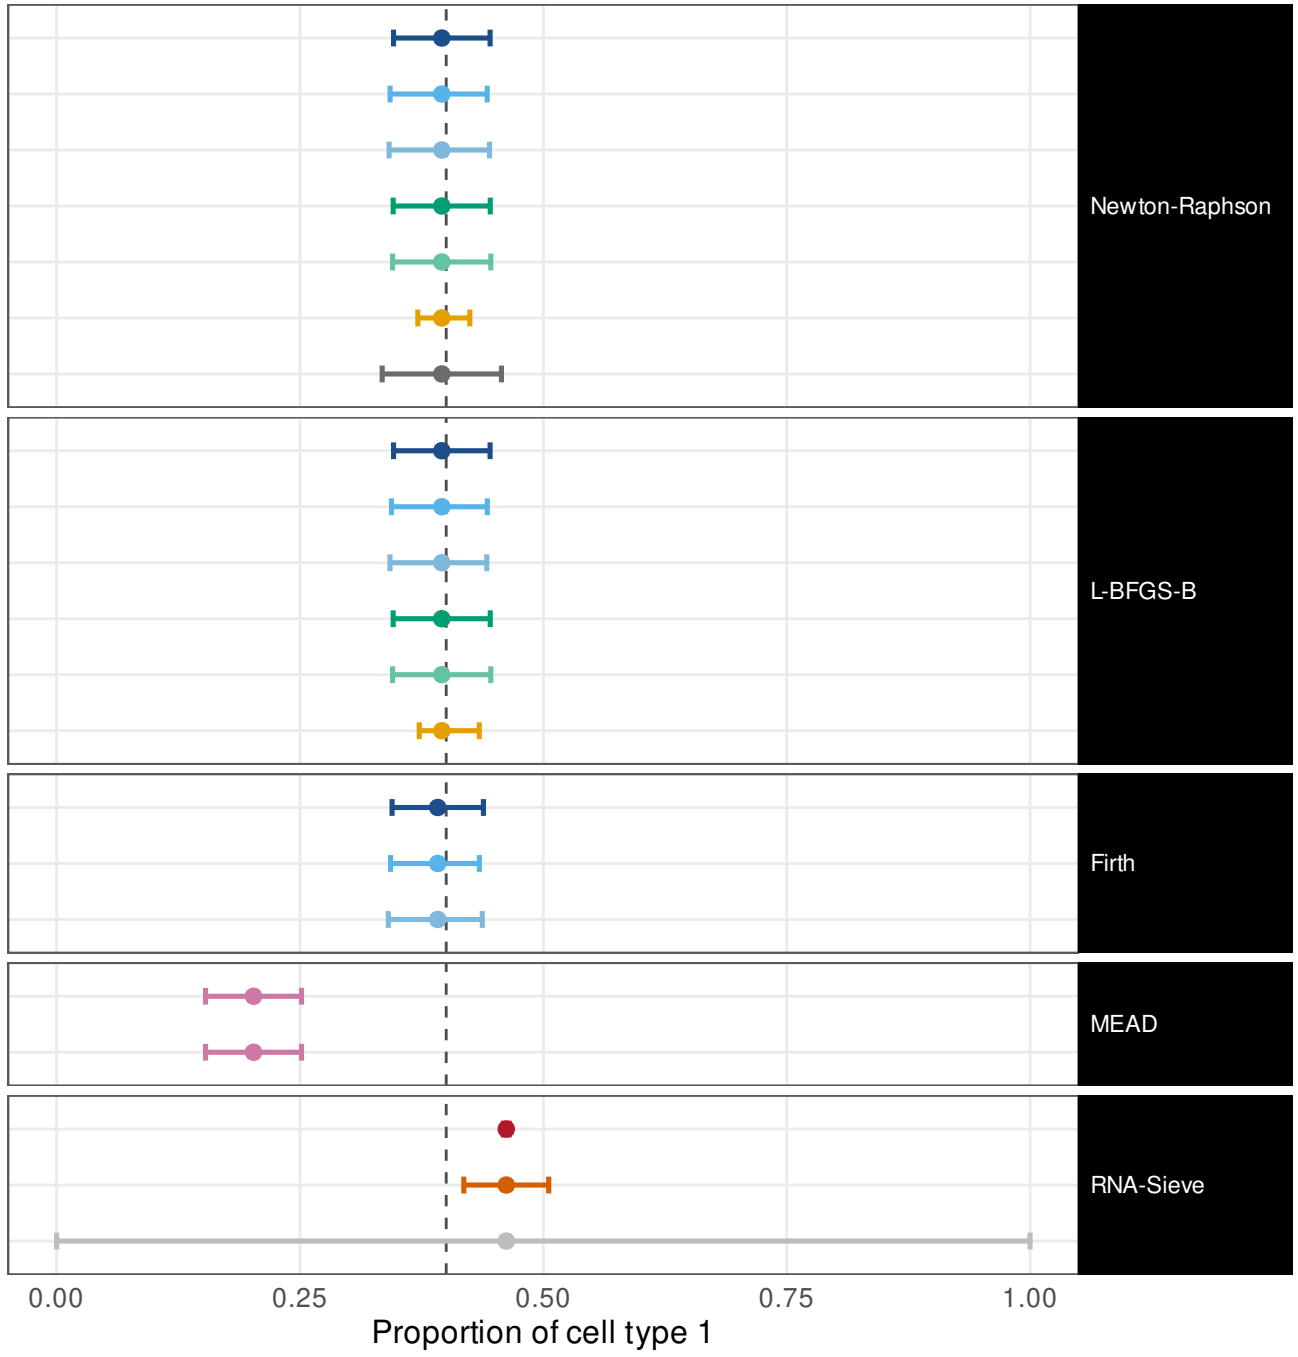


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.103
ILR, mapped back	1	[0.57, 1]	w = 0.105
ILR, REML	1	[0.57, 1]	w = 0.107
Profile likelihood	1	[0.57, 1]	w = 0.104
Profile, REML	1	[0.57, 1]	w = 0.105
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0499
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.13
Wald (delta)	1	[0.57, 1]	w = 0.103
ILR, mapped back	1	[0.57, 1]	w = 0.104
ILR, REML	1	[0.57, 1]	w = 0.107
Profile likelihood	1	[0.57, 1]	w = 0.104
Profile, REML	1	[0.57, 1]	w = 0.105
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0578
Wald (delta)	1	[0.57, 1]	w = 0.0965
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0965
ILR, REML	1	[0.57, 1]	w = 0.0996
Method's own interval	0	[0, 0.43]	w = 0.0661
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0661
Fisher information (Wald)	0	[0, 0.43]	w = 0.00126
Godambe sandwich	1	[0.57, 1]	w = 0.123
Released code, as published	1	[0.57, 1]	w = 1

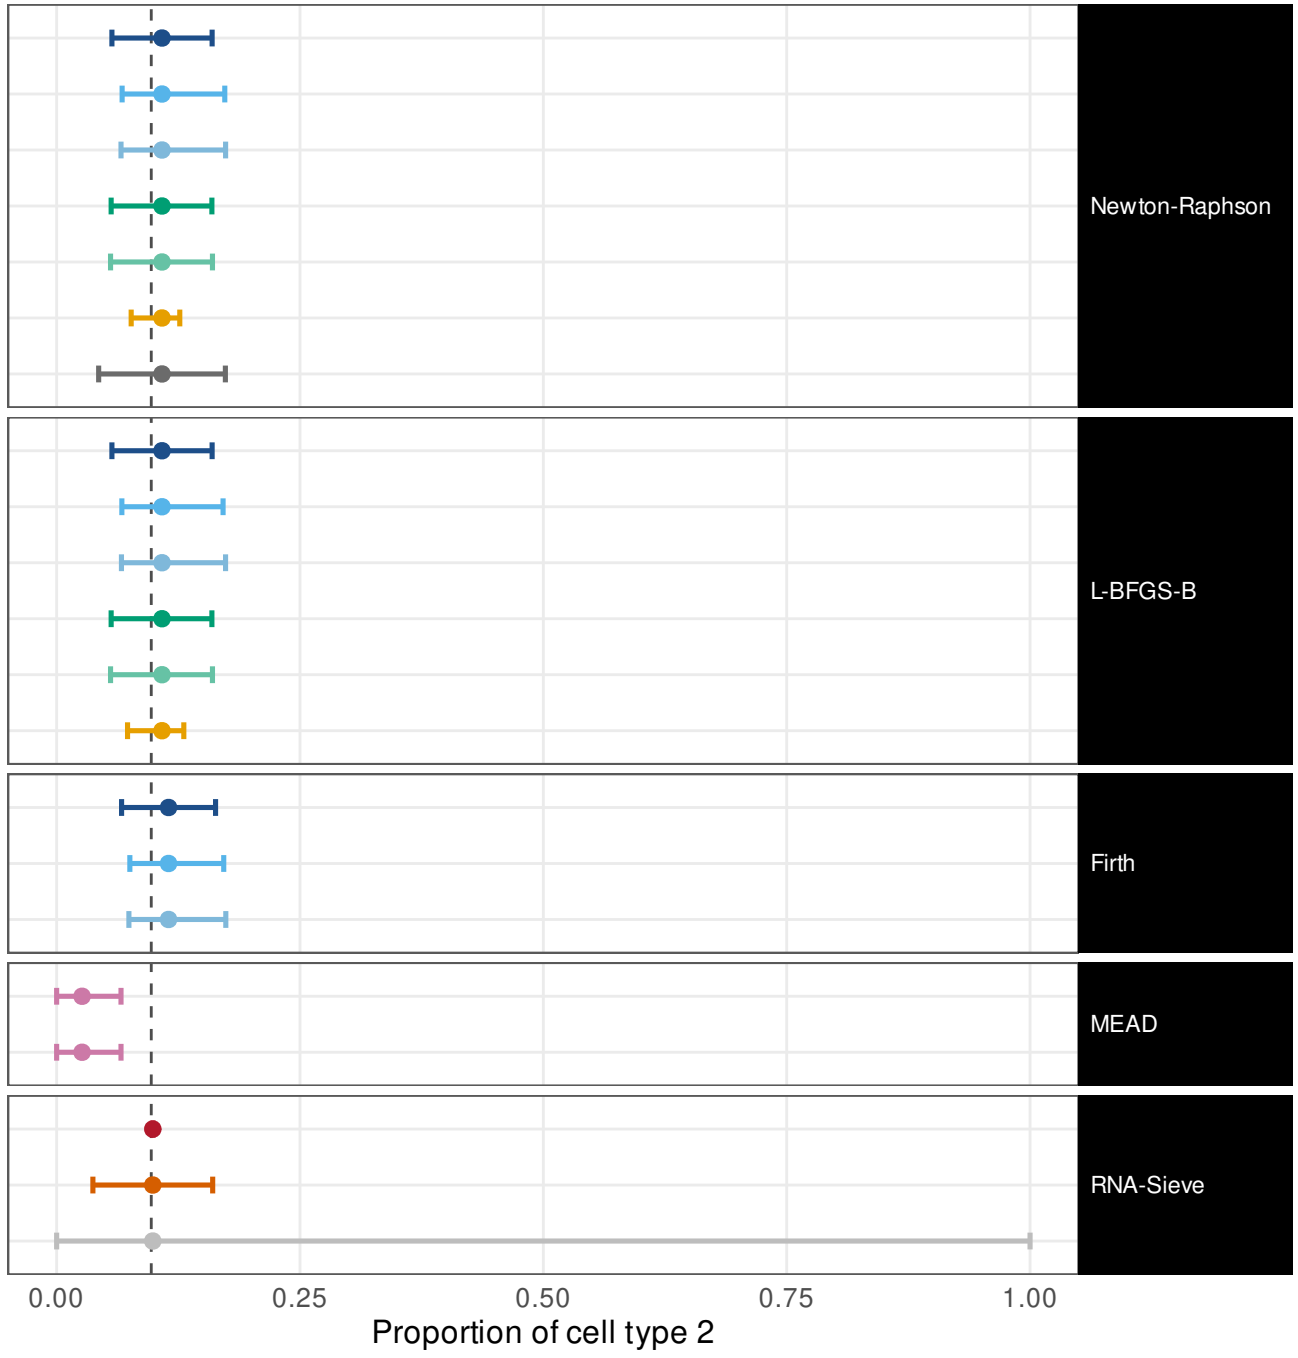


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.0359
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0368
ILR, REML	0.8	[0.38, 0.96]	w = 0.0373
Profile likelihood	1	[0.57, 1]	w = 0.0361
Profile, REML	1	[0.57, 1]	w = 0.0365
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.021
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0377
Wald (delta)	1	[0.57, 1]	w = 0.0359
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.037
ILR, REML	1	[0.57, 1]	w = 0.0384
Profile likelihood	1	[0.57, 1]	w = 0.0361
Profile, REML	1	[0.57, 1]	w = 0.0365
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0243
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0355
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0362
ILR, REML	0.8	[0.38, 0.96]	w = 0.037
Method's own interval	0	[0, 0.43]	w = 0.109
Own interval, transcript fractions	0.6	[0.23, 0.88]	w = 0.109
Fisher information (Wald)	0	[0, 0.43]	w = 0.00365
Godambe sandwich	0	[0, 0.43]	w = 0.115
Released code, as published	1	[0.57, 1]	w = 1

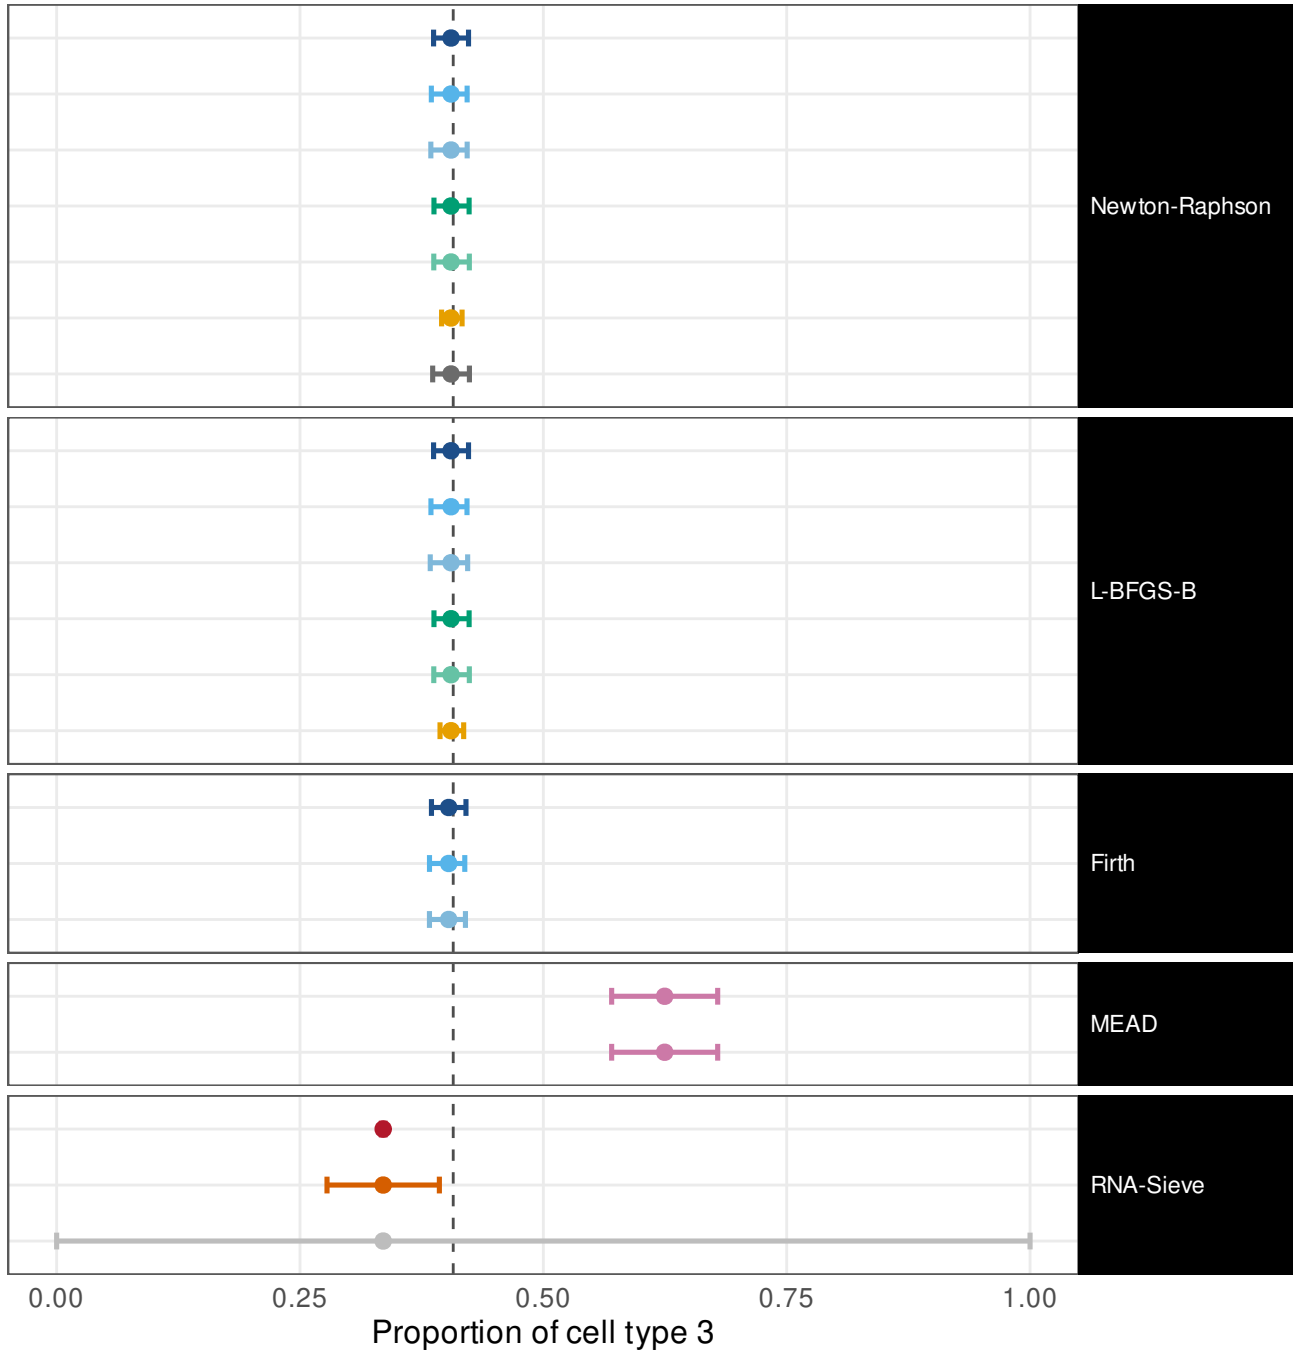

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                        0.8  [0.38, 0.96]   w = 0.0224
ILR, mapped back                    0.8  [0.38, 0.96]   w = 0.0222
ILR, REML                           0.8  [0.38, 0.96]   w = 0.0231
Profile likelihood                  0.8  [0.38, 0.96]   w = 0.0226
Profile, REML                       0.8  [0.38, 0.96]   w = 0.0228
Parametric bootstrap                  0  [   0, 0.43]   w = 0.0107
Oracle (Fisher at p*)               0.8  [0.38, 0.96]   w = 0.0232

Wald (delta)                        0.8  [0.38, 0.96]   w = 0.0224
ILR, mapped back                    0.8  [0.38, 0.96]   w = 0.0227
ILR, REML                           0.8  [0.38, 0.96]   w = 0.0227
Profile likelihood                  0.8  [0.38, 0.96]   w = 0.0226
Profile, REML                       0.8  [0.38, 0.96]   w = 0.0228
Parametric bootstrap                0.4  [0.12, 0.77]   w = 0.0131

Wald (delta)                        0.8  [0.38, 0.96]   w = 0.0223
ILR, mapped back                    0.8  [0.38, 0.96]   w = 0.0219
ILR, REML                           0.8  [0.38, 0.96]   w = 0.0224

Method's own interval               0.6  [0.23, 0.88]   w = 0.124
Own interval, transcript fractions    1  [0.57,    1]   w = 0.124

Fisher information (Wald)           0.2  [0.036, 0.62]   w = 0.00134
Godambe sandwich                      1  [0.57,    1]   w = 0.154
Released code, as published           1  [0.57,    1]   w =     1
```

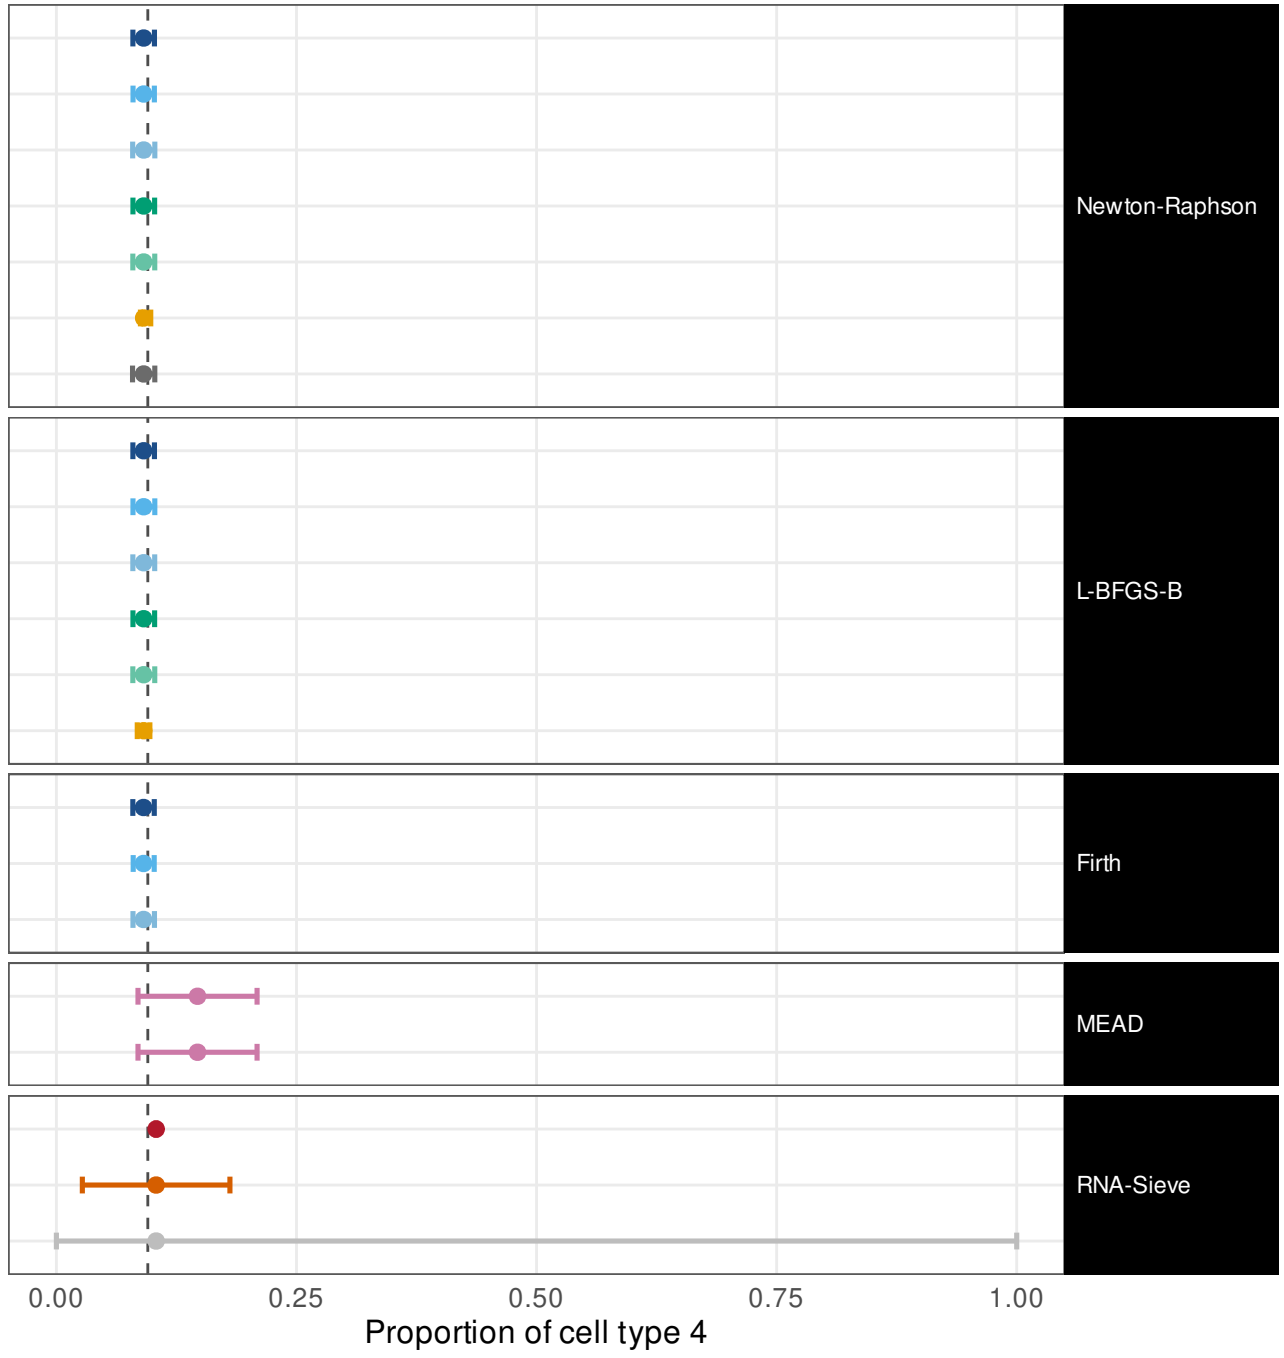


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.0623
ILR, mapped back	1	[0.57, 1]	w = 0.0618
ILR, REML	1	[0.57, 1]	w = 0.0633
Profile likelihood	1	[0.57, 1]	w = 0.0626
Profile, REML	1	[0.57, 1]	w = 0.0634
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.0409
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0612
Wald (delta)	1	[0.57, 1]	w = 0.0623
ILR, mapped back	1	[0.57, 1]	w = 0.0626
ILR, REML	1	[0.57, 1]	w = 0.0628
Profile likelihood	1	[0.57, 1]	w = 0.0626
Profile, REML	1	[0.57, 1]	w = 0.0634
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0452
Wald (delta)	1	[0.57, 1]	w = 0.0618
ILR, mapped back	1	[0.57, 1]	w = 0.0625
ILR, REML	1	[0.57, 1]	w = 0.0615
Method's own interval	1	[0.57, 1]	w = 0.87
Own interval, transcript fractions	1	[0.57, 1]	w = 0.87
Fisher information (Wald)	0	[0, 0.43]	w = 0.00142
Godambe sandwich	1	[0.57, 1]	w = 0.347
Released code, as published	1	[0.57, 1]	w = 0.347

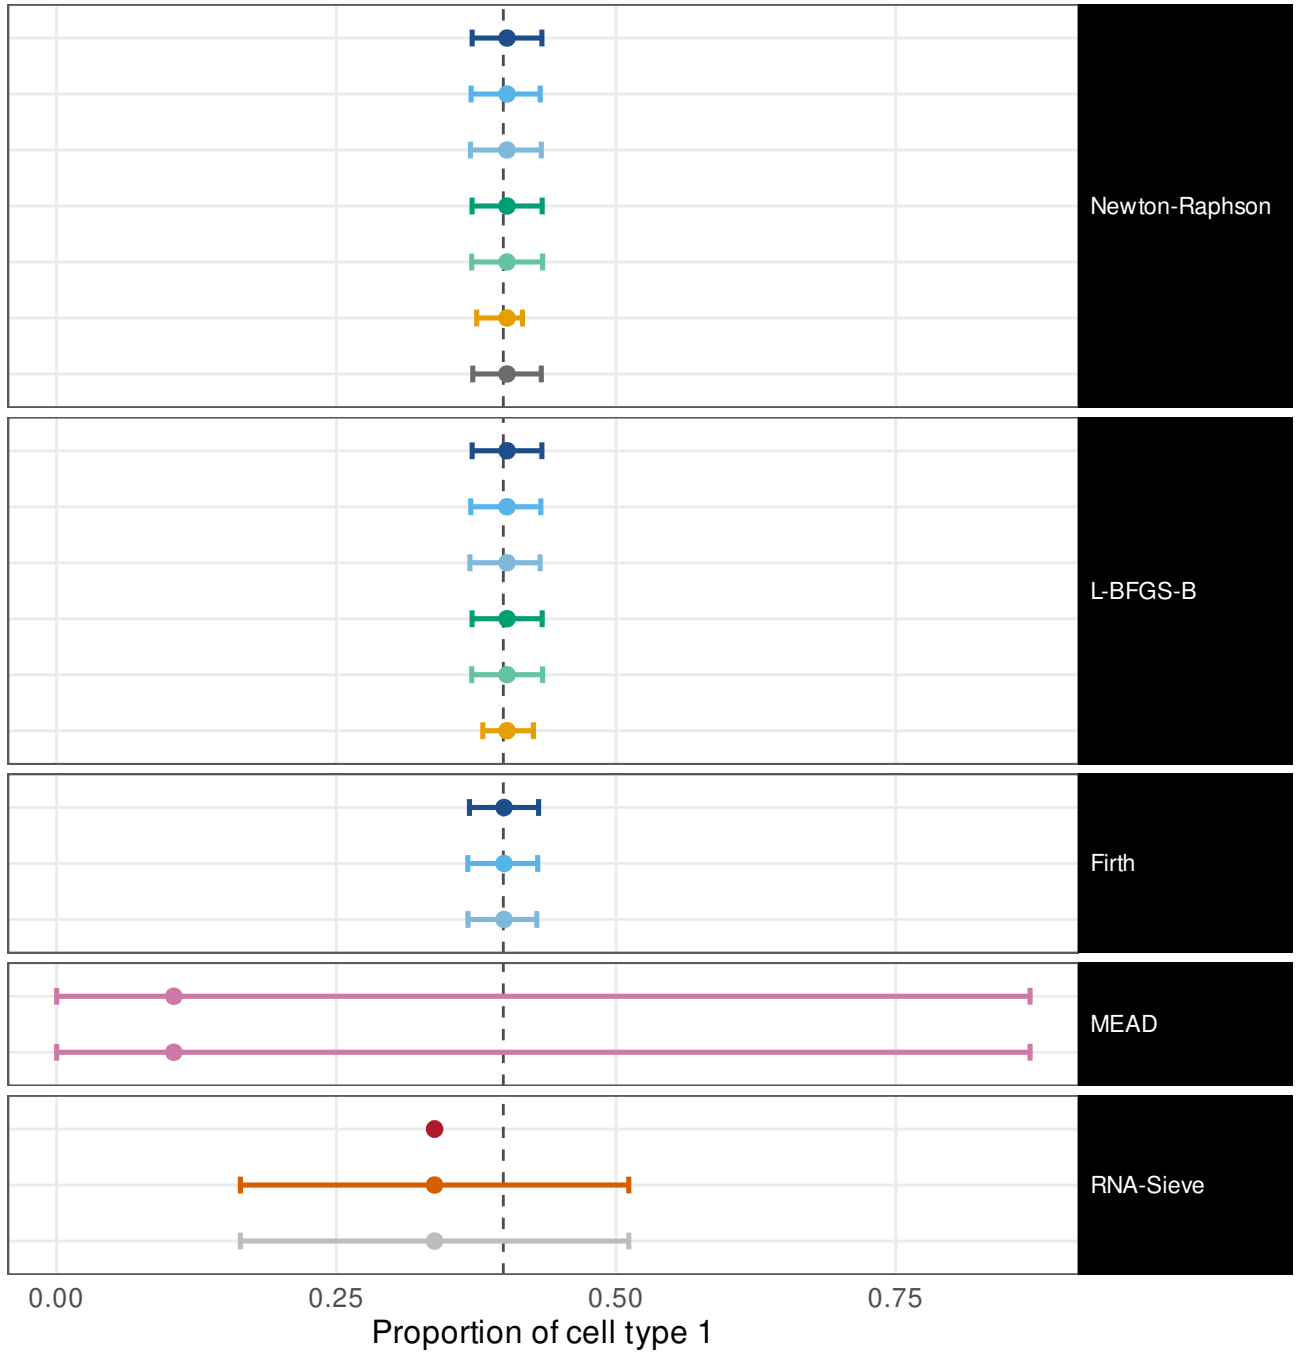


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.0618
ILR, mapped back	1	[0.57, 1]	w = 0.0617
ILR, REML	1	[0.57, 1]	w = 0.0634
Profile likelihood	1	[0.57, 1]	w = 0.0621
Profile, REML	1	[0.57, 1]	w = 0.0628
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0445
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0602
Wald (delta)	1	[0.57, 1]	w = 0.0618
ILR, mapped back	1	[0.57, 1]	w = 0.0623
ILR, REML	1	[0.57, 1]	w = 0.063
Profile likelihood	1	[0.57, 1]	w = 0.0621
Profile, REML	1	[0.57, 1]	w = 0.0628
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0351
Wald (delta)	1	[0.57, 1]	w = 0.0611
ILR, mapped back	1	[0.57, 1]	w = 0.0617
ILR, REML	1	[0.57, 1]	w = 0.0614
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0	[0, 0.43]	w = 0.00122
Godambe sandwich	1	[0.57, 1]	w = 0.283
Released code, as published	1	[0.57, 1]	w = 0.283

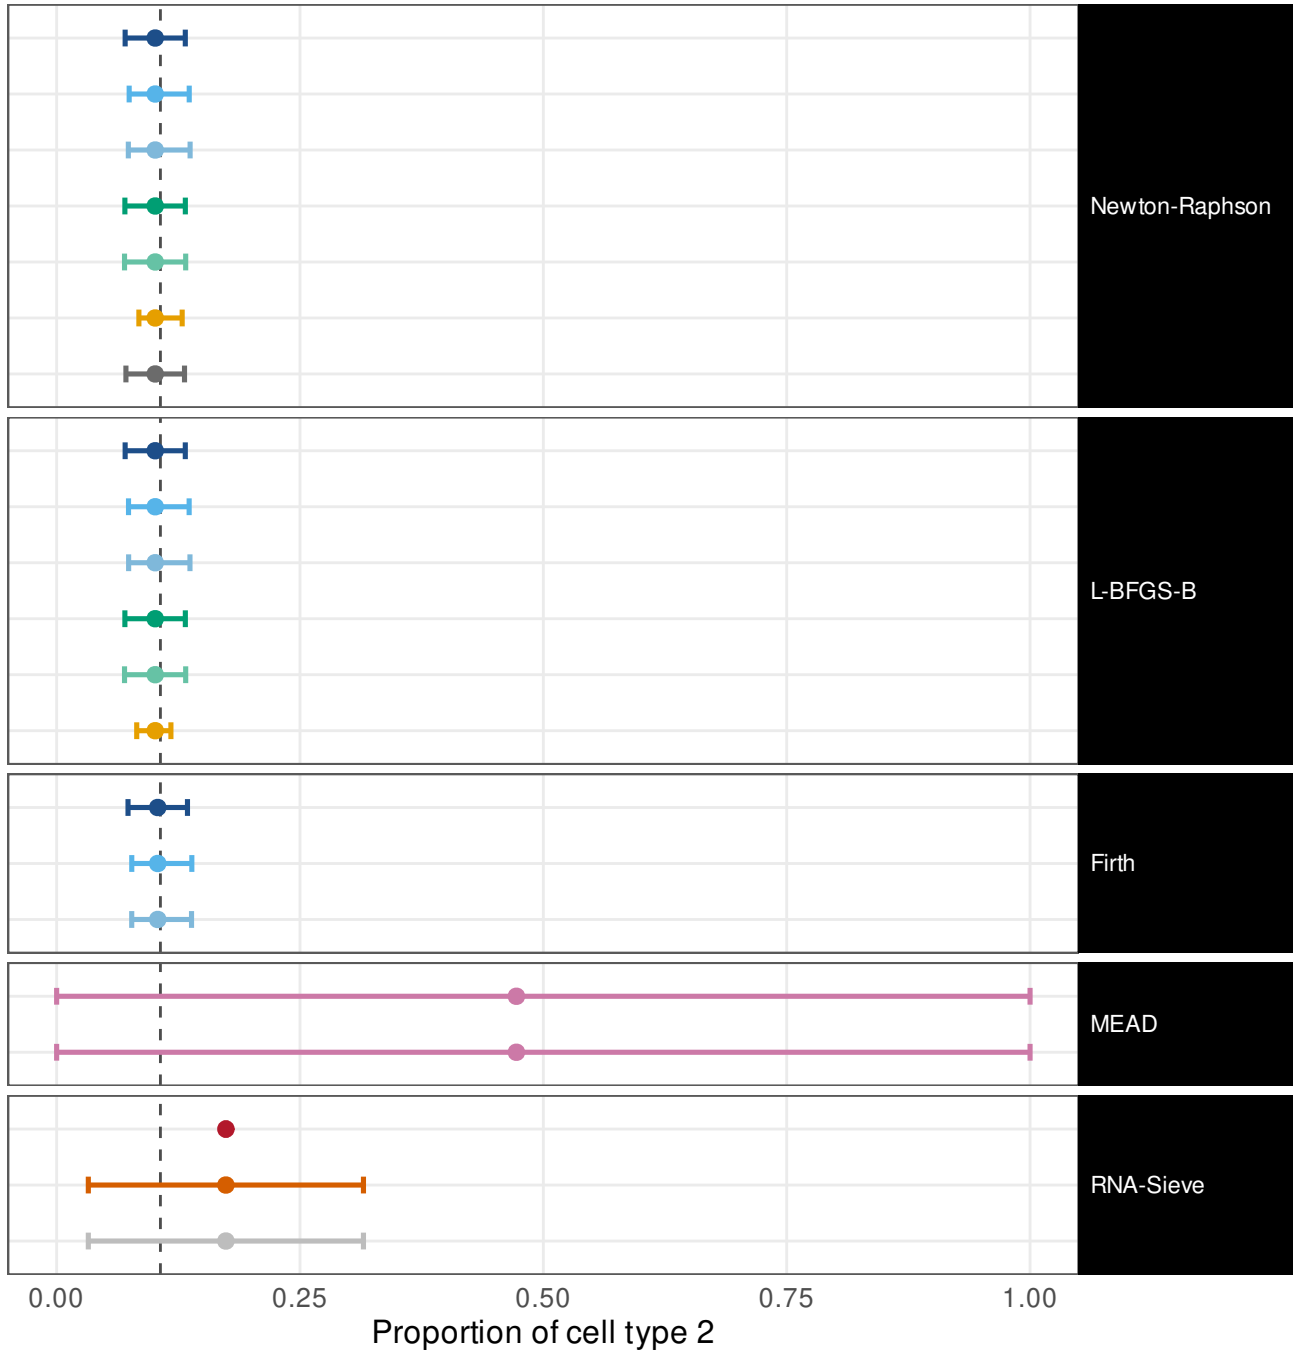

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.0618
ILR, mapped back                      1  [0.57,    1]   w = 0.0614
ILR, REML                             1  [0.57,    1]   w = 0.0638
Profile likelihood                    1  [0.57,    1]   w = 0.0621
Profile, REML                         1  [0.57,    1]   w = 0.0628
Parametric bootstrap                  1  [0.57,    1]   w = 0.0513
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0628

Wald (delta)                          1  [0.57,    1]   w = 0.0618
ILR, mapped back                      1  [0.57,    1]   w = 0.0621
ILR, REML                             1  [0.57,    1]   w = 0.0631
Profile likelihood                    1  [0.57,    1]   w = 0.0621
Profile, REML                         1  [0.57,    1]   w = 0.0628
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.0292

Wald (delta)                          1  [0.57,    1]   w = 0.0612
ILR, mapped back                      1  [0.57,    1]   w = 0.0608
ILR, REML                             1  [0.57,    1]   w = 0.0624

Method's own interval                 1  [0.57,    1]   w =    1
Own interval, transcript fractions    1  [0.57,    1]   w =    1

Fisher information (Wald)             0  [   0, 0.43]   w = 0.00137
Godambe sandwich                      1  [0.57,    1]   w = 0.358
Released code, as published           1  [0.57,    1]   w = 0.358
```

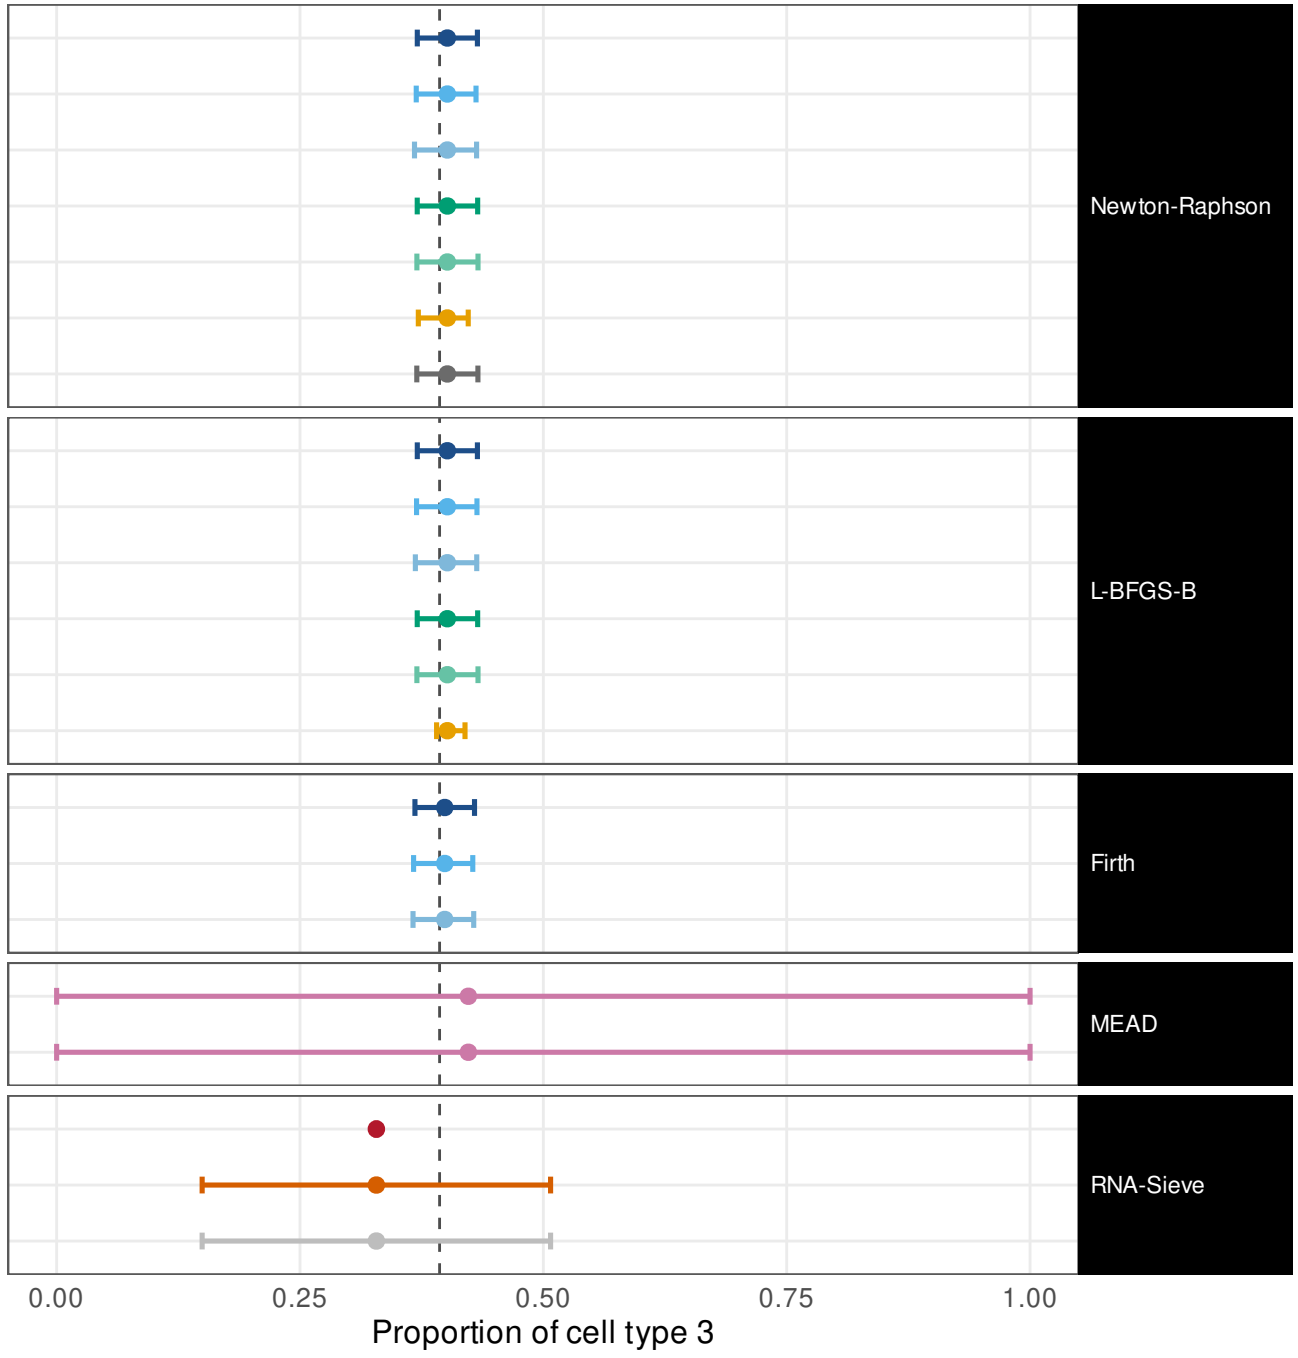

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.062
ILR, mapped back                      1  [0.57,    1]   w = 0.0614
ILR, REML                             1  [0.57,    1]   w = 0.0635
Profile likelihood                    1  [0.57,    1]   w = 0.0623
Profile, REML                         1  [0.57,    1]   w = 0.063
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.0497
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.063

Wald (delta)                          1  [0.57,    1]   w = 0.062
ILR, mapped back                      1  [0.57,    1]   w = 0.0621
ILR, REML                             1  [0.57,    1]   w = 0.0624
Profile likelihood                    1  [0.57,    1]   w = 0.0623
Profile, REML                         1  [0.57,    1]   w = 0.063
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.0373

Wald (delta)                          1  [0.57,    1]   w = 0.0612
ILR, mapped back                      1  [0.57,    1]   w = 0.0614
ILR, REML                             1  [0.57,    1]   w = 0.062

Method's own interval                 1  [0.57,    1]   w =     1
Own interval, transcript fractions    1  [0.57,    1]   w =     1

Fisher information (Wald)             0  [   0, 0.43]   w = 0.00119
Godambe sandwich                      1  [0.57,    1]   w = 0.247
Released code, as published           1  [0.57,    1]   w = 0.247
```

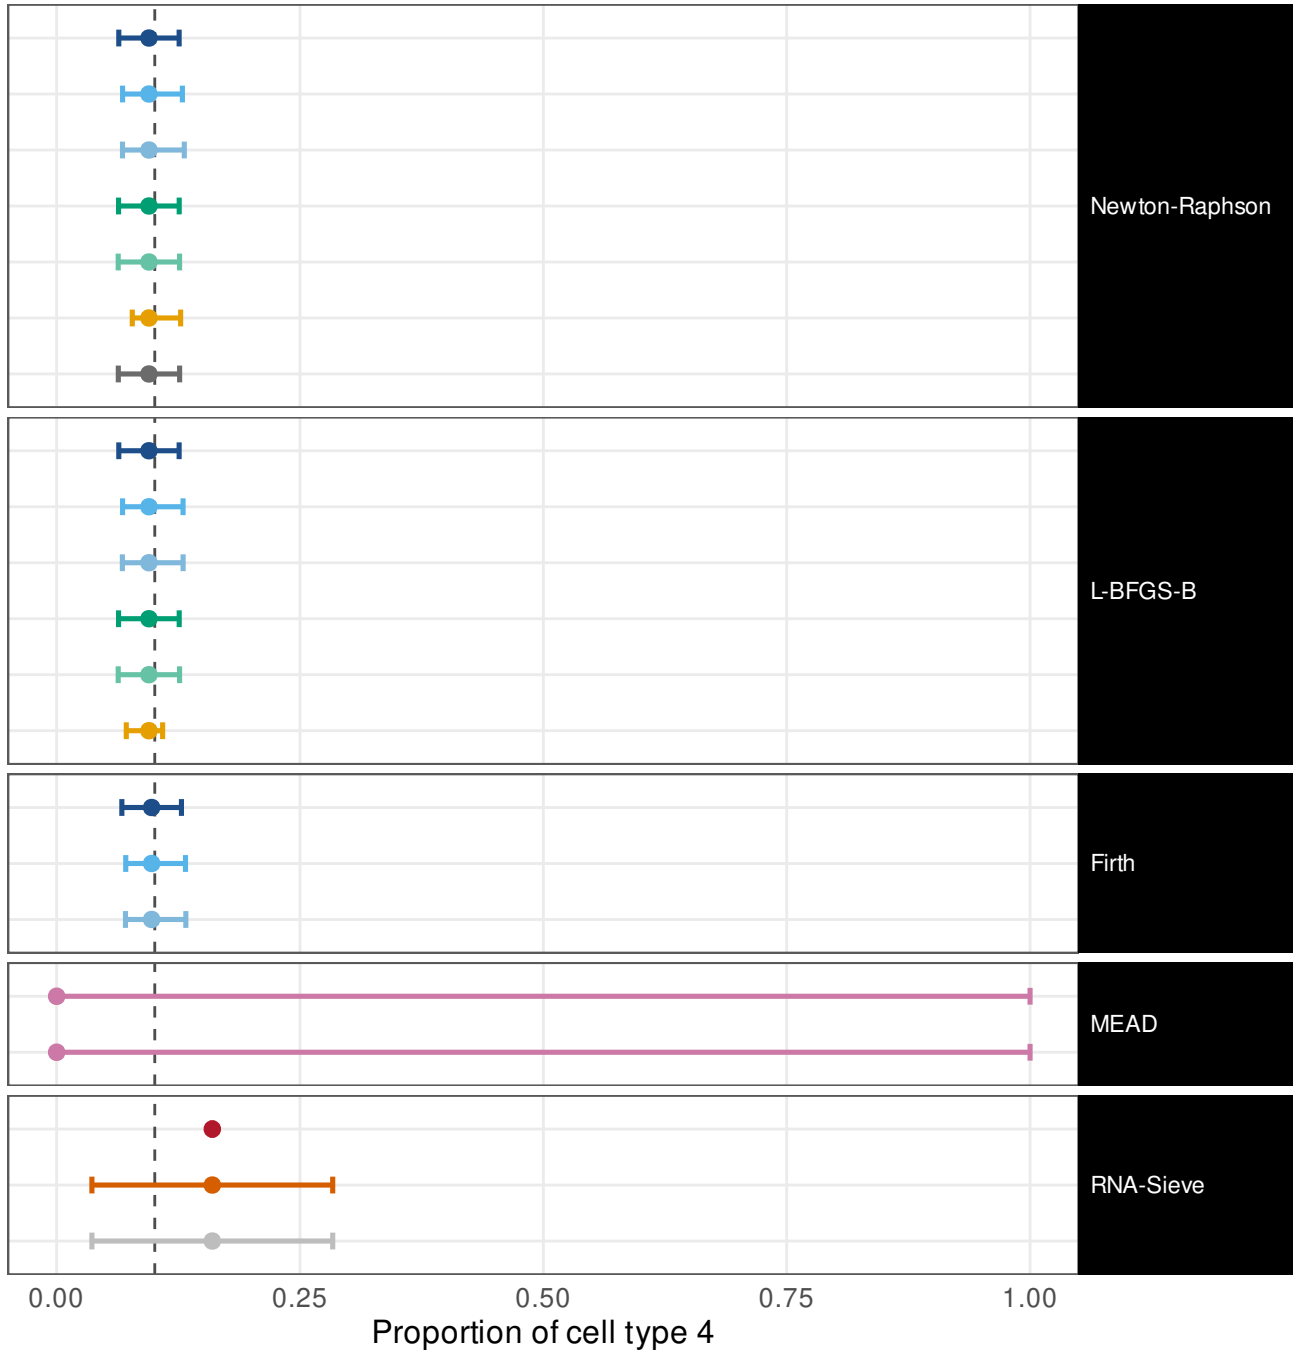


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	0.8	[0.38, 0.96]	w = 0.23
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.288
ILR, REML	0.8	[0.38, 0.96]	w = 0.292
Profile likelihood	0.8	[0.38, 0.96]	w = 0.22
Profile, REML	0.8	[0.38, 0.96]	w = 0.222
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.09
Oracle (Fisher at p*)	1	[0.44, 1]	w = 0.382
Wald (delta)	0.8	[0.38, 0.96]	w = 0.23
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.289
ILR, REML	0.8	[0.38, 0.96]	w = 0.293
Profile likelihood	0.8	[0.38, 0.96]	w = 0.22
Profile, REML	0.8	[0.38, 0.96]	w = 0.222
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.129
Wald (delta)	0.8	[0.38, 0.96]	w = 0.194
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.192
ILR, REML	0.8	[0.38, 0.96]	w = 0.2
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0	[0, 0.43]	w = 0.0133
Godambe sandwich	1	[0.57, 1]	w = 0.429
Released code, as published	1	[0.57, 1]	w = 1

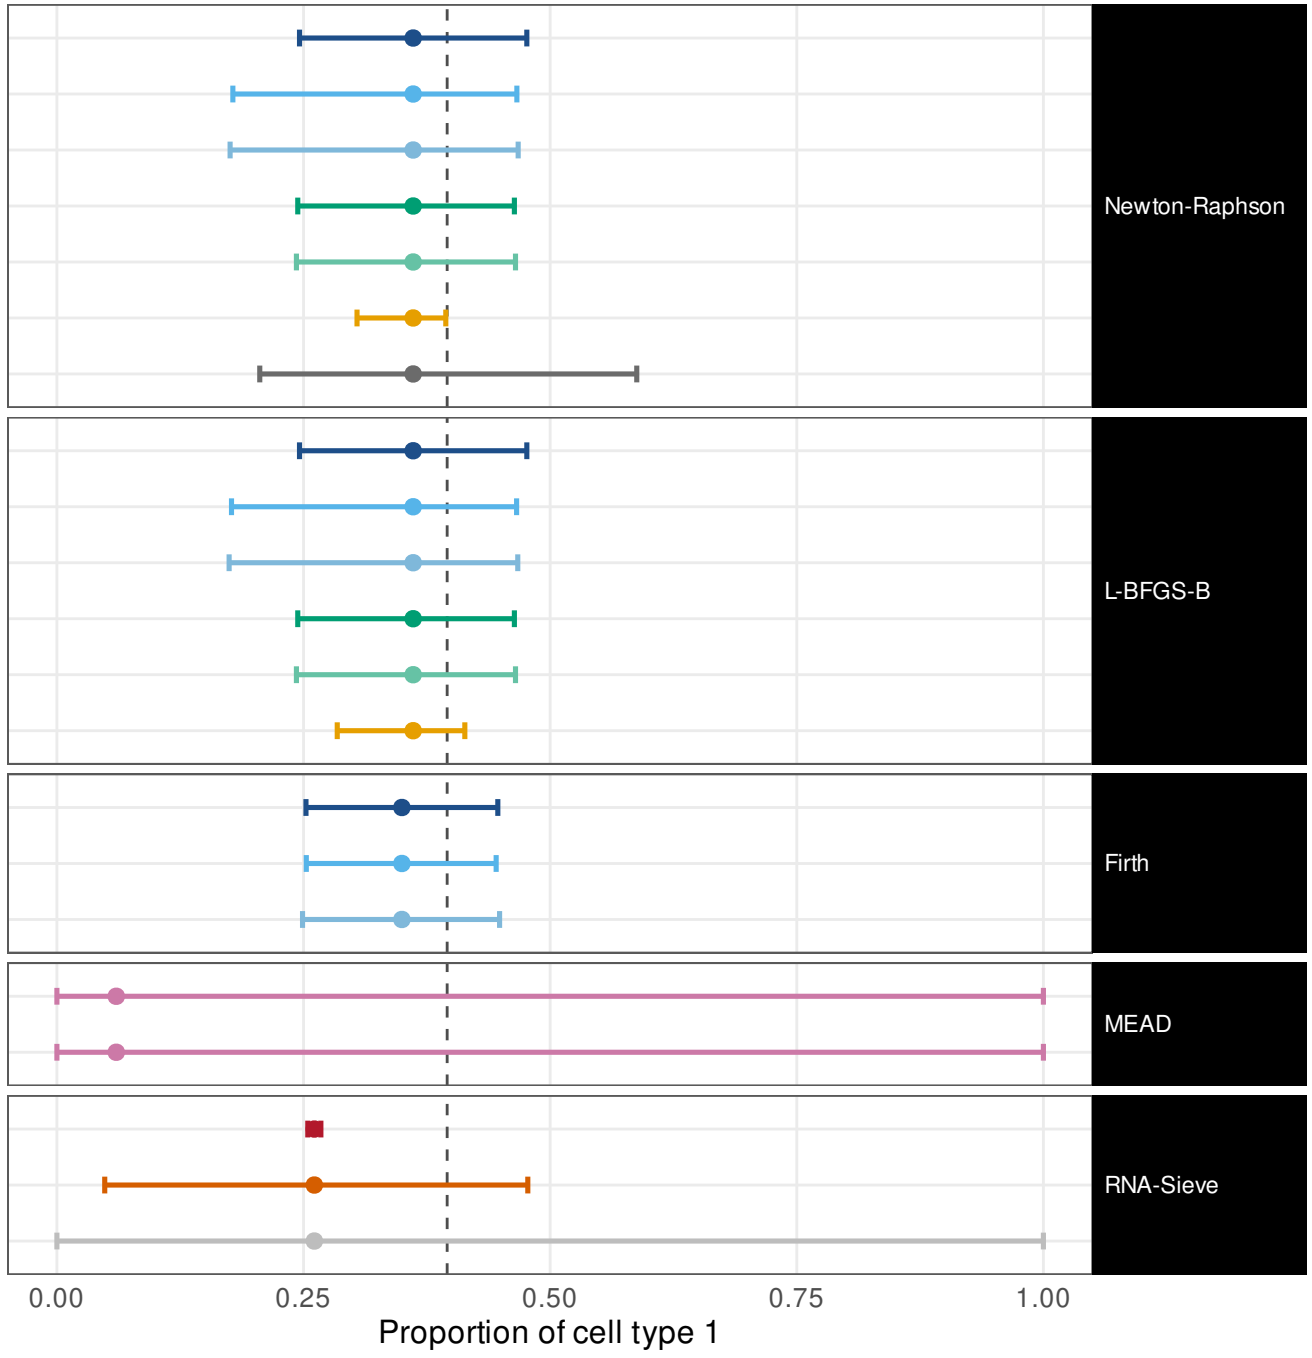

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                        0.8  [0.38, 0.96]   w = 0.237
ILR, mapped back                    0.8  [0.38, 0.96]   w = 0.388
ILR, REML                           0.8  [0.38, 0.96]   w = 0.394
Profile likelihood                  0.8  [0.38, 0.96]   w = 0.215
Profile, REML                       0.8  [0.38, 0.96]   w = 0.217
Parametric bootstrap                0.2  [0.036, 0.62]   w = 0.08
Oracle (Fisher at p*)               0.67 [0.21, 0.94]   w = 0.412

Wald (delta)                        0.8  [0.38, 0.96]   w = 0.237
ILR, mapped back                    0.8  [0.38, 0.96]   w = 0.39
ILR, REML                           0.8  [0.38, 0.96]   w = 0.395
Profile likelihood                  0.8  [0.38, 0.96]   w = 0.215
Profile, REML                       0.8  [0.38, 0.96]   w = 0.217
Parametric bootstrap                0.4  [0.12, 0.77]   w = 0.107

Wald (delta)                        0.8  [0.38, 0.96]   w = 0.195
ILR, mapped back                    0.8  [0.38, 0.96]   w =  0.2
ILR, REML                           0.8  [0.38, 0.96]   w = 0.204

Method's own interval                 1  [0.57,    1]   w =    1
Own interval, transcript fractions    1  [0.57,    1]   w =    1

Fisher information (Wald)             0  [   0, 0.43]   w = 0.0206
Godambe sandwich                    0.4  [0.12, 0.77]   w = 0.43
Released code, as published           1  [0.57,    1]   w =    1
```

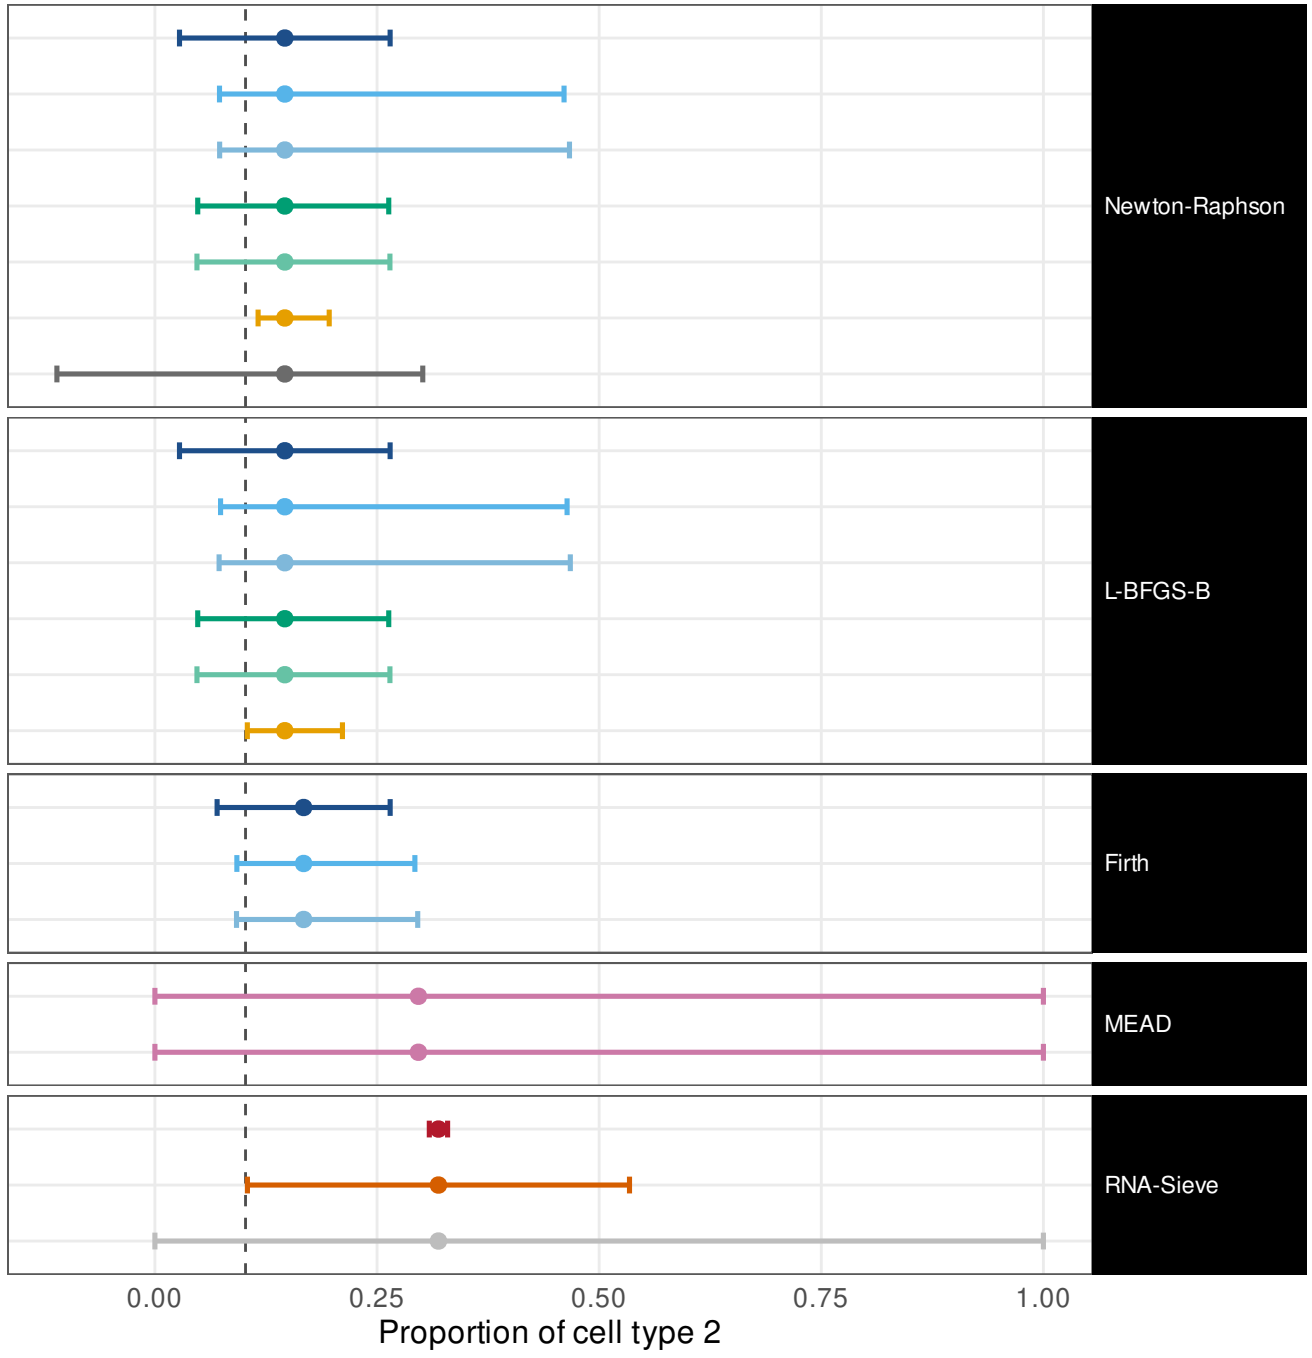


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.0824
ILR, mapped back	1	[0.57, 1]	w = 0.16
ILR, REML	1	[0.57, 1]	w = 0.163
Profile likelihood	1	[0.57, 1]	w = 0.0831
Profile, REML	1	[0.57, 1]	w = 0.0841
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0346
Oracle (Fisher at p*)	1	[0.44, 1]	w = 0.0913
Wald (delta)	1	[0.57, 1]	w = 0.0824
ILR, mapped back	1	[0.57, 1]	w = 0.16
ILR, REML	1	[0.57, 1]	w = 0.161
Profile likelihood	1	[0.57, 1]	w = 0.0831
Profile, REML	1	[0.57, 1]	w = 0.0841
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0497
Wald (delta)	1	[0.57, 1]	w = 0.0788
ILR, mapped back	1	[0.57, 1]	w = 0.0838
ILR, REML	1	[0.57, 1]	w = 0.0865
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0	[0, 0.43]	w = 0.0109
Godambe sandwich	0.4	[0.12, 0.77]	w = 0.193
Released code, as published	1	[0.57, 1]	w = 1

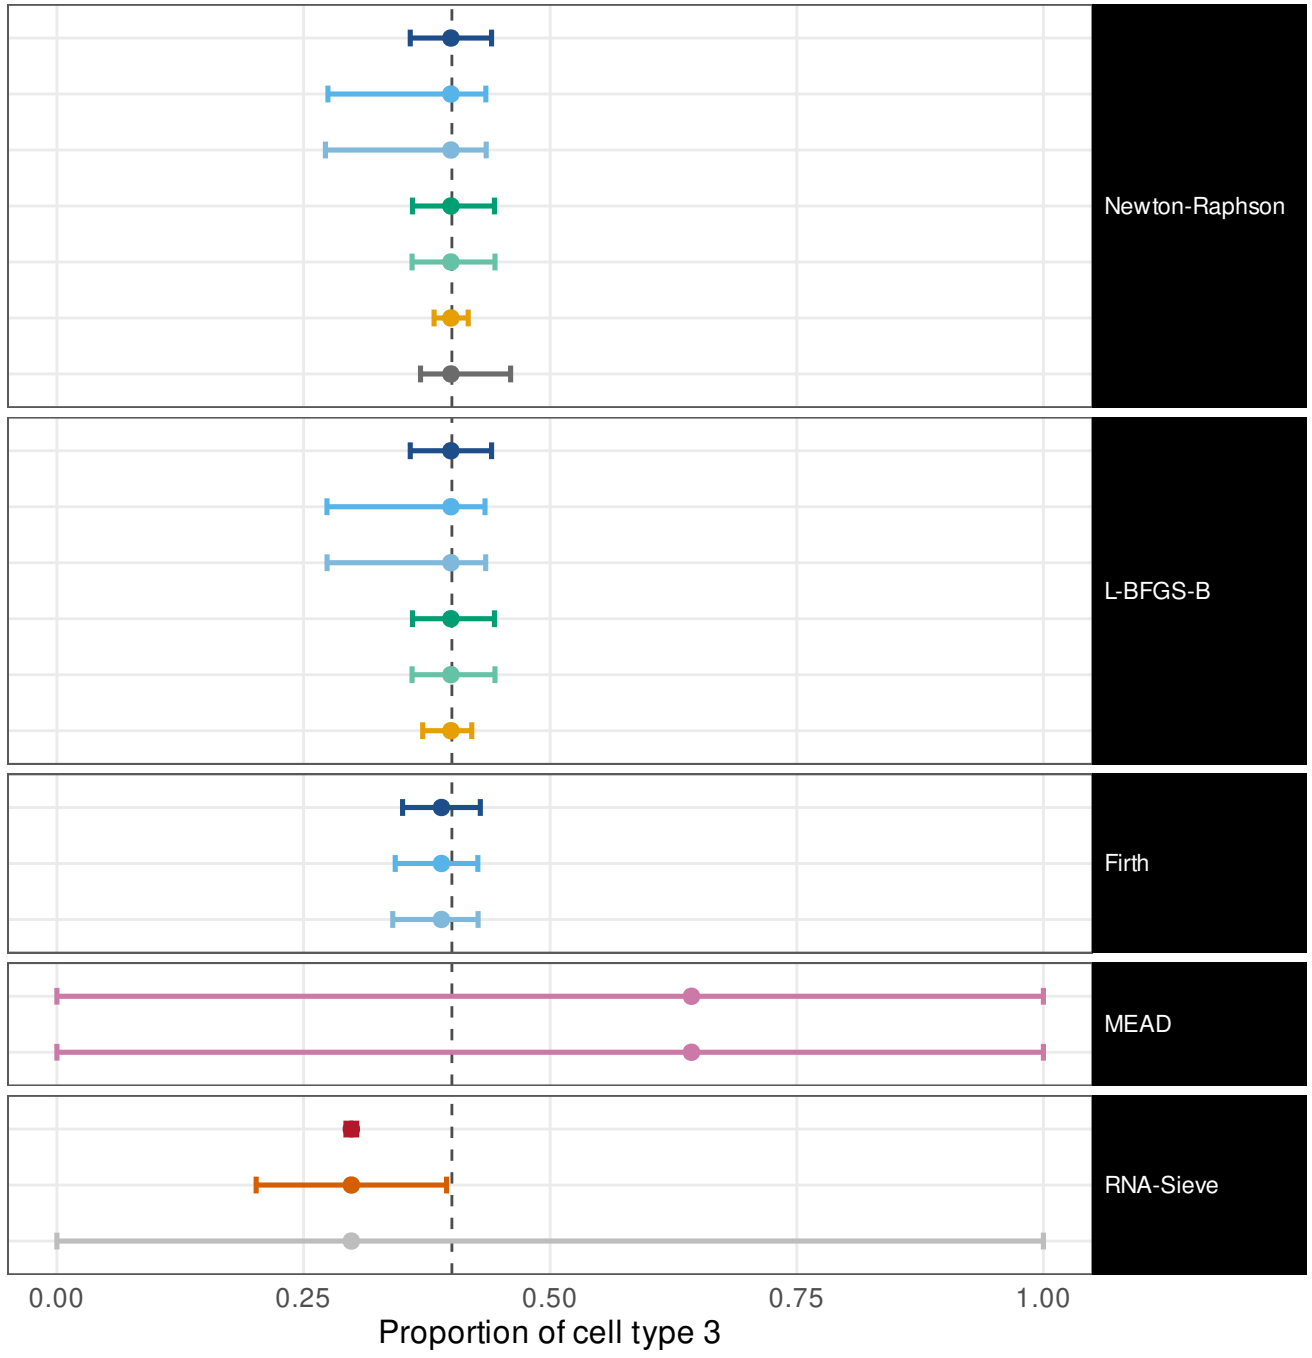


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1000 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	0.8	[0.38, 0.96]	w = 0.0521
ILR, mapped back	1	[0.57, 1]	w = 0.0672
ILR, REML	0.8	[0.38, 0.96]	w = 0.0668
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0526
Profile, REML	0.8	[0.38, 0.96]	w = 0.0532
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0286
Oracle (Fisher at p*)	0.67	[0.21, 0.94]	w = 0.0542
Wald (delta)	0.8	[0.38, 0.96]	w = 0.0521
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.066
ILR, REML	0.8	[0.38, 0.96]	w = 0.067
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0526
Profile, REML	0.8	[0.38, 0.96]	w = 0.0532
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0299
Wald (delta)	0.8	[0.38, 0.96]	w = 0.051
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.0518
ILR, REML	1	[0.57, 1]	w = 0.0527
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0	[0, 0.43]	w = 0.00484
Godambe sandwich	1	[0.57, 1]	w = 0.201
Released code, as published	1	[0.57, 1]	w = 1

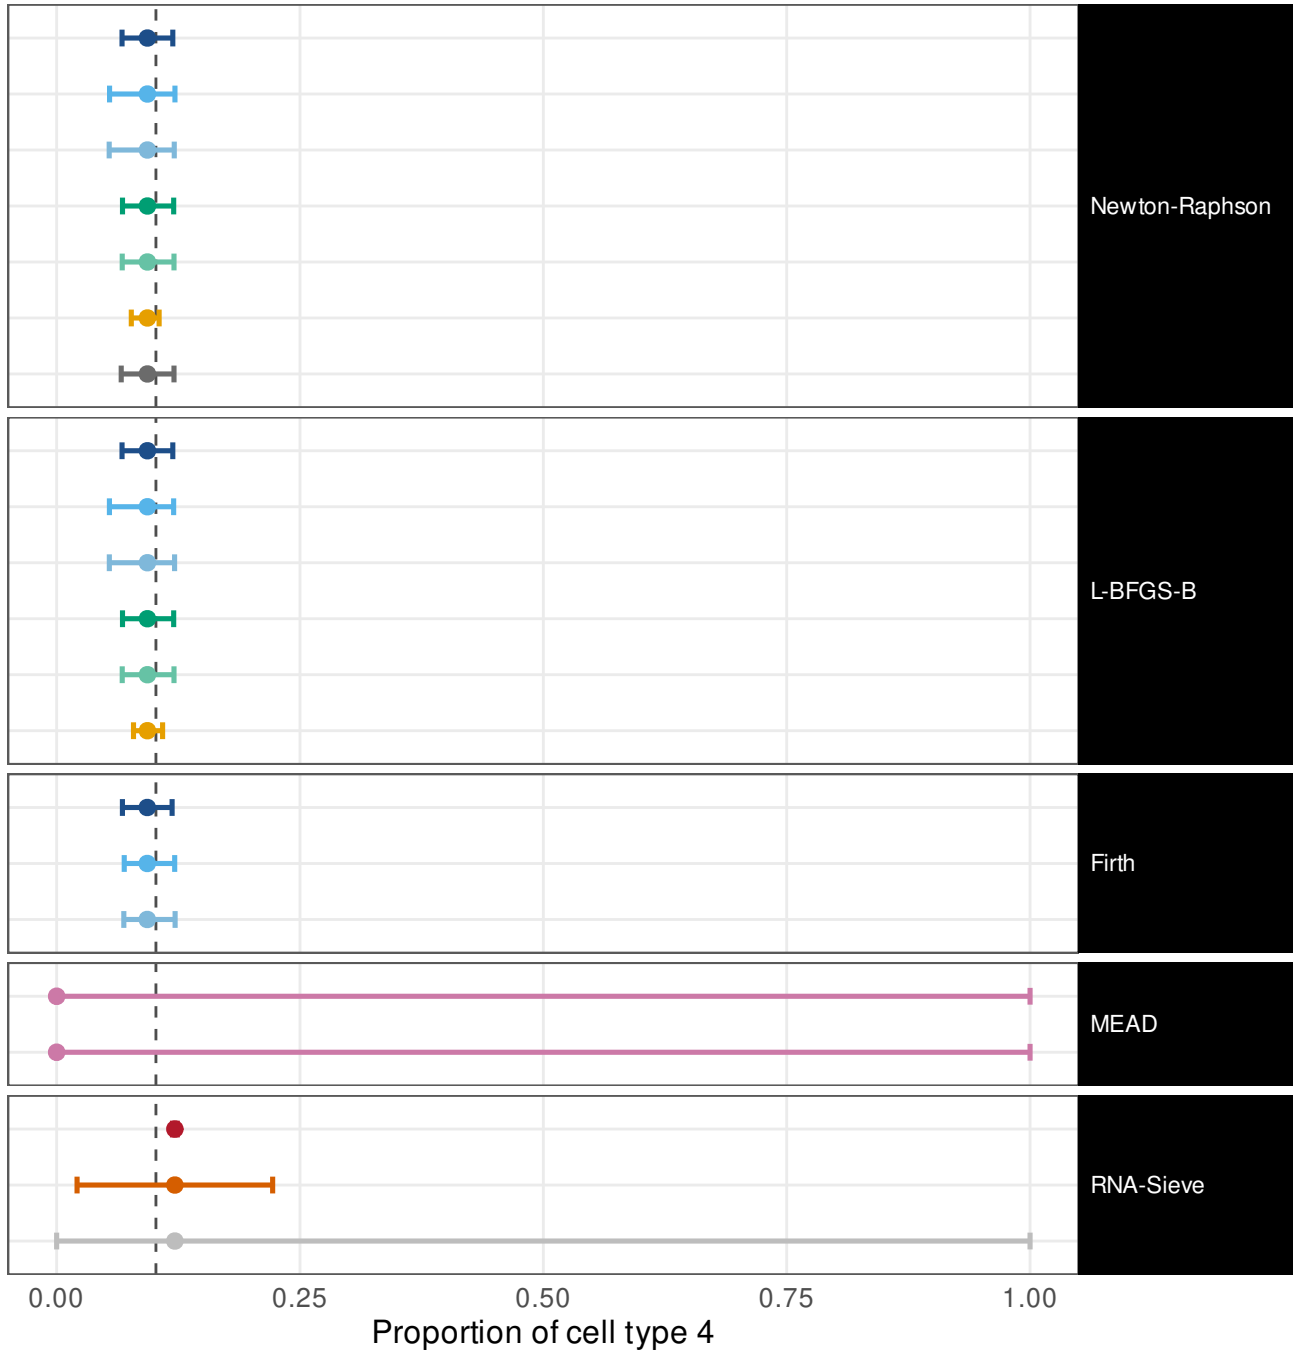

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.00301
ILR, mapped back                      1  [0.57,    1]   w = 0.00299
ILR, REML                             1  [0.57,    1]   w = 0.0031
Profile likelihood                    1  [0.57,    1]   w = 0.00302
Profile, REML                         1  [0.57,    1]   w = 0.00306
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00108
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.00304

Wald (delta)                          1  [0.57,    1]   w = 0.00301
ILR, mapped back                      1  [0.57,    1]   w = 0.00301
ILR, REML                             1  [0.57,    1]   w = 0.00299
Profile likelihood                    1  [0.57,    1]   w = 0.00302
Profile, REML                         1  [0.57,    1]   w = 0.00306
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00193

Wald (delta)                          1  [0.57,    1]   w = 0.00301
ILR, mapped back                      1  [0.57,    1]   w = 0.00297
ILR, REML                             1  [0.57,    1]   w = 0.00304

Method's own interval                 1  [0.57,    1]   w = 0.0667
Own interval, transcript fractions    1  [0.57,    1]   w = 0.0667

Fisher information (Wald)             0  [   0, 0.43]   w = 3.2e-05
Godambe sandwich                      1  [0.57,    1]   w = 0.207
Released code, as published           1  [0.57,    1]   w =    1
```

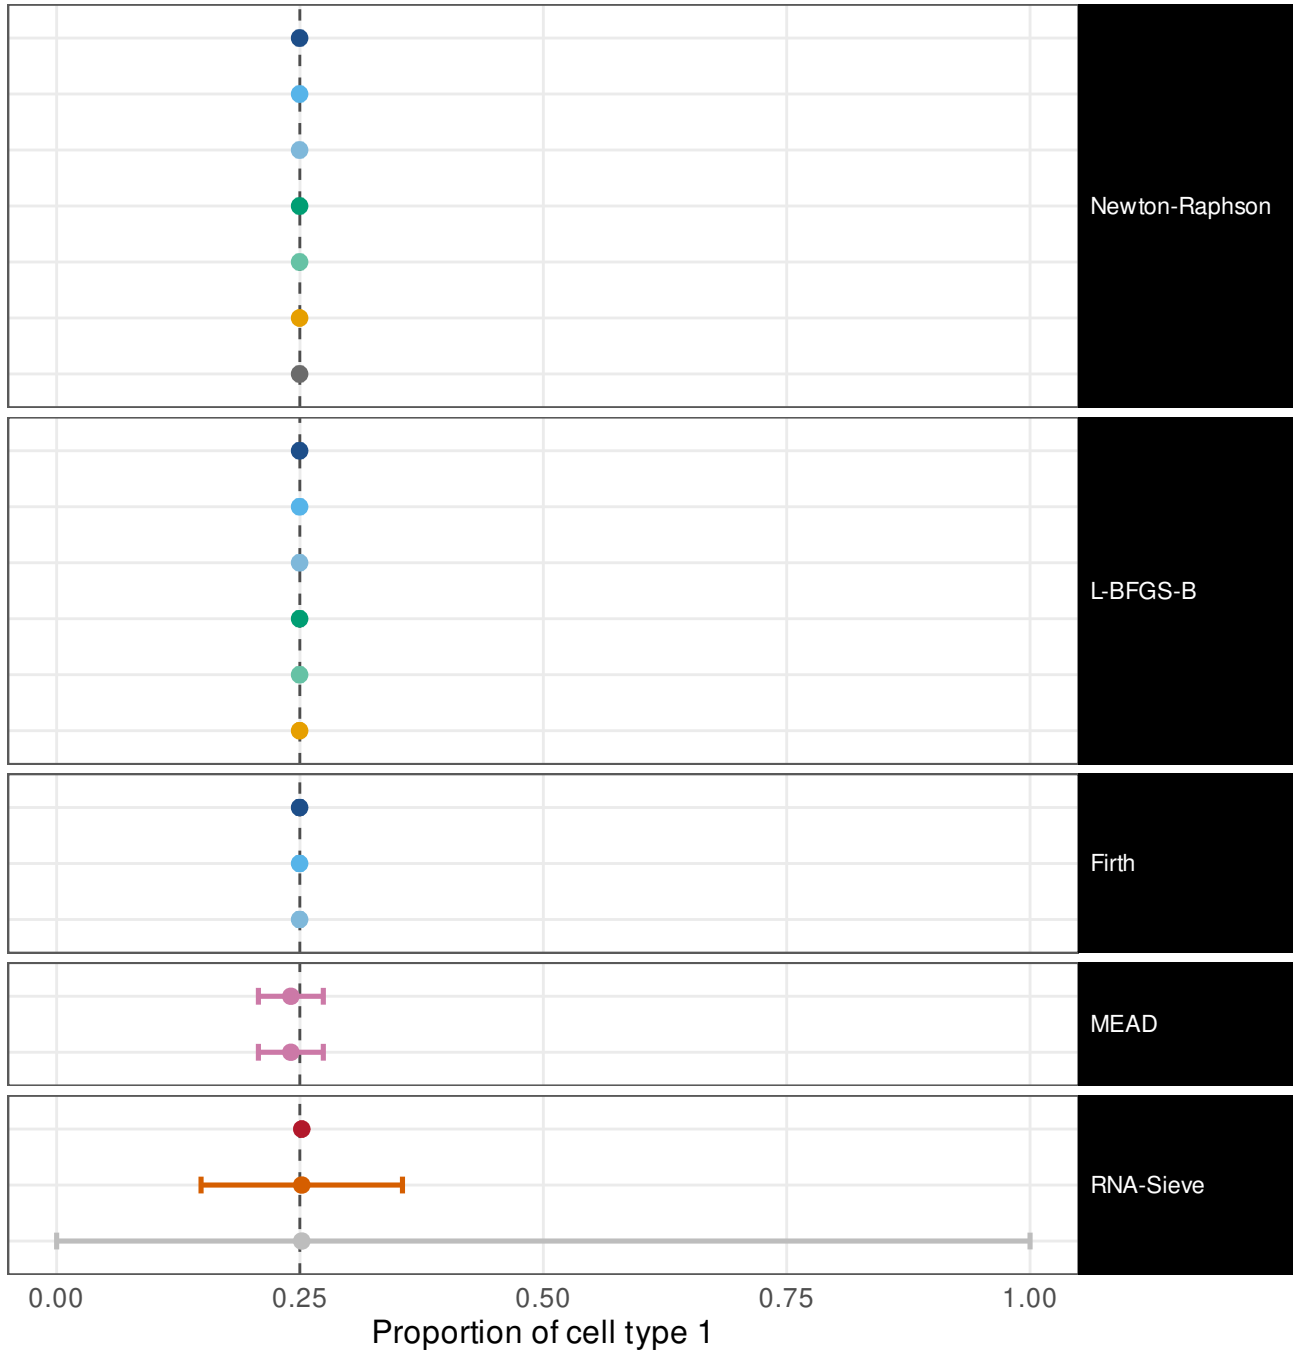


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00298
ILR, mapped back	1	[0.57, 1]	w = 0.00299
ILR, REML	1	[0.57, 1]	w = 0.00306
Profile likelihood	1	[0.57, 1]	w = 0.003
Profile, REML	1	[0.57, 1]	w = 0.00303
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00116
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00303
Wald (delta)	1	[0.57, 1]	w = 0.00298
ILR, mapped back	1	[0.57, 1]	w = 0.00303
ILR, REML	1	[0.57, 1]	w = 0.003
Profile likelihood	1	[0.57, 1]	w = 0.003
Profile, REML	1	[0.57, 1]	w = 0.00303
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00199
Wald (delta)	1	[0.57, 1]	w = 0.00298
ILR, mapped back	1	[0.57, 1]	w = 0.00294
ILR, REML	1	[0.57, 1]	w = 0.00305
Method's own interval	1	[0.57, 1]	w = 0.0696
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0696
Fisher information (Wald)	0	[0, 0.43]	w = 3.3e-05
Godambe sandwich	1	[0.57, 1]	w = 0.198
Released code, as published	1	[0.57, 1]	w = 1

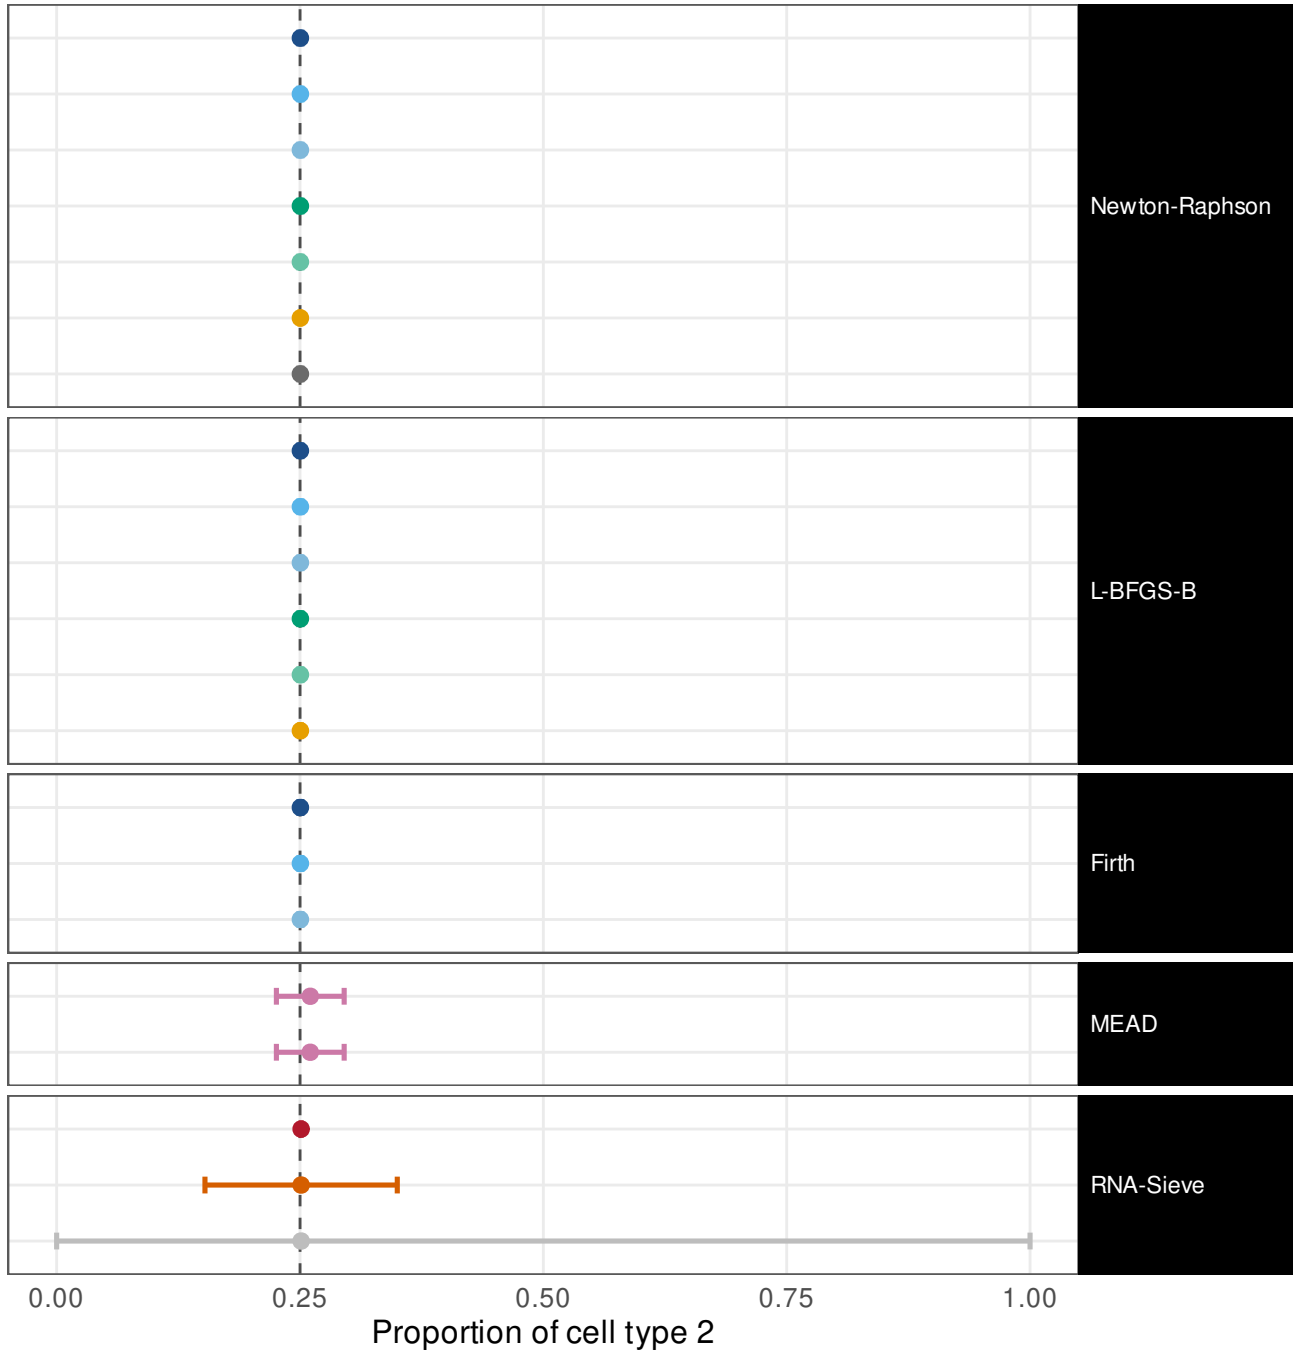


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00297
ILR, mapped back	1	[0.57, 1]	w = 0.00297
ILR, REML	1	[0.57, 1]	w = 0.00303
Profile likelihood	1	[0.57, 1]	w = 0.00299
Profile, REML	1	[0.57, 1]	w = 0.00302
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.00176
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00303
Wald (delta)	1	[0.57, 1]	w = 0.00297
ILR, mapped back	1	[0.57, 1]	w = 0.00295
ILR, REML	1	[0.57, 1]	w = 0.00302
Profile likelihood	1	[0.57, 1]	w = 0.00299
Profile, REML	1	[0.57, 1]	w = 0.00302
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.00162
Wald (delta)	1	[0.57, 1]	w = 0.00297
ILR, mapped back	1	[0.57, 1]	w = 0.00294
ILR, REML	1	[0.57, 1]	w = 0.00304
Method's own interval	1	[0.57, 1]	w = 0.053
Own interval, transcript fractions	1	[0.57, 1]	w = 0.053
Fisher information (Wald)	0	[0, 0.43]	w = 3.11e-05
Godambe sandwich	1	[0.57, 1]	w = 0.207
Released code, as published	1	[0.57, 1]	w = 1

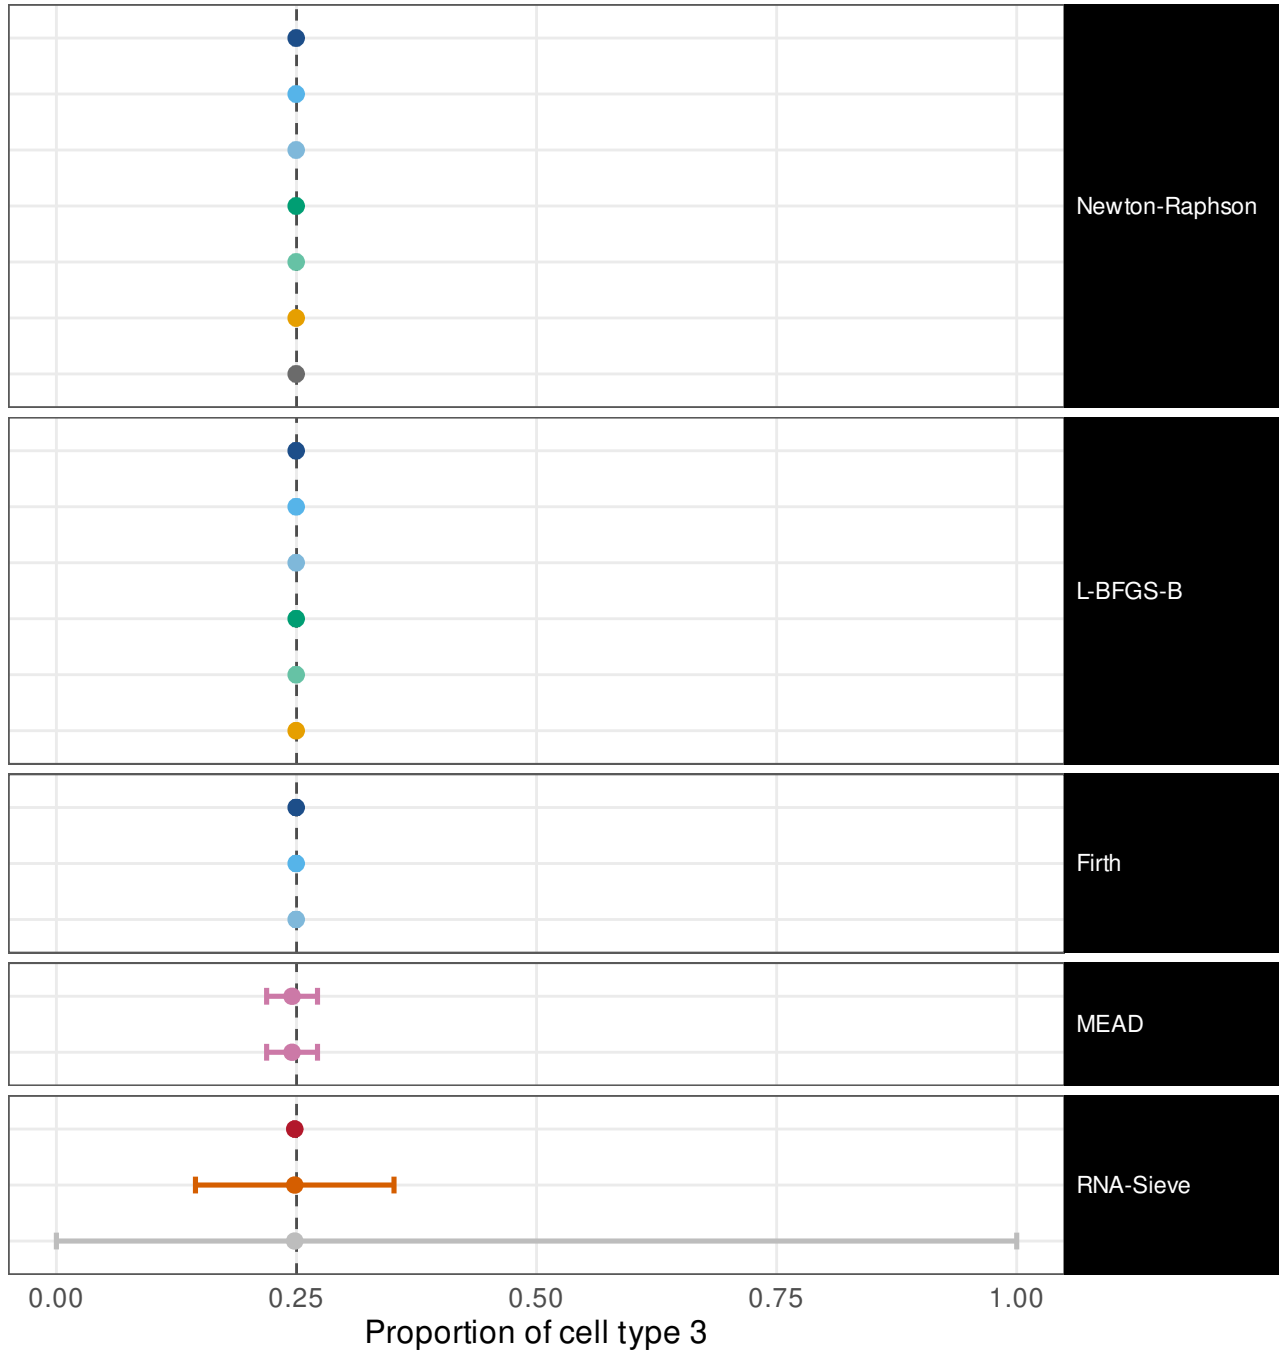


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00299
ILR, mapped back	1	[0.57, 1]	w = 0.003
ILR, REML	1	[0.57, 1]	w = 0.00307
Profile likelihood	1	[0.57, 1]	w = 0.003
Profile, REML	1	[0.57, 1]	w = 0.00304
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00207
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00303
Wald (delta)	1	[0.57, 1]	w = 0.00299
ILR, mapped back	1	[0.57, 1]	w = 0.00297
ILR, REML	1	[0.57, 1]	w = 0.00304
Profile likelihood	1	[0.57, 1]	w = 0.003
Profile, REML	1	[0.57, 1]	w = 0.00304
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00146
Wald (delta)	1	[0.57, 1]	w = 0.00299
ILR, mapped back	1	[0.57, 1]	w = 0.00298
ILR, REML	1	[0.57, 1]	w = 0.00304
Method's own interval	1	[0.57, 1]	w = 0.0502
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0502
Fisher information (Wald)	0	[0, 0.43]	w = 3.06e-05
Godambe sandwich	1	[0.57, 1]	w = 0.209
Released code, as published	1	[0.57, 1]	w = 1

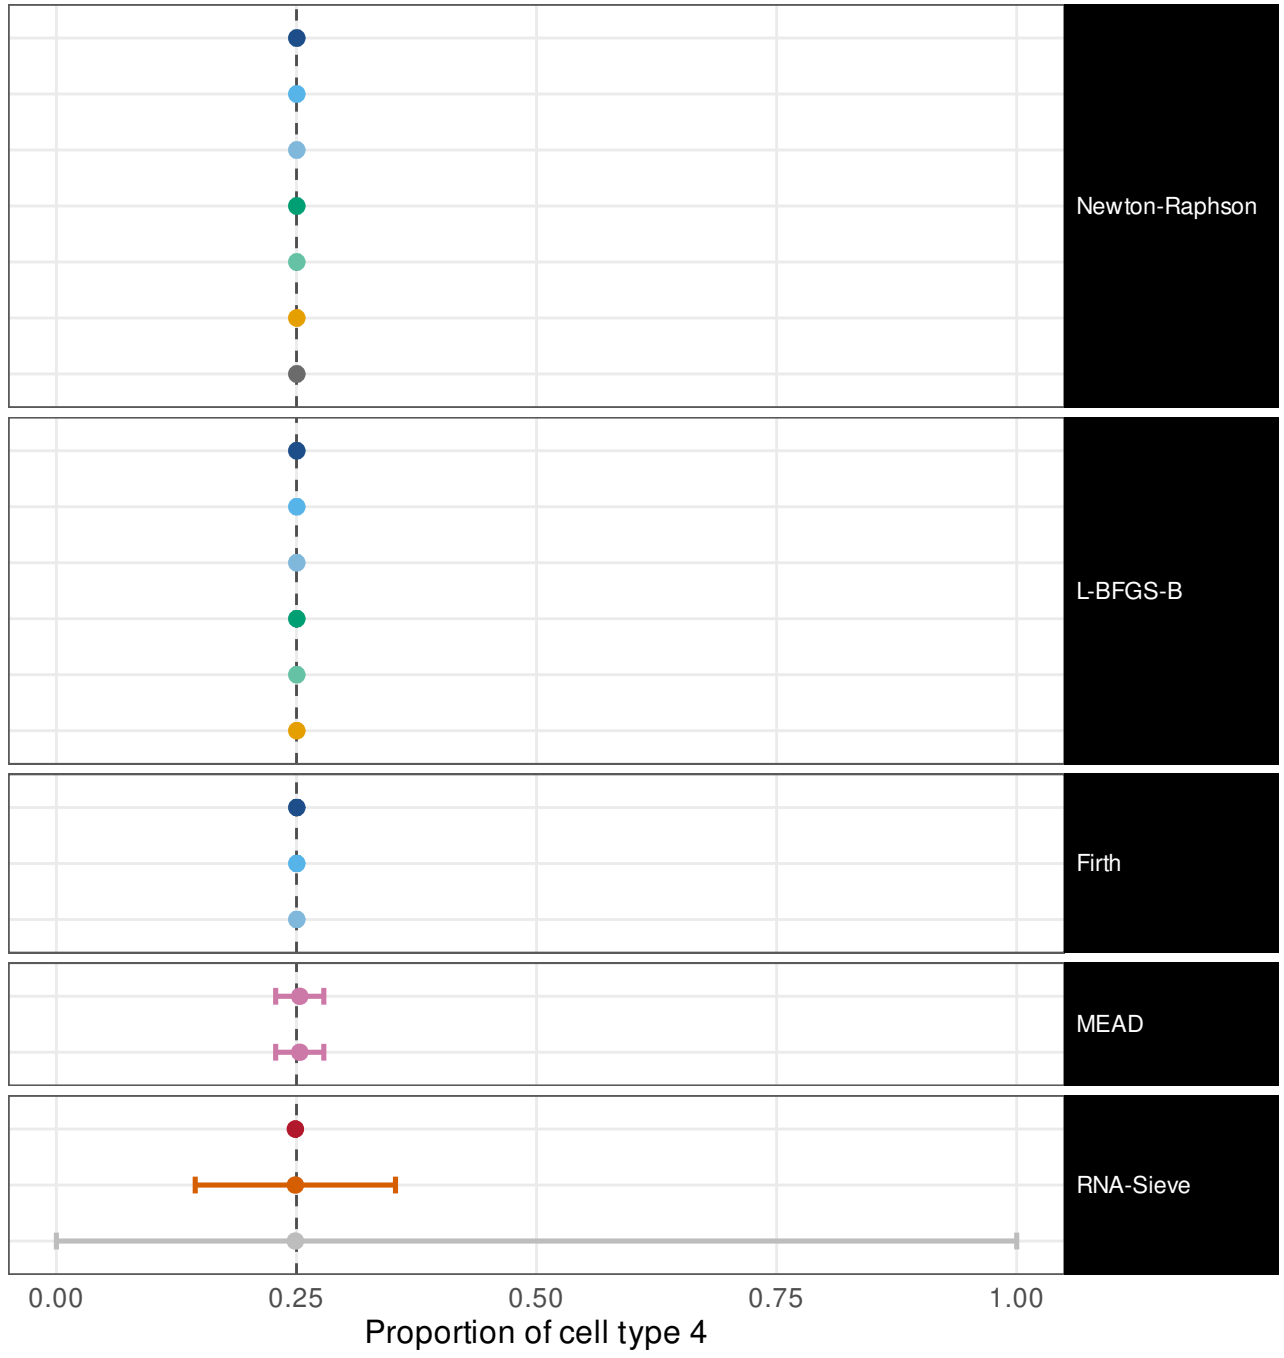

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.0105
ILR, mapped back                      1  [0.57,    1]   w = 0.0105
ILR, REML                             1  [0.57,    1]   w = 0.0107
Profile likelihood                    1  [0.57,    1]   w = 0.0105
Profile, REML                         1  [0.57,    1]   w = 0.0107
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00756
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0105

Wald (delta)                          1  [0.57,    1]   w = 0.0105
ILR, mapped back                      1  [0.57,    1]   w = 0.0106
ILR, REML                             1  [0.57,    1]   w = 0.0106
Profile likelihood                    1  [0.57,    1]   w = 0.0105
Profile, REML                         1  [0.57,    1]   w = 0.0107
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.00542

Wald (delta)                          1  [0.57,    1]   w = 0.0105
ILR, mapped back                      1  [0.57,    1]   w = 0.0104
ILR, REML                             1  [0.57,    1]   w = 0.0105

Method's own interval                 0  [   0, 0.43]   w = 0.0771
Own interval, transcript fractions    1  [0.57,    1]   w = 0.0771

Fisher information (Wald)             0  [   0, 0.43]   w = 0.000146
Godambe sandwich                      1  [0.57,    1]   w = 0.647
Released code, as published           1  [0.57,    1]   w =     1
```

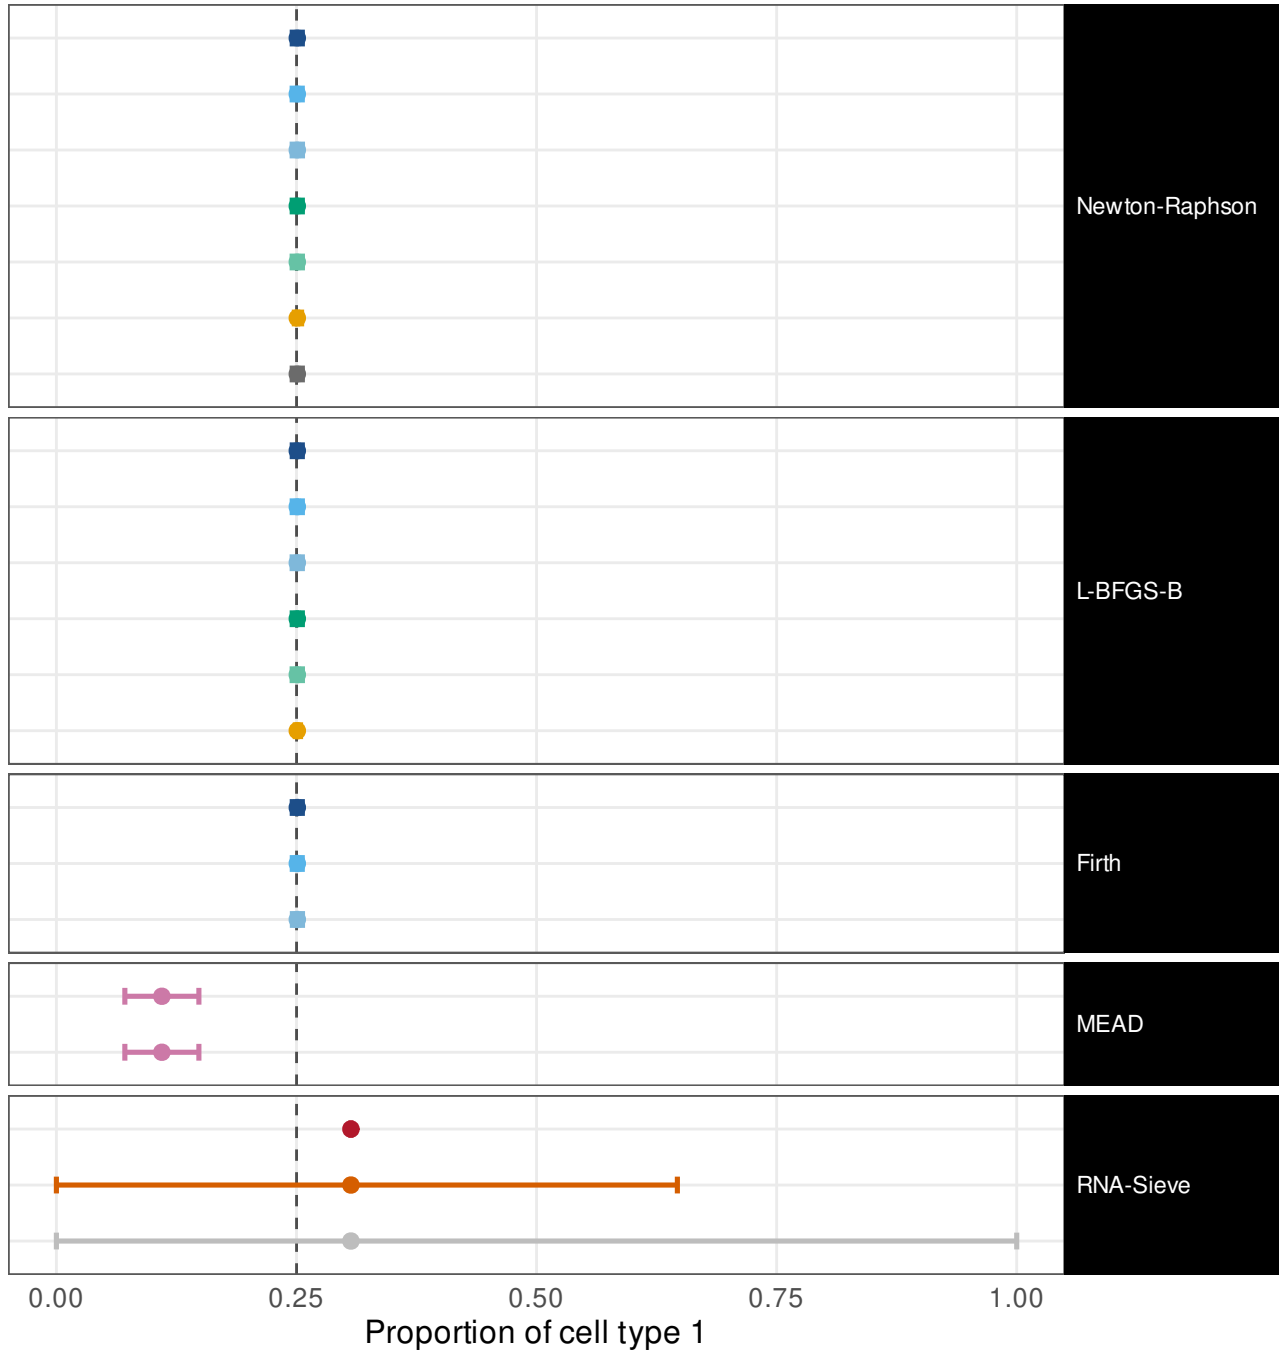


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.0105
ILR, mapped back	1	[0.57, 1]	w = 0.0105
ILR, REML	1	[0.57, 1]	w = 0.0107
Profile likelihood	1	[0.57, 1]	w = 0.0106
Profile, REML	1	[0.57, 1]	w = 0.0107
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0056
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0106
Wald (delta)	1	[0.57, 1]	w = 0.0105
ILR, mapped back	1	[0.57, 1]	w = 0.0105
ILR, REML	1	[0.57, 1]	w = 0.0106
Profile likelihood	1	[0.57, 1]	w = 0.0106
Profile, REML	1	[0.57, 1]	w = 0.0107
Parametric bootstrap	1	[0.57, 1]	w = 0.00527
Wald (delta)	1	[0.57, 1]	w = 0.0105
ILR, mapped back	1	[0.57, 1]	w = 0.0104
ILR, REML	1	[0.57, 1]	w = 0.0105
Method's own interval	0	[0, 0.43]	w = 0.0672
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0672
Fisher information (Wald)	0	[0, 0.43]	w = 0.000174
Godambe sandwich	1	[0.57, 1]	w = 0.548
Released code, as published	1	[0.57, 1]	w = 1

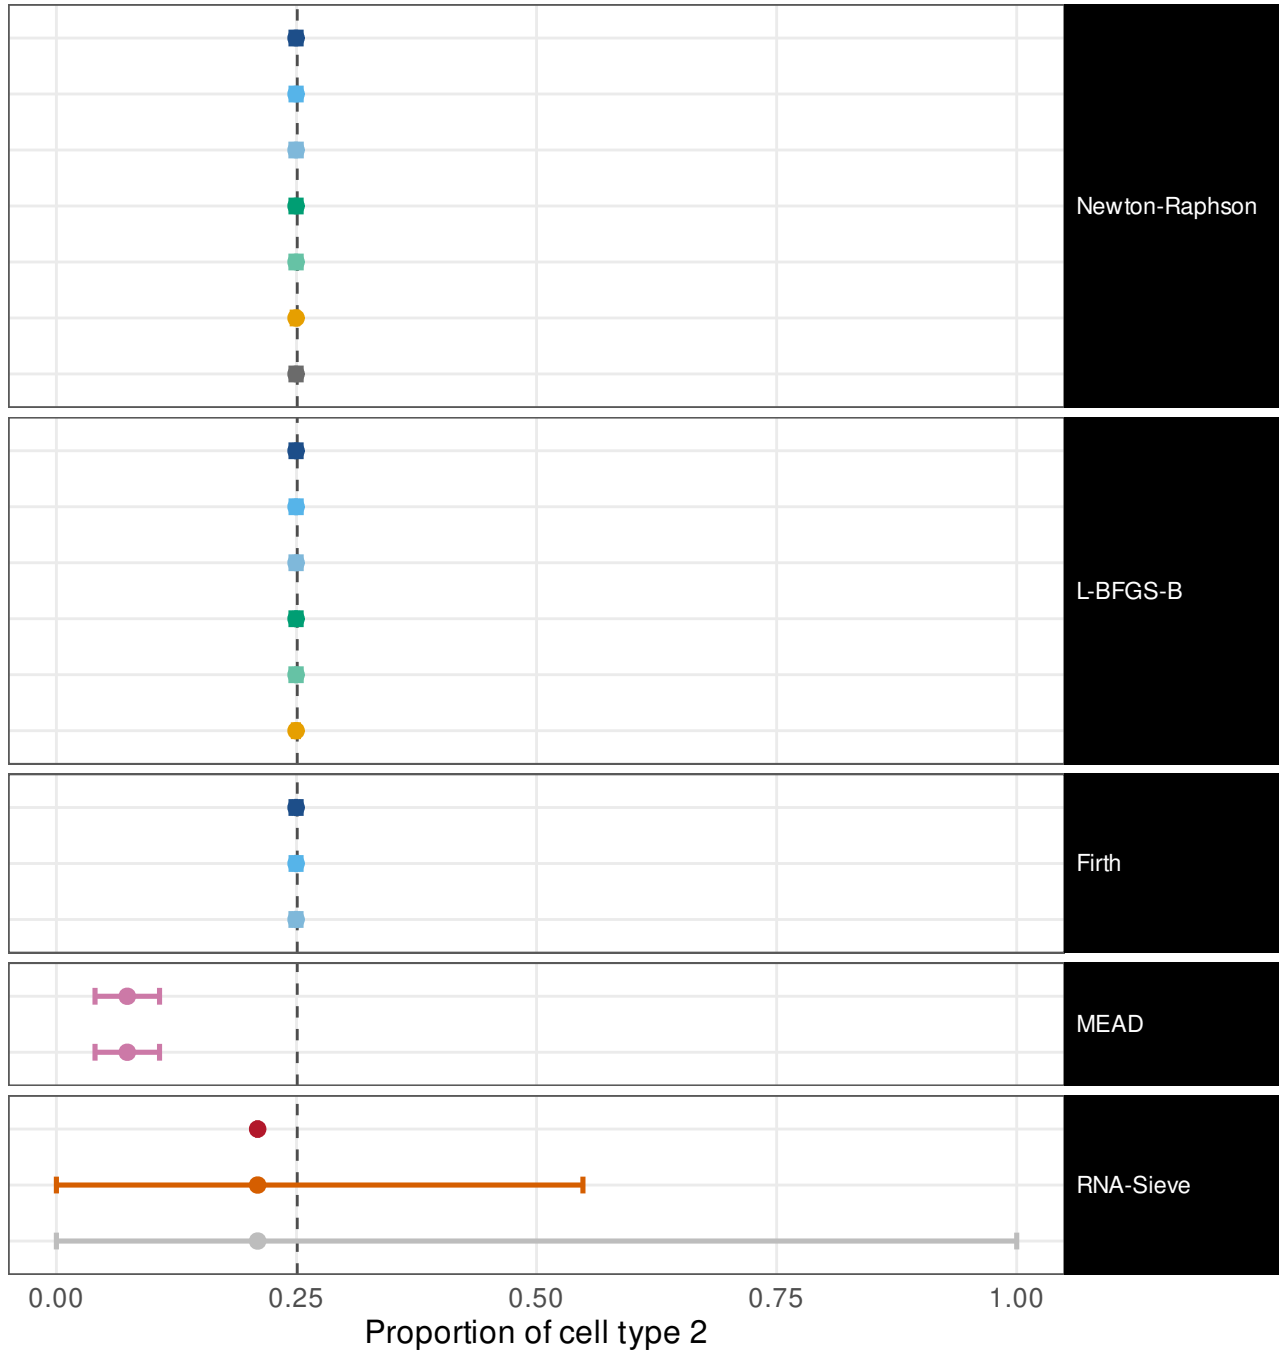

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.00293
ILR, mapped back                      1  [0.57,    1]   w = 0.00293
ILR, REML                             1  [0.57,    1]   w = 0.00299
Profile likelihood                    1  [0.57,    1]   w = 0.00295
Profile, REML                         1  [0.57,    1]   w = 0.00298
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00206
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.00296

Wald (delta)                          1  [0.57,    1]   w = 0.00293
ILR, mapped back                      1  [0.57,    1]   w = 0.00292
ILR, REML                             1  [0.57,    1]   w = 0.00298
Profile likelihood                    1  [0.57,    1]   w = 0.00295
Profile, REML                         1  [0.57,    1]   w = 0.00298
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00153

Wald (delta)                          1  [0.57,    1]   w = 0.00293
ILR, mapped back                    0.8  [0.38, 0.96]   w = 0.00285
ILR, REML                             1  [0.57,    1]   w = 0.00298

Method's own interval                 0  [   0, 0.43]   w = 0.0963
Own interval, transcript fractions    1  [0.57,    1]   w = 0.0963

Fisher information (Wald)             0  [   0, 0.43]   w = 9.46e-05
Godambe sandwich                      1  [0.57,    1]   w = 0.176
Released code, as published           1  [0.57,    1]   w =     1
```

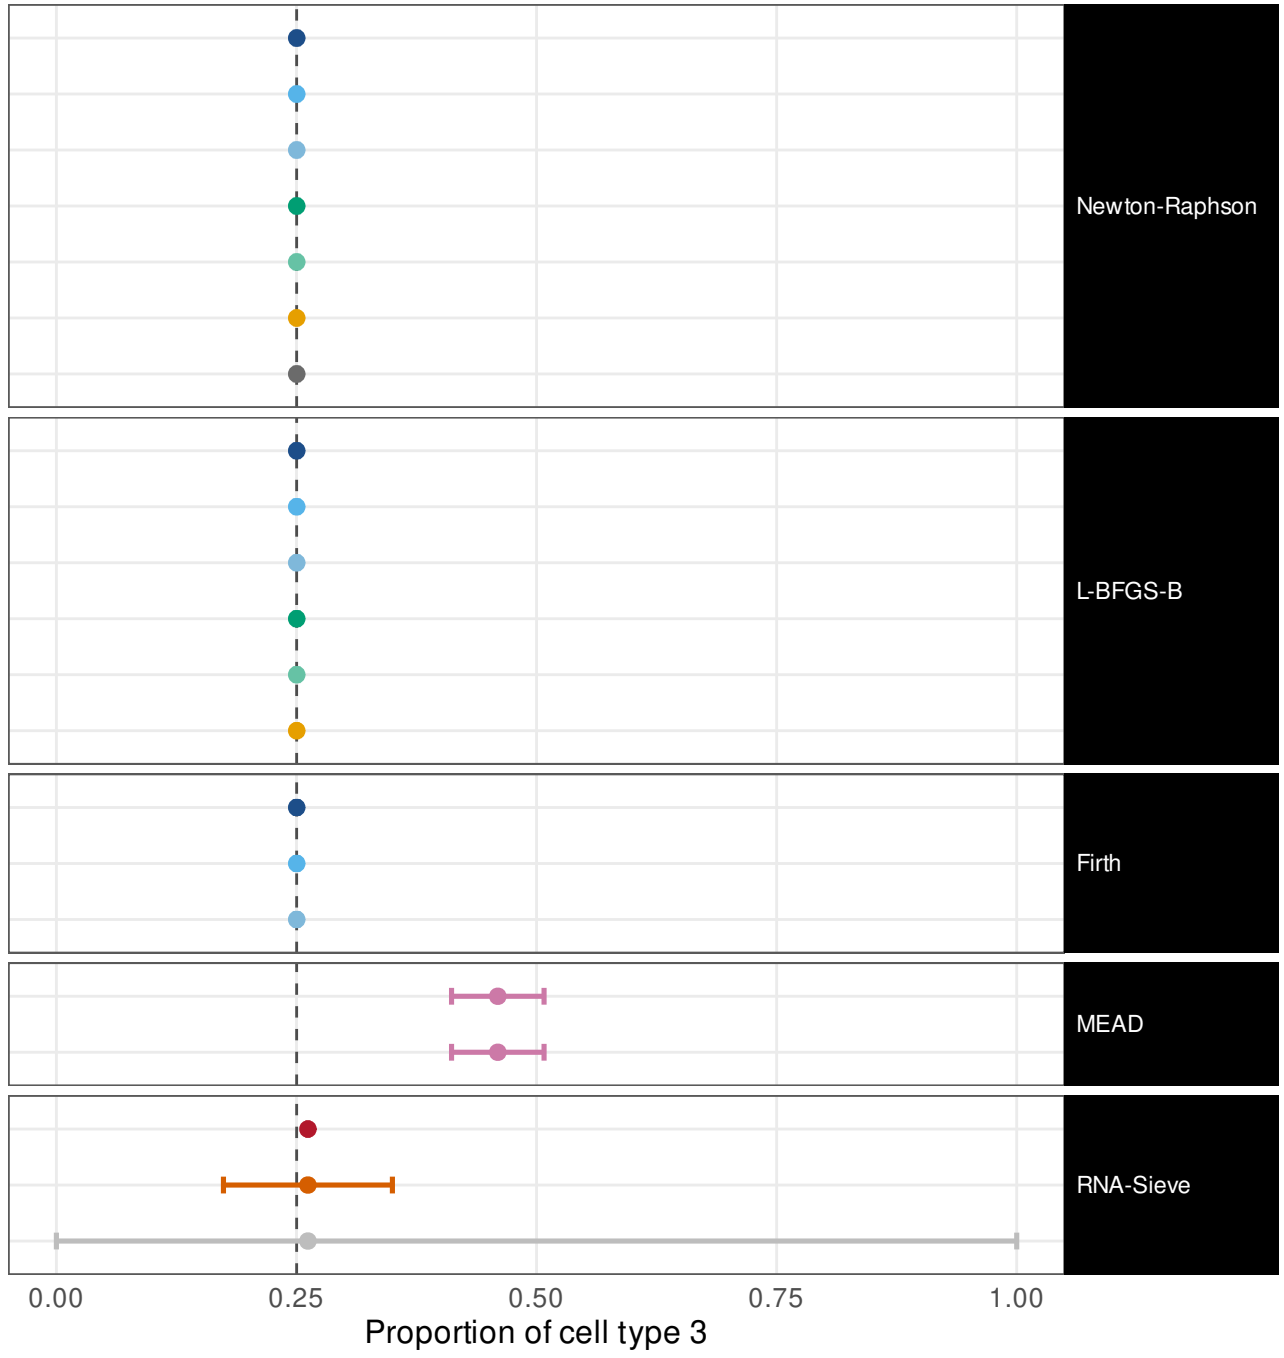

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / low sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.00292
ILR, mapped back                      1  [0.57,    1]   w = 0.00296
ILR, REML                             1  [0.57,    1]   w = 0.00294
Profile likelihood                    1  [0.57,    1]   w = 0.00294
Profile, REML                         1  [0.57,    1]   w = 0.00297
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.00159
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.00295

Wald (delta)                          1  [0.57,    1]   w = 0.00292
ILR, mapped back                      1  [0.57,    1]   w = 0.00294
ILR, REML                             1  [0.57,    1]   w = 0.00297
Profile likelihood                    1  [0.57,    1]   w = 0.00294
Profile, REML                         1  [0.57,    1]   w = 0.00297
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00163

Wald (delta)                          1  [0.57,    1]   w = 0.00292
ILR, mapped back                      1  [0.57,    1]   w = 0.00285
ILR, REML                             1  [0.57,    1]   w = 0.00294

Method's own interval                 0  [   0, 0.43]   w = 0.0955
Own interval, transcript fractions    0  [   0, 0.43]   w = 0.0955

Fisher information (Wald)             0  [   0, 0.43]   w = 8.7e-05
Godambe sandwich                      1  [0.57,    1]   w = 0.173
Released code, as published           1  [0.57,    1]   w =     1
```

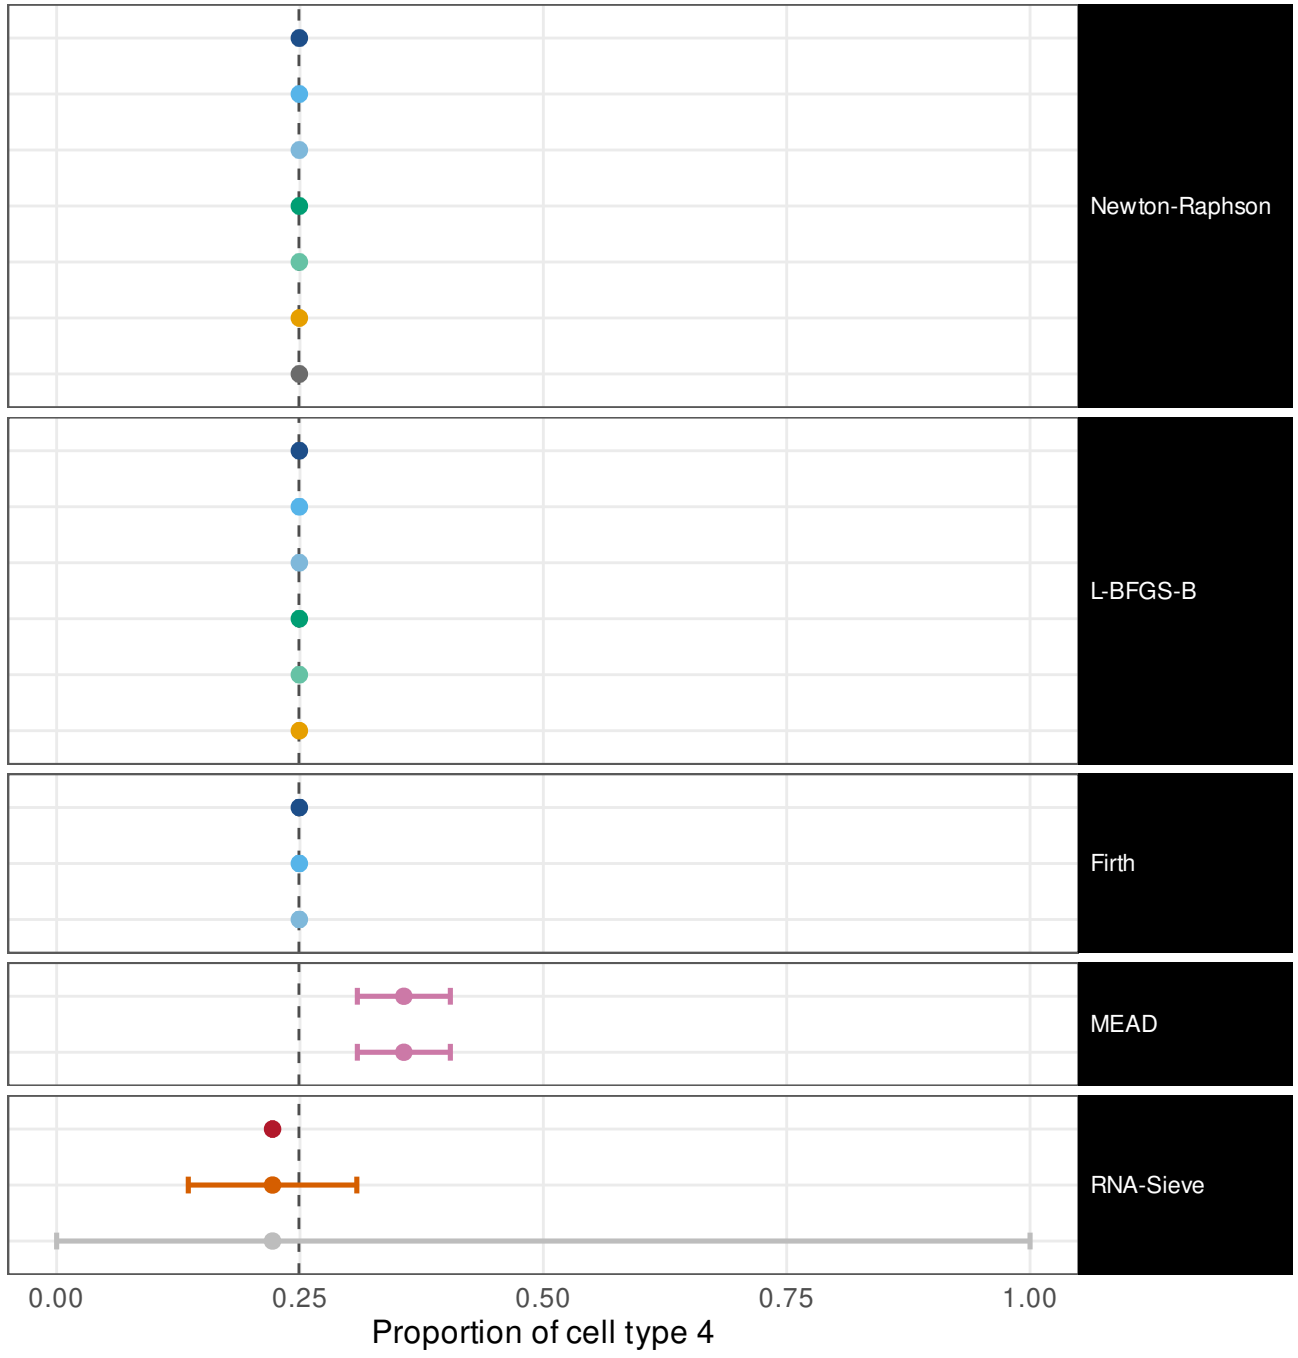

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.0065
ILR, mapped back                      1  [0.57,    1]   w = 0.00642
ILR, REML                             1  [0.57,    1]   w = 0.0066
Profile likelihood                    1  [0.57,    1]   w = 0.00654
Profile, REML                         1  [0.57,    1]   w = 0.00661
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00404
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.00655

Wald (delta)                          1  [0.57,    1]   w = 0.0065
ILR, mapped back                      1  [0.57,    1]   w = 0.00649
ILR, REML                             1  [0.57,    1]   w = 0.00669
Profile likelihood                    1  [0.57,    1]   w = 0.00654
Profile, REML                         1  [0.57,    1]   w = 0.00661
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.00427

Wald (delta)                          1  [0.57,    1]   w = 0.0065
ILR, mapped back                      1  [0.57,    1]   w = 0.00647
ILR, REML                             1  [0.57,    1]   w = 0.00656

Method's own interval                 1  [0.57,    1]   w =    1
Own interval, transcript fractions    1  [0.57,    1]   w =    1

Fisher information (Wald)             0  [   0, 0.43]   w = 0.000159
Godambe sandwich                      1  [0.57,    1]   w = 0.364
Released code, as published           1  [0.57,    1]   w =    1
```

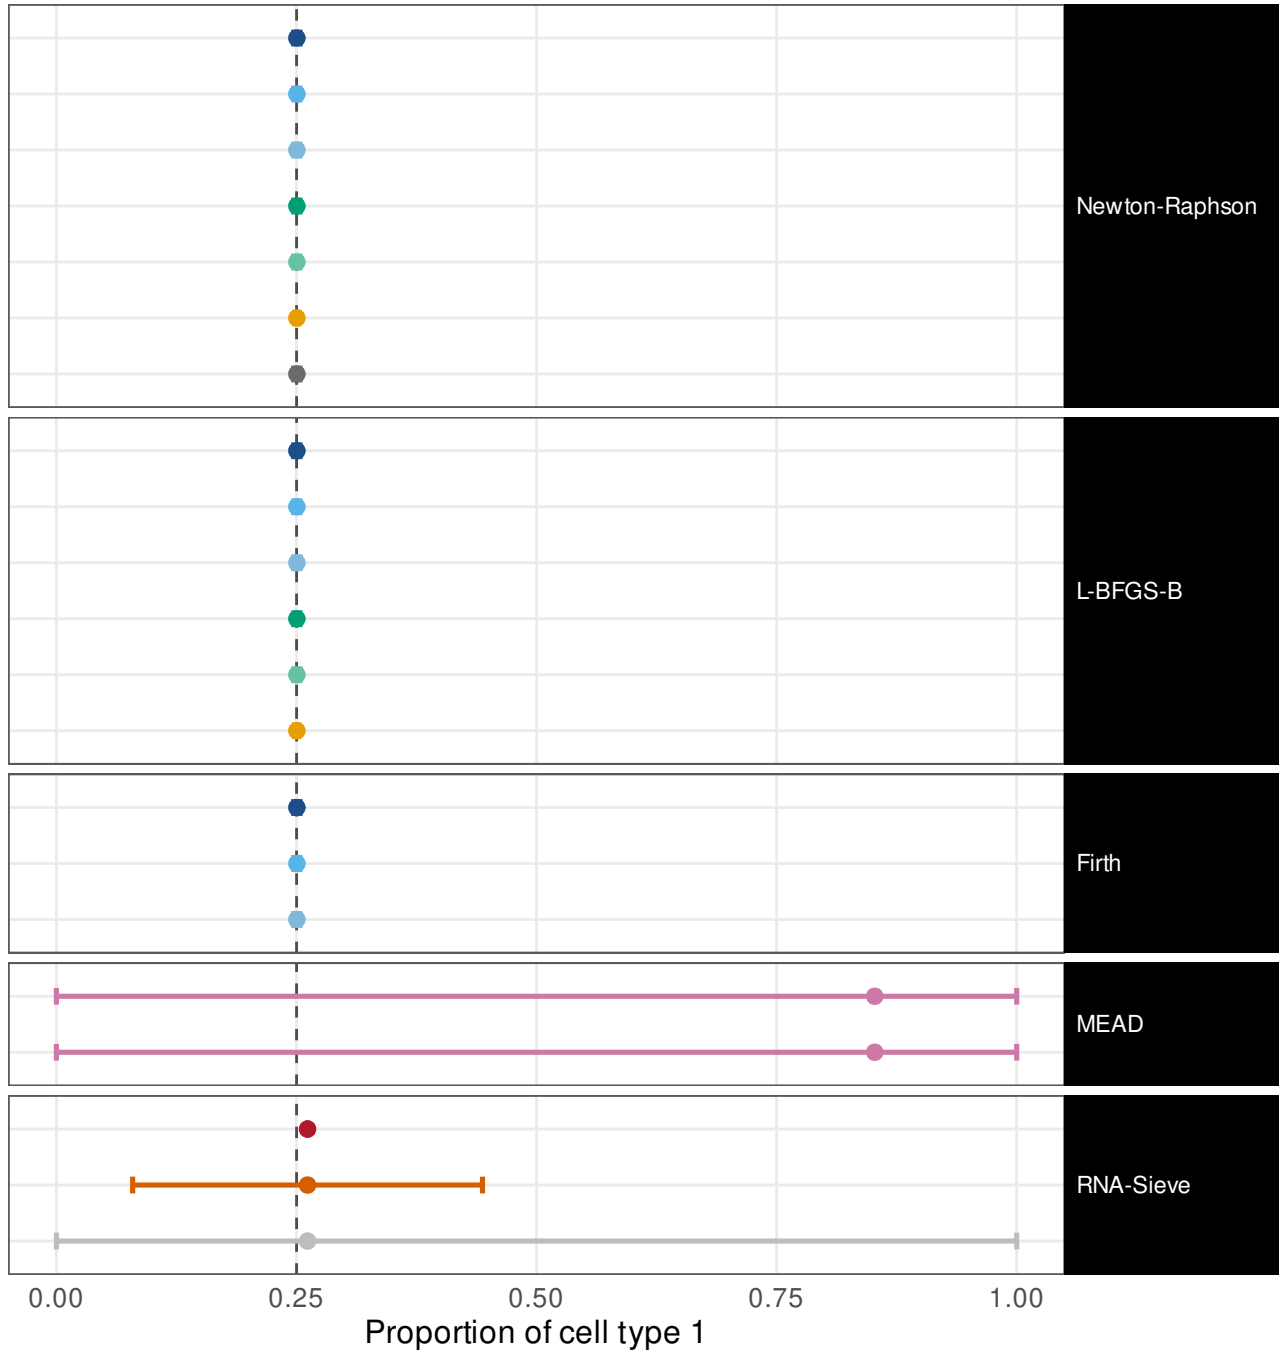


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00645
ILR, mapped back	1	[0.57, 1]	w = 0.00645
ILR, REML	1	[0.57, 1]	w = 0.0065
Profile likelihood	1	[0.57, 1]	w = 0.00648
Profile, REML	1	[0.57, 1]	w = 0.00655
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00384
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00649
Wald (delta)	1	[0.57, 1]	w = 0.00645
ILR, mapped back	1	[0.57, 1]	w = 0.00647
ILR, REML	1	[0.57, 1]	w = 0.0066
Profile likelihood	1	[0.57, 1]	w = 0.00648
Profile, REML	1	[0.57, 1]	w = 0.00655
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00481
Wald (delta)	1	[0.57, 1]	w = 0.00645
ILR, mapped back	1	[0.57, 1]	w = 0.00639
ILR, REML	1	[0.57, 1]	w = 0.00649
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0	[0, 0.43]	w = 0.000154
Godambe sandwich	1	[0.57, 1]	w = 0.34
Released code, as published	1	[0.57, 1]	w = 1

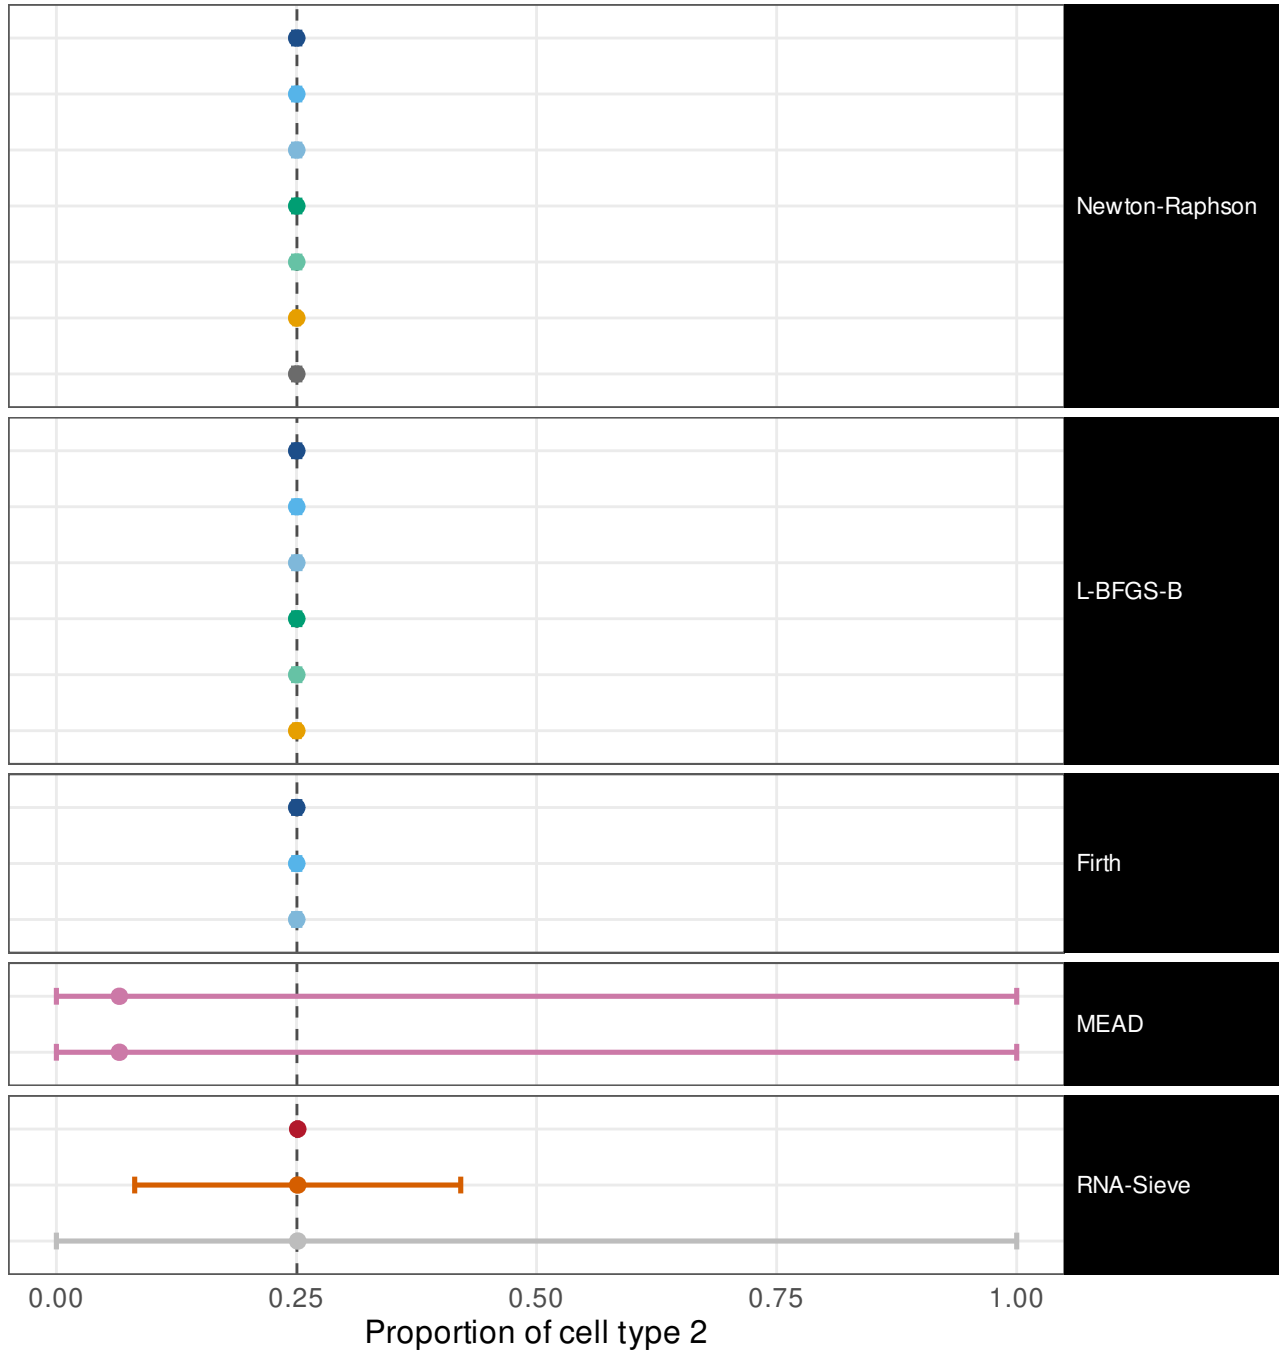

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes


```
Wald (delta)                          1  [0.57,    1]   w = 0.00643
ILR, mapped back                      1  [0.57,    1]   w = 0.0063
ILR, REML                             1  [0.57,    1]   w = 0.00646
Profile likelihood                    1  [0.57,    1]   w = 0.00646
Profile, REML                         1  [0.57,    1]   w = 0.00653
Parametric bootstrap                0.4  [0.12, 0.77]   w = 0.00256
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.00649

Wald (delta)                          1  [0.57,    1]   w = 0.00643
ILR, mapped back                      1  [0.57,    1]   w = 0.0063
ILR, REML                             1  [0.57,    1]   w = 0.00653
Profile likelihood                    1  [0.57,    1]   w = 0.00646
Profile, REML                         1  [0.57,    1]   w = 0.00653
Parametric bootstrap                0.4  [0.12, 0.77]   w = 0.00303

Wald (delta)                          1  [0.57,    1]   w = 0.00643
ILR, mapped back                      1  [0.57,    1]   w = 0.00639
ILR, REML                             1  [0.57,    1]   w = 0.00651

Method's own interval                 1  [0.57,    1]   w = 0.668
Own interval, transcript fractions    1  [0.57,    1]   w = 0.668

Fisher information (Wald)             0  [   0, 0.43]   w = 0.000146
Godambe sandwich                      1  [0.57,    1]   w = 0.348
Released code, as published           1  [0.57,    1]   w =     1
```

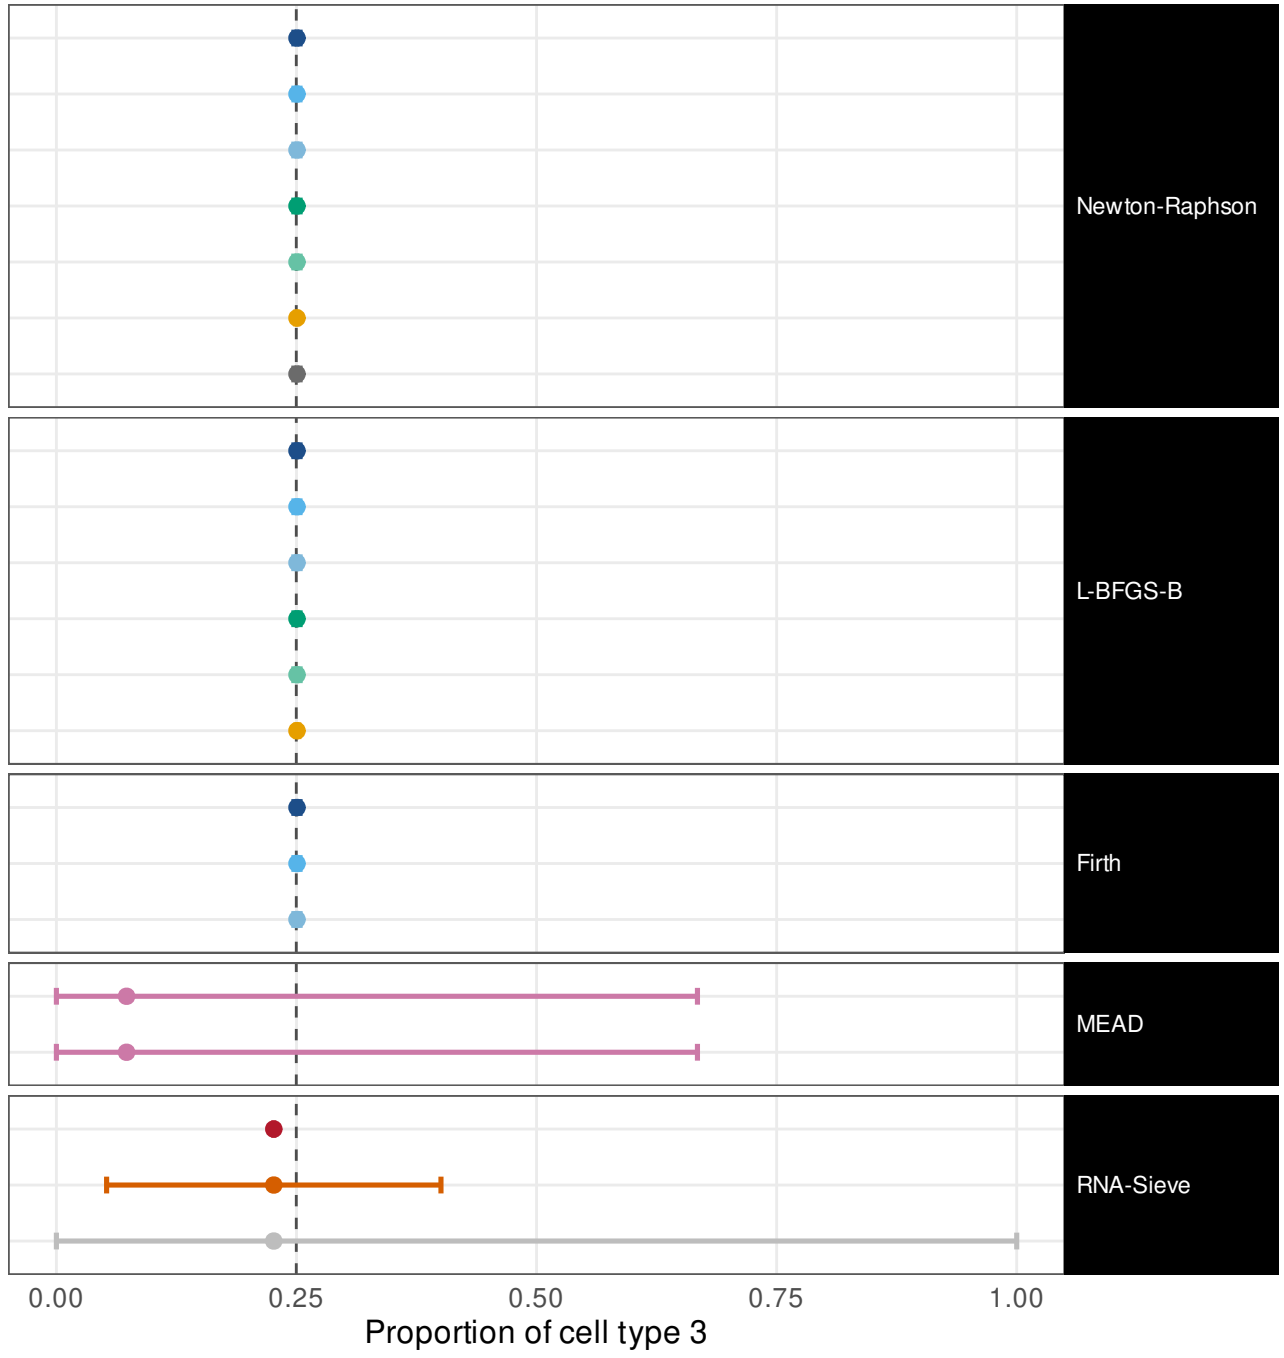


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00646
ILR, mapped back	1	[0.57, 1]	w = 0.00637
ILR, REML	1	[0.57, 1]	w = 0.00656
Profile likelihood	1	[0.57, 1]	w = 0.00649
Profile, REML	1	[0.57, 1]	w = 0.00657
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.00268
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00654
Wald (delta)	1	[0.57, 1]	w = 0.00646
ILR, mapped back	1	[0.57, 1]	w = 0.00632
ILR, REML	1	[0.57, 1]	w = 0.0065
Profile likelihood	1	[0.57, 1]	w = 0.00649
Profile, REML	1	[0.57, 1]	w = 0.00657
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00292
Wald (delta)	1	[0.57, 1]	w = 0.00646
ILR, mapped back	1	[0.57, 1]	w = 0.00647
ILR, REML	1	[0.57, 1]	w = 0.00651
Method's own interval	1	[0.57, 1]	w = 0.347
Own interval, transcript fractions	1	[0.57, 1]	w = 0.347
Fisher information (Wald)	0	[0, 0.43]	w = 0.00015
Godambe sandwich	1	[0.57, 1]	w = 0.379
Released code, as published	1	[0.57, 1]	w = 1

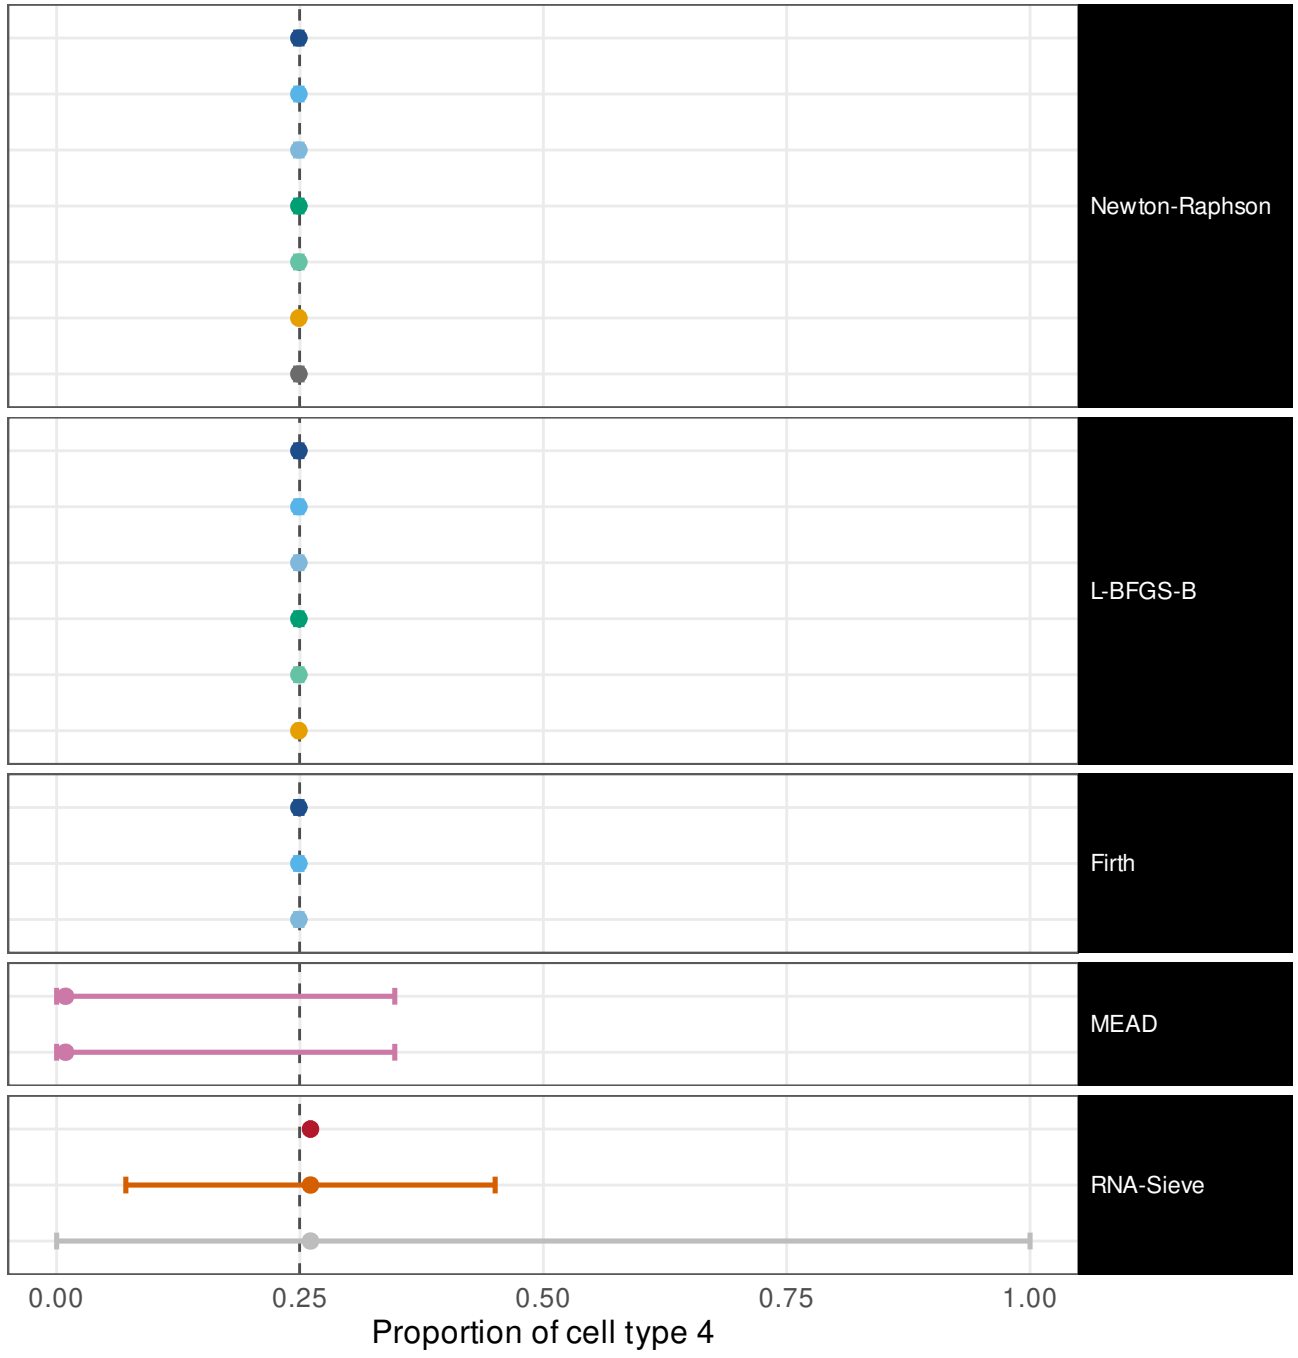


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.0238
ILR, mapped back	1	[0.57, 1]	w = 0.0239
ILR, REML	1	[0.57, 1]	w = 0.0246
Profile likelihood	1	[0.57, 1]	w = 0.0239
Profile, REML	1	[0.57, 1]	w = 0.0242
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.0088
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0238
Wald (delta)	1	[0.57, 1]	w = 0.0238
ILR, mapped back	1	[0.57, 1]	w = 0.0237
ILR, REML	1	[0.57, 1]	w = 0.0242
Profile likelihood	1	[0.57, 1]	w = 0.0239
Profile, REML	1	[0.57, 1]	w = 0.0242
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0118
Wald (delta)	1	[0.57, 1]	w = 0.0238
ILR, mapped back	1	[0.57, 1]	w = 0.0234
ILR, REML	1	[0.57, 1]	w = 0.0241
Method's own interval	1	[0.57, 1]	w = 0.552
Own interval, transcript fractions	1	[0.57, 1]	w = 0.552
Fisher information (Wald)	0	[0, 0.43]	w = 0.00121
Godambe sandwich	1	[0.57, 1]	w = 0.511
Released code, as published	1	[0.57, 1]	w = 1

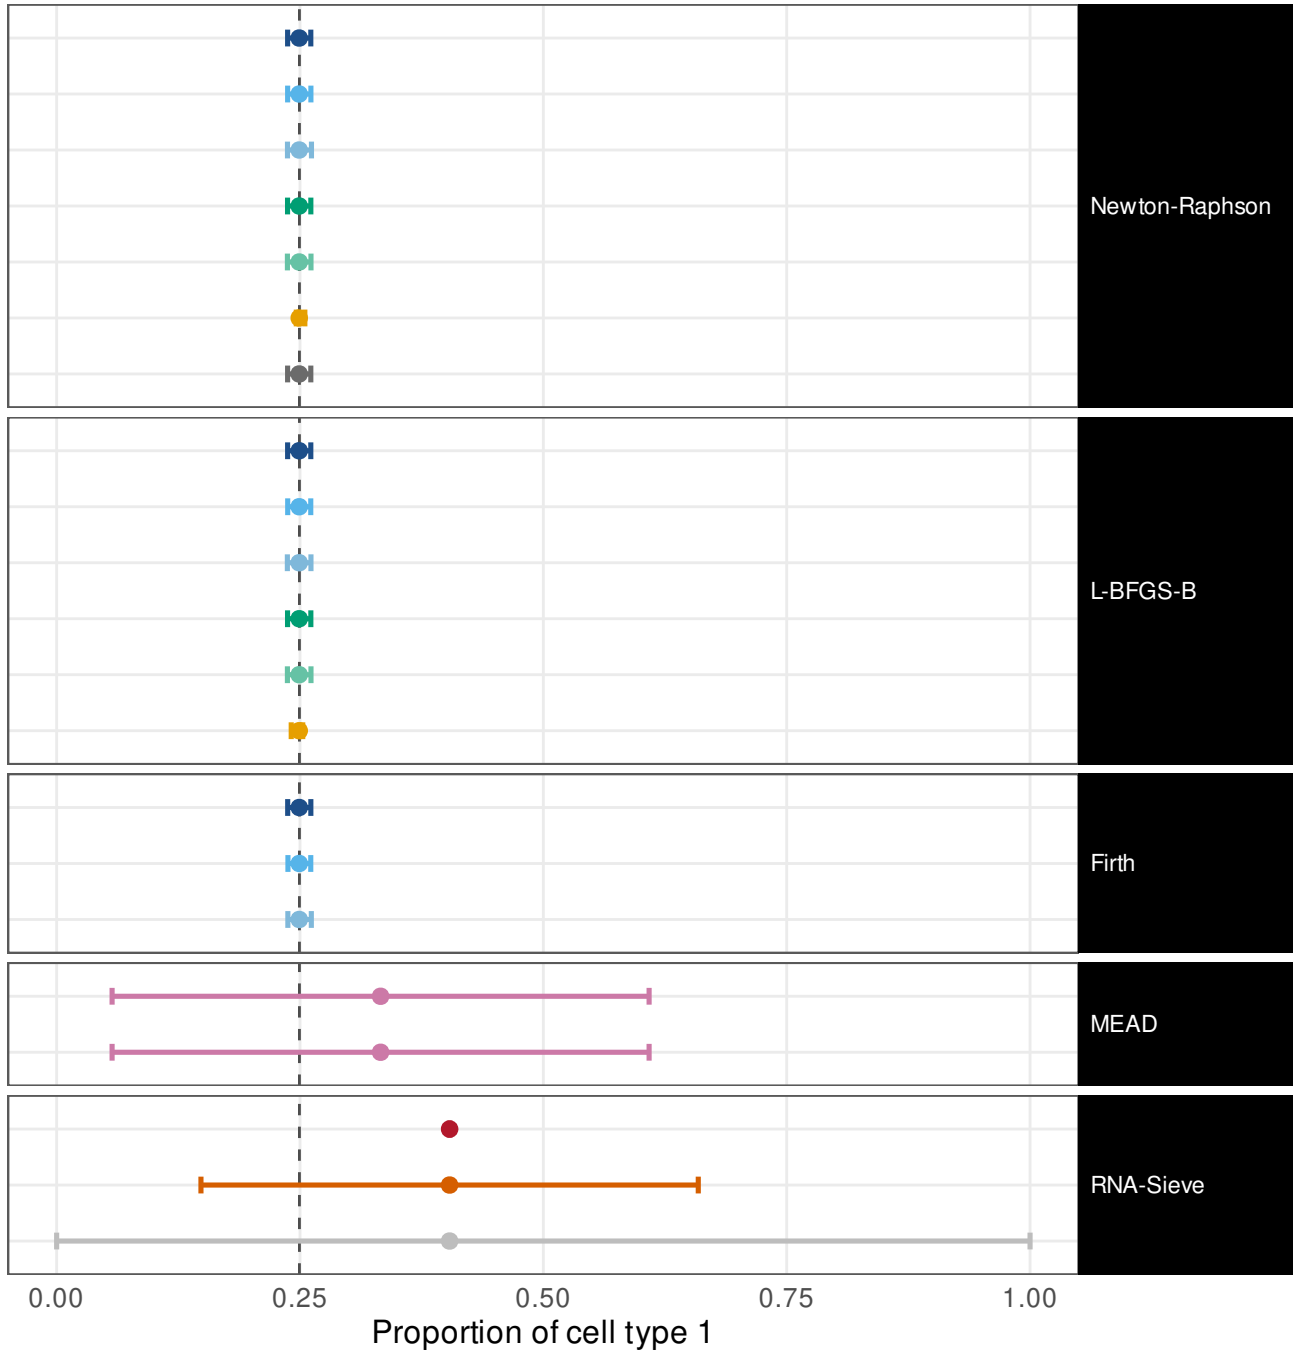

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.0238
ILR, mapped back                      1  [0.57,    1]   w = 0.0239
ILR, REML                             1  [0.57,    1]   w = 0.0244
Profile likelihood                    1  [0.57,    1]   w = 0.0239
Profile, REML                         1  [0.57,    1]   w = 0.0242
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.00866
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0238

Wald (delta)                          1  [0.57,    1]   w = 0.0238
ILR, mapped back                      1  [0.57,    1]   w = 0.0237
ILR, REML                             1  [0.57,    1]   w = 0.0239
Profile likelihood                    1  [0.57,    1]   w = 0.0239
Profile, REML                         1  [0.57,    1]   w = 0.0242
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.0132

Wald (delta)                          1  [0.57,    1]   w = 0.0238
ILR, mapped back                      1  [0.57,    1]   w = 0.0233
ILR, REML                             1  [0.57,    1]   w = 0.0241

Method's own interval                 1  [0.57,    1]   w = 0.286
Own interval, transcript fractions    1  [0.57,    1]   w = 0.286

Fisher information (Wald)             0  [   0, 0.43]   w = 0.0012
Godambe sandwich                      1  [0.57,    1]   w = 0.445
Released code, as published           1  [0.57,    1]   w =    1
```

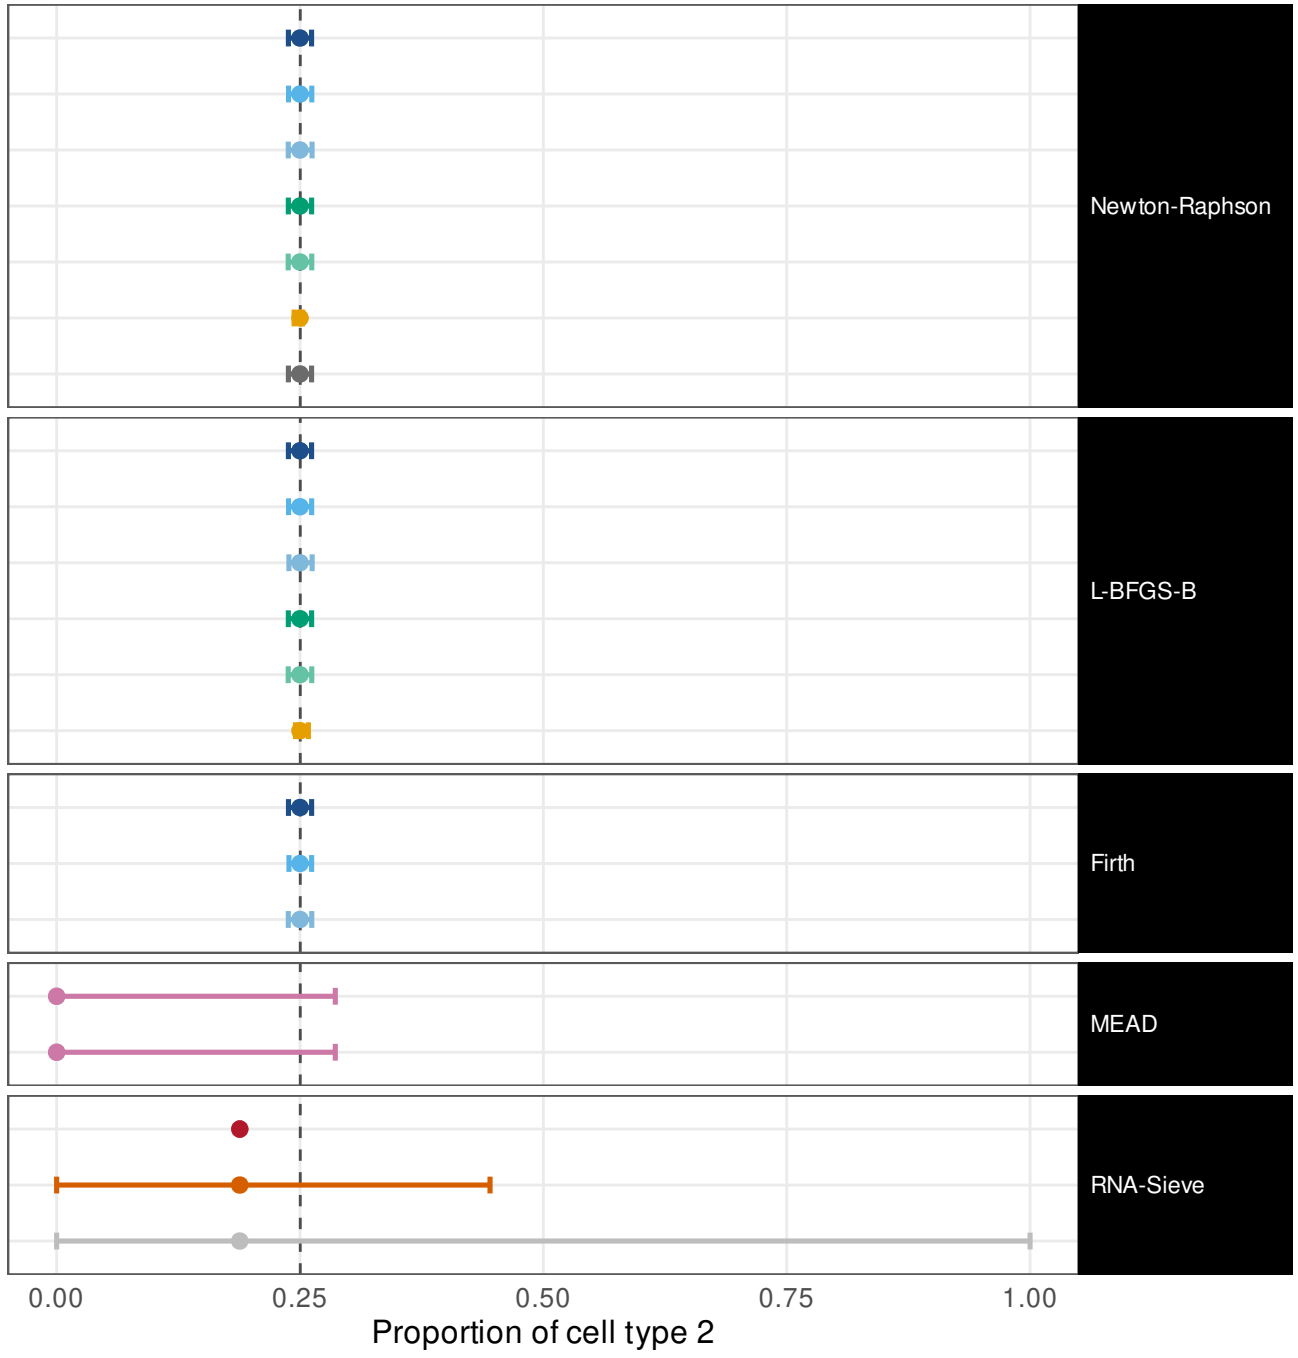

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.00666
ILR, mapped back                      1  [0.57,    1]   w = 0.00663
ILR, REML                             1  [0.57,    1]   w = 0.0068
Profile likelihood                    1  [0.57,    1]   w = 0.00669
Profile, REML                         1  [0.57,    1]   w = 0.00677
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.00334
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0067

Wald (delta)                          1  [0.57,    1]   w = 0.00666
ILR, mapped back                      1  [0.57,    1]   w = 0.00653
ILR, REML                             1  [0.57,    1]   w = 0.00676
Profile likelihood                    1  [0.57,    1]   w = 0.00669
Profile, REML                         1  [0.57,    1]   w = 0.00677
Parametric bootstrap                  1  [0.57,    1]   w = 0.00472

Wald (delta)                          1  [0.57,    1]   w = 0.00665
ILR, mapped back                      1  [0.57,    1]   w = 0.00674
ILR, REML                             1  [0.57,    1]   w = 0.00676

Method's own interval                 1  [0.57,    1]   w = 0.91
Own interval, transcript fractions    1  [0.57,    1]   w = 0.91

Fisher information (Wald)             0  [   0, 0.43]   w = 0.000442
Godambe sandwich                      1  [0.57,    1]   w = 0.249
Released code, as published           1  [0.57,    1]   w =    1
```

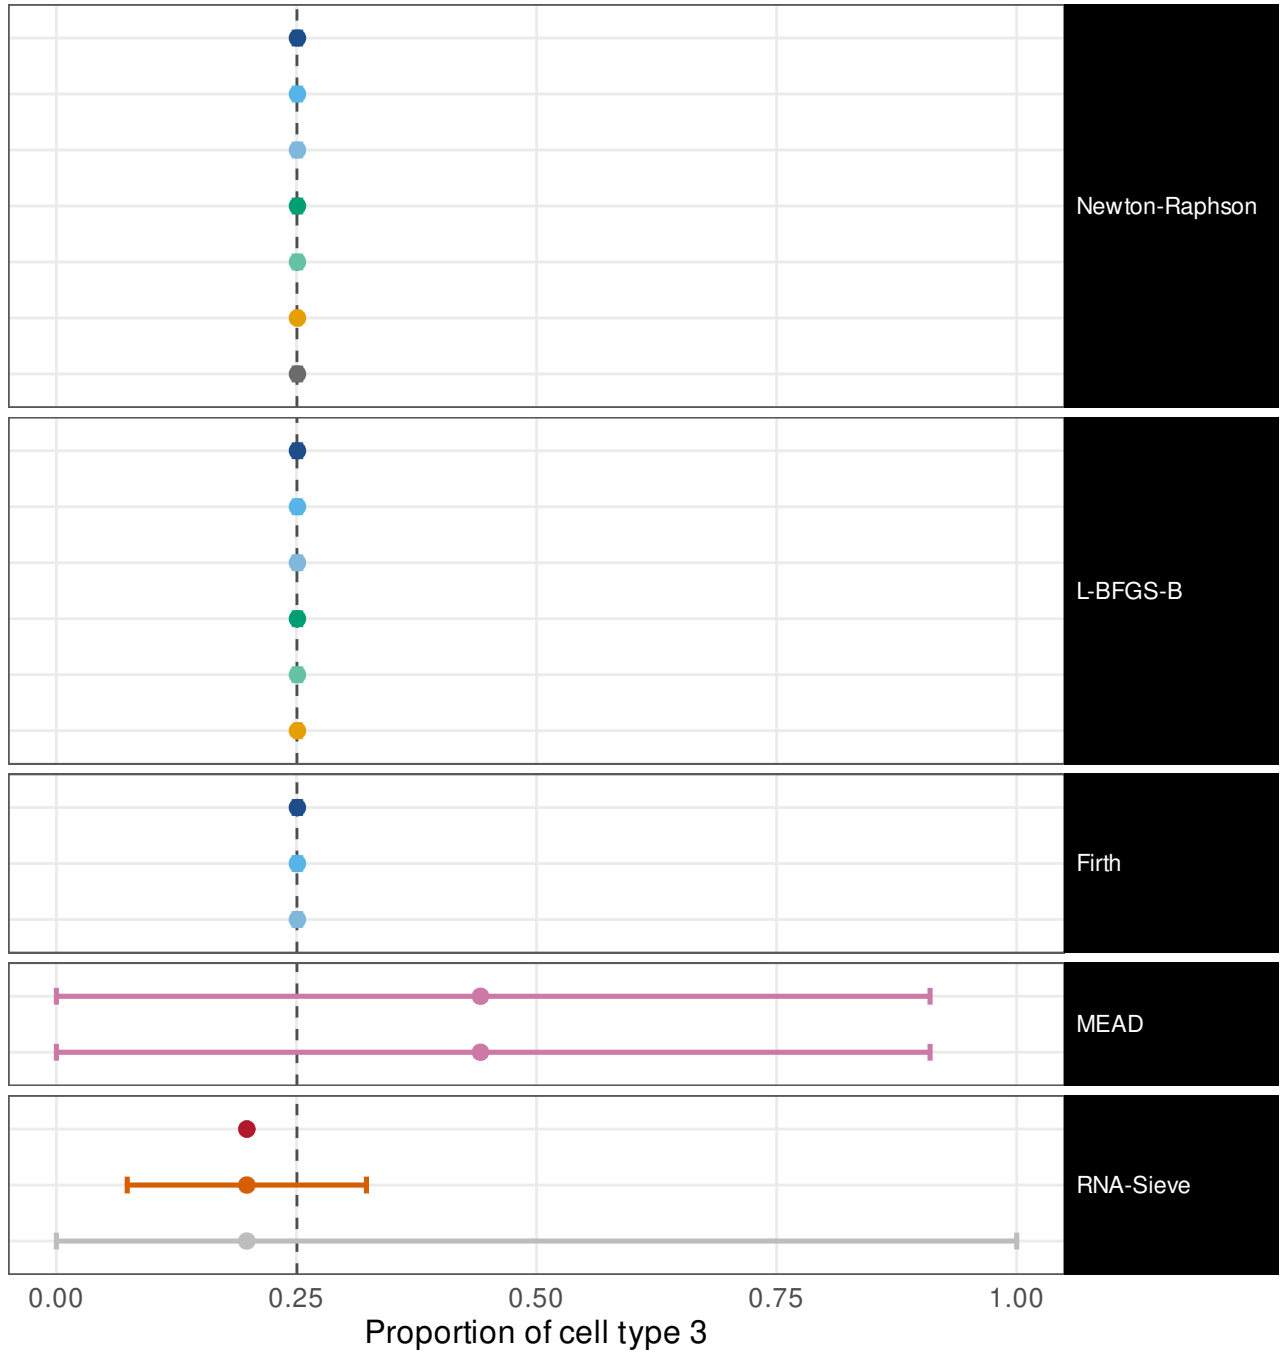


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / balanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.00663
ILR, mapped back	1	[0.57, 1]	w = 0.00662
ILR, REML	1	[0.57, 1]	w = 0.00671
Profile likelihood	1	[0.57, 1]	w = 0.00666
Profile, REML	1	[0.57, 1]	w = 0.00674
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00284
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00669
Wald (delta)	1	[0.57, 1]	w = 0.00663
ILR, mapped back	1	[0.57, 1]	w = 0.00659
ILR, REML	1	[0.57, 1]	w = 0.00668
Profile likelihood	1	[0.57, 1]	w = 0.00666
Profile, REML	1	[0.57, 1]	w = 0.00674
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00302
Wald (delta)	1	[0.57, 1]	w = 0.00663
ILR, mapped back	1	[0.57, 1]	w = 0.00652
ILR, REML	1	[0.57, 1]	w = 0.00676
Method's own interval	1	[0.57, 1]	w = 0.655
Own interval, transcript fractions	1	[0.57, 1]	w = 0.655
Fisher information (Wald)	0	[0, 0.43]	w = 0.000475
Godambe sandwich	1	[0.57, 1]	w = 0.259
Released code, as published	1	[0.57, 1]	w = 1

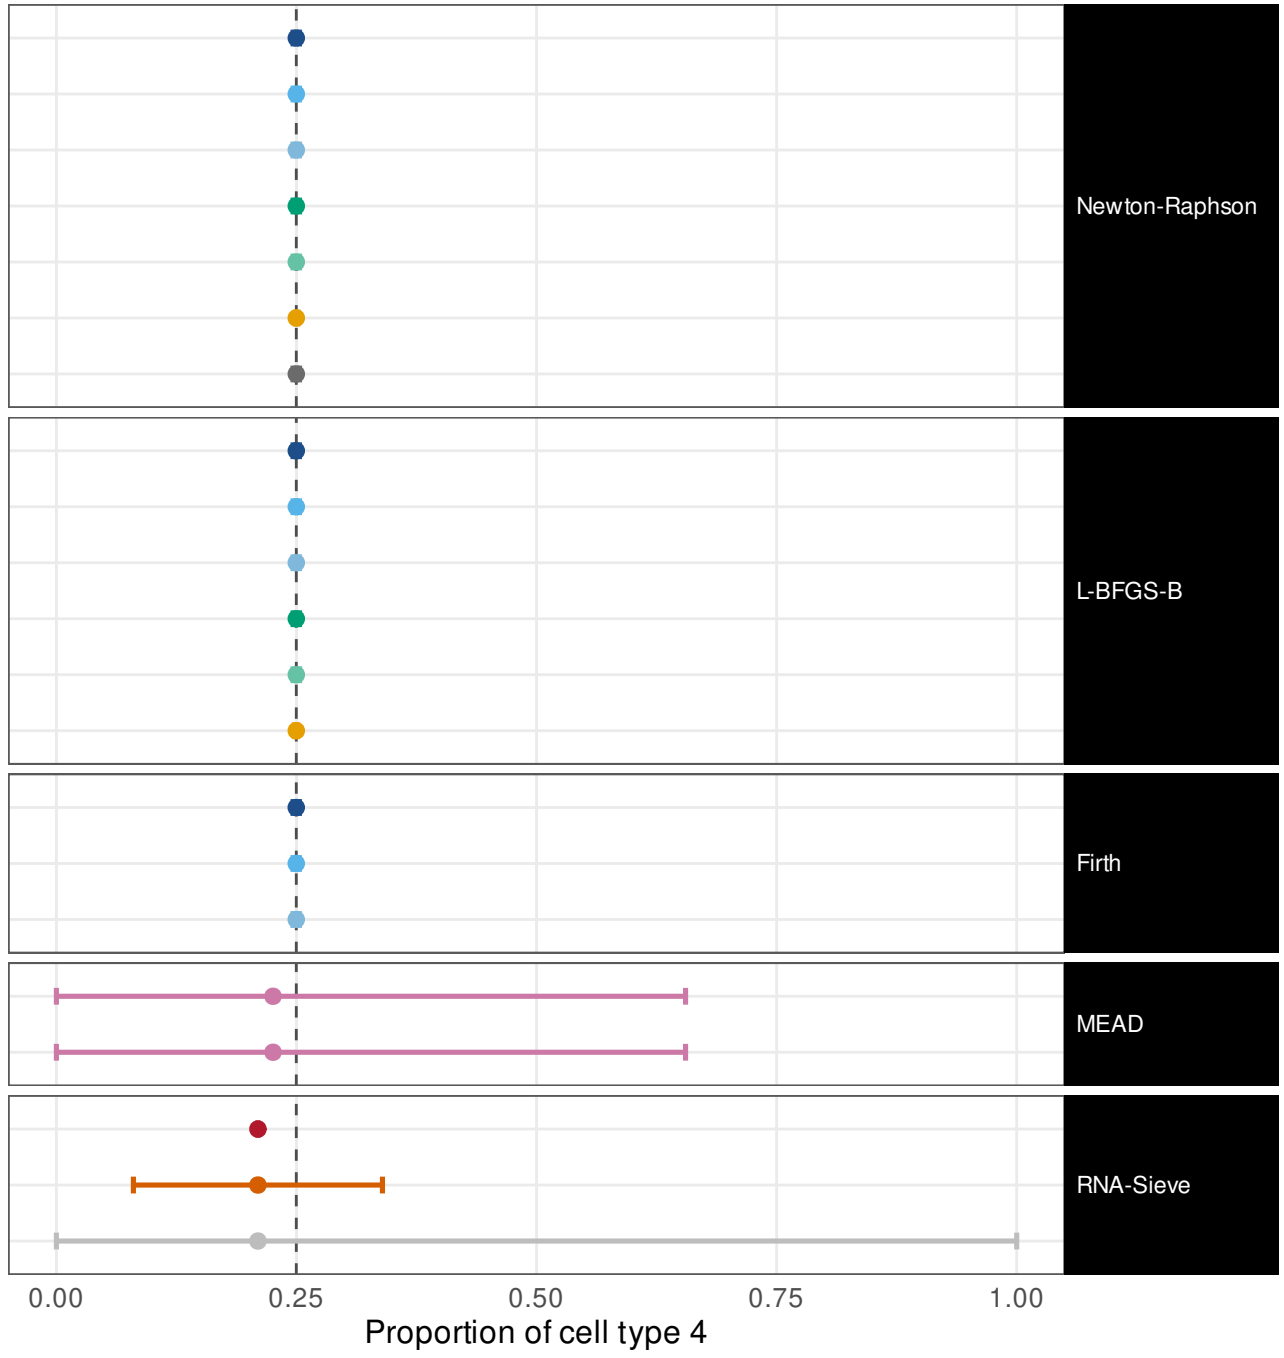


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	0.8	[0.38, 0.96]	w = 0.00282
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00278
ILR, REML	0.8	[0.38, 0.96]	w = 0.00291
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00283
Profile, REML	0.8	[0.38, 0.96]	w = 0.00287
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00247
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.00288
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00282
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00278
ILR, REML	0.8	[0.38, 0.96]	w = 0.00288
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00283
Profile, REML	0.8	[0.38, 0.96]	w = 0.00287
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00179
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00282
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00283
ILR, REML	0.8	[0.38, 0.96]	w = 0.0029
Method's own interval	1	[0.57, 1]	w = 0.0761
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0761
Fisher information (Wald)	0	[0, 0.43]	w = 3.06e-05
Godambe sandwich	1	[0.57, 1]	w = 0.202
Released code, as published	1	[0.57, 1]	w = 1

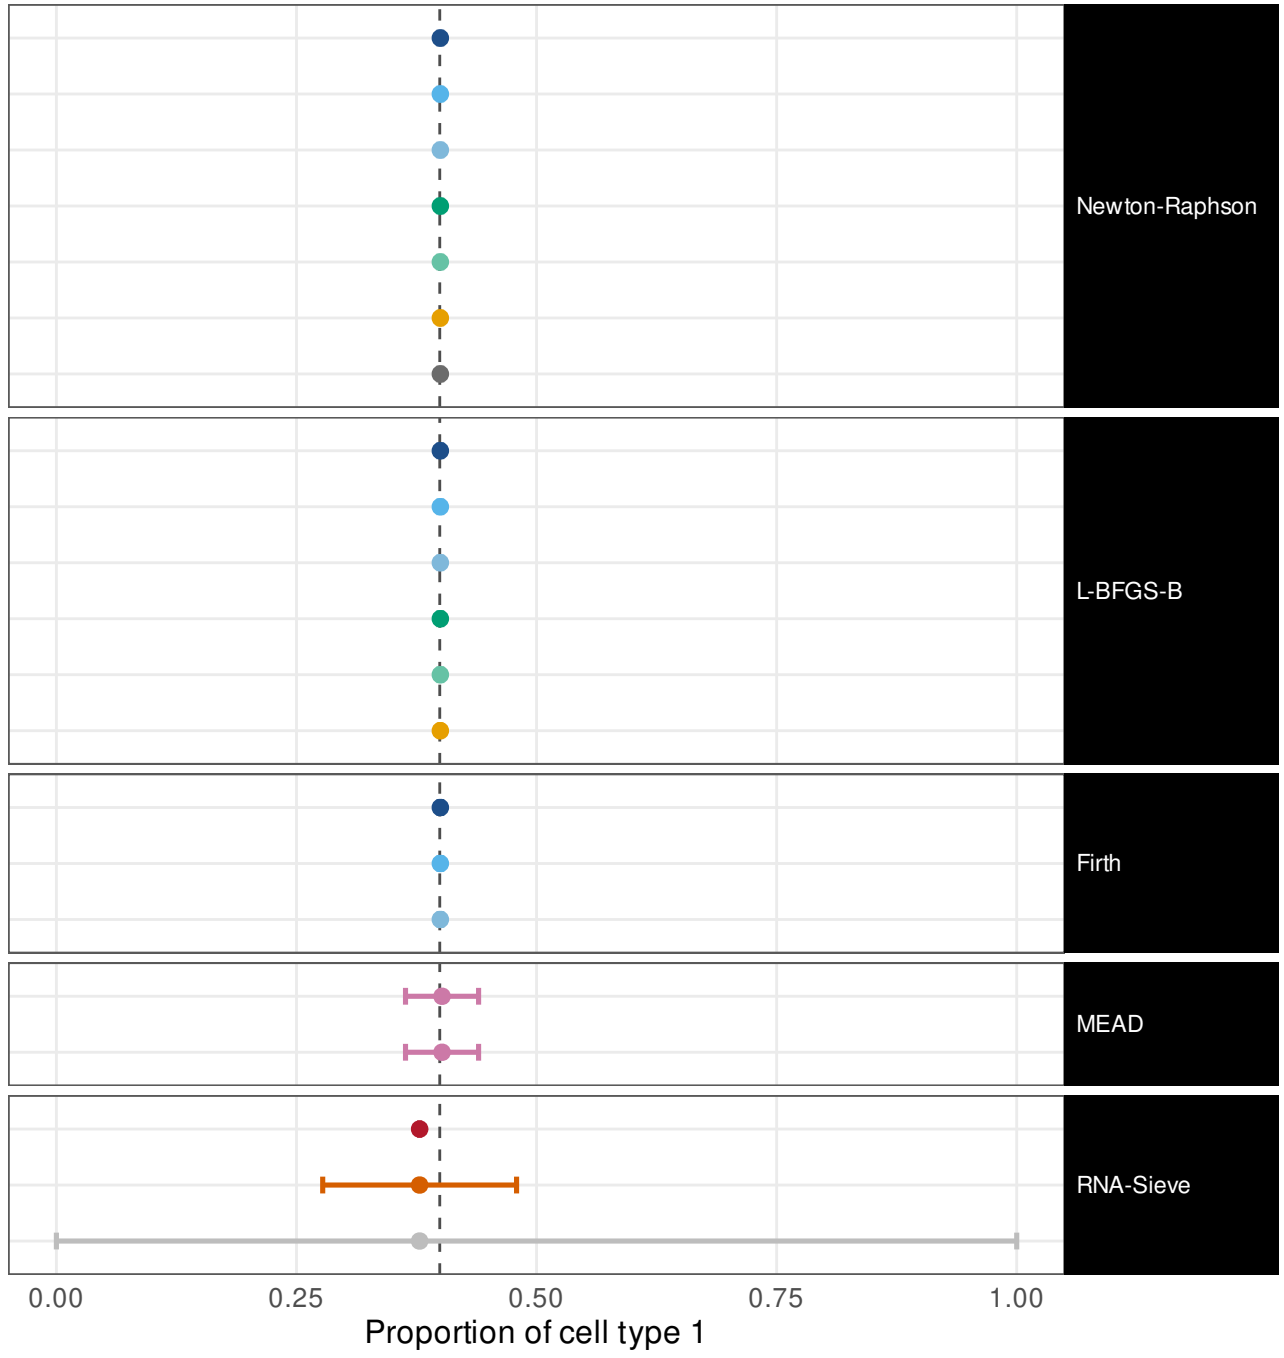


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.0028
ILR, mapped back	1	[0.57, 1]	w = 0.00273
ILR, REML	1	[0.57, 1]	w = 0.00285
Profile likelihood	1	[0.57, 1]	w = 0.00282
Profile, REML	1	[0.57, 1]	w = 0.00285
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00206
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00284
Wald (delta)	1	[0.57, 1]	w = 0.0028
ILR, mapped back	1	[0.57, 1]	w = 0.00277
ILR, REML	1	[0.57, 1]	w = 0.00287
Profile likelihood	1	[0.57, 1]	w = 0.00282
Profile, REML	1	[0.57, 1]	w = 0.00285
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00179
Wald (delta)	1	[0.57, 1]	w = 0.0028
ILR, mapped back	1	[0.57, 1]	w = 0.00282
ILR, REML	1	[0.57, 1]	w = 0.00284
Method's own interval	1	[0.57, 1]	w = 0.0701
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0701
Fisher information (Wald)	0	[0, 0.43]	w = 3.06e-05
Godambe sandwich	1	[0.57, 1]	w = 0.217
Released code, as published	1	[0.57, 1]	w = 1

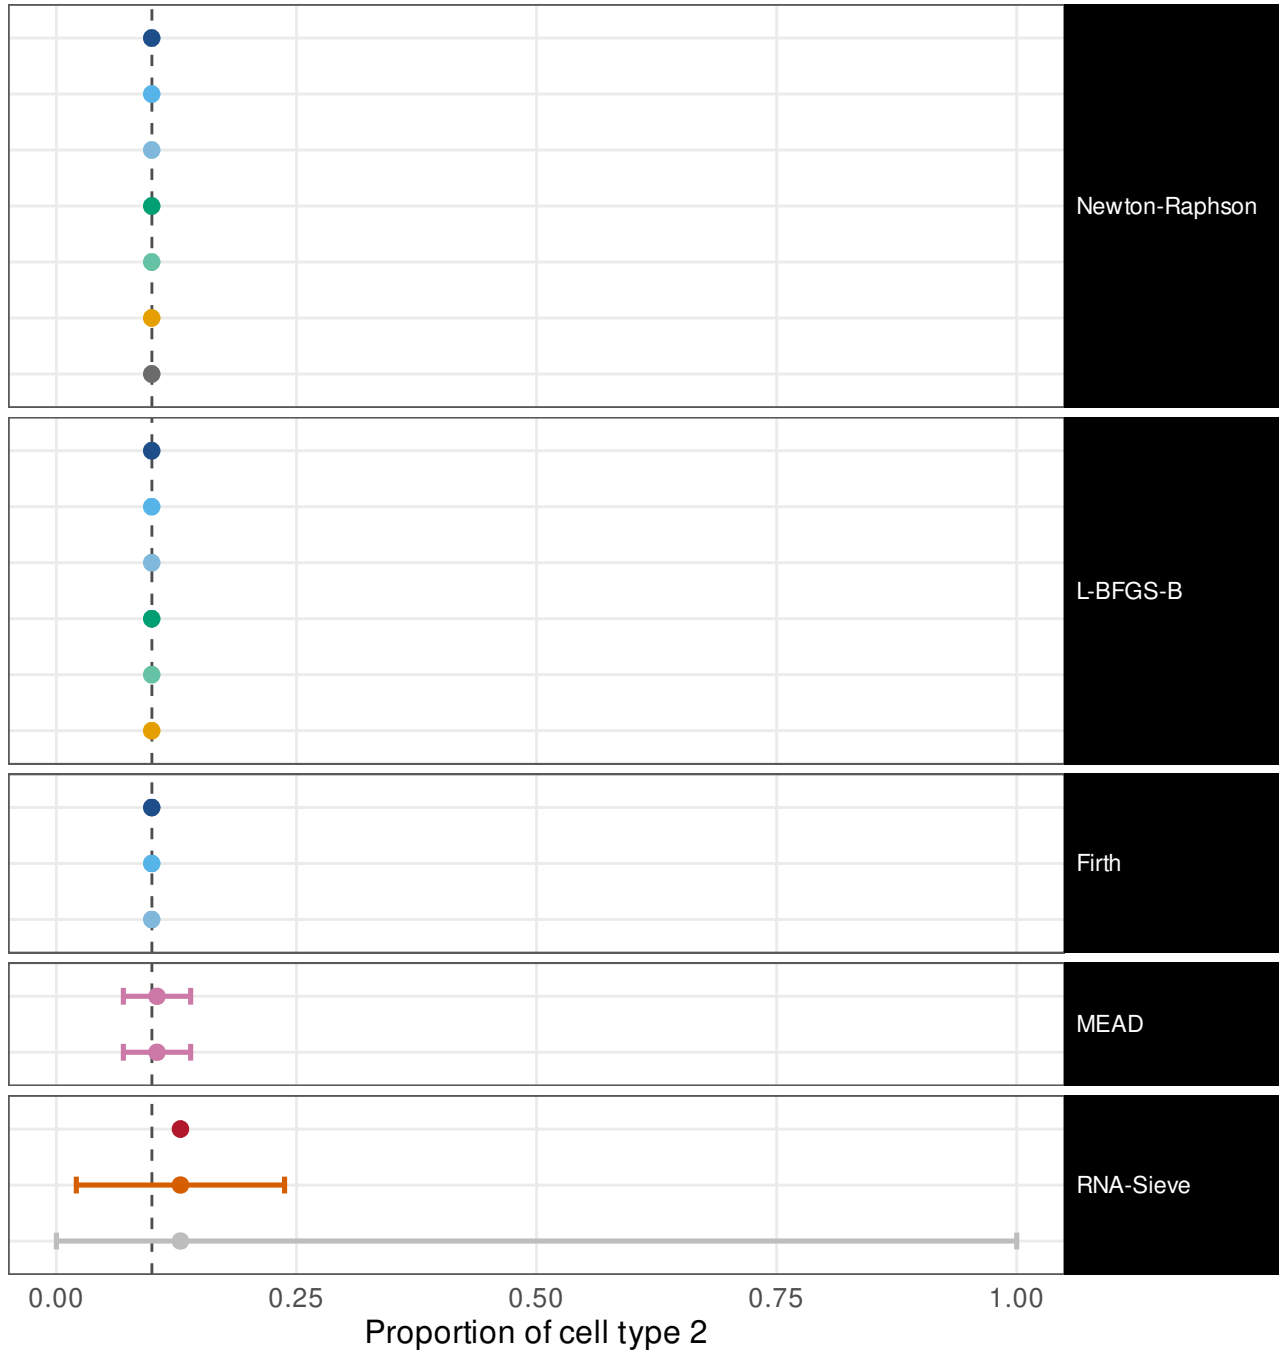


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00279
ILR, mapped back	1	[0.57, 1]	w = 0.0028
ILR, REML	1	[0.57, 1]	w = 0.00283
Profile likelihood	1	[0.57, 1]	w = 0.0028
Profile, REML	1	[0.57, 1]	w = 0.00283
Parametric bootstrap	1	[0.57, 1]	w = 0.00191
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00281
Wald (delta)	1	[0.57, 1]	w = 0.00279
ILR, mapped back	1	[0.57, 1]	w = 0.00276
ILR, REML	1	[0.57, 1]	w = 0.00283
Profile likelihood	1	[0.57, 1]	w = 0.0028
Profile, REML	1	[0.57, 1]	w = 0.00283
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00157
Wald (delta)	1	[0.57, 1]	w = 0.00279
ILR, mapped back	1	[0.57, 1]	w = 0.00276
ILR, REML	1	[0.57, 1]	w = 0.00285
Method's own interval	1	[0.57, 1]	w = 0.0765
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0765
Fisher information (Wald)	0	[0, 0.43]	w = 2.71e-05
Godambe sandwich	1	[0.57, 1]	w = 0.192
Released code, as published	1	[0.57, 1]	w = 1

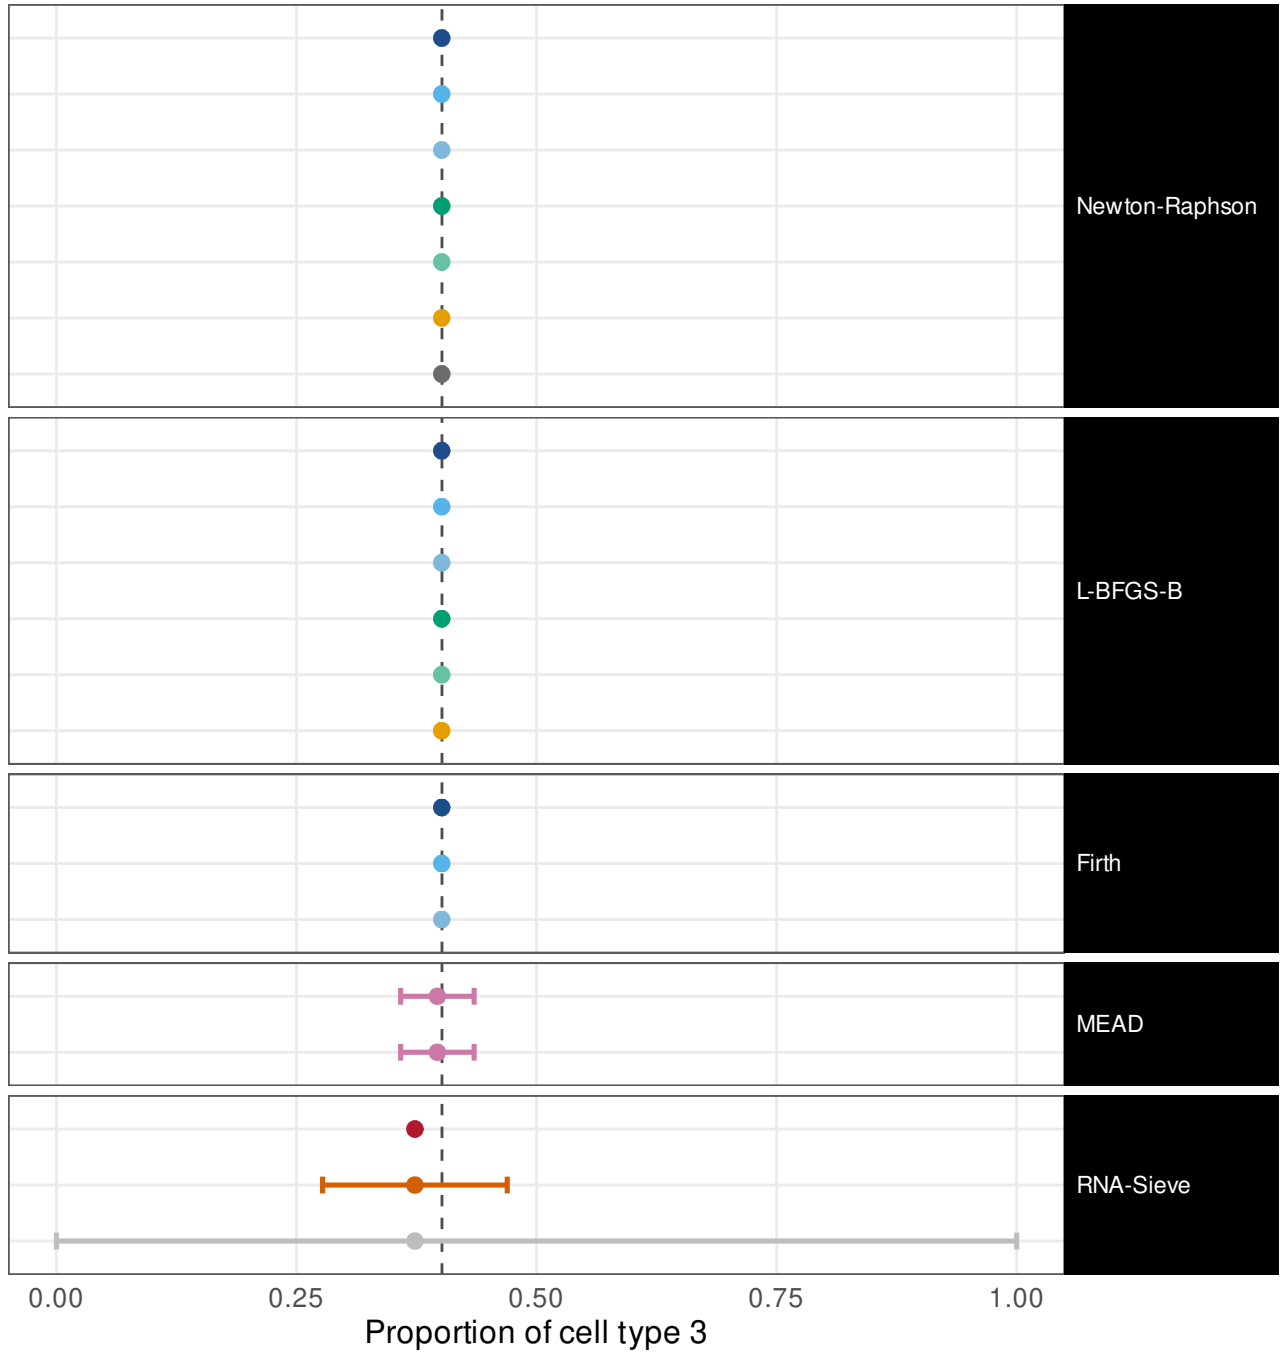


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.0028
ILR, mapped back	1	[0.57, 1]	w = 0.00281
ILR, REML	1	[0.57, 1]	w = 0.00288
Profile likelihood	1	[0.57, 1]	w = 0.00281
Profile, REML	1	[0.57, 1]	w = 0.00285
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00189
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00283
Wald (delta)	1	[0.57, 1]	w = 0.0028
ILR, mapped back	1	[0.57, 1]	w = 0.00276
ILR, REML	1	[0.57, 1]	w = 0.00284
Profile likelihood	1	[0.57, 1]	w = 0.00281
Profile, REML	1	[0.57, 1]	w = 0.00285
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00149
Wald (delta)	1	[0.57, 1]	w = 0.0028
ILR, mapped back	1	[0.57, 1]	w = 0.00276
ILR, REML	1	[0.57, 1]	w = 0.00287
Method's own interval	1	[0.57, 1]	w = 0.0671
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0671
Fisher information (Wald)	0	[0, 0.43]	w = 2.7e-05
Godambe sandwich	1	[0.57, 1]	w = 0.208
Released code, as published	1	[0.57, 1]	w = 1

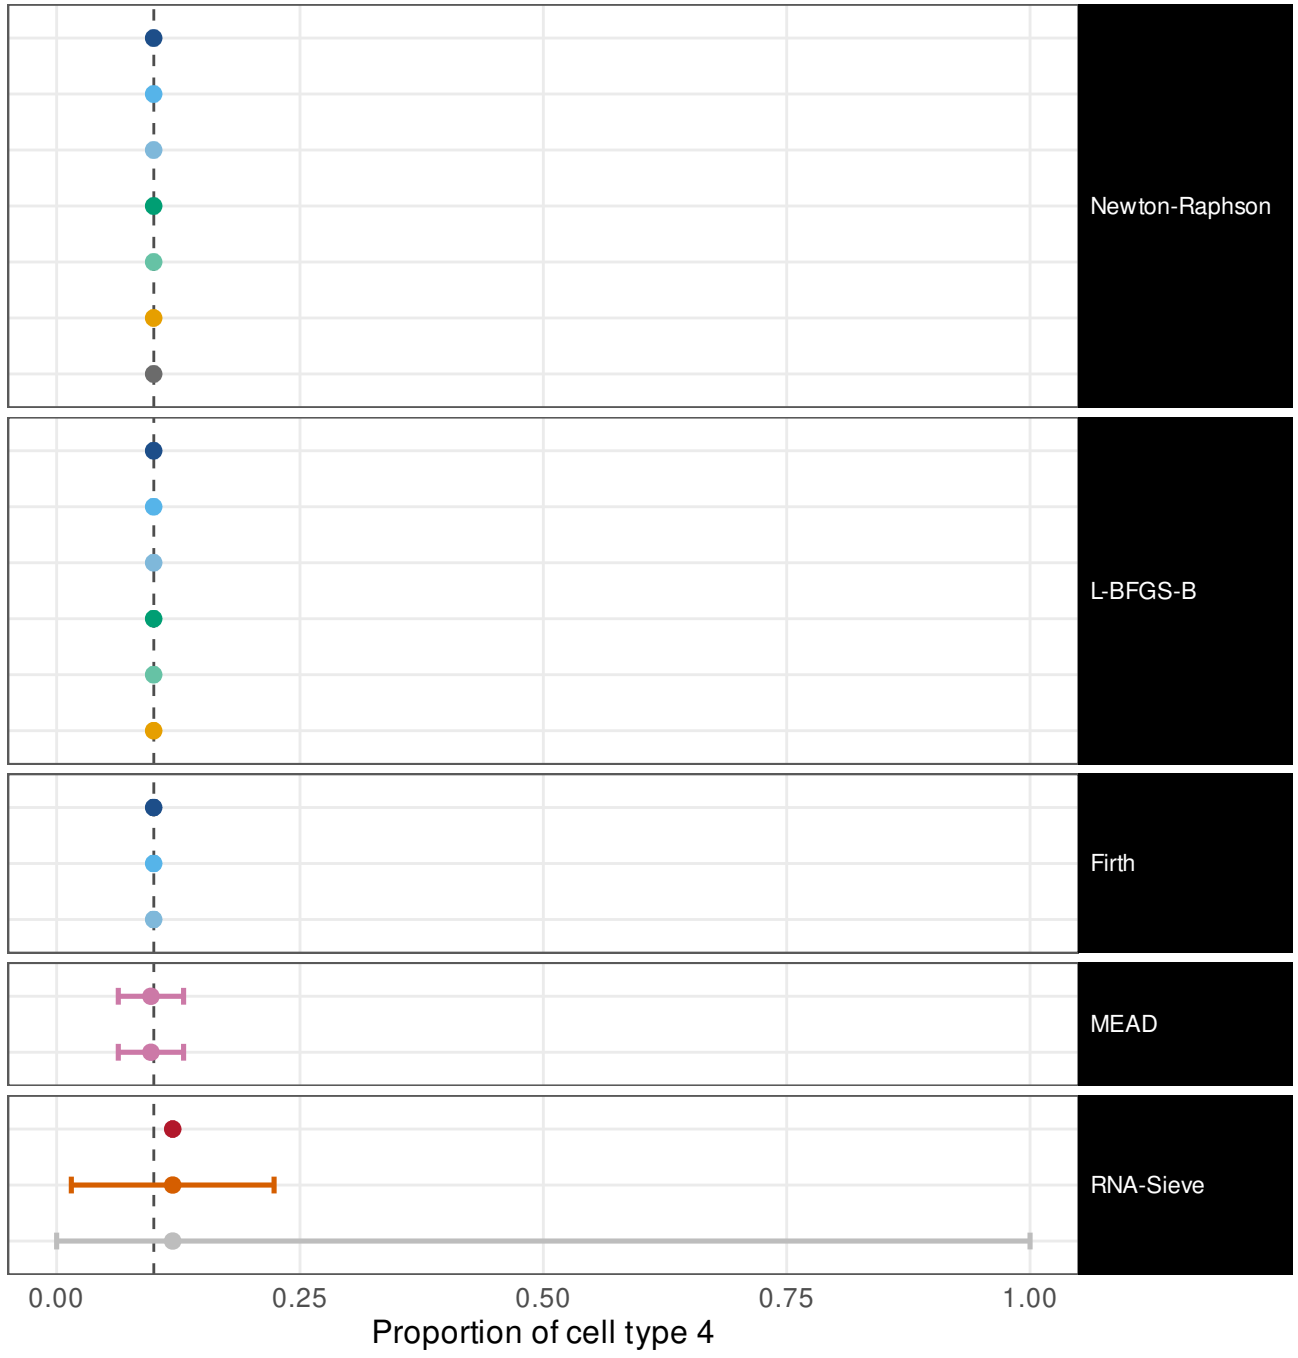


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5


Wald (delta)	1	[0.57, 1]	w = 0.0105
ILR, mapped back	1	[0.57, 1]	w = 0.0105
ILR, REML	1	[0.57, 1]	w = 0.0106
Profile likelihood	1	[0.57, 1]	w = 0.0105
Profile, REML	1	[0.57, 1]	w = 0.0107
Parametric bootstrap	1	[0.57, 1]	w = 0.00519
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0105
Wald (delta)	1	[0.57, 1]	w = 0.0105
ILR, mapped back	1	[0.57, 1]	w = 0.0105
ILR, REML	1	[0.57, 1]	w = 0.0105
Profile likelihood	1	[0.57, 1]	w = 0.0105
Profile, REML	1	[0.57, 1]	w = 0.0107
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.00518
Wald (delta)	1	[0.57, 1]	w = 0.0105
ILR, mapped back	1	[0.57, 1]	w = 0.0105
ILR, REML	1	[0.57, 1]	w = 0.0105
Method's own interval	0	[0, 0.43]	w = 0.0816
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0816
Fisher information (Wald)	0	[0, 0.43]	w = 0.00013
Godambe sandwich	1	[0.57, 1]	w = 0.848
Released code, as published	1	[0.57, 1]	w = 1

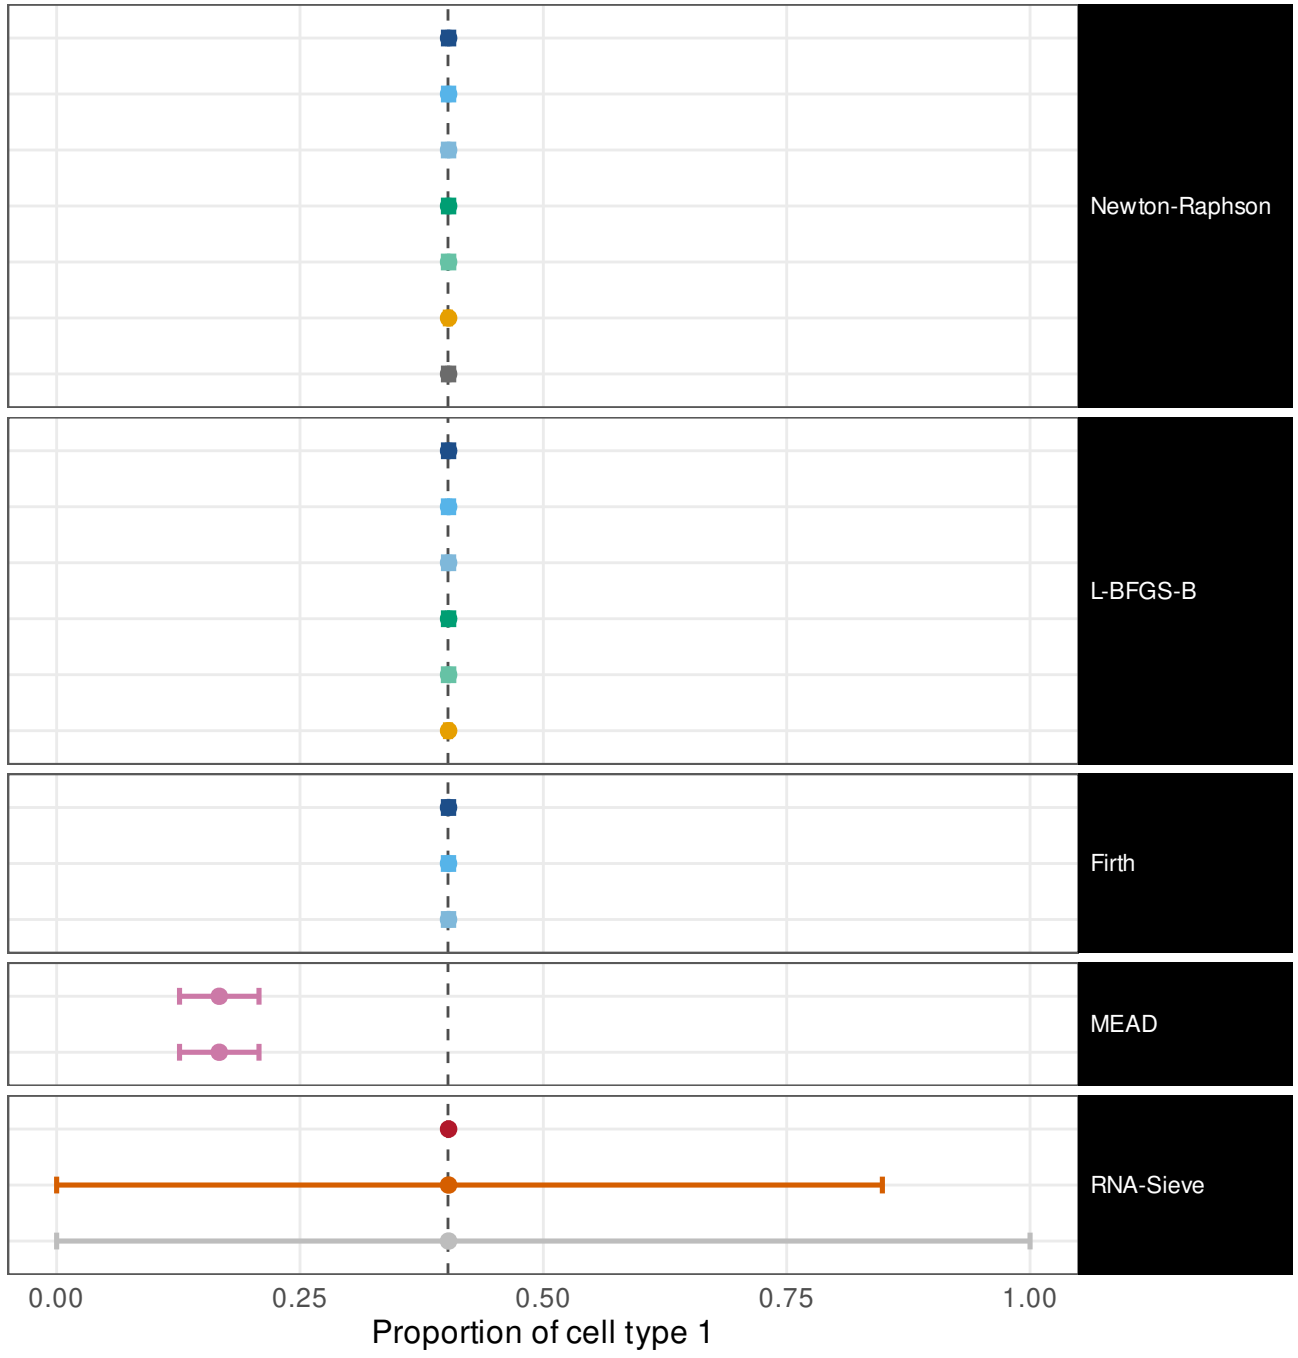

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5

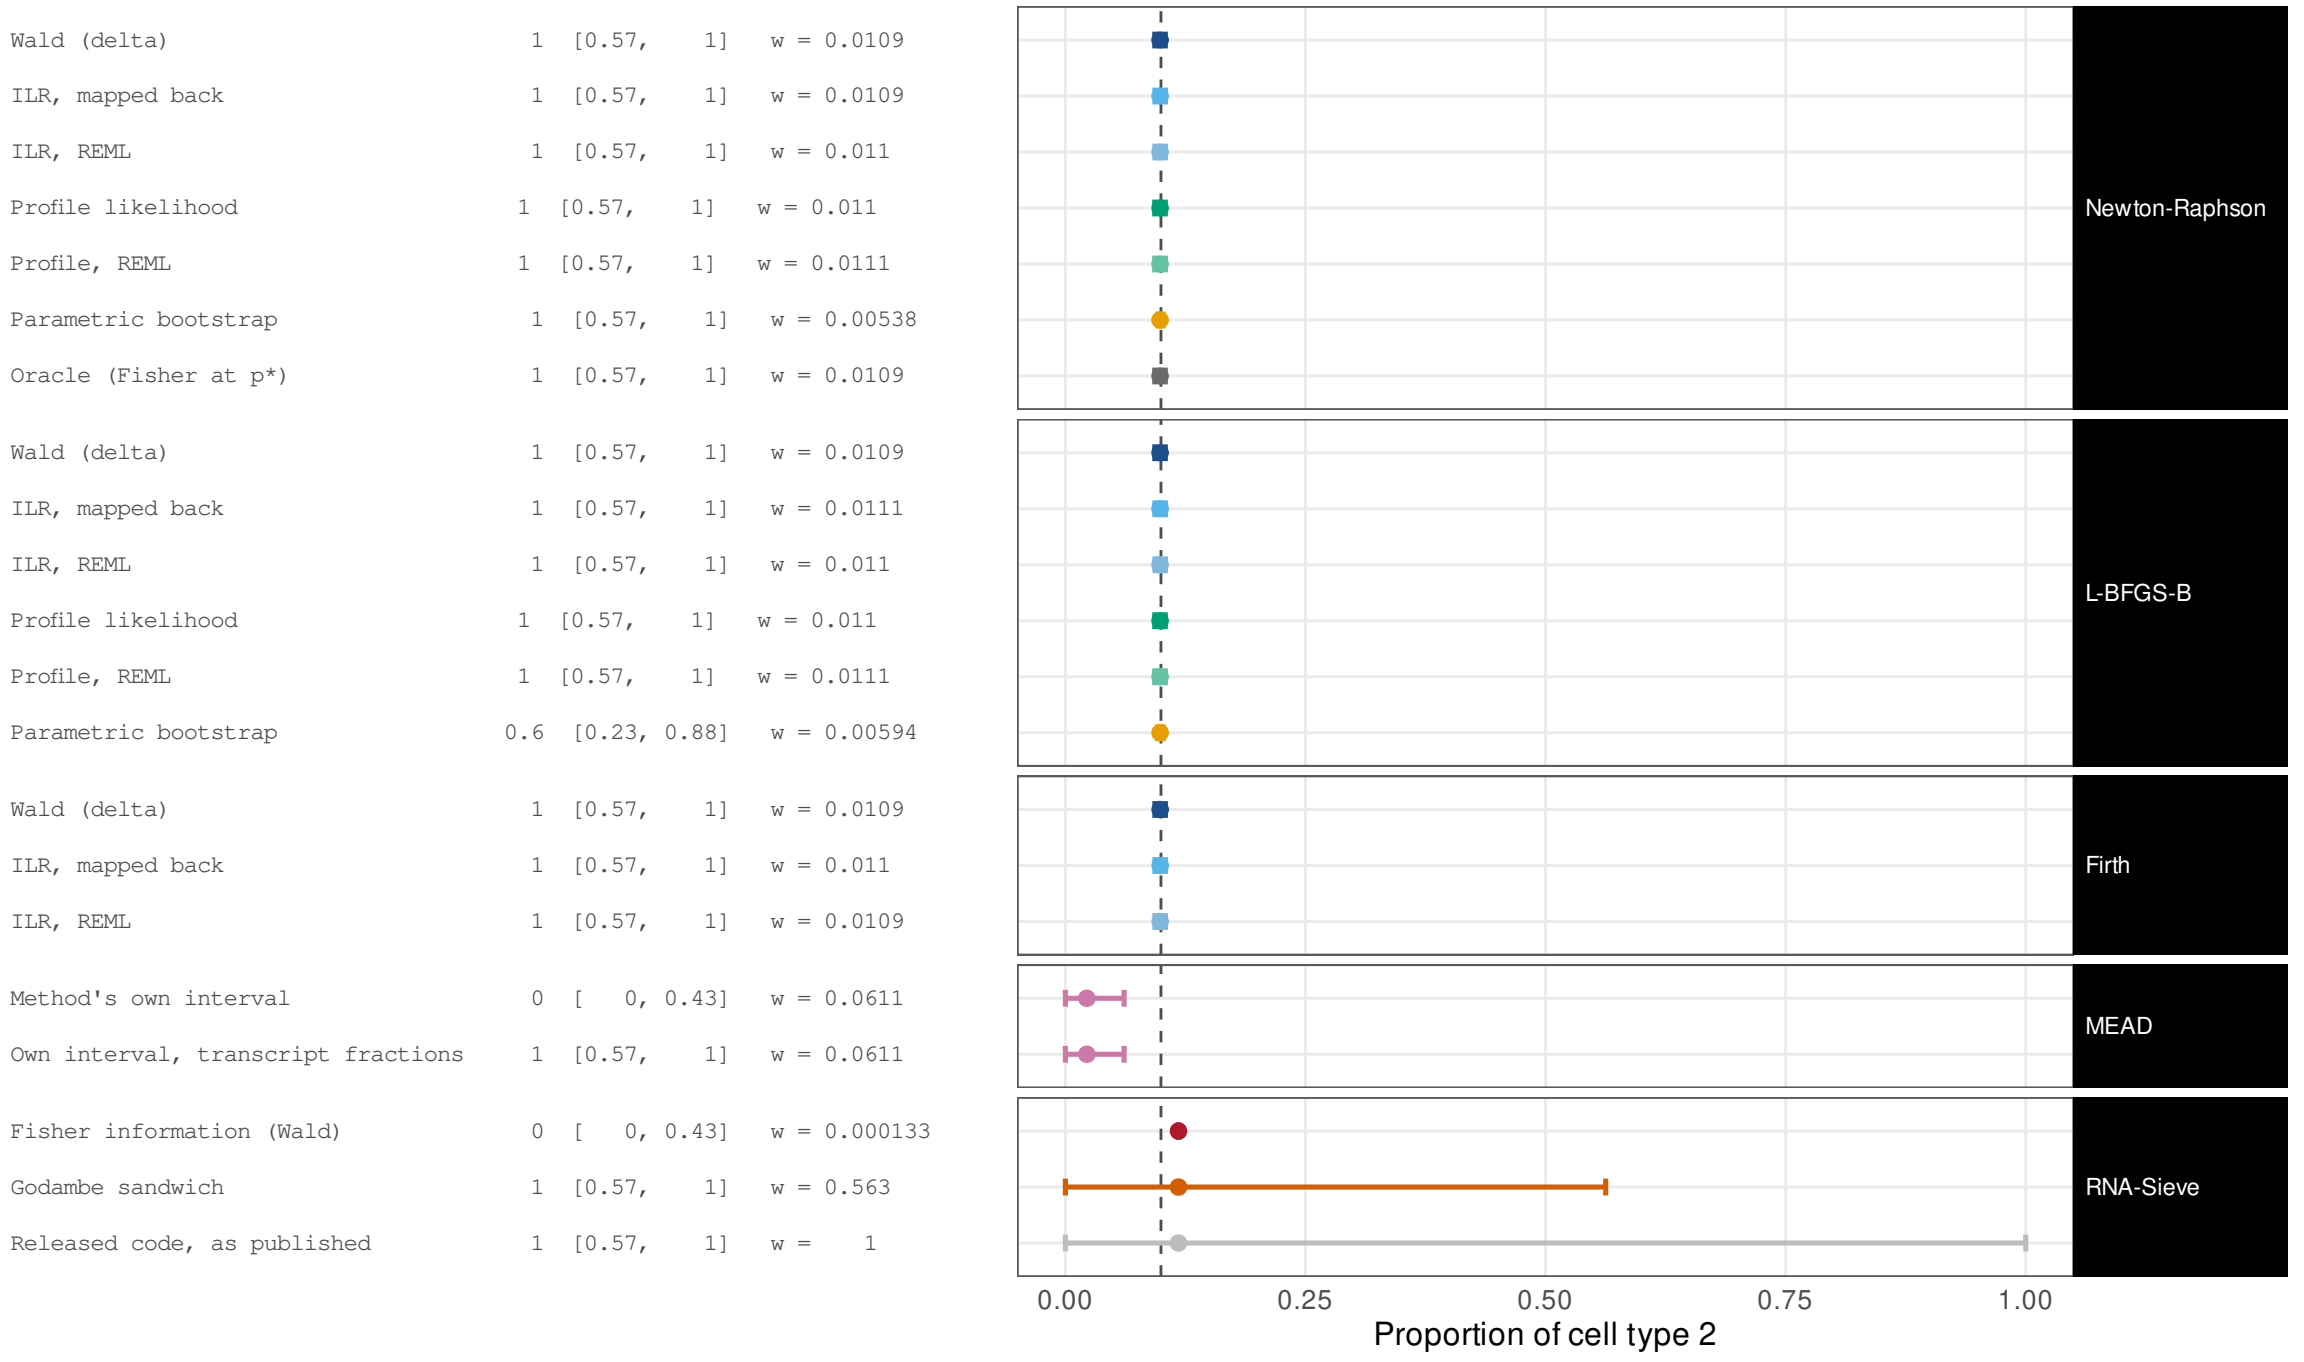


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.00376
ILR, mapped back	1	[0.57, 1]	w = 0.00379
ILR, REML	1	[0.57, 1]	w = 0.00382
Profile likelihood	1	[0.57, 1]	w = 0.00378
Profile, REML	1	[0.57, 1]	w = 0.00382
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00177
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00378
Wald (delta)	1	[0.57, 1]	w = 0.00376
ILR, mapped back	1	[0.57, 1]	w = 0.00376
ILR, REML	1	[0.57, 1]	w = 0.00384
Profile likelihood	1	[0.57, 1]	w = 0.00378
Profile, REML	1	[0.57, 1]	w = 0.00382
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00186
Wald (delta)	1	[0.57, 1]	w = 0.00376
ILR, mapped back	1	[0.57, 1]	w = 0.00373
ILR, REML	1	[0.57, 1]	w = 0.00379
Method's own interval	0	[0, 0.43]	w = 0.0908
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0908
Fisher information (Wald)	0	[0, 0.43]	w = 9.45e-05
Godambe sandwich	1	[0.57, 1]	w = 0.164
Released code, as published	1	[0.57, 1]	w = 1

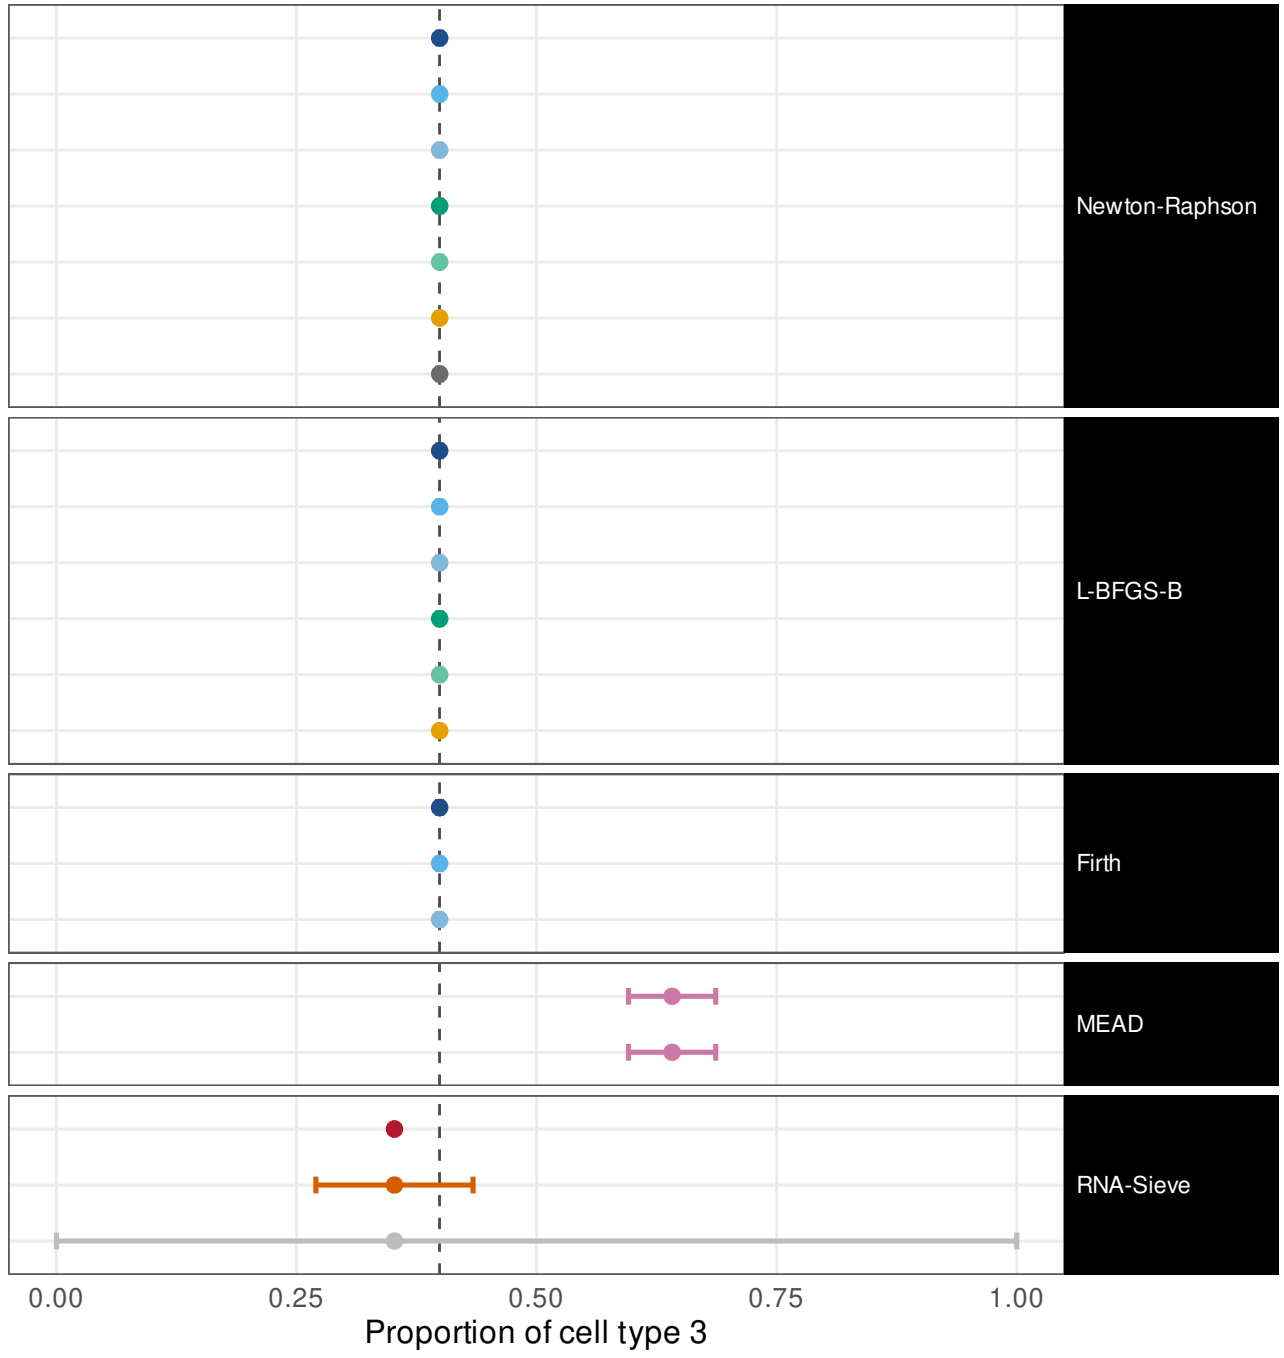


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / low sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.0024
ILR, mapped back	1	[0.57, 1]	w = 0.00239
ILR, REML	0.8	[0.38, 0.96]	w = 0.00241
Profile likelihood	1	[0.57, 1]	w = 0.00241
Profile, REML	1	[0.57, 1]	w = 0.00244
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00143
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00242
Wald (delta)	1	[0.57, 1]	w = 0.0024
ILR, mapped back	1	[0.57, 1]	w = 0.0024
ILR, REML	1	[0.57, 1]	w = 0.00241
Profile likelihood	1	[0.57, 1]	w = 0.00241
Profile, REML	1	[0.57, 1]	w = 0.00244
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0012
Wald (delta)	1	[0.57, 1]	w = 0.0024
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00242
ILR, REML	1	[0.57, 1]	w = 0.00243
Method's own interval	0	[0, 0.43]	w = 0.0897
Own interval, transcript fractions	1	[0.57, 1]	w = 0.0897
Fisher information (Wald)	0	[0, 0.43]	w = 3.16e-05
Godambe sandwich	1	[0.57, 1]	w = 0.166
Released code, as published	1	[0.57, 1]	w = 1

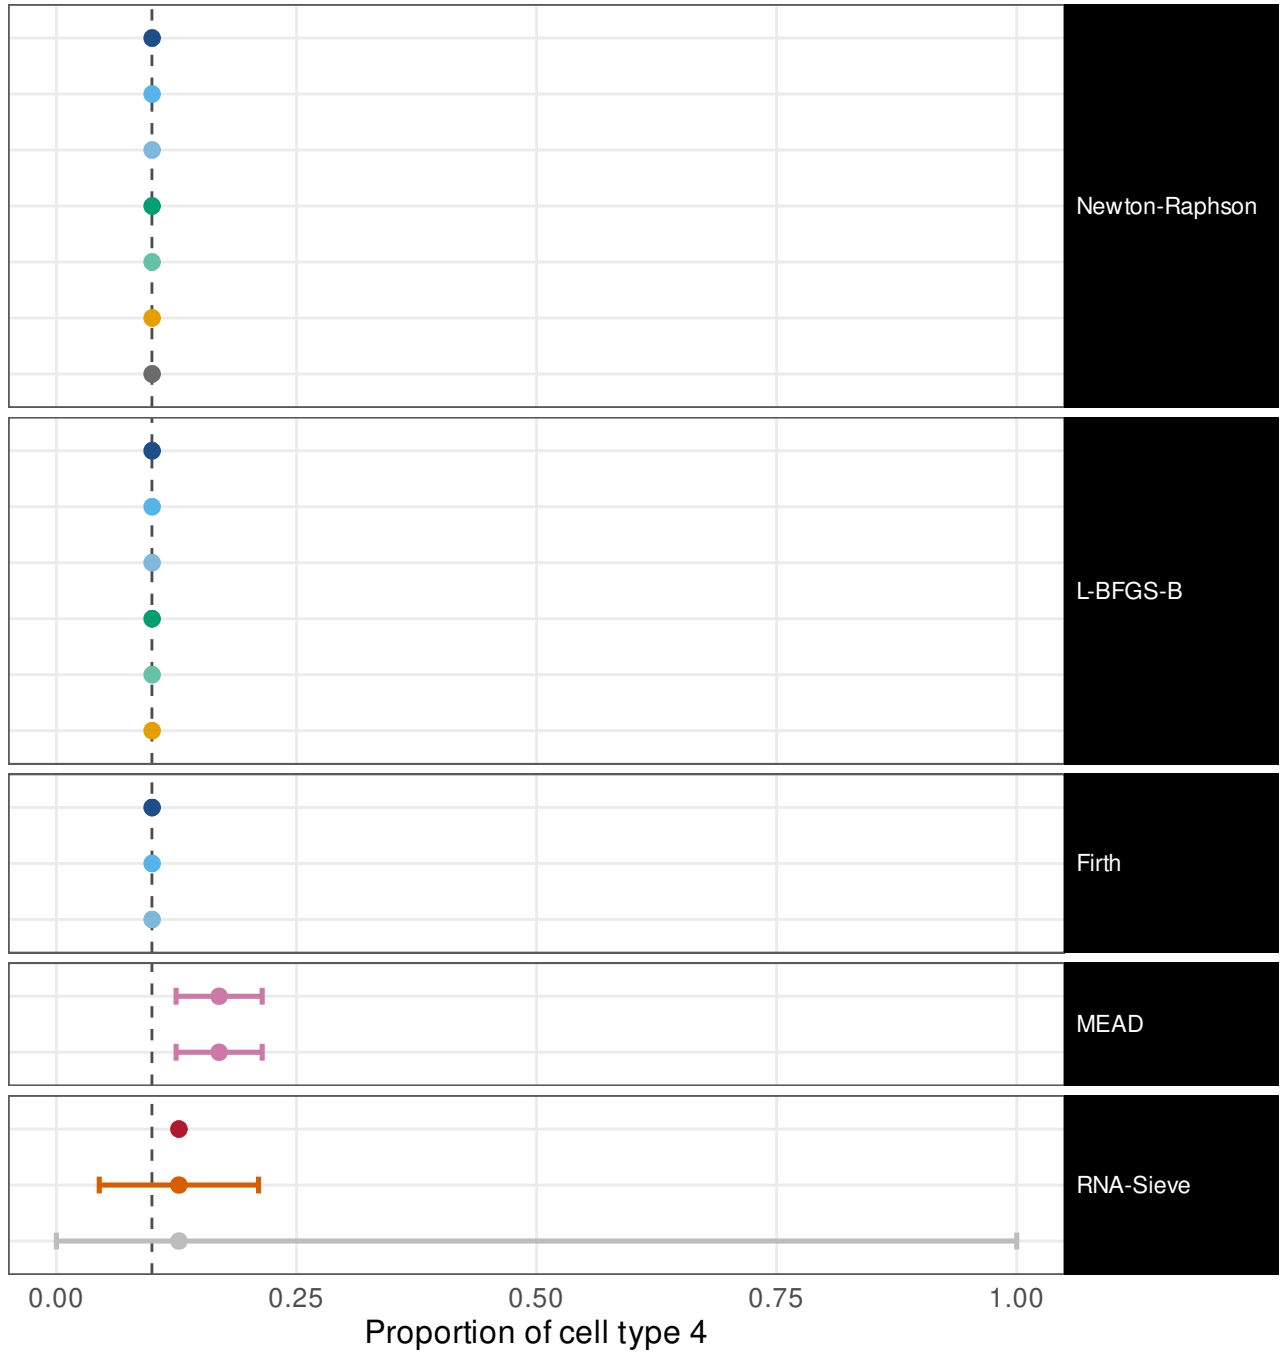


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	1	[0.57, 1]	w = 0.00651
ILR, mapped back	1	[0.57, 1]	w = 0.00652
ILR, REML	1	[0.57, 1]	w = 0.00667
Profile likelihood	1	[0.57, 1]	w = 0.00654
Profile, REML	1	[0.57, 1]	w = 0.00661
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00341
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00657
Wald (delta)	1	[0.57, 1]	w = 0.00651
ILR, mapped back	1	[0.57, 1]	w = 0.00638
ILR, REML	1	[0.57, 1]	w = 0.00653
Profile likelihood	1	[0.57, 1]	w = 0.00654
Profile, REML	1	[0.57, 1]	w = 0.00661
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00339
Wald (delta)	1	[0.57, 1]	w = 0.00651
ILR, mapped back	1	[0.57, 1]	w = 0.00654
ILR, REML	1	[0.57, 1]	w = 0.0065
Method's own interval	0	[0, 0.43]	w = 0.323
Own interval, transcript fractions	0	[0, 0.43]	w = 0.323
Fisher information (Wald)	0	[0, 0.43]	w = 0.000144
Godambe sandwich	1	[0.57, 1]	w = 0.387
Released code, as published	1	[0.57, 1]	w = 1

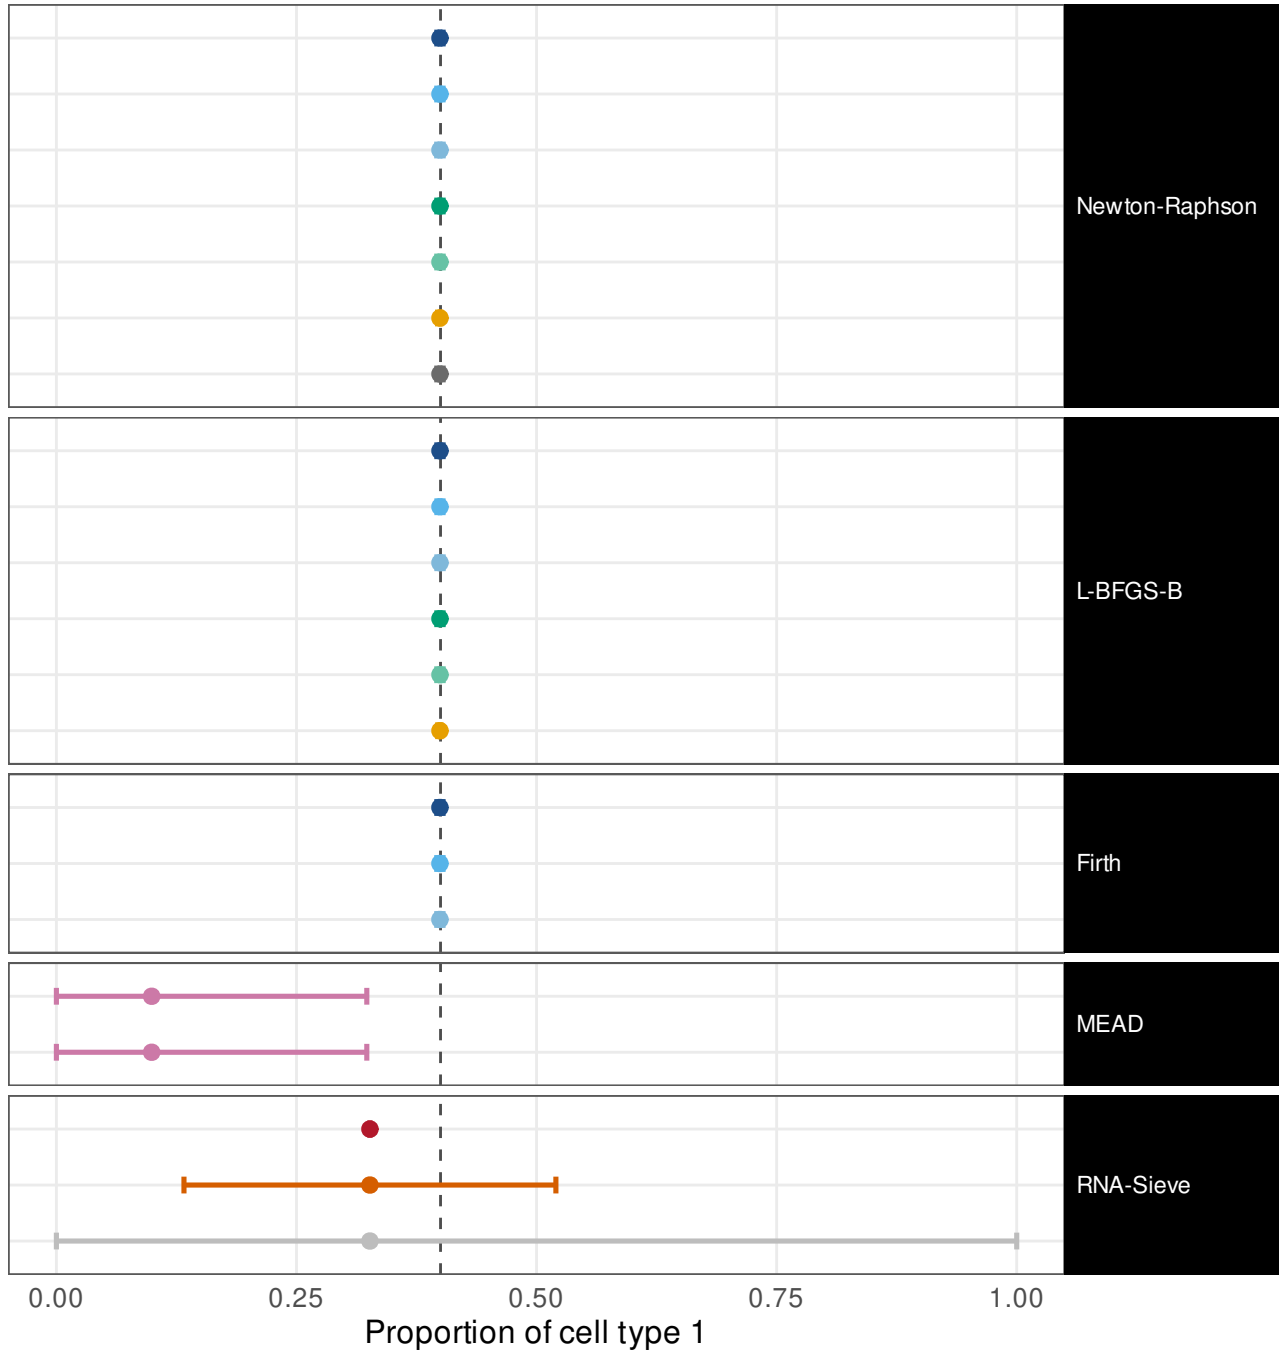


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	0.8	[0.38, 0.96]	w = 0.00646
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00637
ILR, REML	0.8	[0.38, 0.96]	w = 0.00664
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00649
Profile, REML	0.8	[0.38, 0.96]	w = 0.00657
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00311
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.00654
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00646
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00644
ILR, REML	0.8	[0.38, 0.96]	w = 0.00645
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00649
Profile, REML	0.8	[0.38, 0.96]	w = 0.00657
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.00396
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00646
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00644
ILR, REML	0.8	[0.38, 0.96]	w = 0.00652
Method's own interval	0	[0, 0.43]	w = 0.364
Own interval, transcript fractions	0	[0, 0.43]	w = 0.364
Fisher information (Wald)	0	[0, 0.43]	w = 0.00015
Godambe sandwich	1	[0.57, 1]	w = 0.409
Released code, as published	1	[0.57, 1]	w = 1

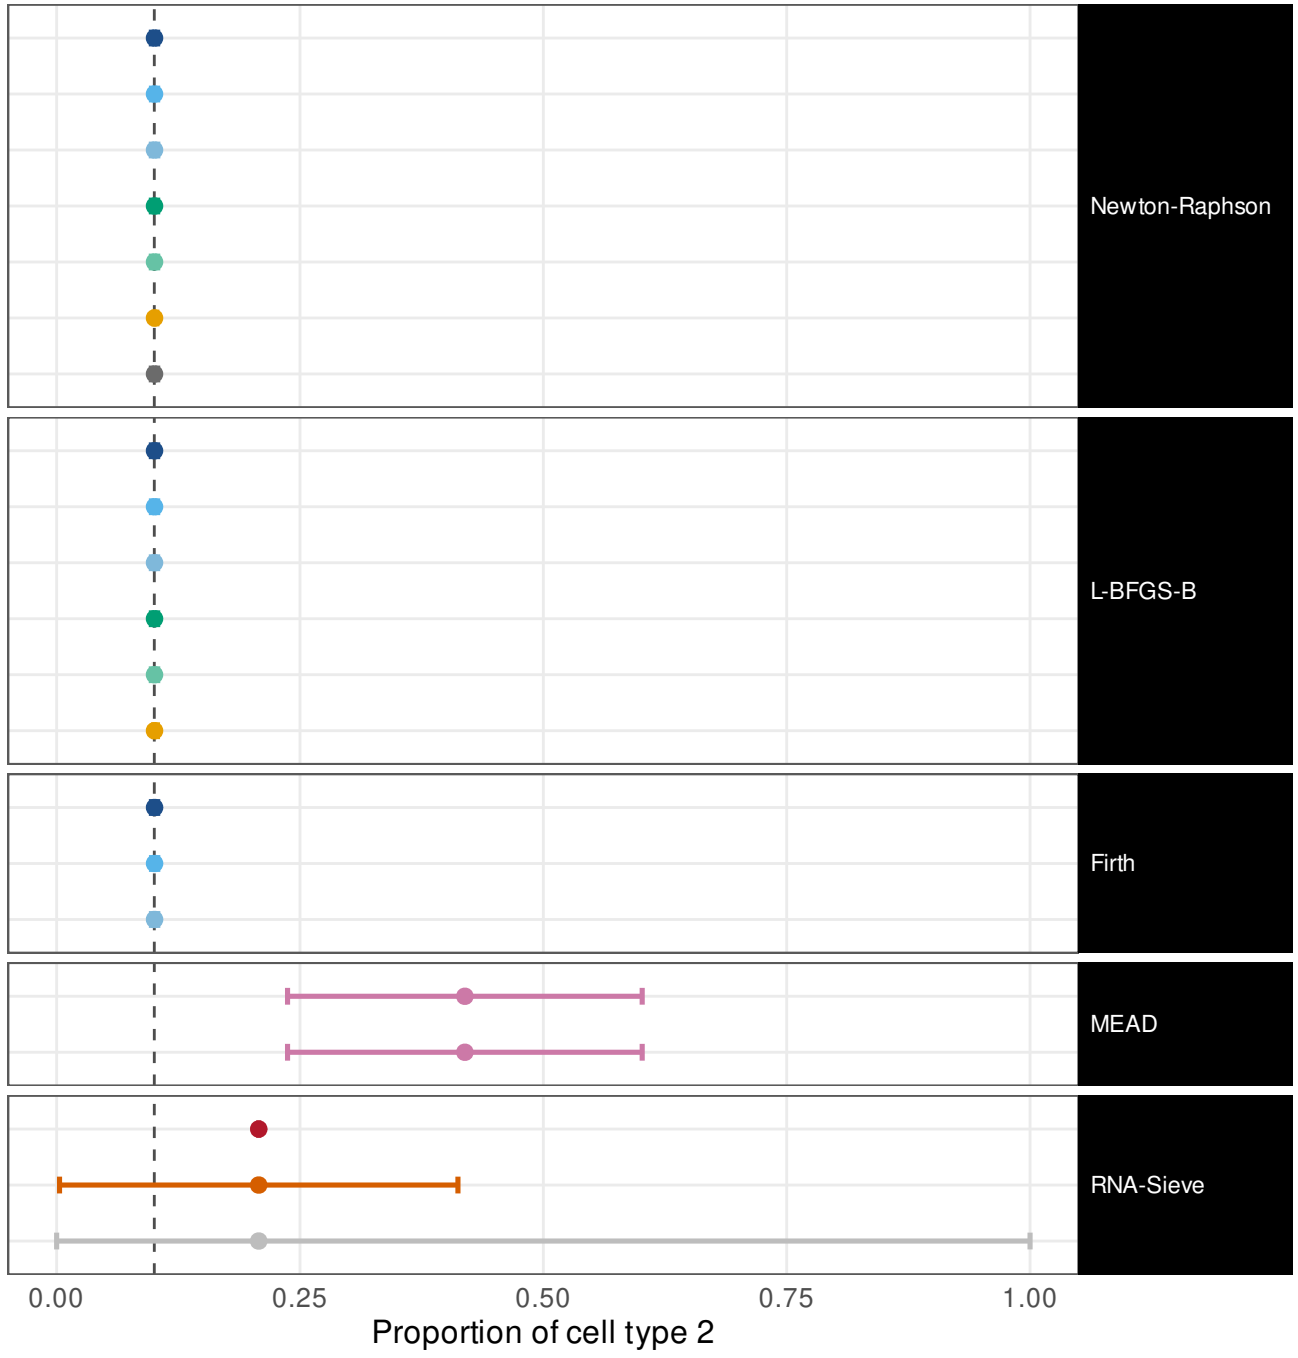


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	0.8	[0.38, 0.96]	w = 0.00643
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00642
ILR, REML	0.8	[0.38, 0.96]	w = 0.00654
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00646
Profile, REML	0.8	[0.38, 0.96]	w = 0.00654
Parametric bootstrap	0.2	[0.036, 0.62]	w = 0.0021
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.00658
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00643
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00639
ILR, REML	0.8	[0.38, 0.96]	w = 0.00663
Profile likelihood	0.8	[0.38, 0.96]	w = 0.00646
Profile, REML	0.8	[0.38, 0.96]	w = 0.00654
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0035
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00643
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00651
ILR, REML	0.8	[0.38, 0.96]	w = 0.00652
Method's own interval	1	[0.57, 1]	w = 0.605
Own interval, transcript fractions	1	[0.57, 1]	w = 0.605
Fisher information (Wald)	0	[0, 0.43]	w = 0.000129
Godambe sandwich	1	[0.57, 1]	w = 0.374
Released code, as published	1	[0.57, 1]	w = 1

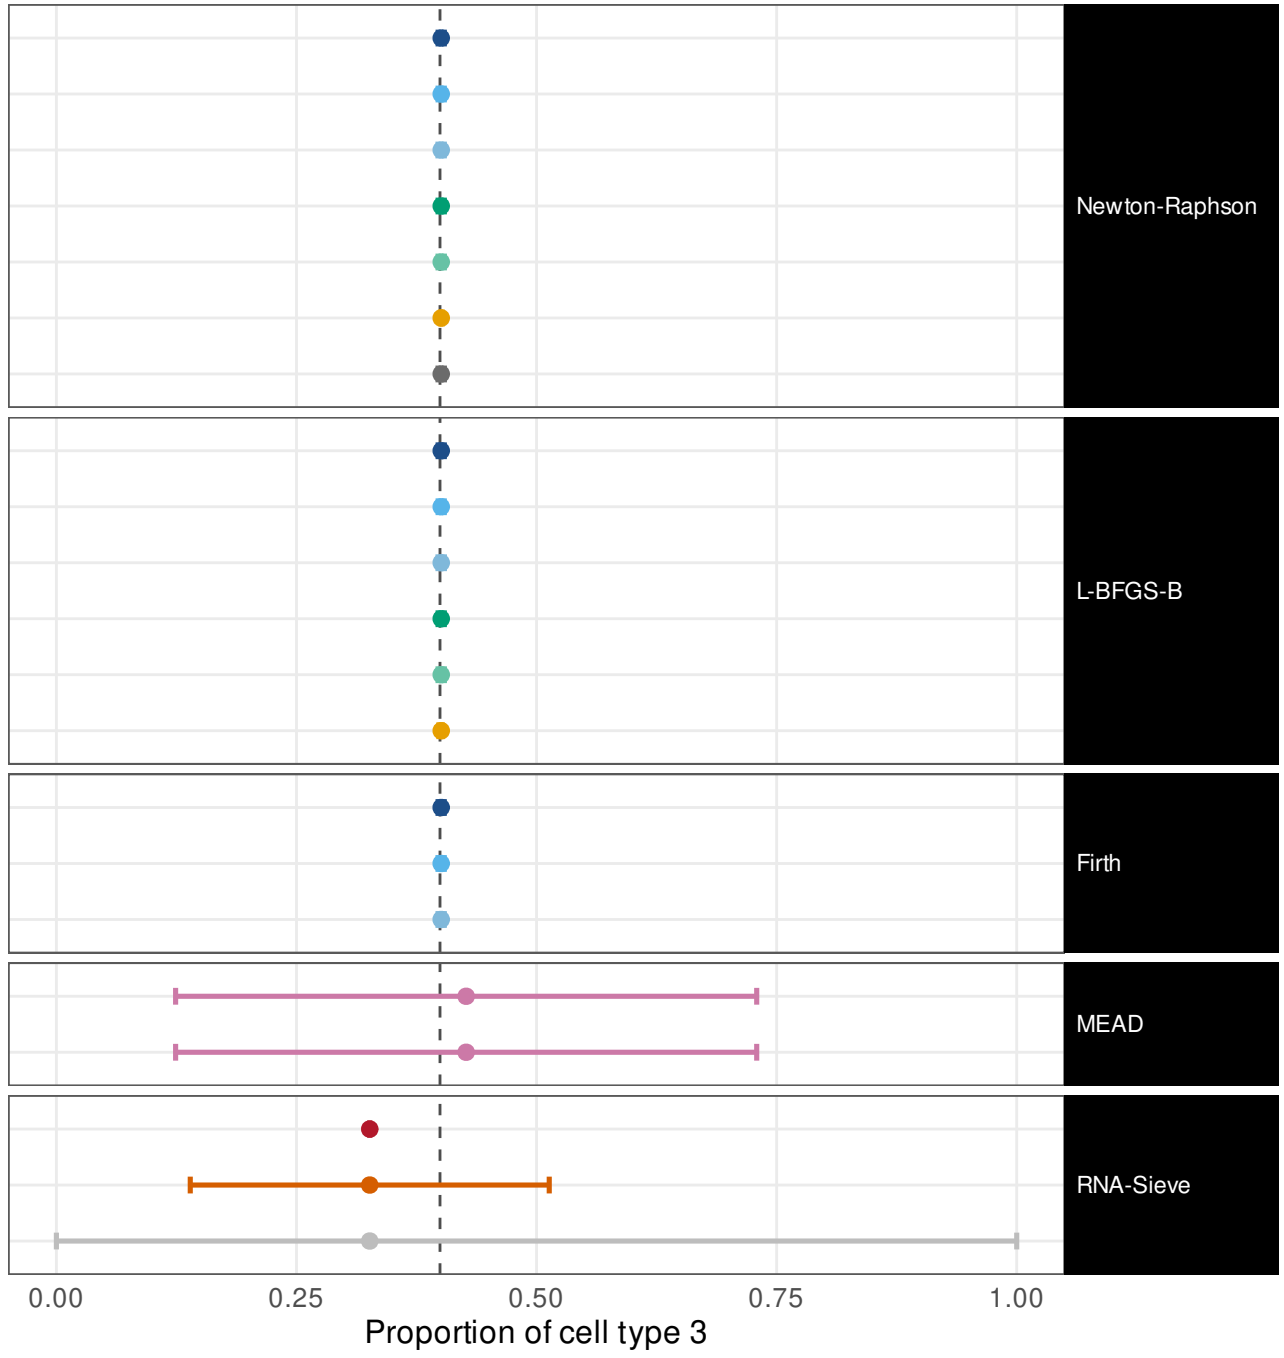


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / equal sizes

Wald (delta)	0.8	[0.38, 0.96]	w = 0.00647
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00642
ILR, REML	0.8	[0.38, 0.96]	w = 0.00652
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0065
Profile, REML	0.8	[0.38, 0.96]	w = 0.00657
Parametric bootstrap	0.4	[0.12, 0.77]	w = 0.00258
Oracle (Fisher at p*)	0.8	[0.38, 0.96]	w = 0.00659
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00647
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00643
ILR, REML	0.8	[0.38, 0.96]	w = 0.00662
Profile likelihood	0.8	[0.38, 0.96]	w = 0.0065
Profile, REML	0.8	[0.38, 0.96]	w = 0.00657
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.00318
Wald (delta)	0.8	[0.38, 0.96]	w = 0.00646
ILR, mapped back	0.8	[0.38, 0.96]	w = 0.00643
ILR, REML	0.8	[0.38, 0.96]	w = 0.00656
Method's own interval	1	[0.57, 1]	w = 0.22
Own interval, transcript fractions	1	[0.57, 1]	w = 0.22
Fisher information (Wald)	0	[0, 0.43]	w = 0.000125
Godambe sandwich	1	[0.57, 1]	w = 0.345
Released code, as published	1	[0.57, 1]	w = 1

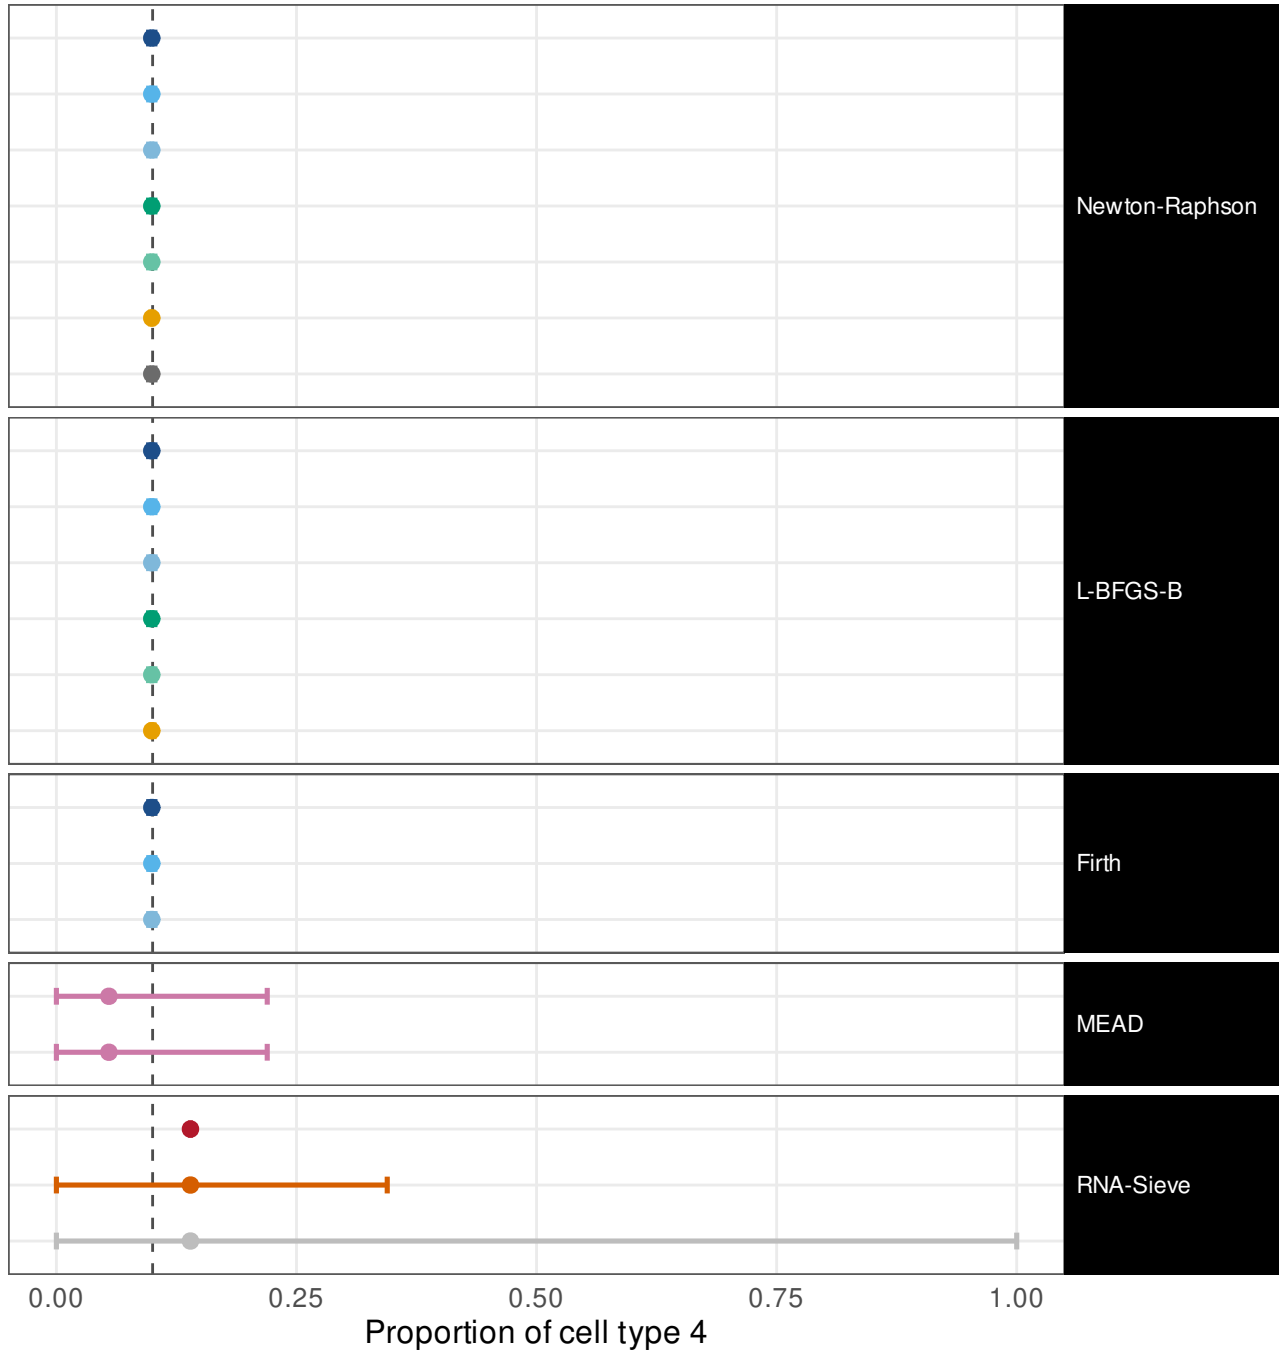


Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5

Wald (delta)	1	[0.57, 1]	w = 0.0227
ILR, mapped back	1	[0.57, 1]	w = 0.0225
ILR, REML	1	[0.57, 1]	w = 0.0231
Profile likelihood	1	[0.57, 1]	w = 0.0228
Profile, REML	1	[0.57, 1]	w = 0.0231
Parametric bootstrap	0.6	[0.23, 0.88]	w = 0.0124
Oracle (Fisher at p*)	1	[0.57, 1]	w = 0.0233
Wald (delta)	1	[0.57, 1]	w = 0.0227
ILR, mapped back	1	[0.57, 1]	w = 0.0229
ILR, REML	1	[0.57, 1]	w = 0.0228
Profile likelihood	1	[0.57, 1]	w = 0.0228
Profile, REML	1	[0.57, 1]	w = 0.0231
Parametric bootstrap	0.8	[0.38, 0.96]	w = 0.0146
Wald (delta)	1	[0.57, 1]	w = 0.0226
ILR, mapped back	1	[0.57, 1]	w = 0.0226
ILR, REML	1	[0.57, 1]	w = 0.0229
Method's own interval	1	[0.57, 1]	w = 1
Own interval, transcript fractions	1	[0.57, 1]	w = 1
Fisher information (Wald)	0	[0, 0.43]	w = 0.00103
Godambe sandwich	1	[0.57, 1]	w = 0.521
Released code, as published	1	[0.57, 1]	w = 1

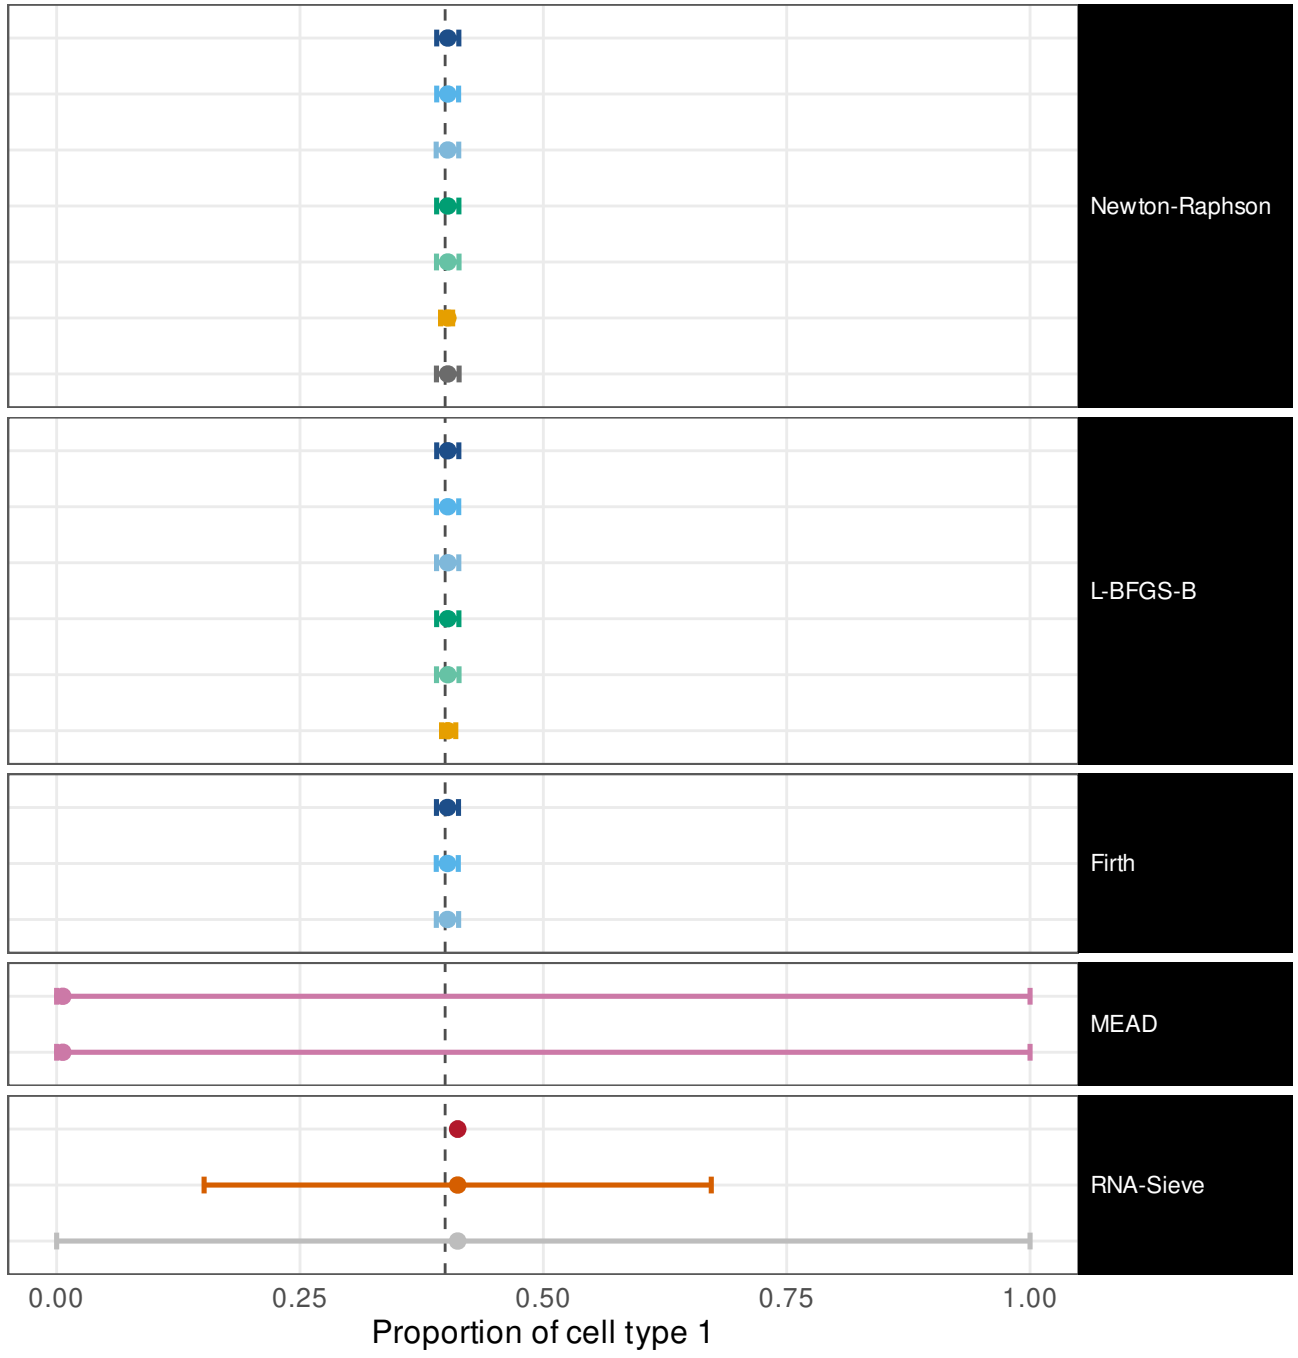

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.0236
ILR, mapped back                      1  [0.57,    1]   w = 0.0237
ILR, REML                             1  [0.57,    1]   w = 0.0241
Profile likelihood                    1  [0.57,    1]   w = 0.0238
Profile, REML                         1  [0.57,    1]   w = 0.024
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.0139
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.0241

Wald (delta)                          1  [0.57,    1]   w = 0.0236
ILR, mapped back                      1  [0.57,    1]   w = 0.0241
ILR, REML                             1  [0.57,    1]   w = 0.0236
Profile likelihood                    1  [0.57,    1]   w = 0.0238
Profile, REML                         1  [0.57,    1]   w = 0.024
Parametric bootstrap                0.8  [0.38, 0.96]   w = 0.0157

Wald (delta)                          1  [0.57,    1]   w = 0.0235
ILR, mapped back                      1  [0.57,    1]   w = 0.0236
ILR, REML                             1  [0.57,    1]   w = 0.024

Method's own interval                 1  [0.57,    1]   w =    1
Own interval, transcript fractions    1  [0.57,    1]   w =    1

Fisher information (Wald)             0  [   0, 0.43]   w = 0.00103
Godambe sandwich                      1  [0.57,    1]   w = 0.465
Released code, as published           1  [0.57,    1]   w =    1
```

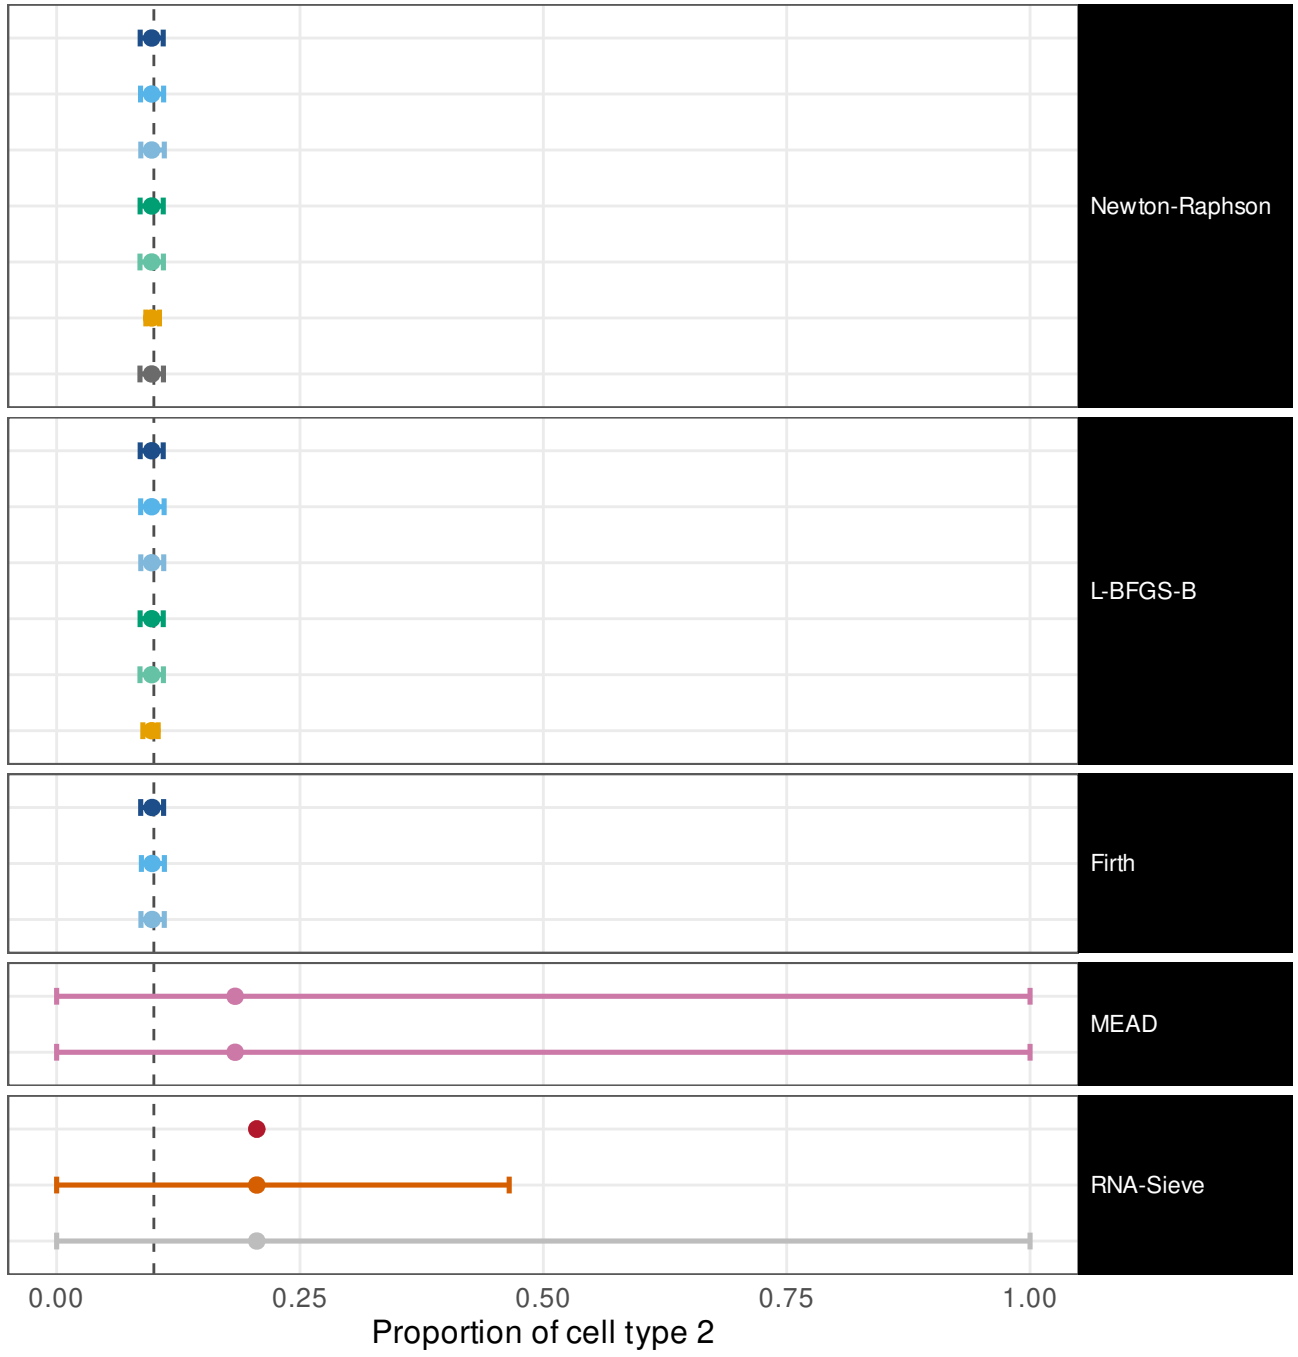

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                      0.8   [0.38, 0.96]   w = 0.00817
ILR, mapped back                  0.8   [0.38, 0.96]   w = 0.0082
ILR, REML                         0.8   [0.38, 0.96]   w = 0.00829
Profile likelihood                0.8   [0.38, 0.96]   w = 0.00821
Profile, REML                     0.8   [0.38, 0.96]   w = 0.0083
Parametric bootstrap              0.6   [0.23, 0.88]   w = 0.00412
Oracle (Fisher at p*)             0.8   [0.38, 0.96]   w = 0.00834

Wald (delta)                      0.8   [0.38, 0.96]   w = 0.00817
ILR, mapped back                  0.8   [0.38, 0.96]   w = 0.0082
ILR, REML                         0.8   [0.38, 0.96]   w = 0.00838
Profile likelihood                0.8   [0.38, 0.96]   w = 0.00821
Profile, REML                     0.8   [0.38, 0.96]   w = 0.0083
Parametric bootstrap              0.4   [0.12, 0.77]   w = 0.00545

Wald (delta)                      0.8   [0.38, 0.96]   w = 0.00816
ILR, mapped back                  0.8   [0.38, 0.96]   w = 0.00813
ILR, REML                         0.8   [0.38, 0.96]   w = 0.00831

Method's own interval               1   [0.57,    1]   w =    1
Own interval, transcript fractions  1   [0.57,    1]   w =    1

Fisher information (Wald)           0   [   0, 0.43]   w = 0.000502
Godambe sandwich                  0.2   [0.036, 0.62]   w = 0.269
Released code, as published         1   [0.57,    1]   w =    1
```

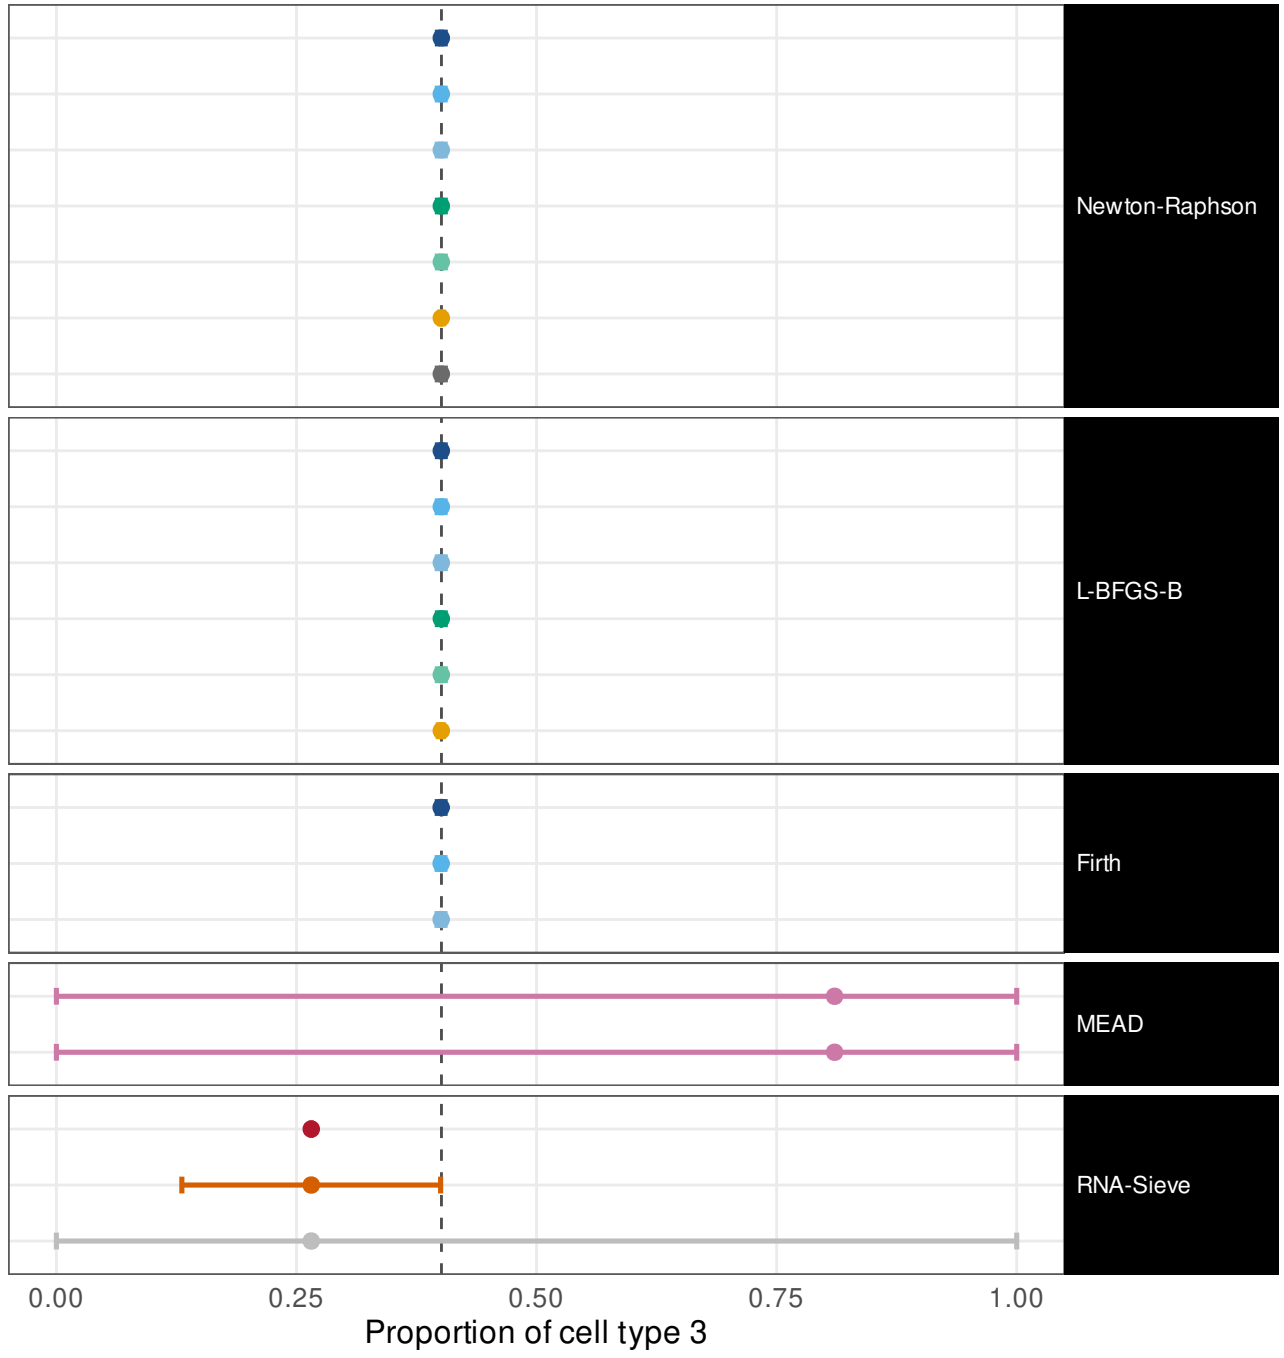

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.

Confidence intervals: coverage [Wilson 95% interval] and mean width w

G = 200 / 1e+05 cells per bulk / unbalanced / high sibling overlap / a = 5 / sizes 1:1:5:5


```
Wald (delta)                          1  [0.57,    1]   w = 0.00519
ILR, mapped back                      1  [0.57,    1]   w = 0.0052
ILR, REML                             1  [0.57,    1]   w = 0.00522
Profile likelihood                    1  [0.57,    1]   w = 0.00521
Profile, REML                         1  [0.57,    1]   w = 0.00527
Parametric bootstrap                0.4  [0.12, 0.77]   w = 0.00255
Oracle (Fisher at p*)                 1  [0.57,    1]   w = 0.00525

Wald (delta)                          1  [0.57,    1]   w = 0.00519
ILR, mapped back                      1  [0.57,    1]   w = 0.00522
ILR, REML                             1  [0.57,    1]   w = 0.00536
Profile likelihood                    1  [0.57,    1]   w = 0.00521
Profile, REML                         1  [0.57,    1]   w = 0.00527
Parametric bootstrap                0.6  [0.23, 0.88]   w = 0.00344

Wald (delta)                          1  [0.57,    1]   w = 0.00519
ILR, mapped back                      1  [0.57,    1]   w = 0.00514
ILR, REML                             1  [0.57,    1]   w = 0.00524

Method's own interval                 1  [0.57,    1]   w =    1
Own interval, transcript fractions    1  [0.57,    1]   w =    1

Fisher information (Wald)             0  [   0, 0.43]   w = 0.000249
Godambe sandwich                      1  [0.57,    1]   w = 0.253
Released code, as published           1  [0.57,    1]   w =    1
```

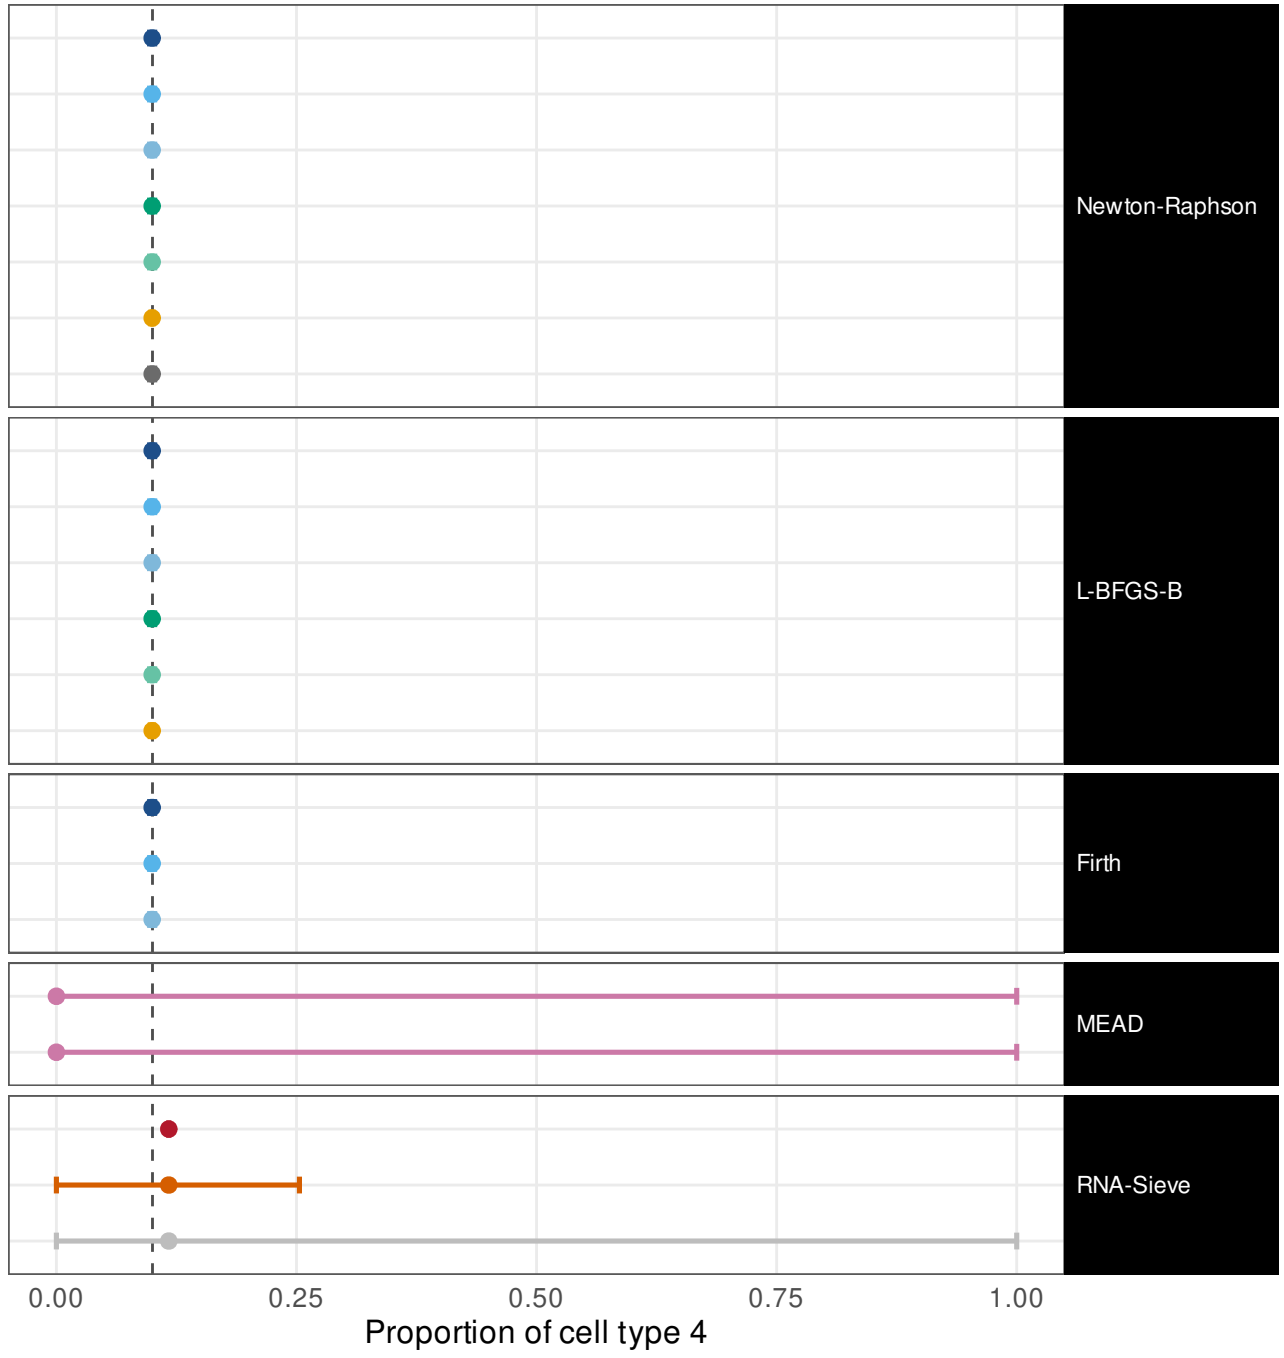

Bar: mean lower to mean upper bound over the simulated bulks; point: mean estimate; dashed: mean target.
Methods without intervals are not shown.