
Accuracy of every method: colour RMSE, size Aitchison distance


G = 20 / 1000 cells per bulk / balanced / low sibling overlap

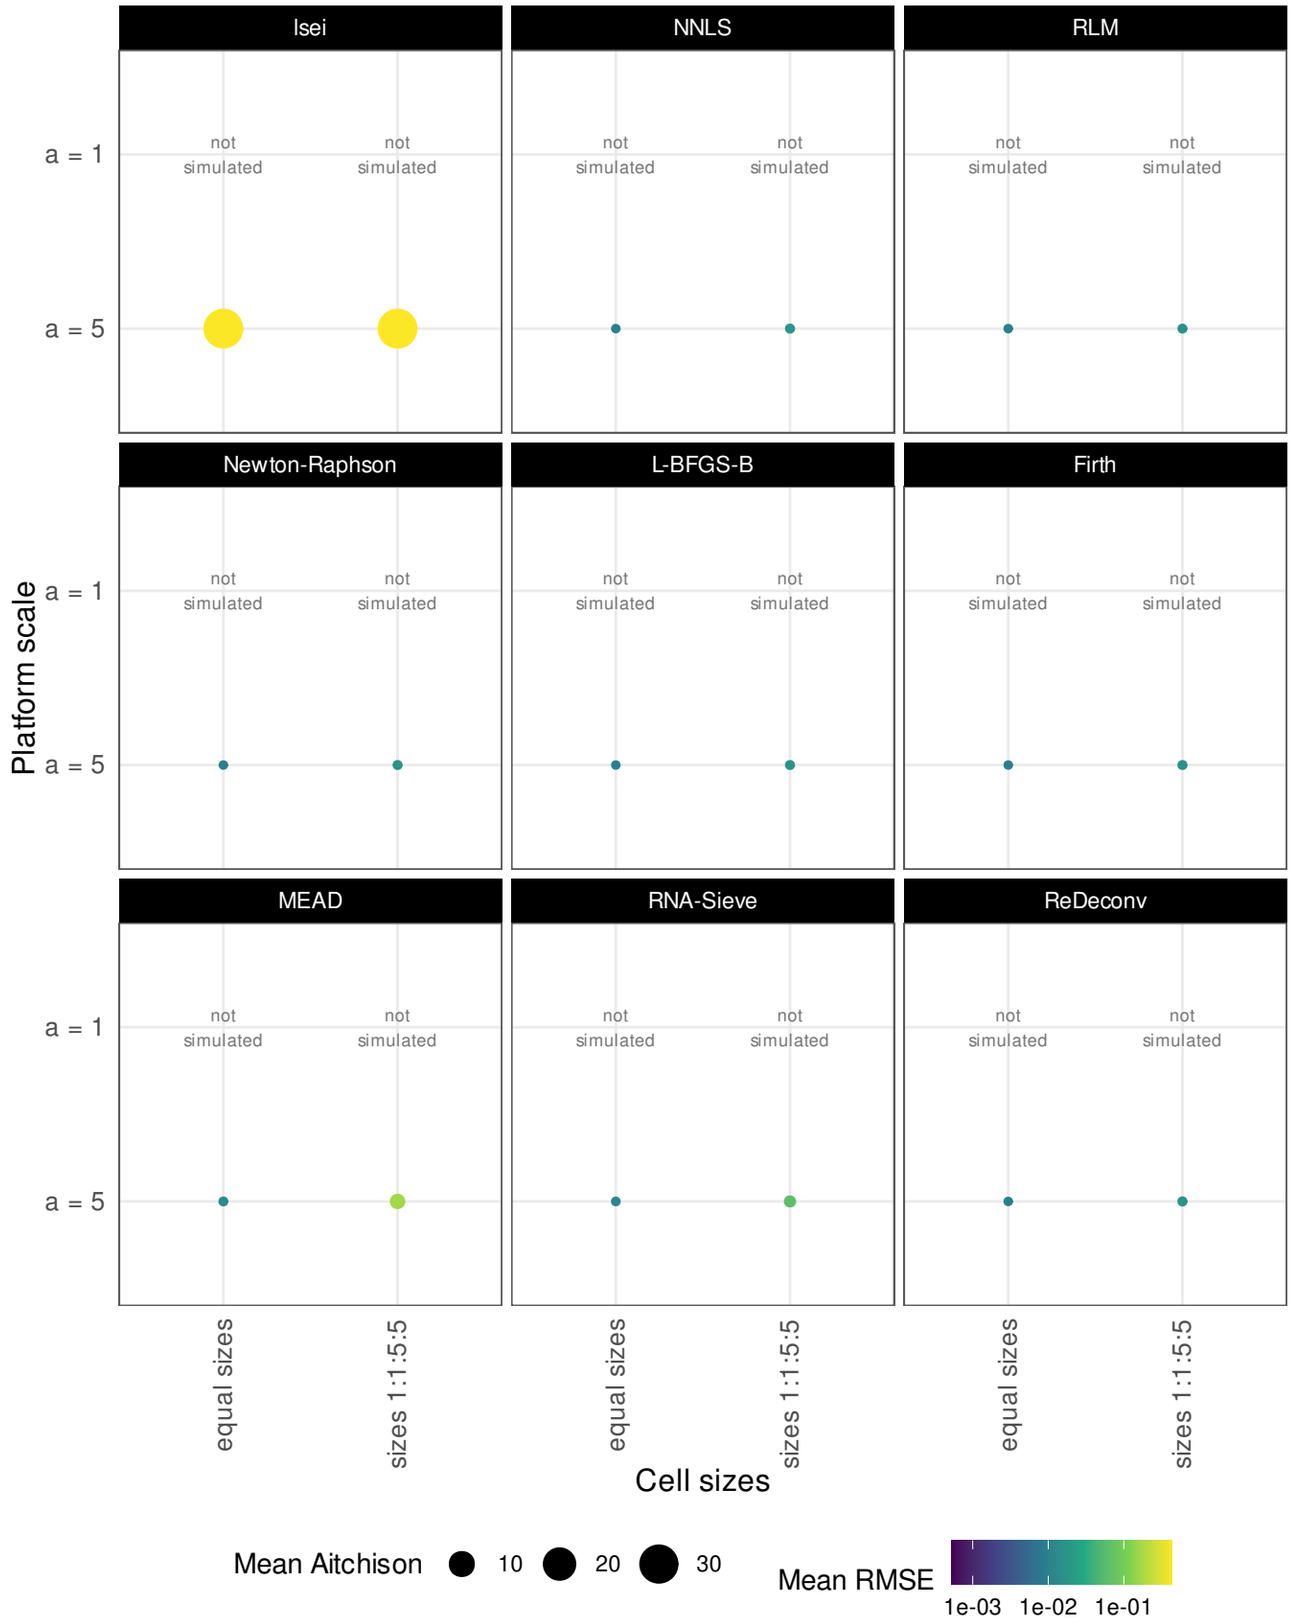

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 20 / 1000 cells per bulk / balanced / high sibling overlap

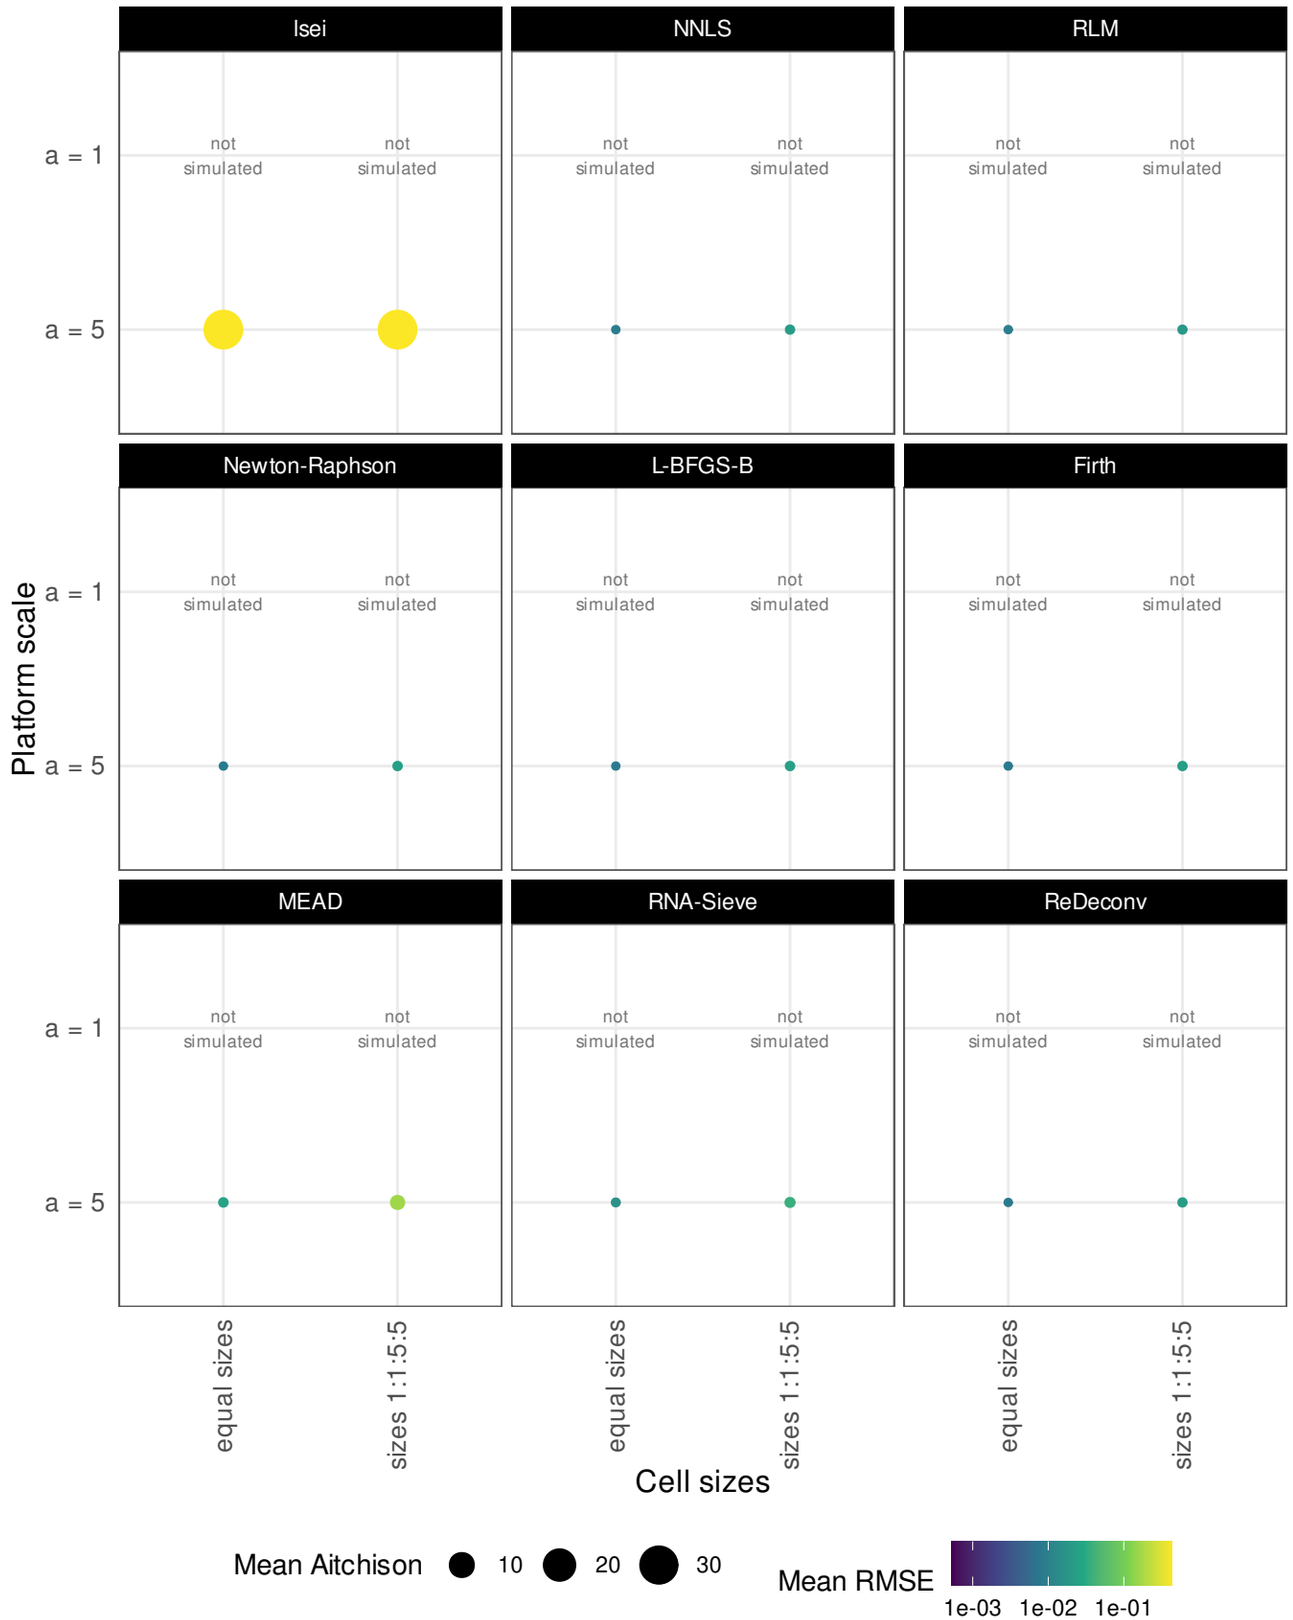

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 20 / 1000 cells per bulk / unbalanced / low sibling overlap

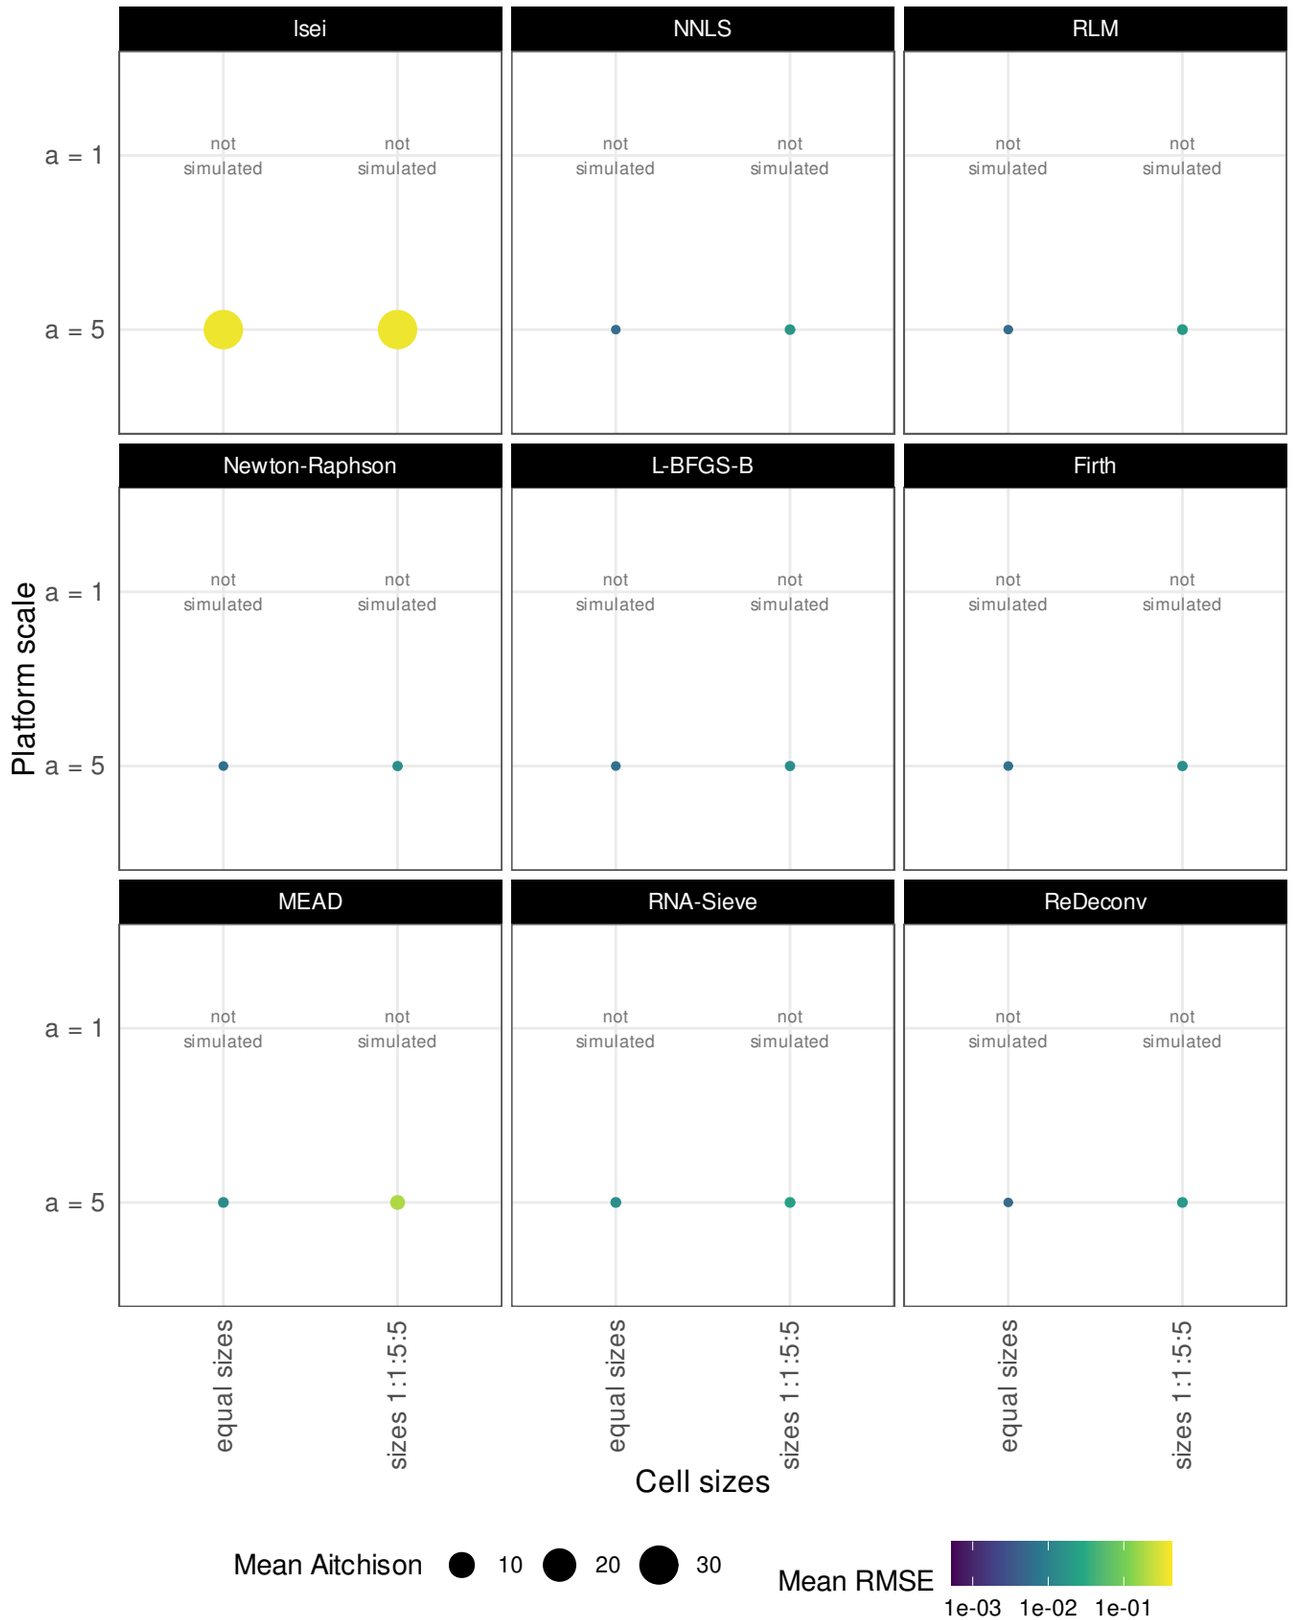

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 20 / 1000 cells per bulk / unbalanced / high sibling overlap

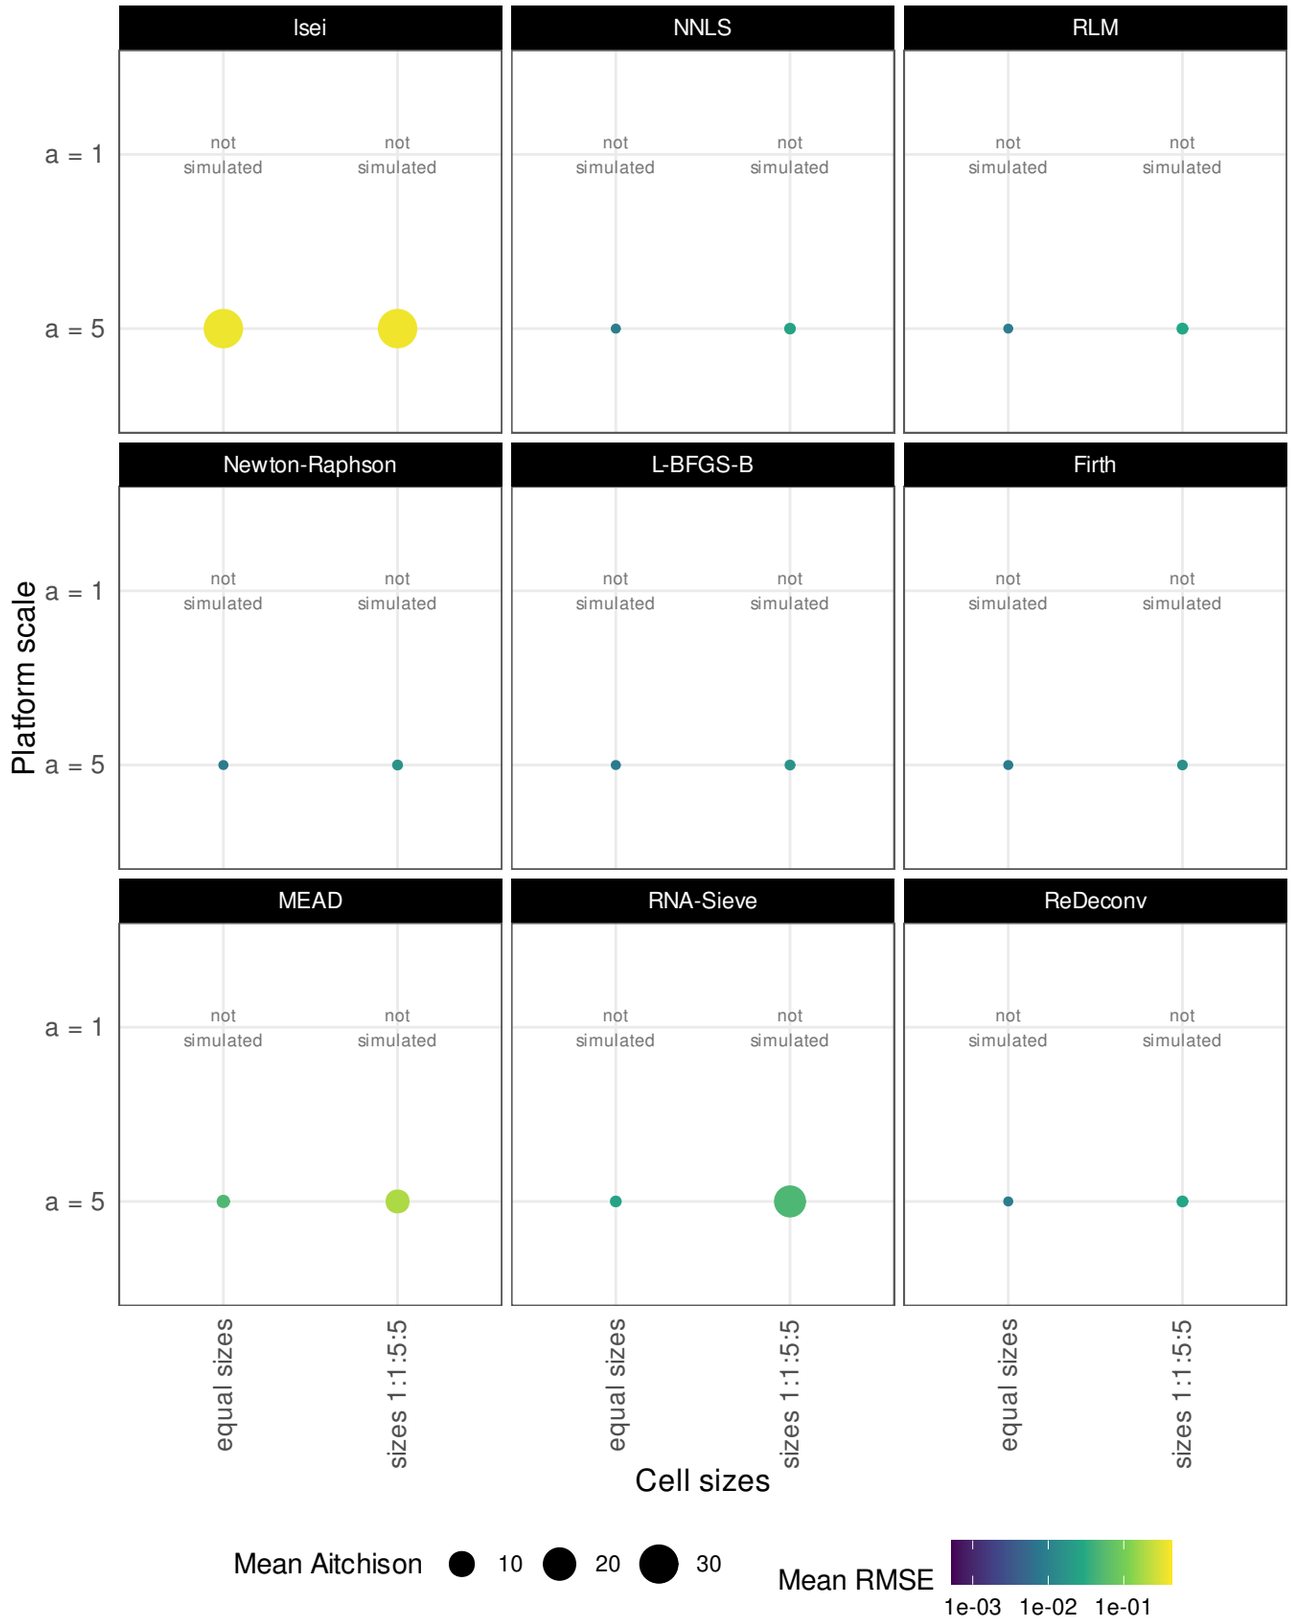

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap

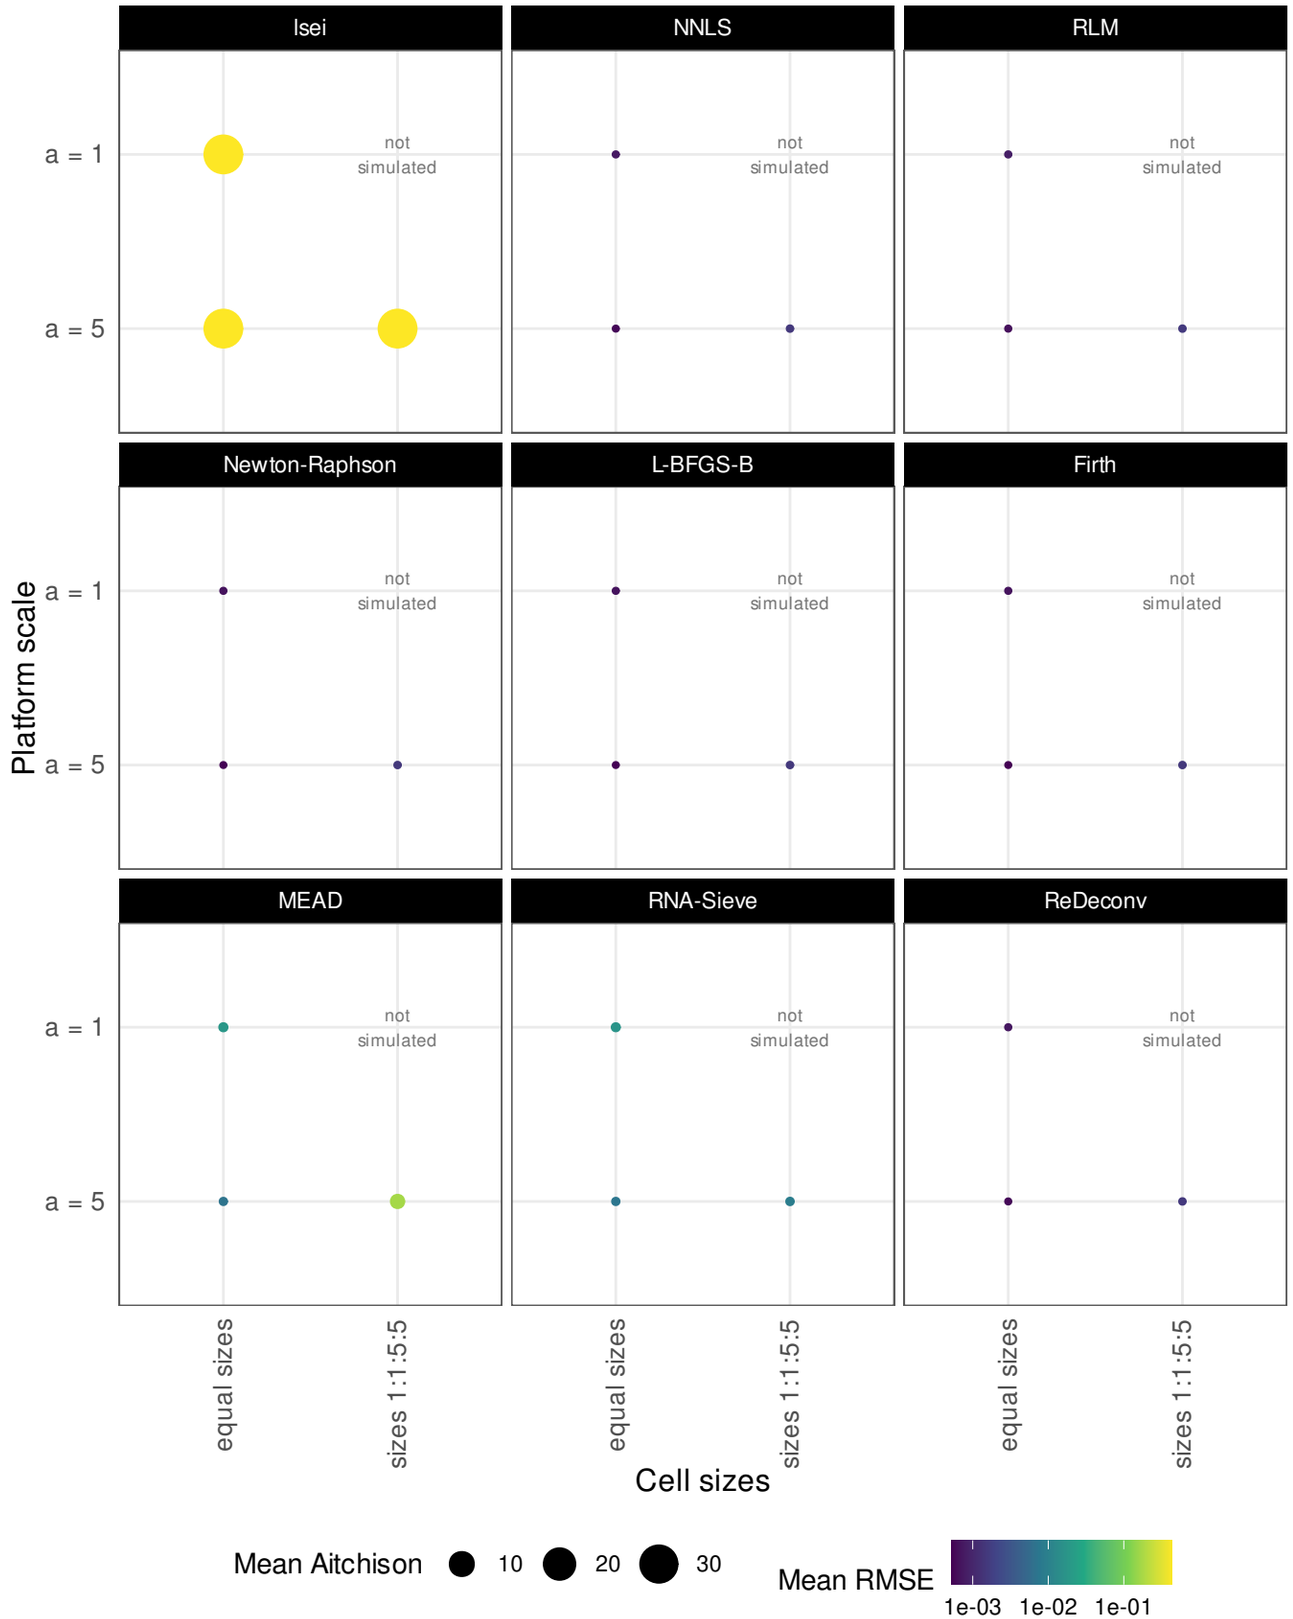

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 20 / 1e+05 cells per bulk / balanced / high sibling overlap

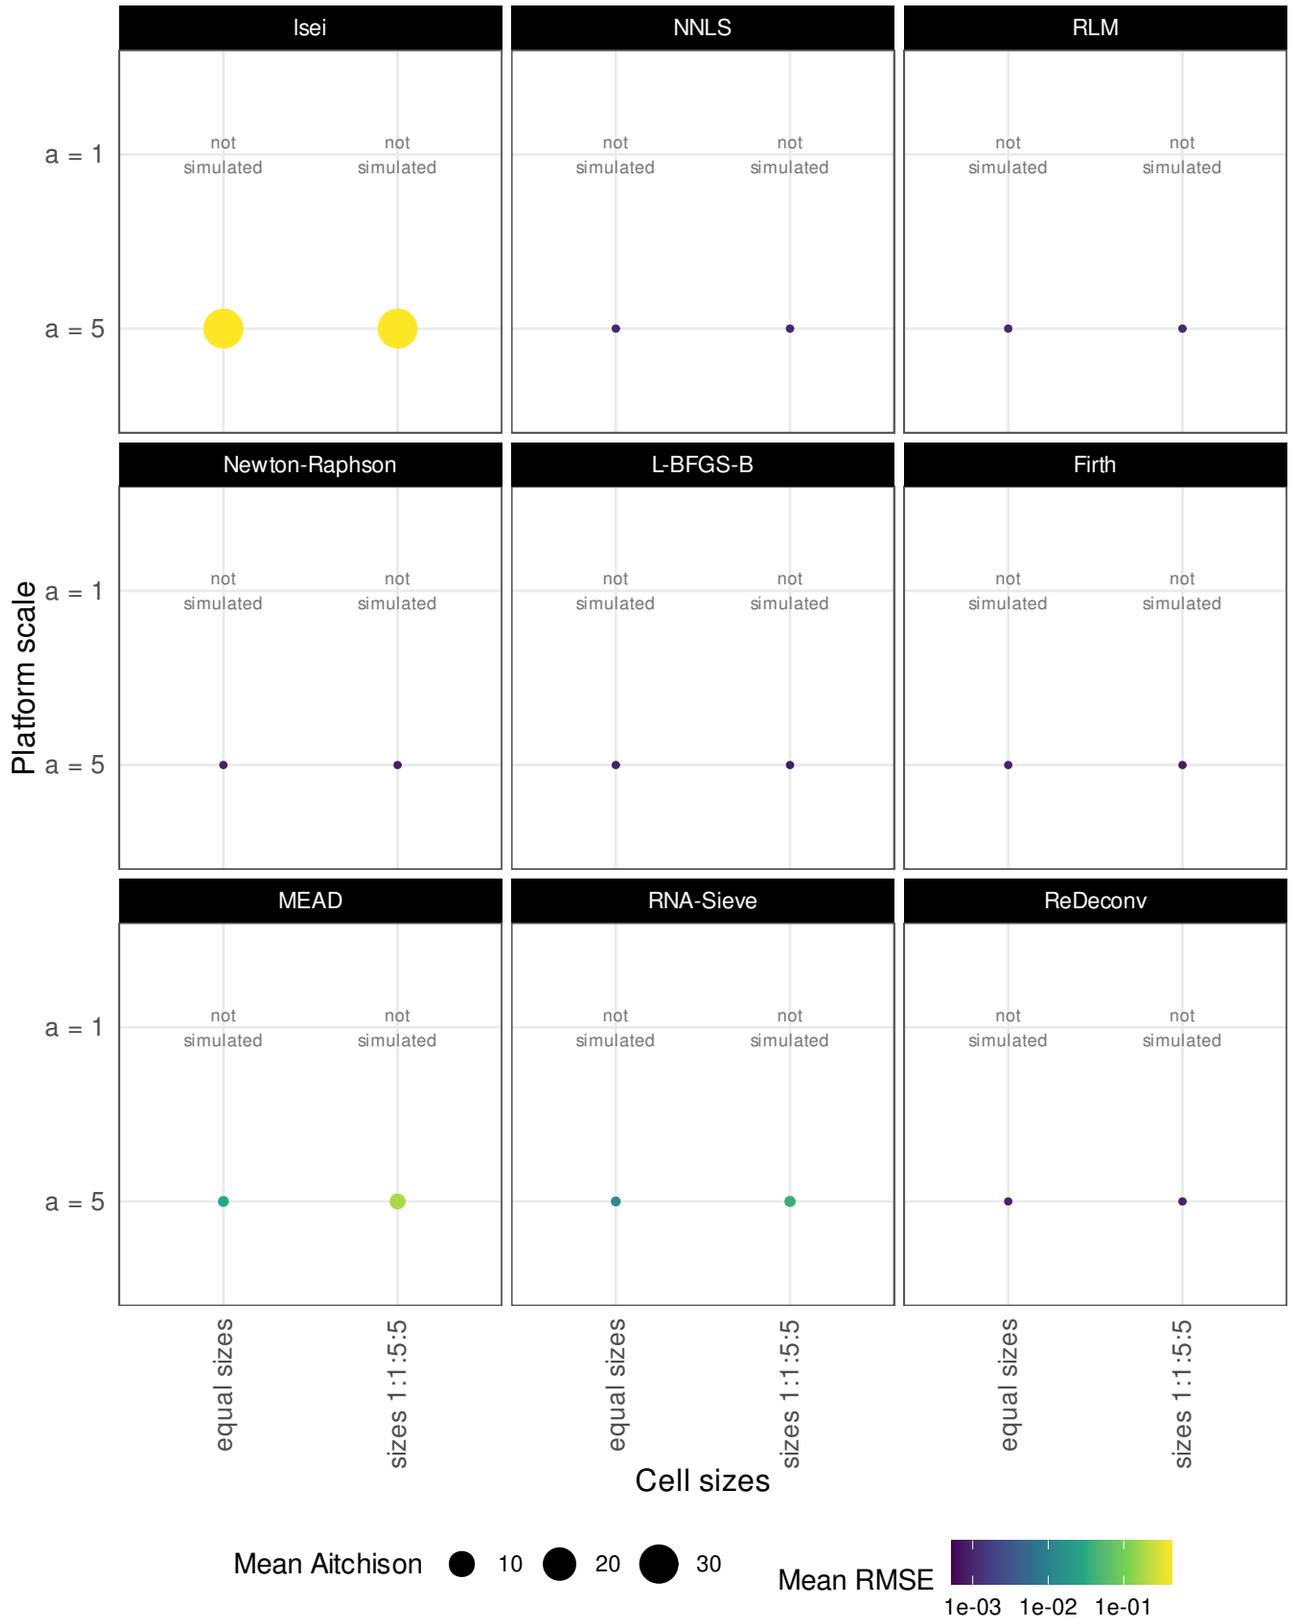

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 20 / 1e+05 cells per bulk / unbalanced / low sibling overlap

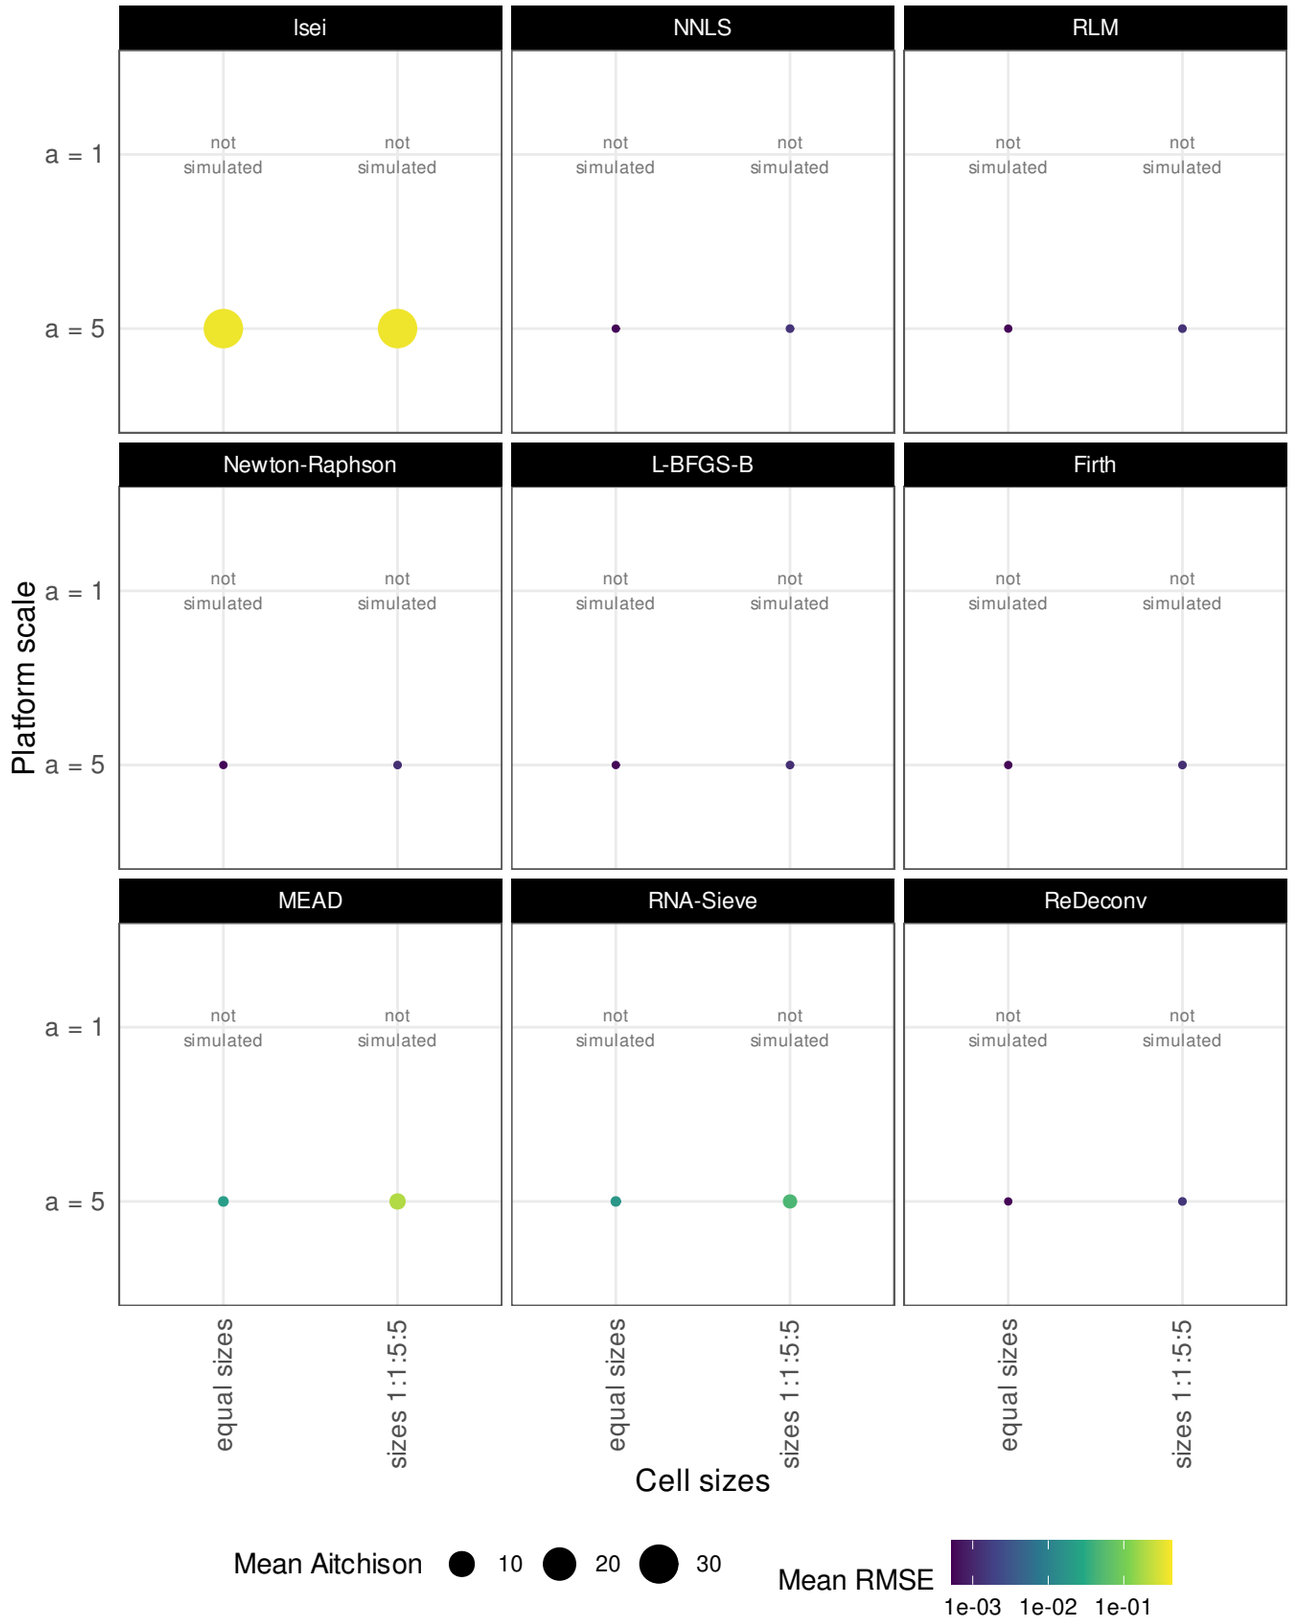

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 20 / 1e+05 cells per bulk / unbalanced / high sibling overlap

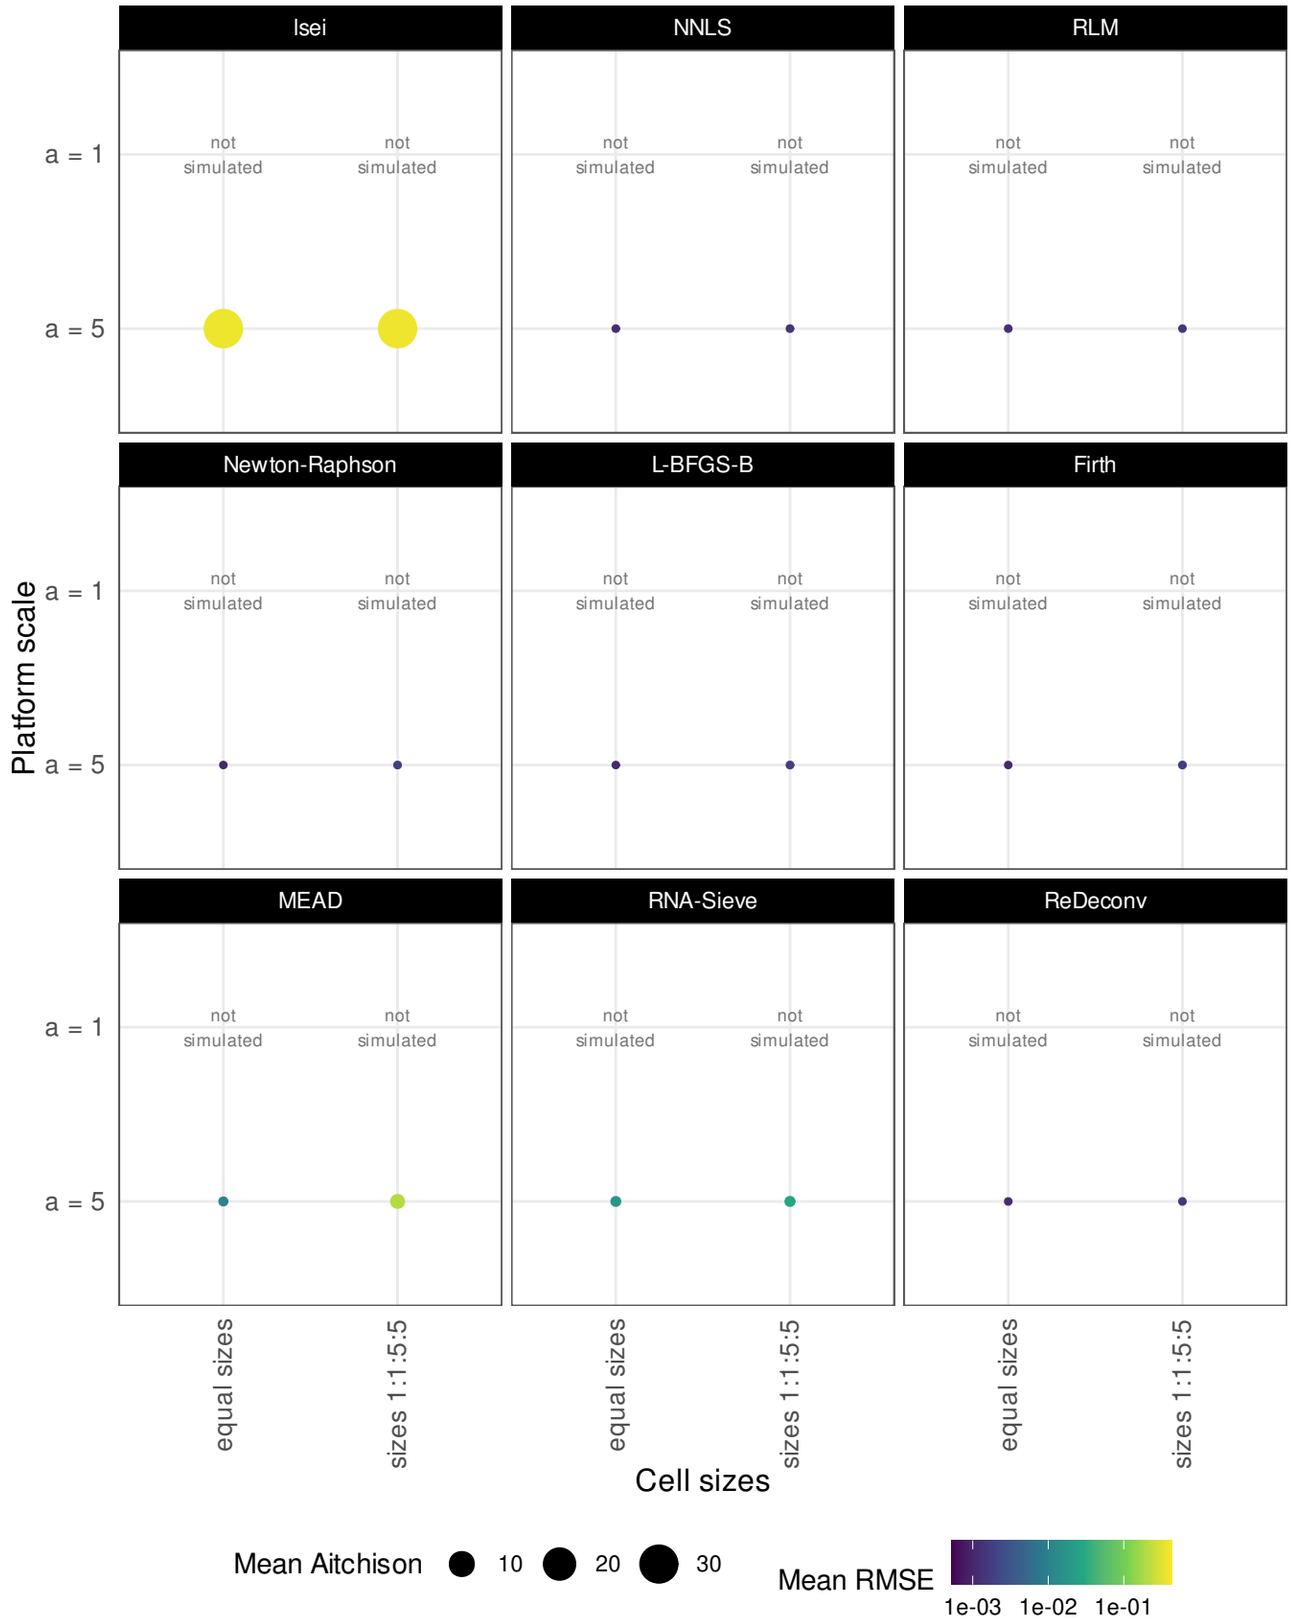

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 200 / 1000 cells per bulk / balanced / low sibling overlap

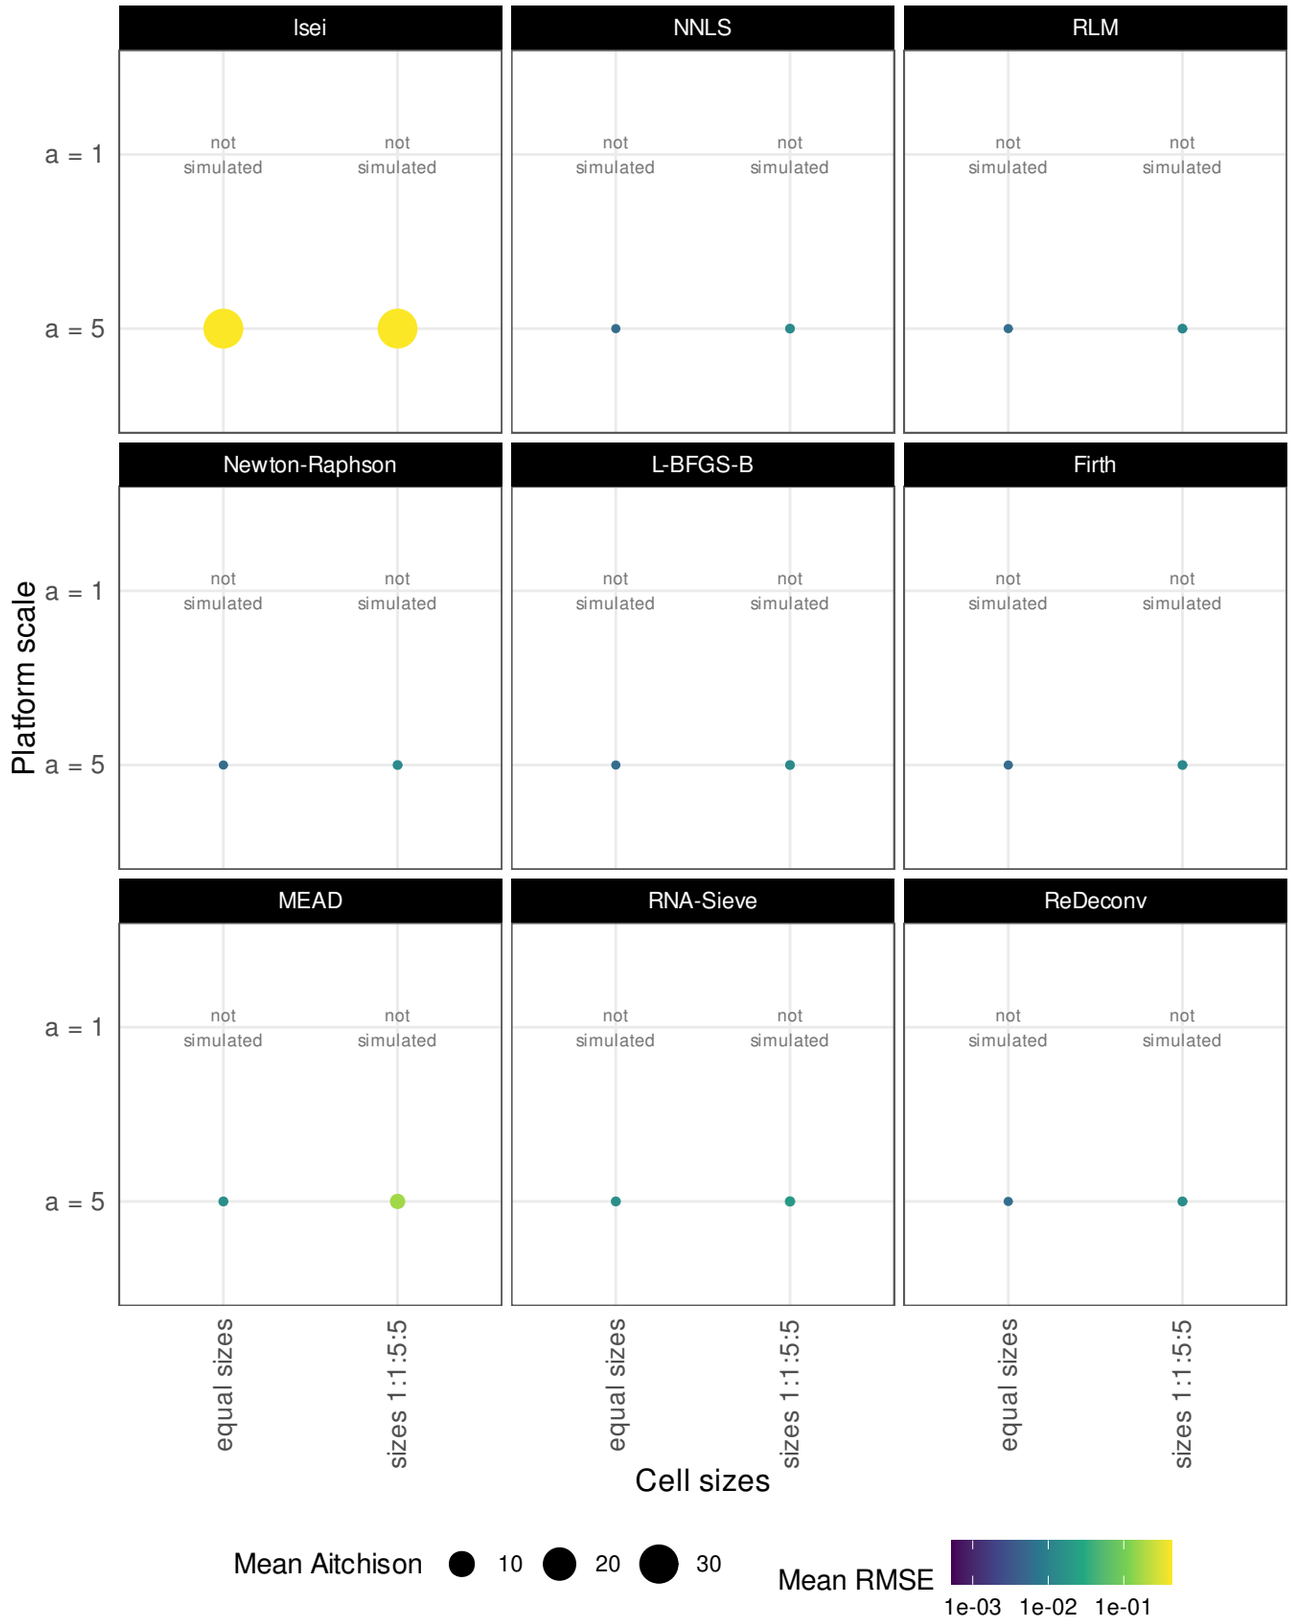

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 200 / 1000 cells per bulk / balanced / high sibling overlap

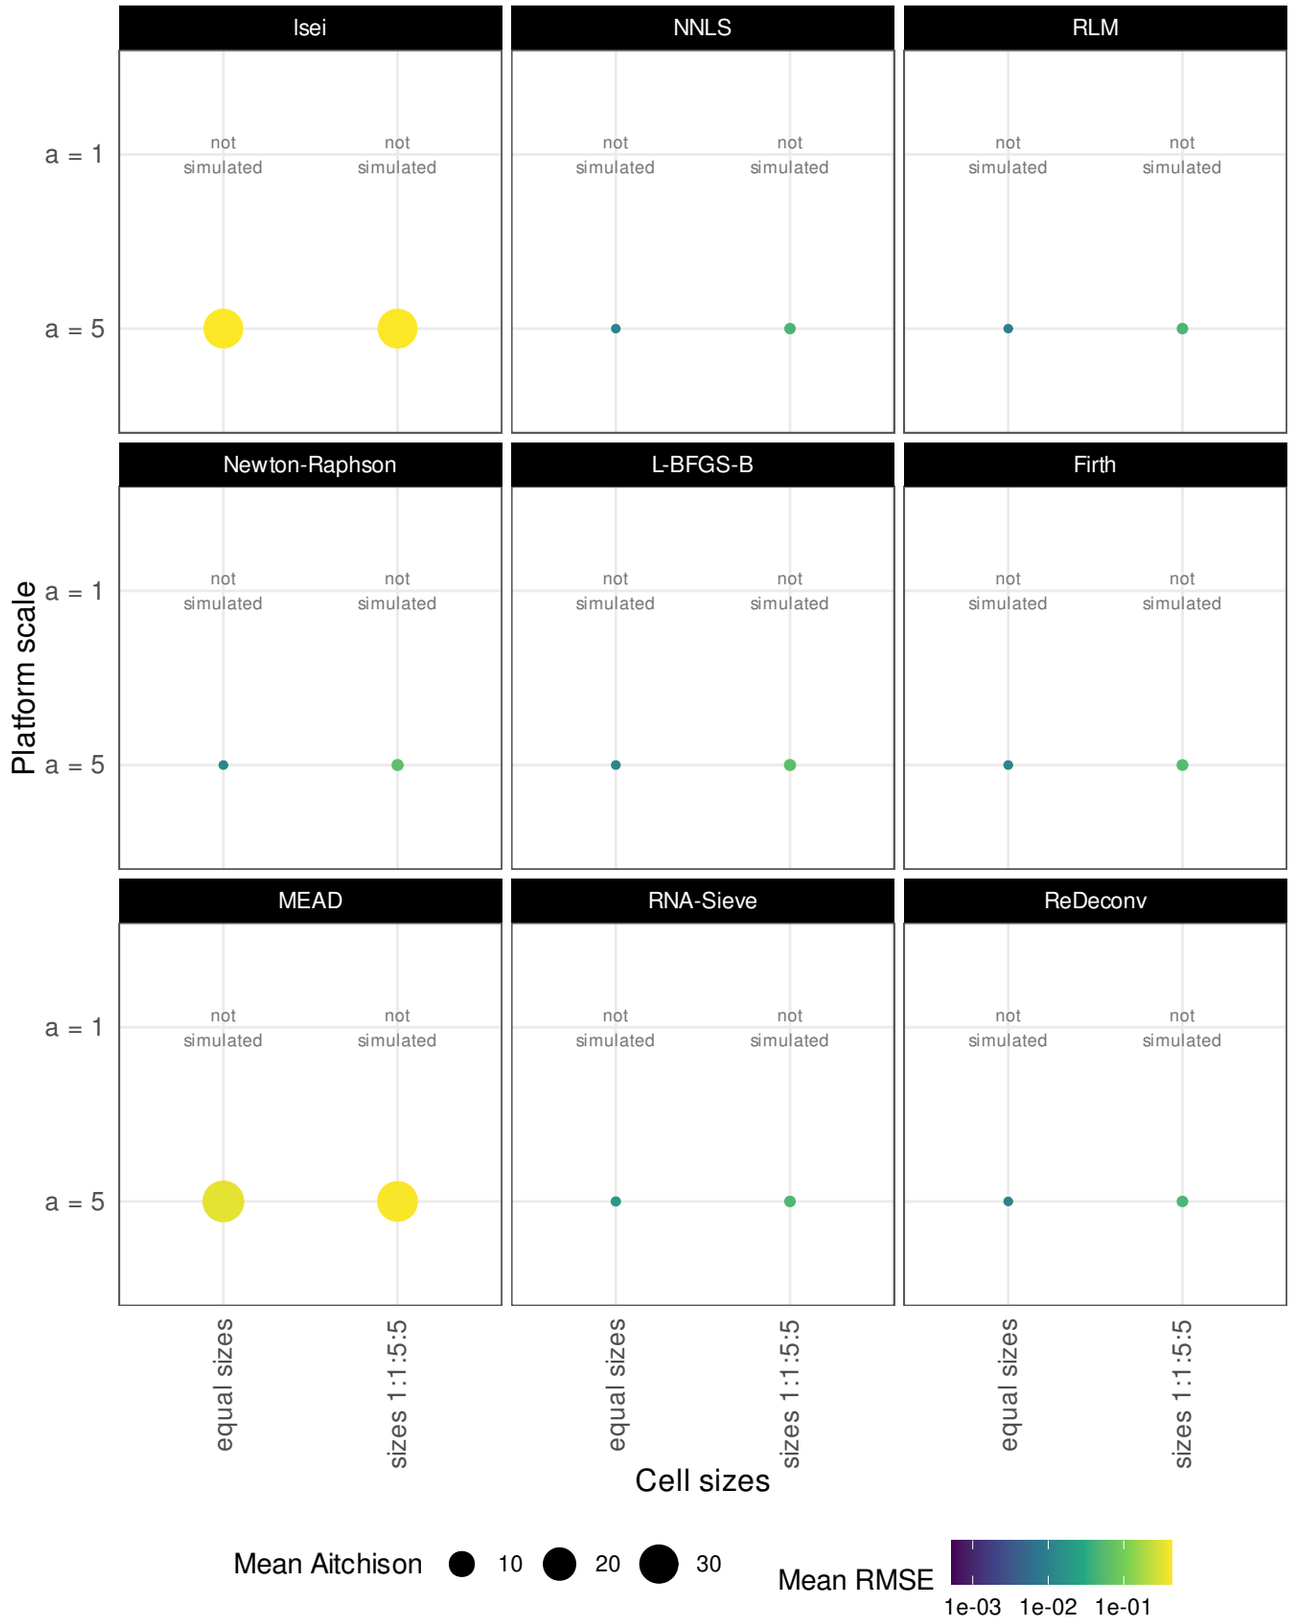

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 200 / 1000 cells per bulk / unbalanced / low sibling overlap

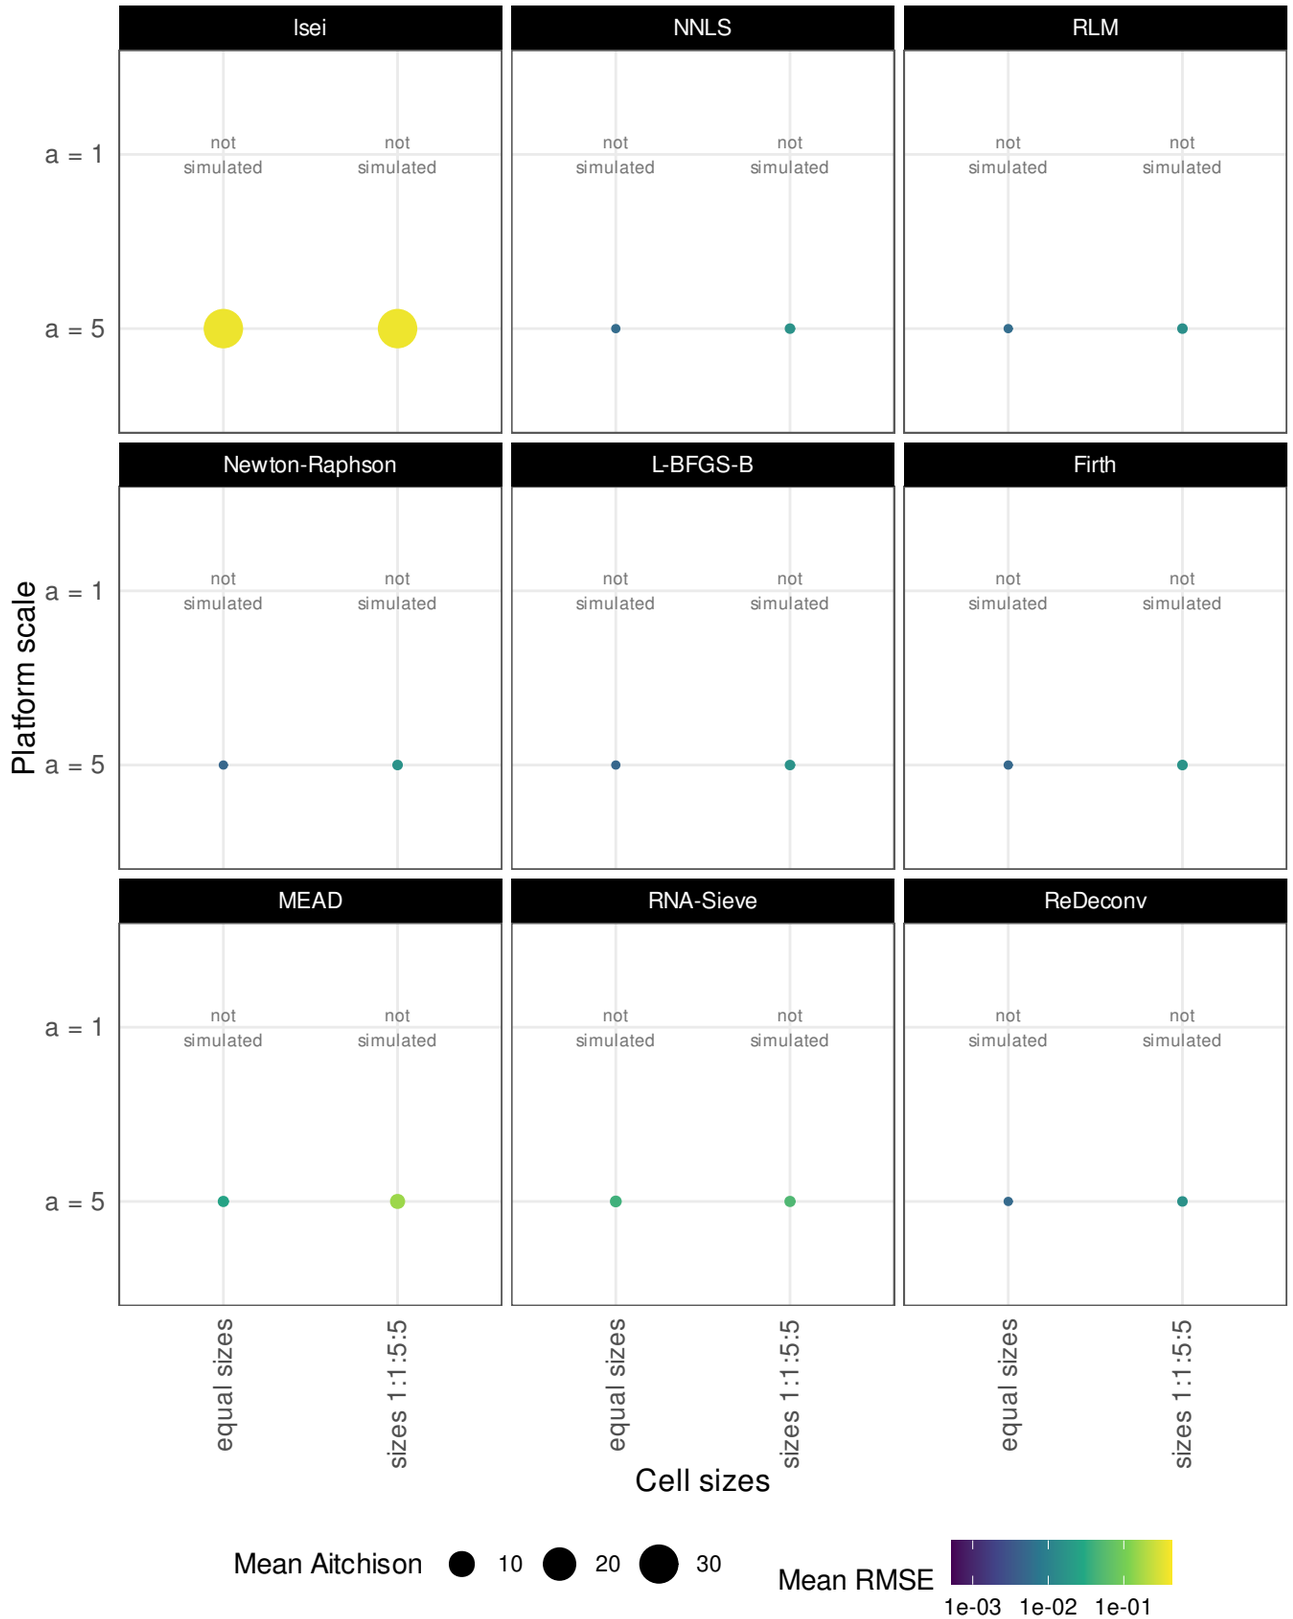

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 200 / 1000 cells per bulk / unbalanced / high sibling overlap

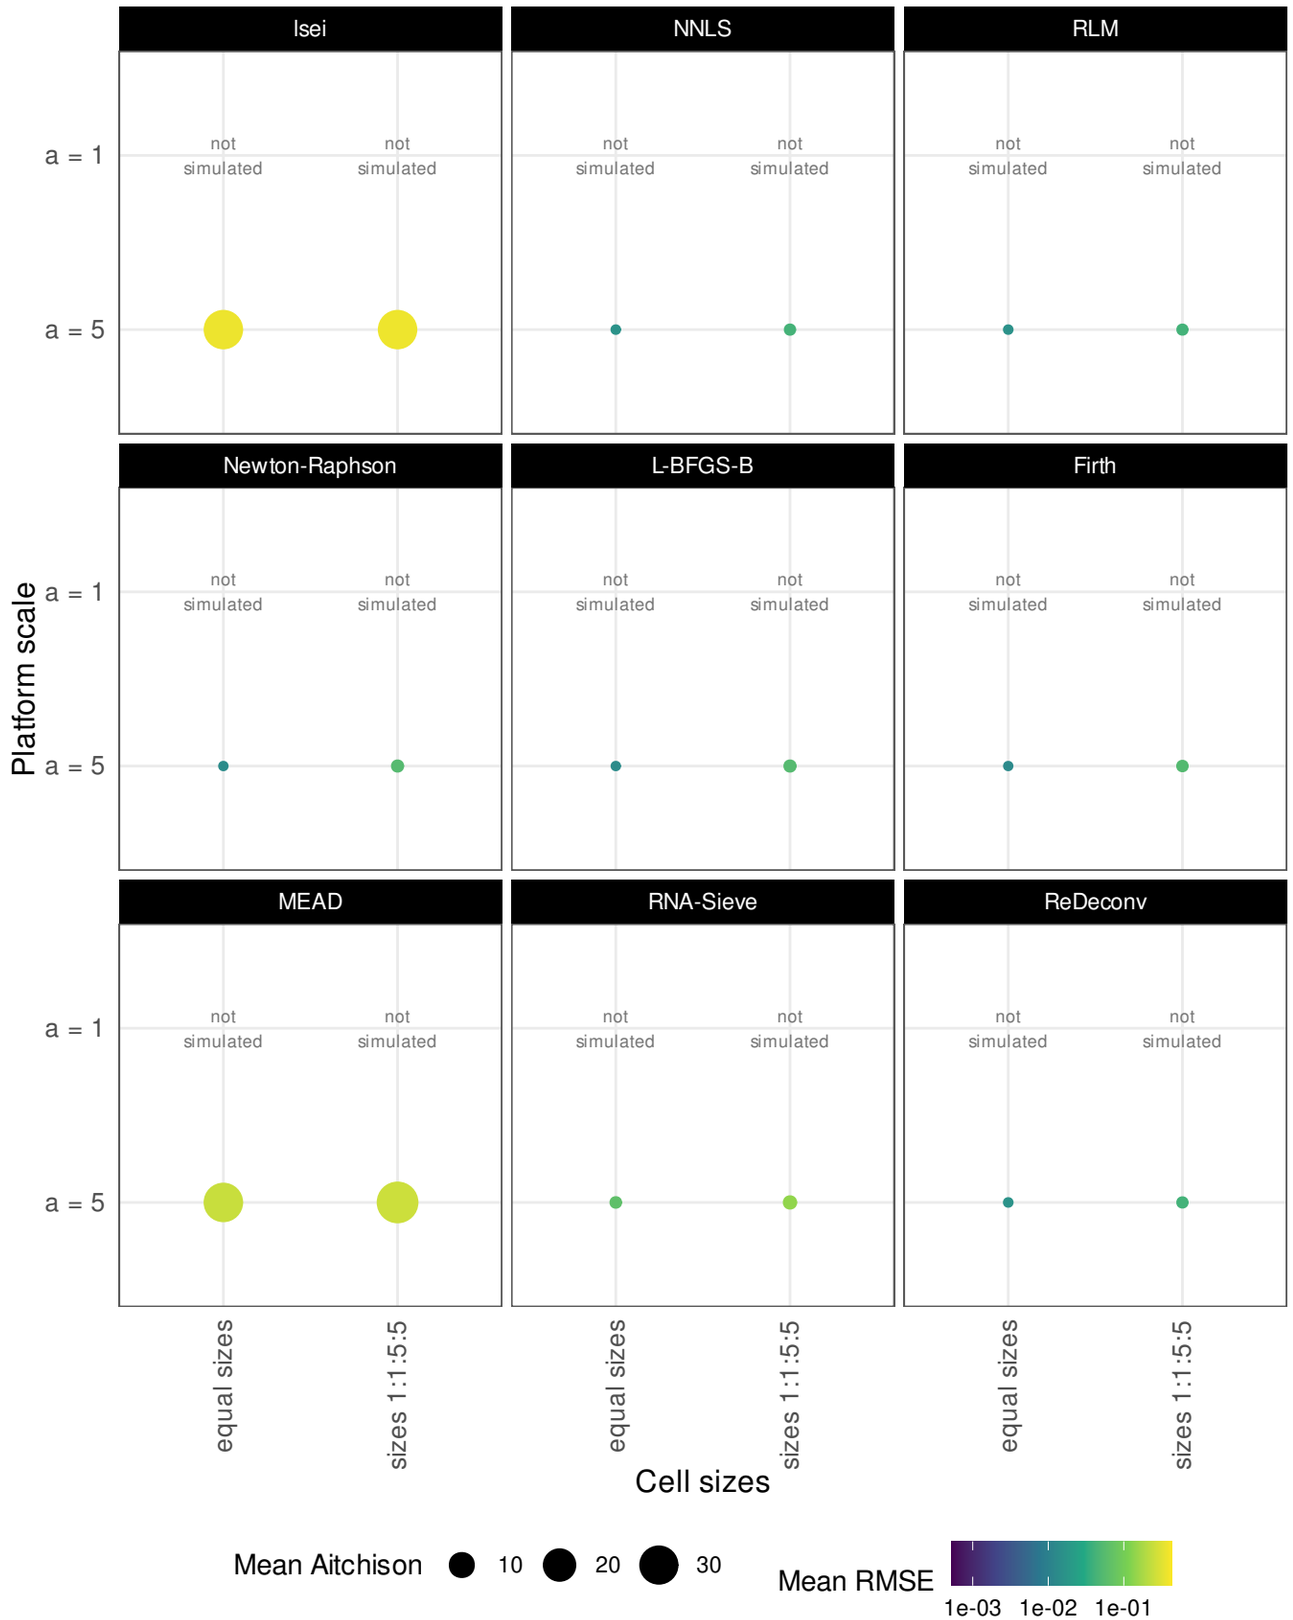

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 200 / 1e+05 cells per bulk / balanced / low sibling overlap

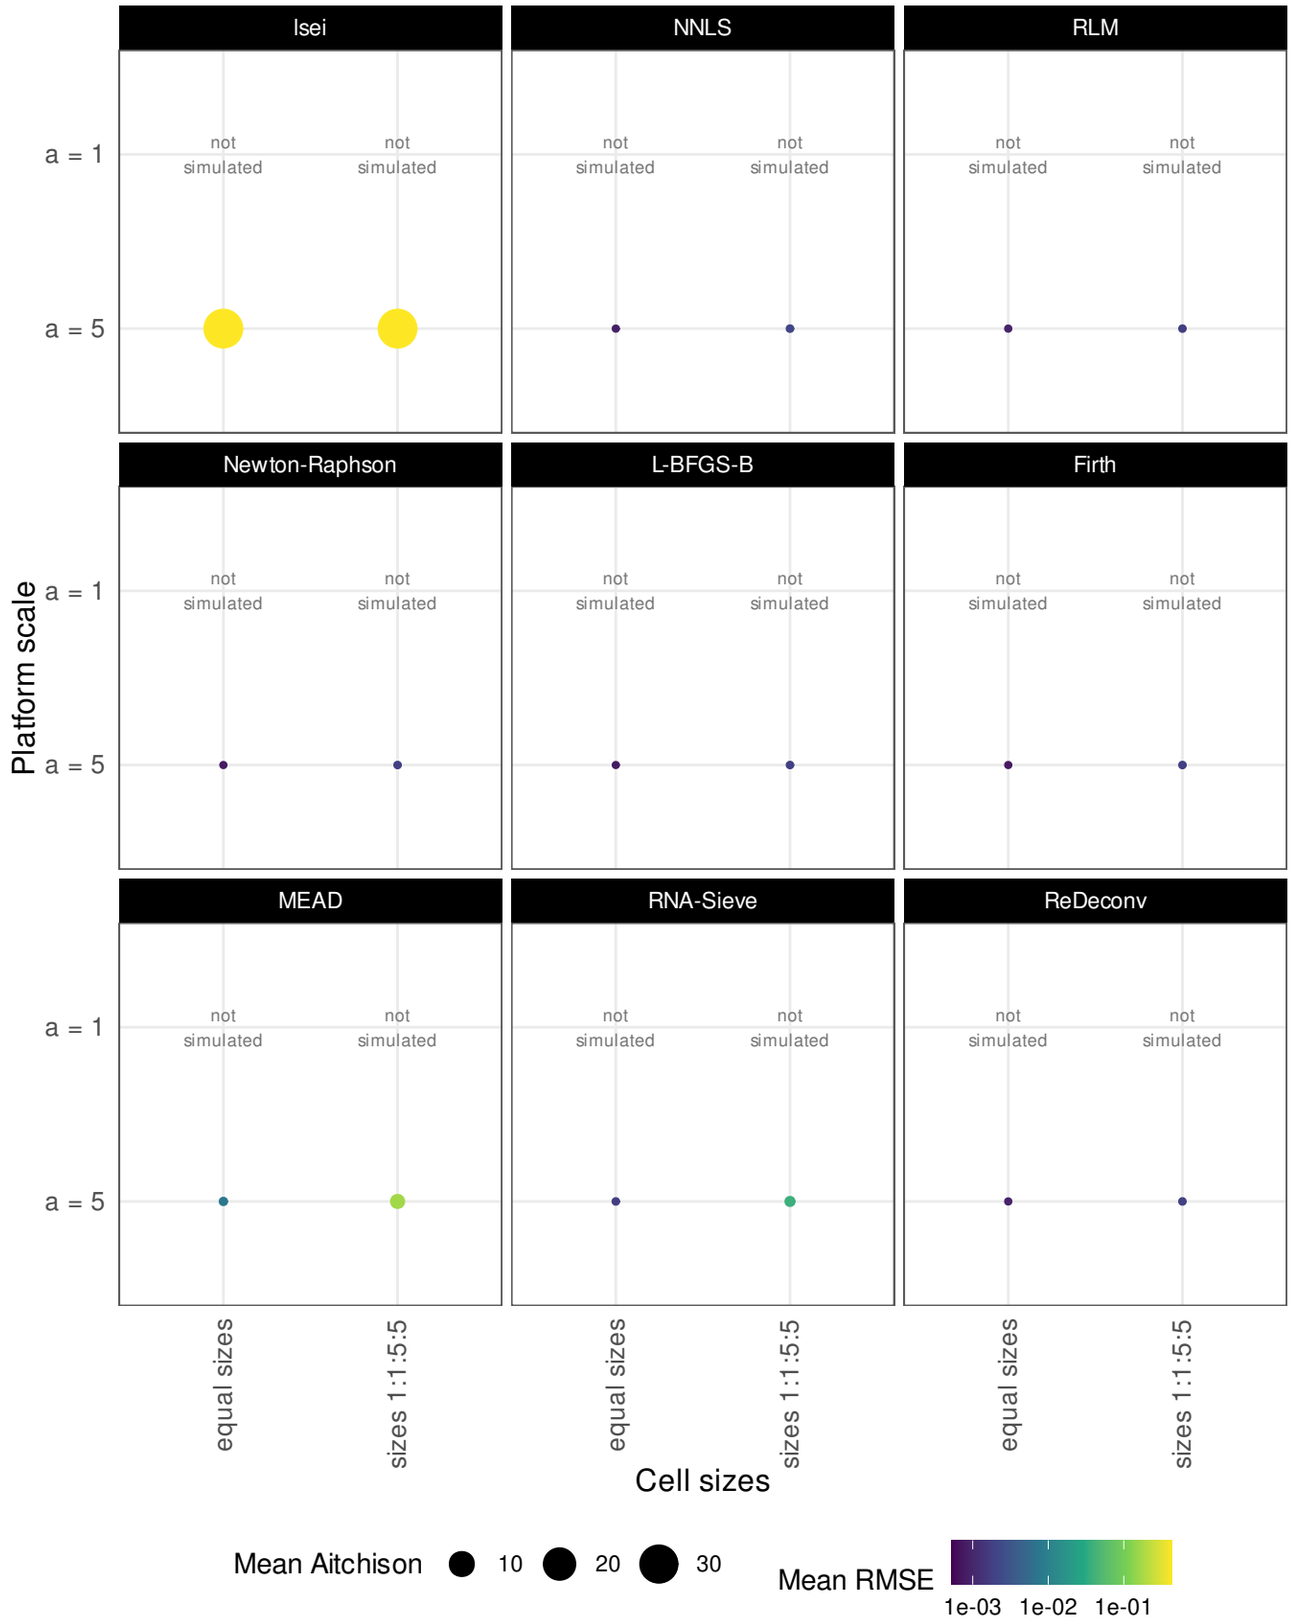

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 200 / 1e+05 cells per bulk / balanced / high sibling overlap

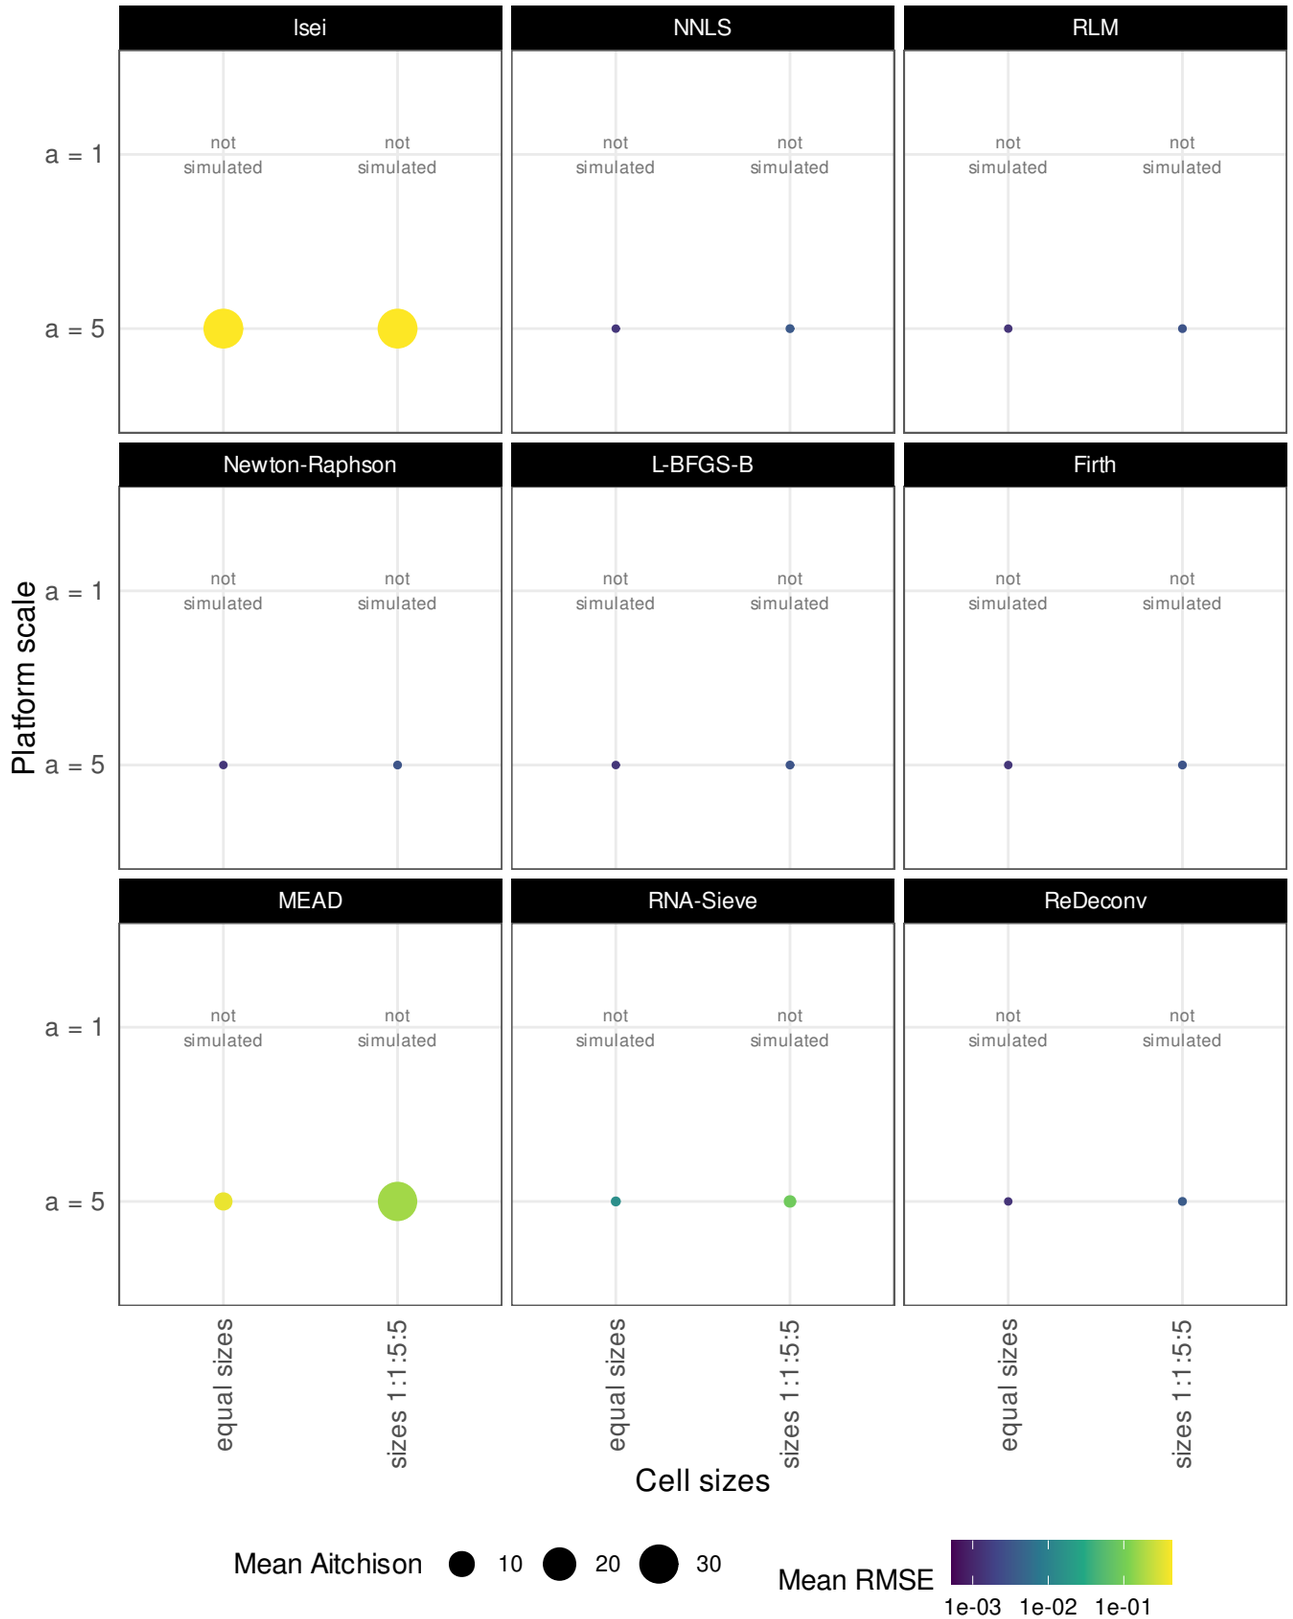

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance


G = 200 / 1e+05 cells per bulk / unbalanced / low sibling overlap

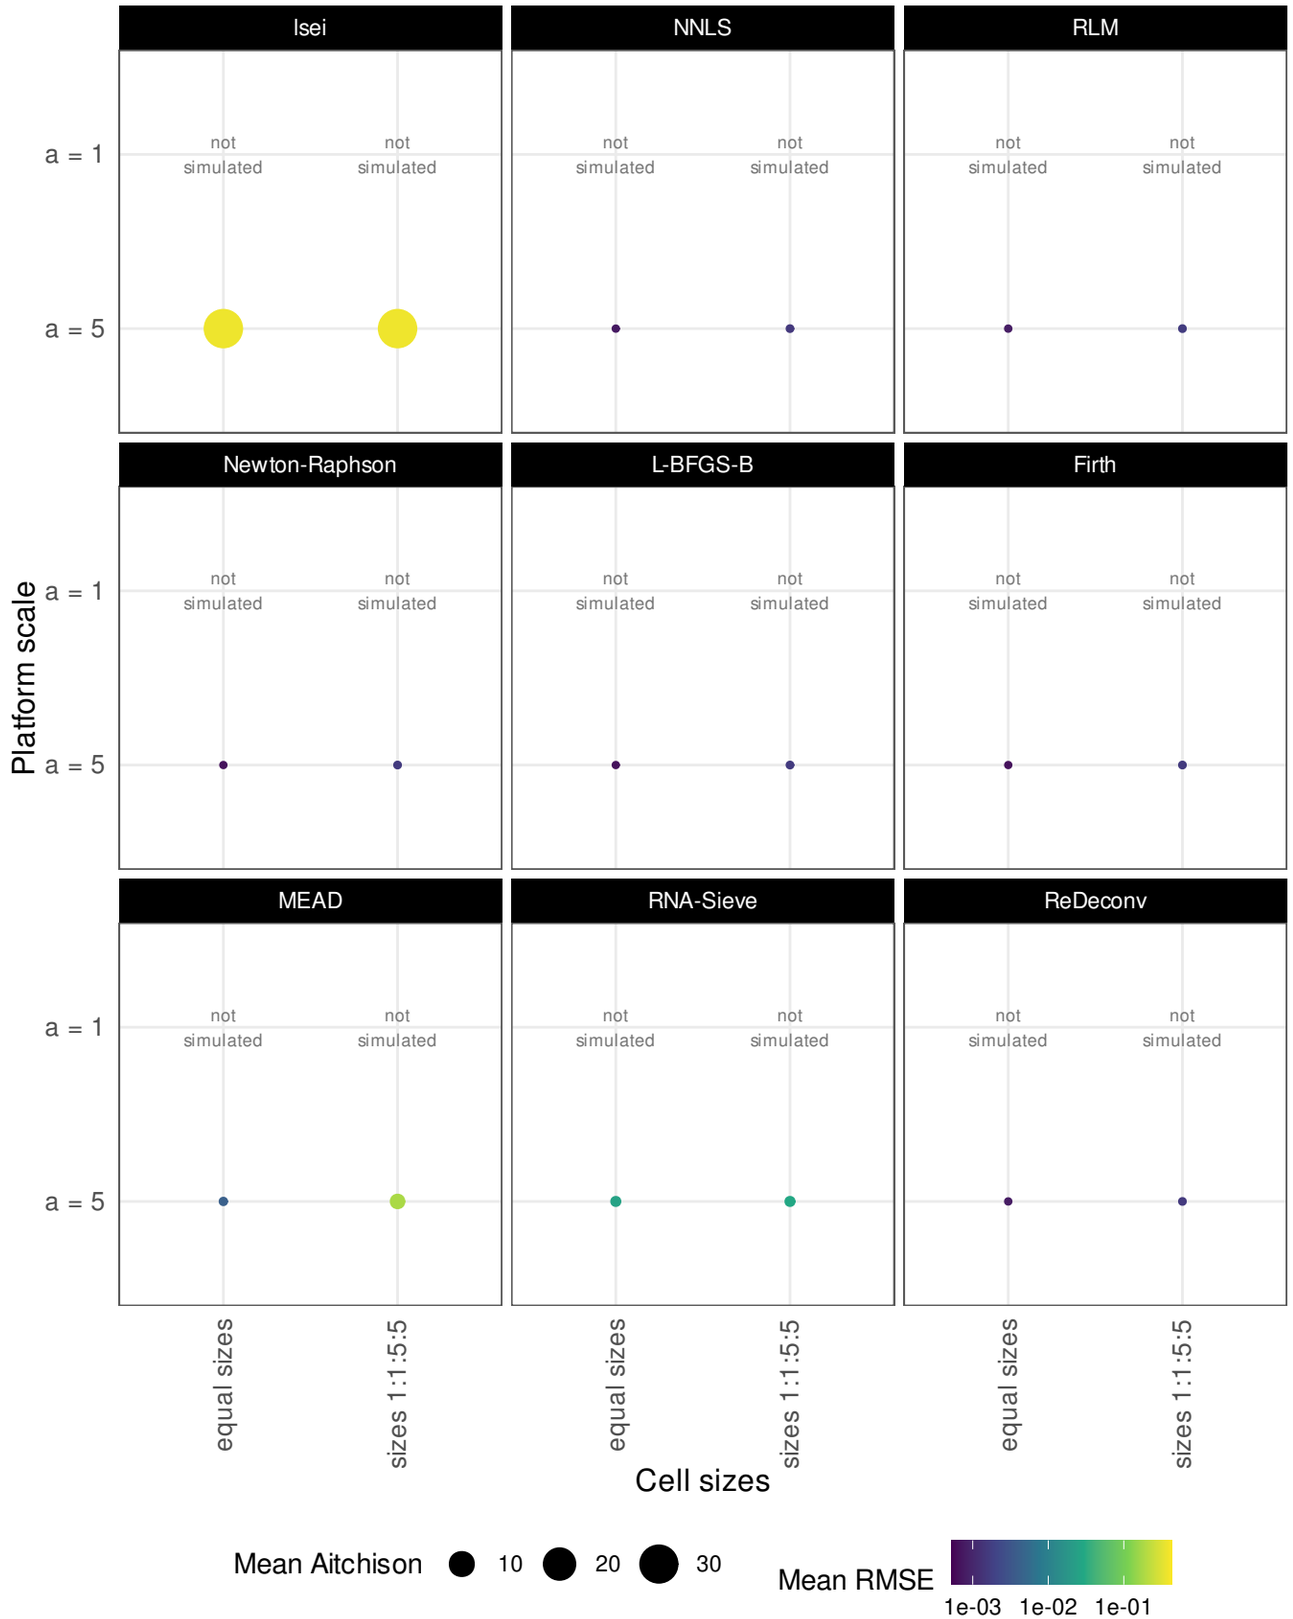

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.

Accuracy of every method: colour RMSE, size Aitchison distance

G = 200 / 1e+05 cells per bulk / unbalanced / high sibling overlap

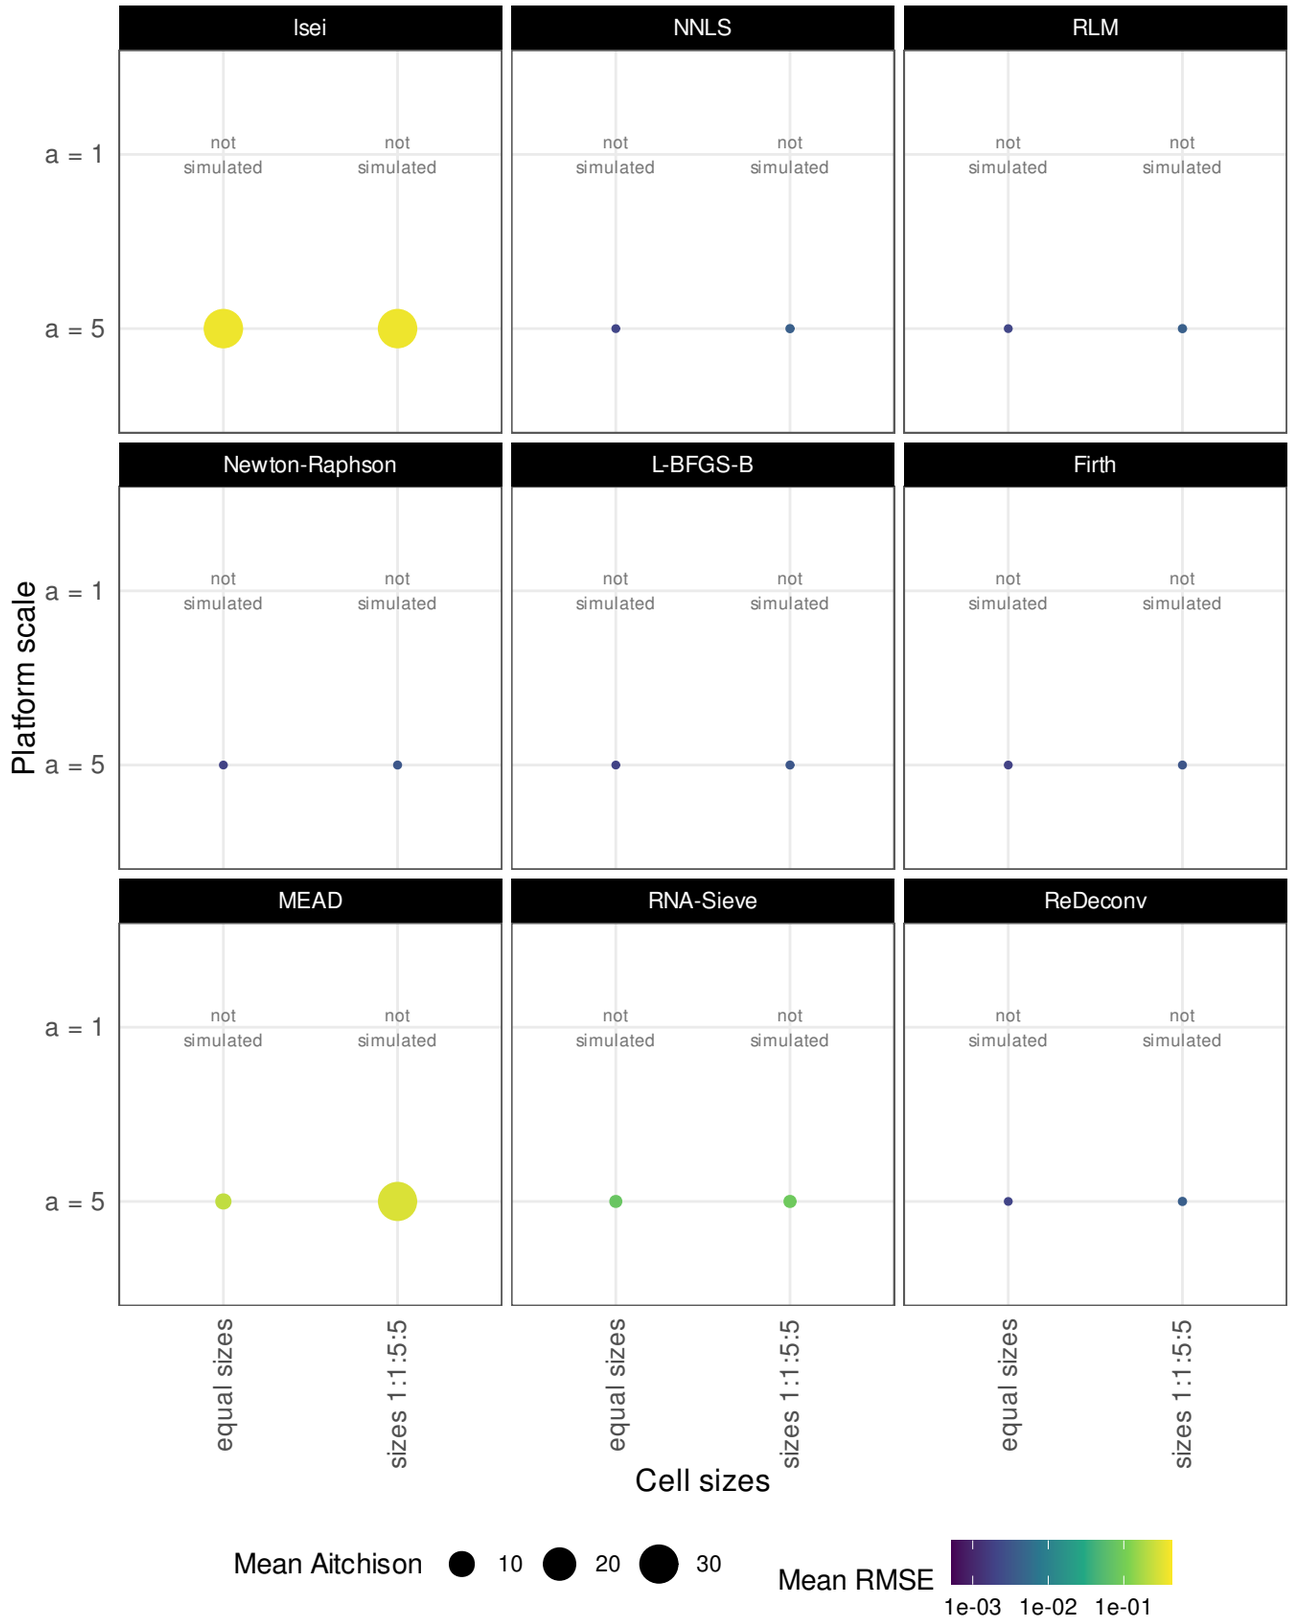

Means over the simulated bulks; colour and size scales shared by every page.
Cross: the method returned no finite estimate for any bulk of that scenario (solver failure).
CIBERSORT not shown: its much larger error would squeeze the shared scale.