
Expected log-likelihood

G = 20 / 1000 cells per bulk / balanced / low sibling overlap

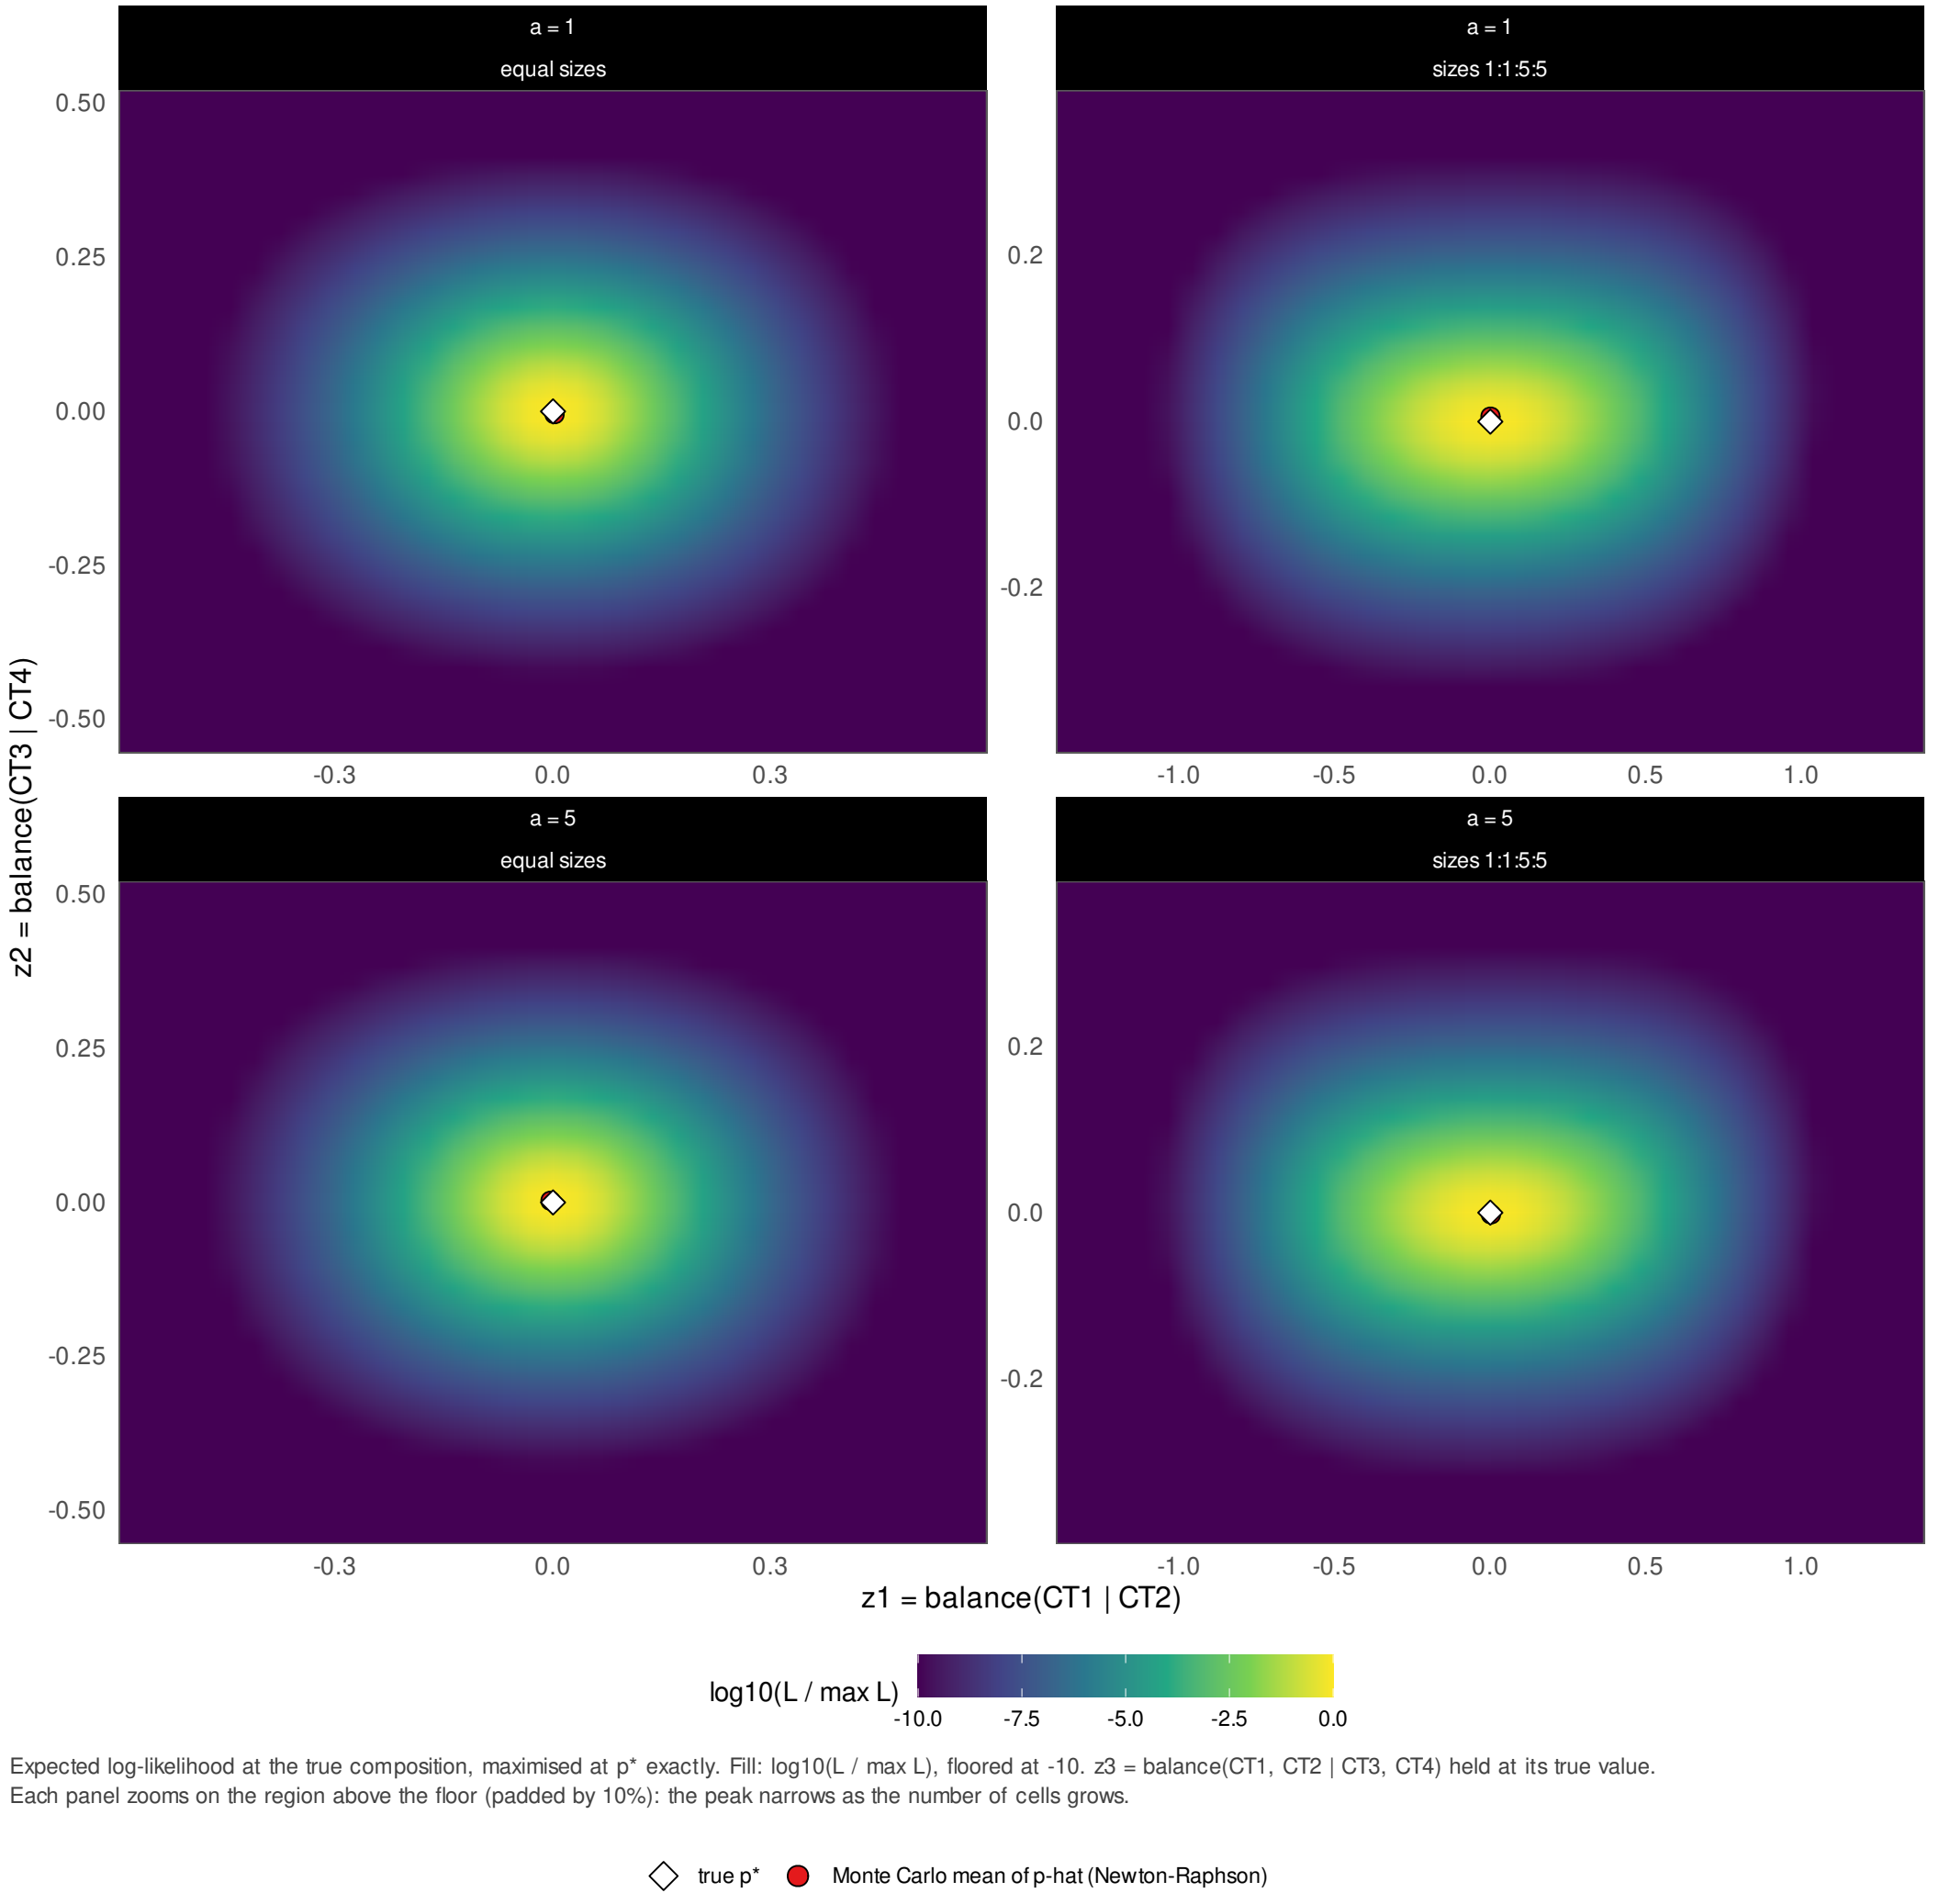


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value. Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

G = 20 / 1000 cells per bulk / balanced / high sibling overlap

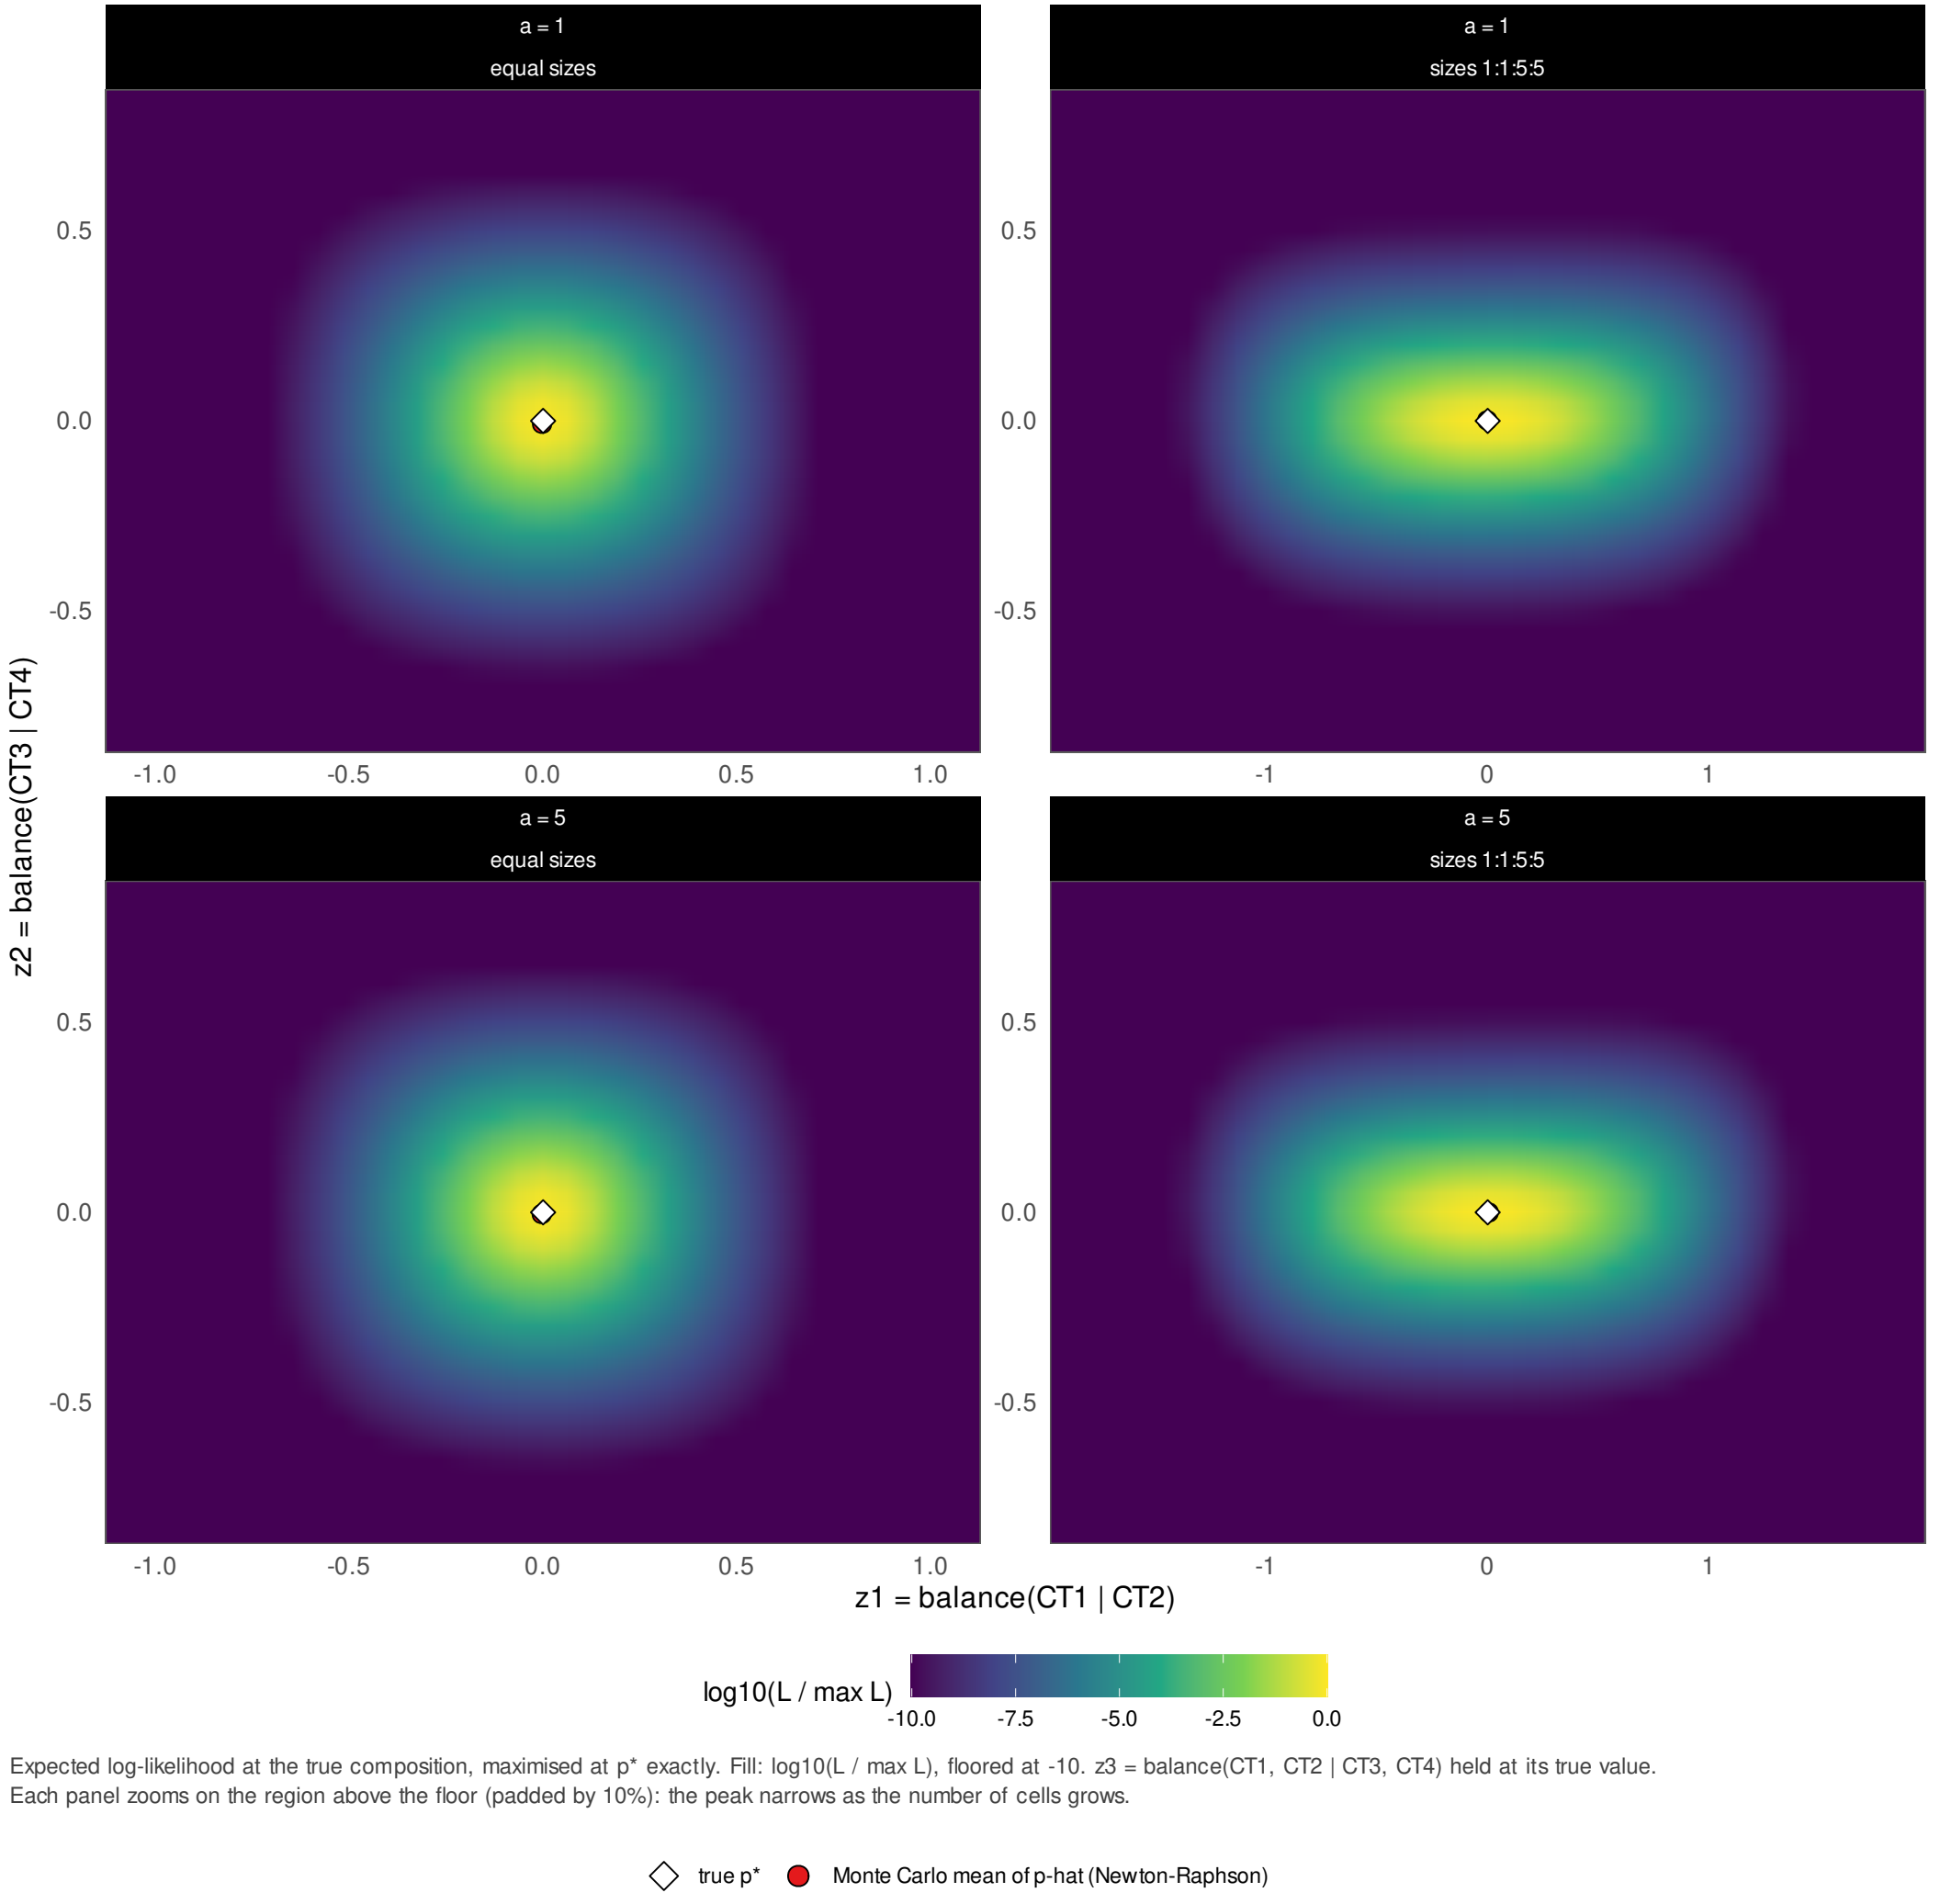


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value. Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

G = 20 / 1000 cells per bulk / unbalanced / low sibling overlap

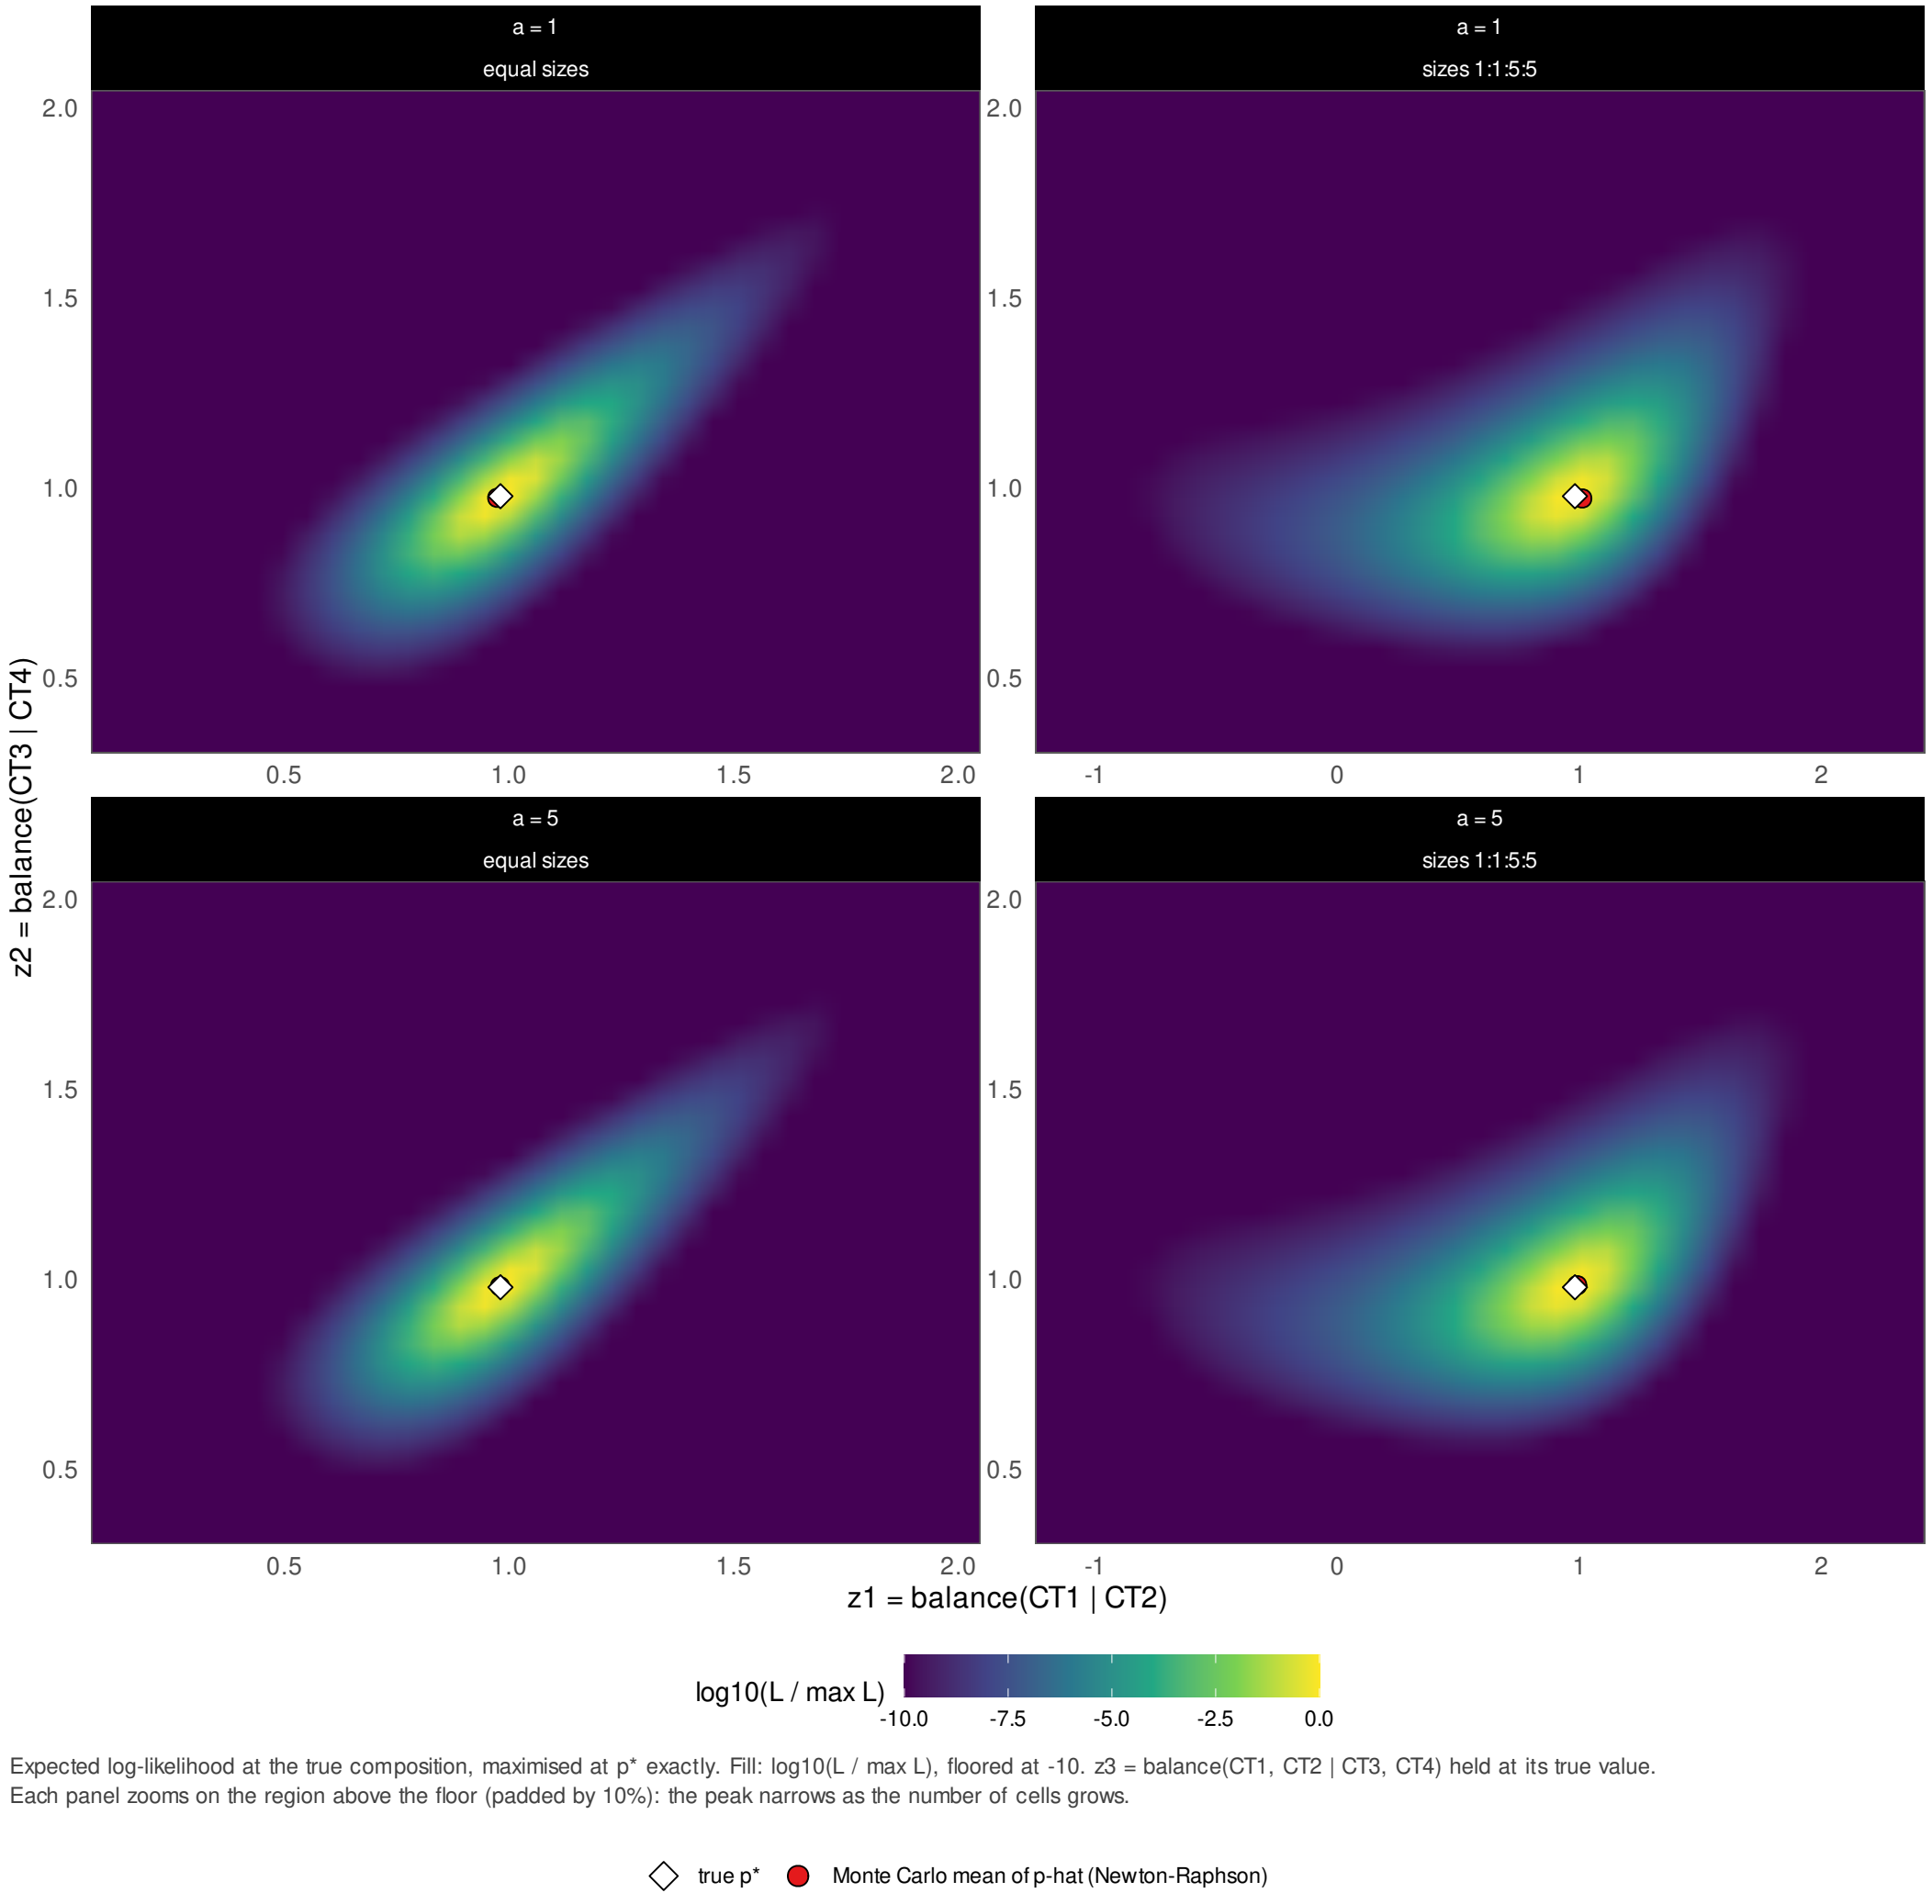

log10(L / max L)


-10.0 -7.5 -5.0 -2.5 0.0

Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value.
Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

G = 20 / 1000 cells per bulk / unbalanced / high sibling overlap

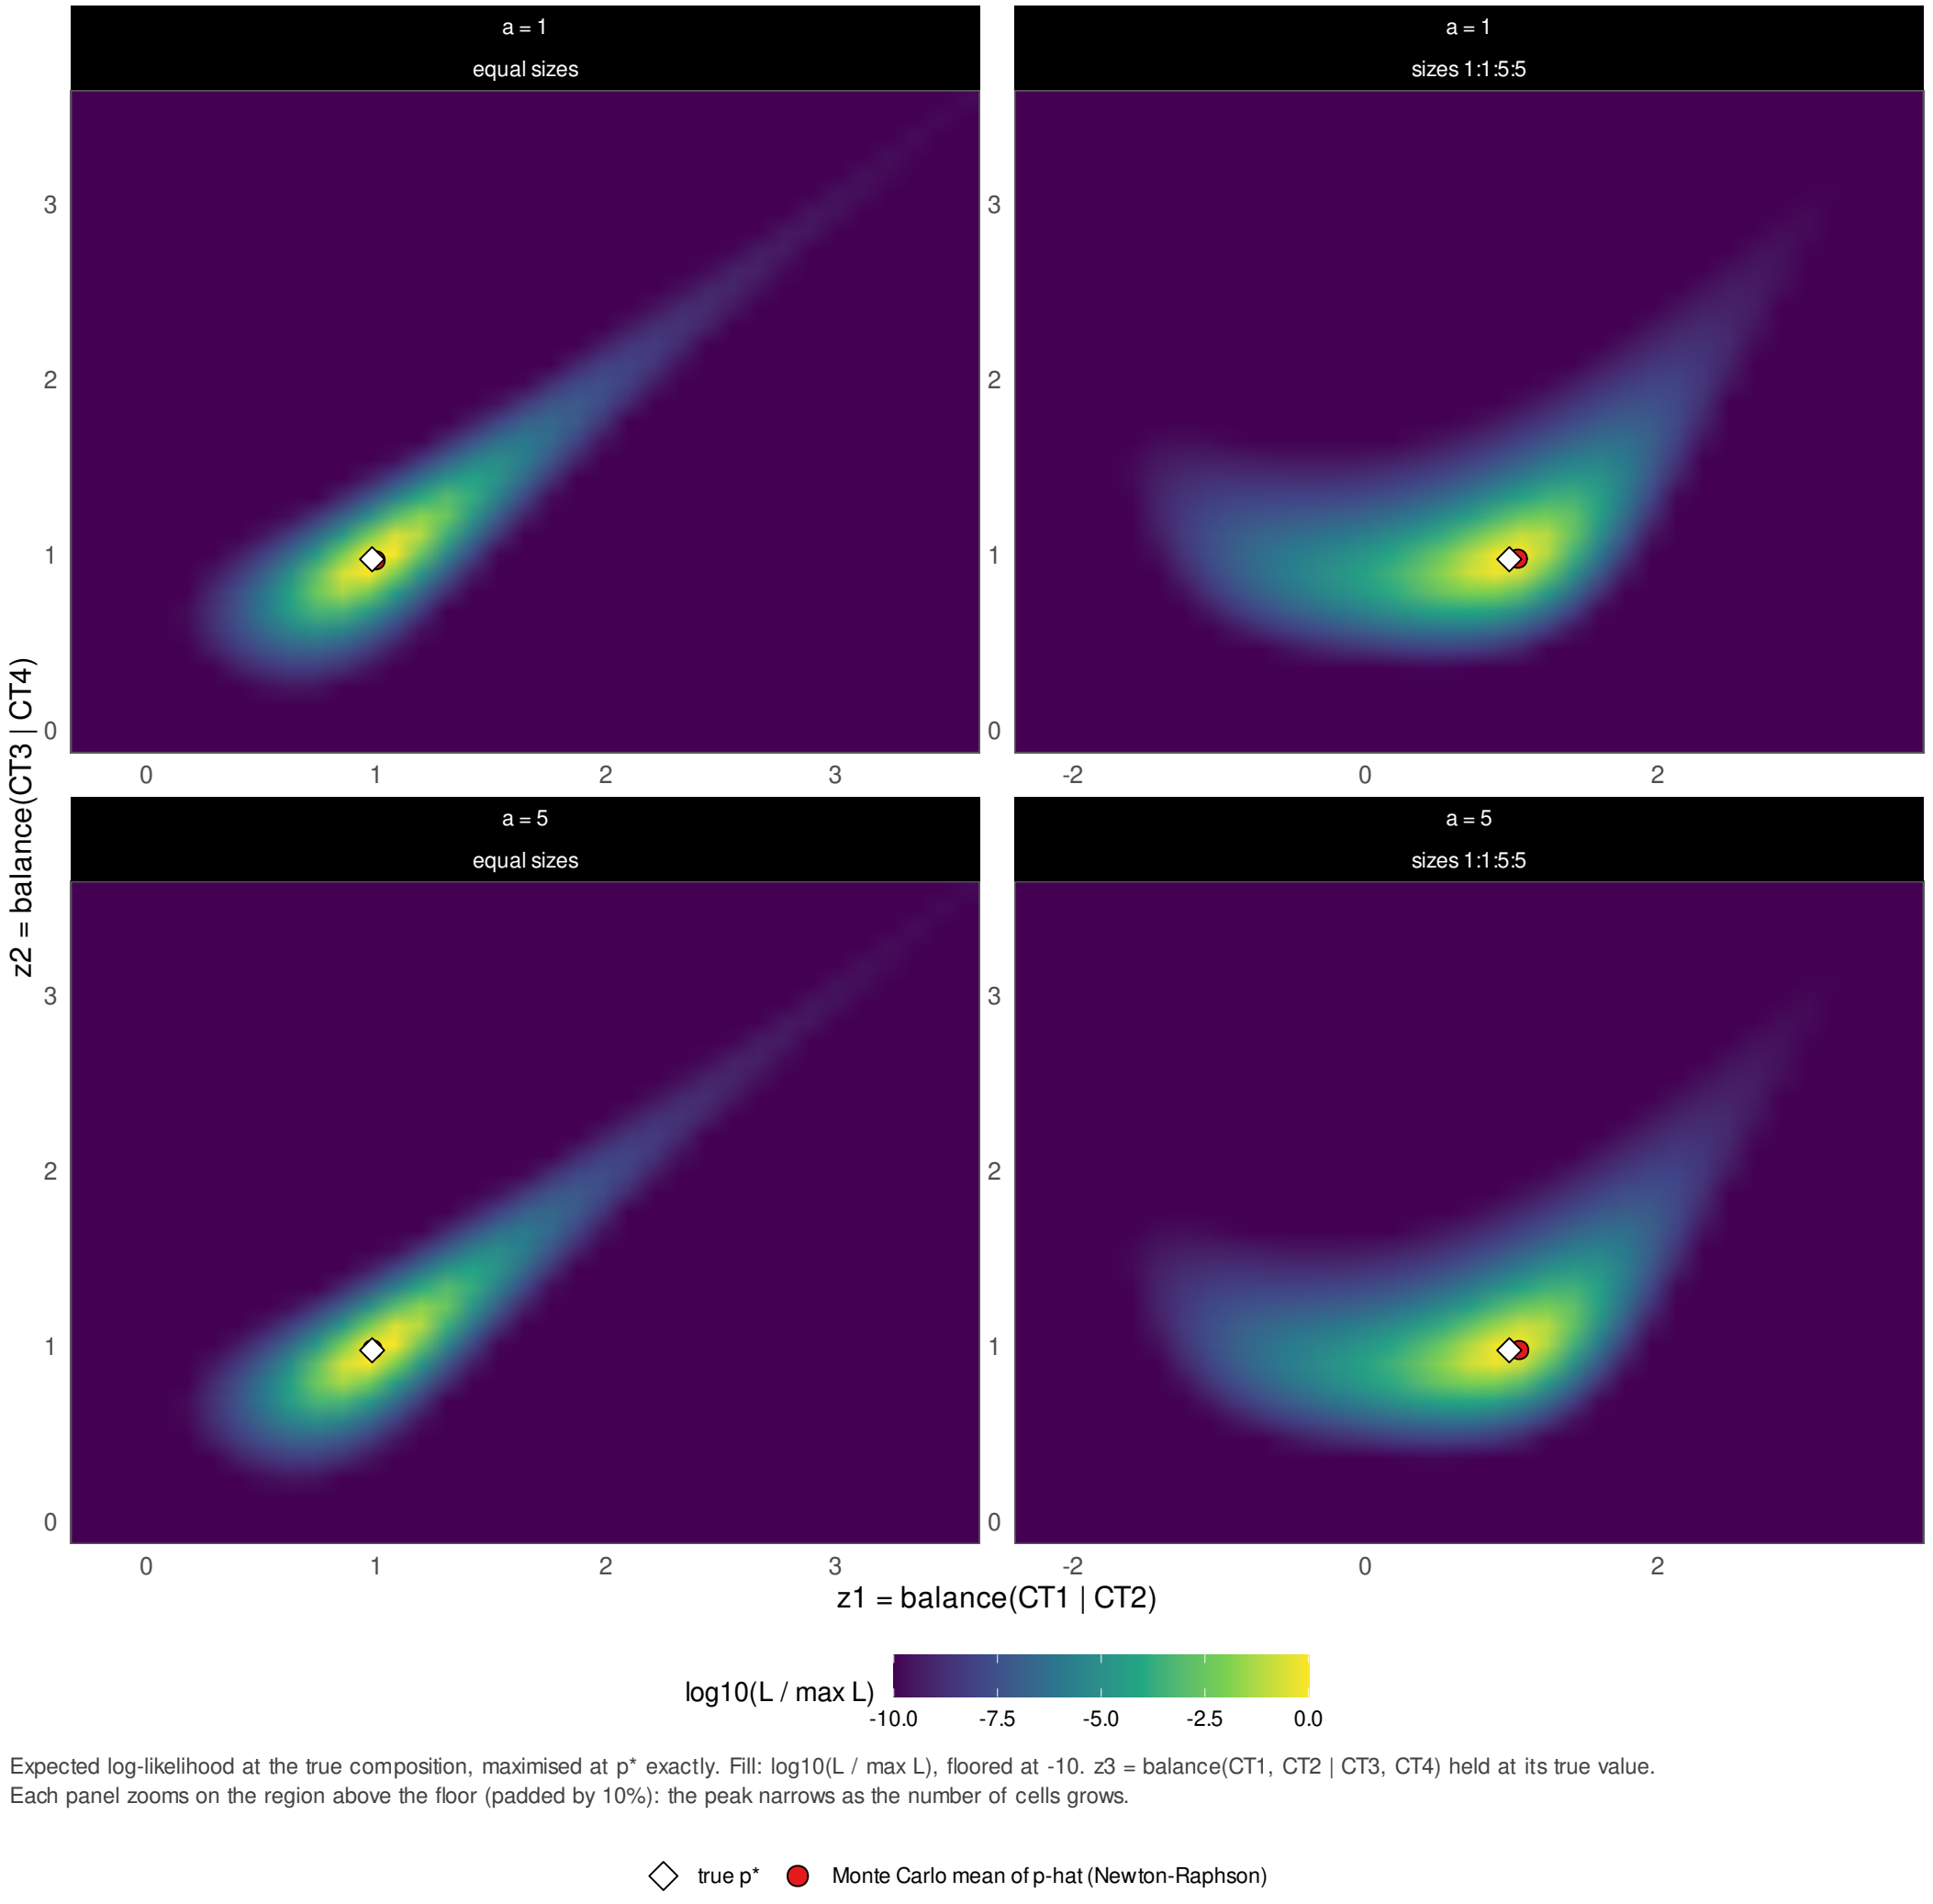


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value. Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap

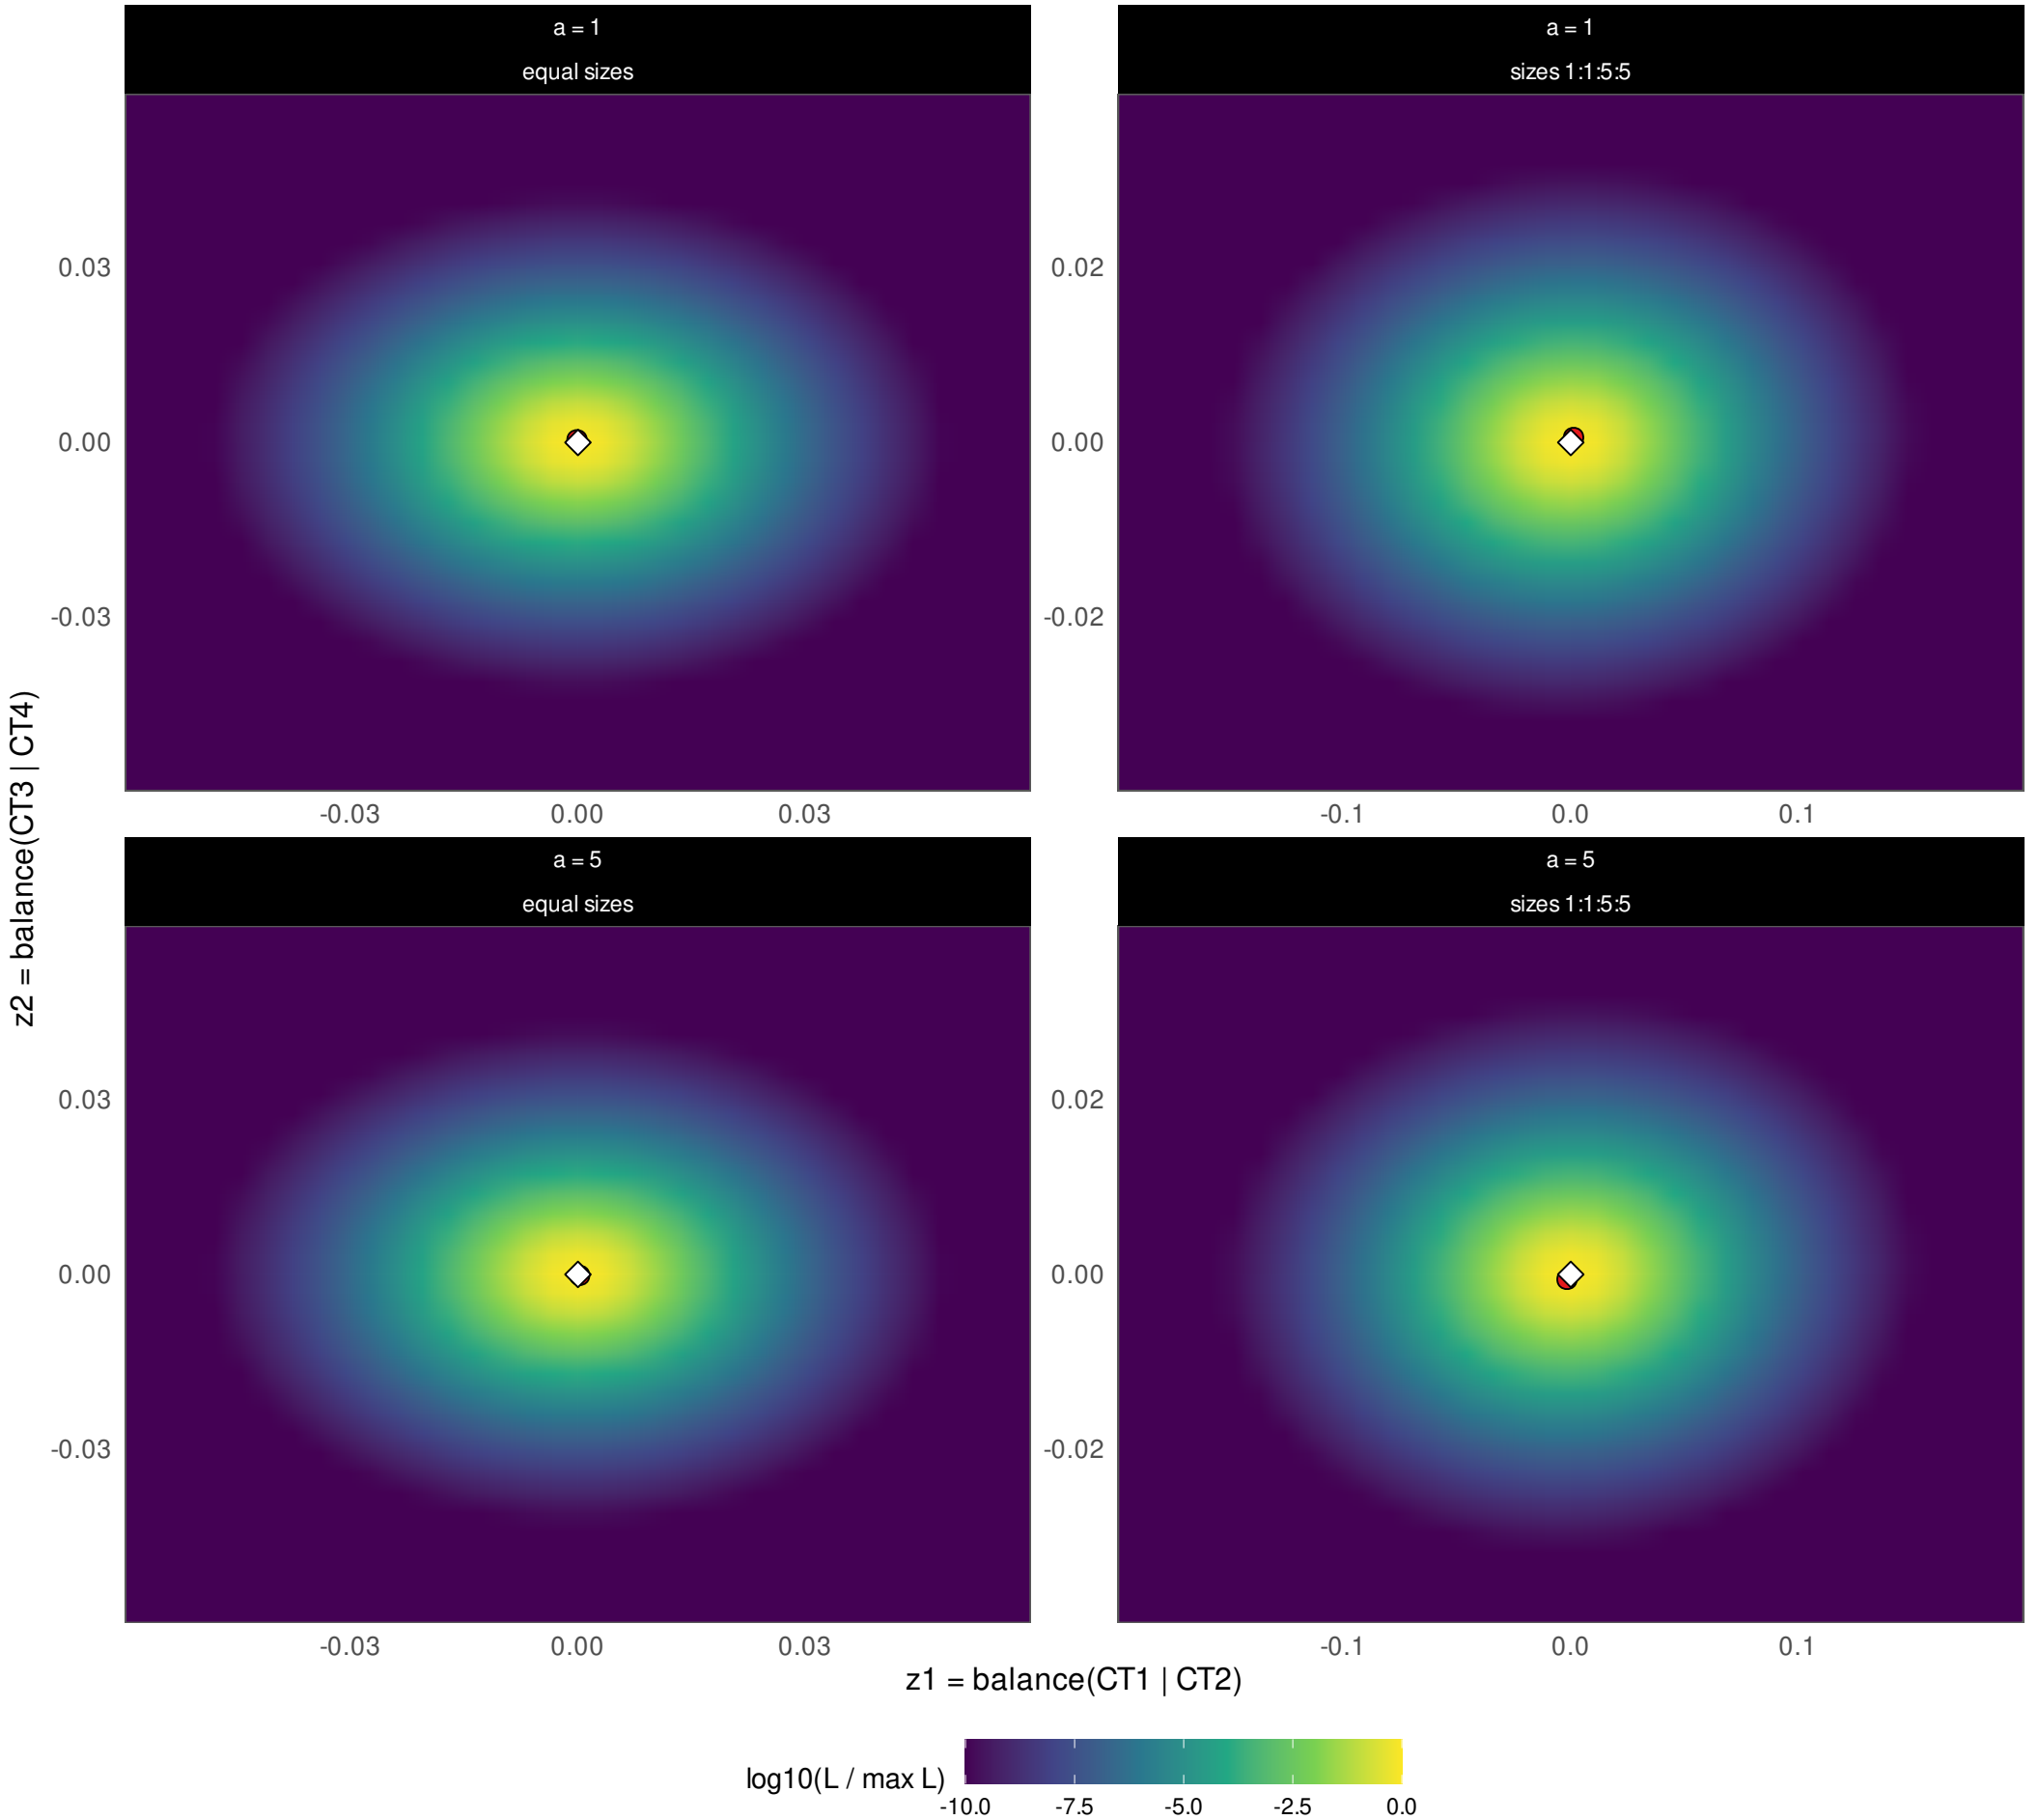


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value. Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

G = 20 / 1e+05 cells per bulk / balanced / high sibling overlap

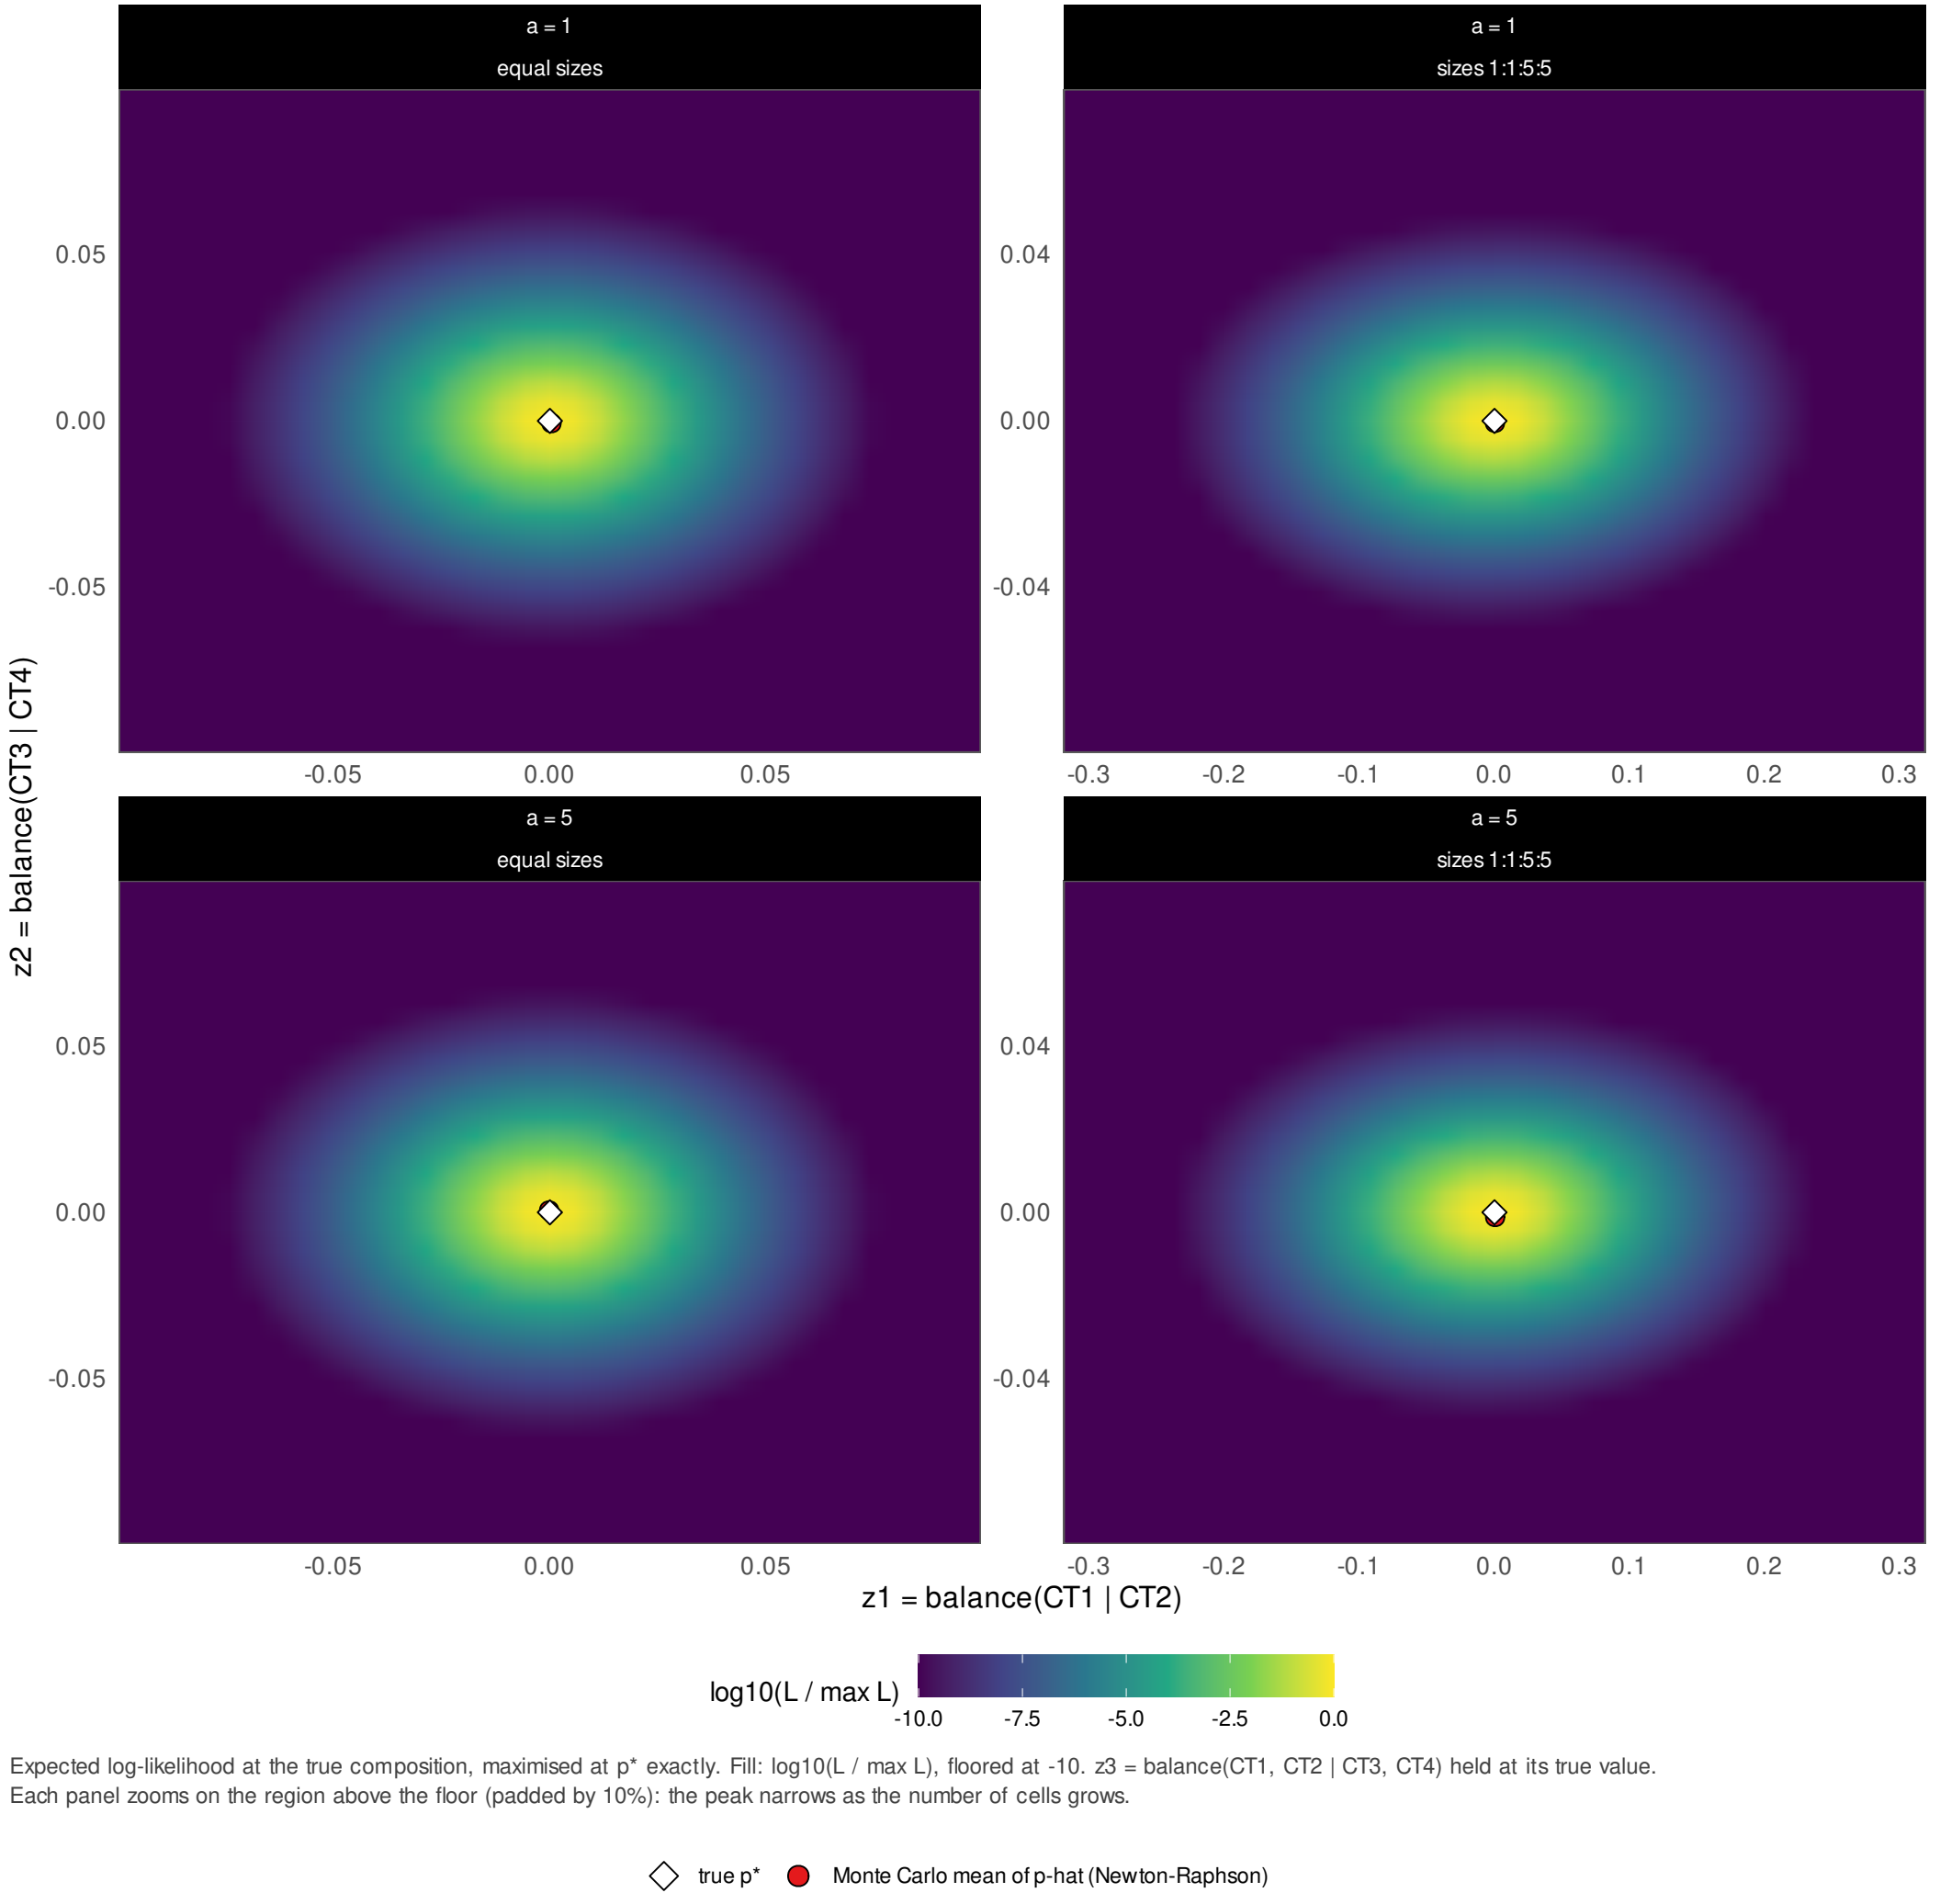


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value. Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

G = 20 / 1e+05 cells per bulk / unbalanced / low sibling overlap

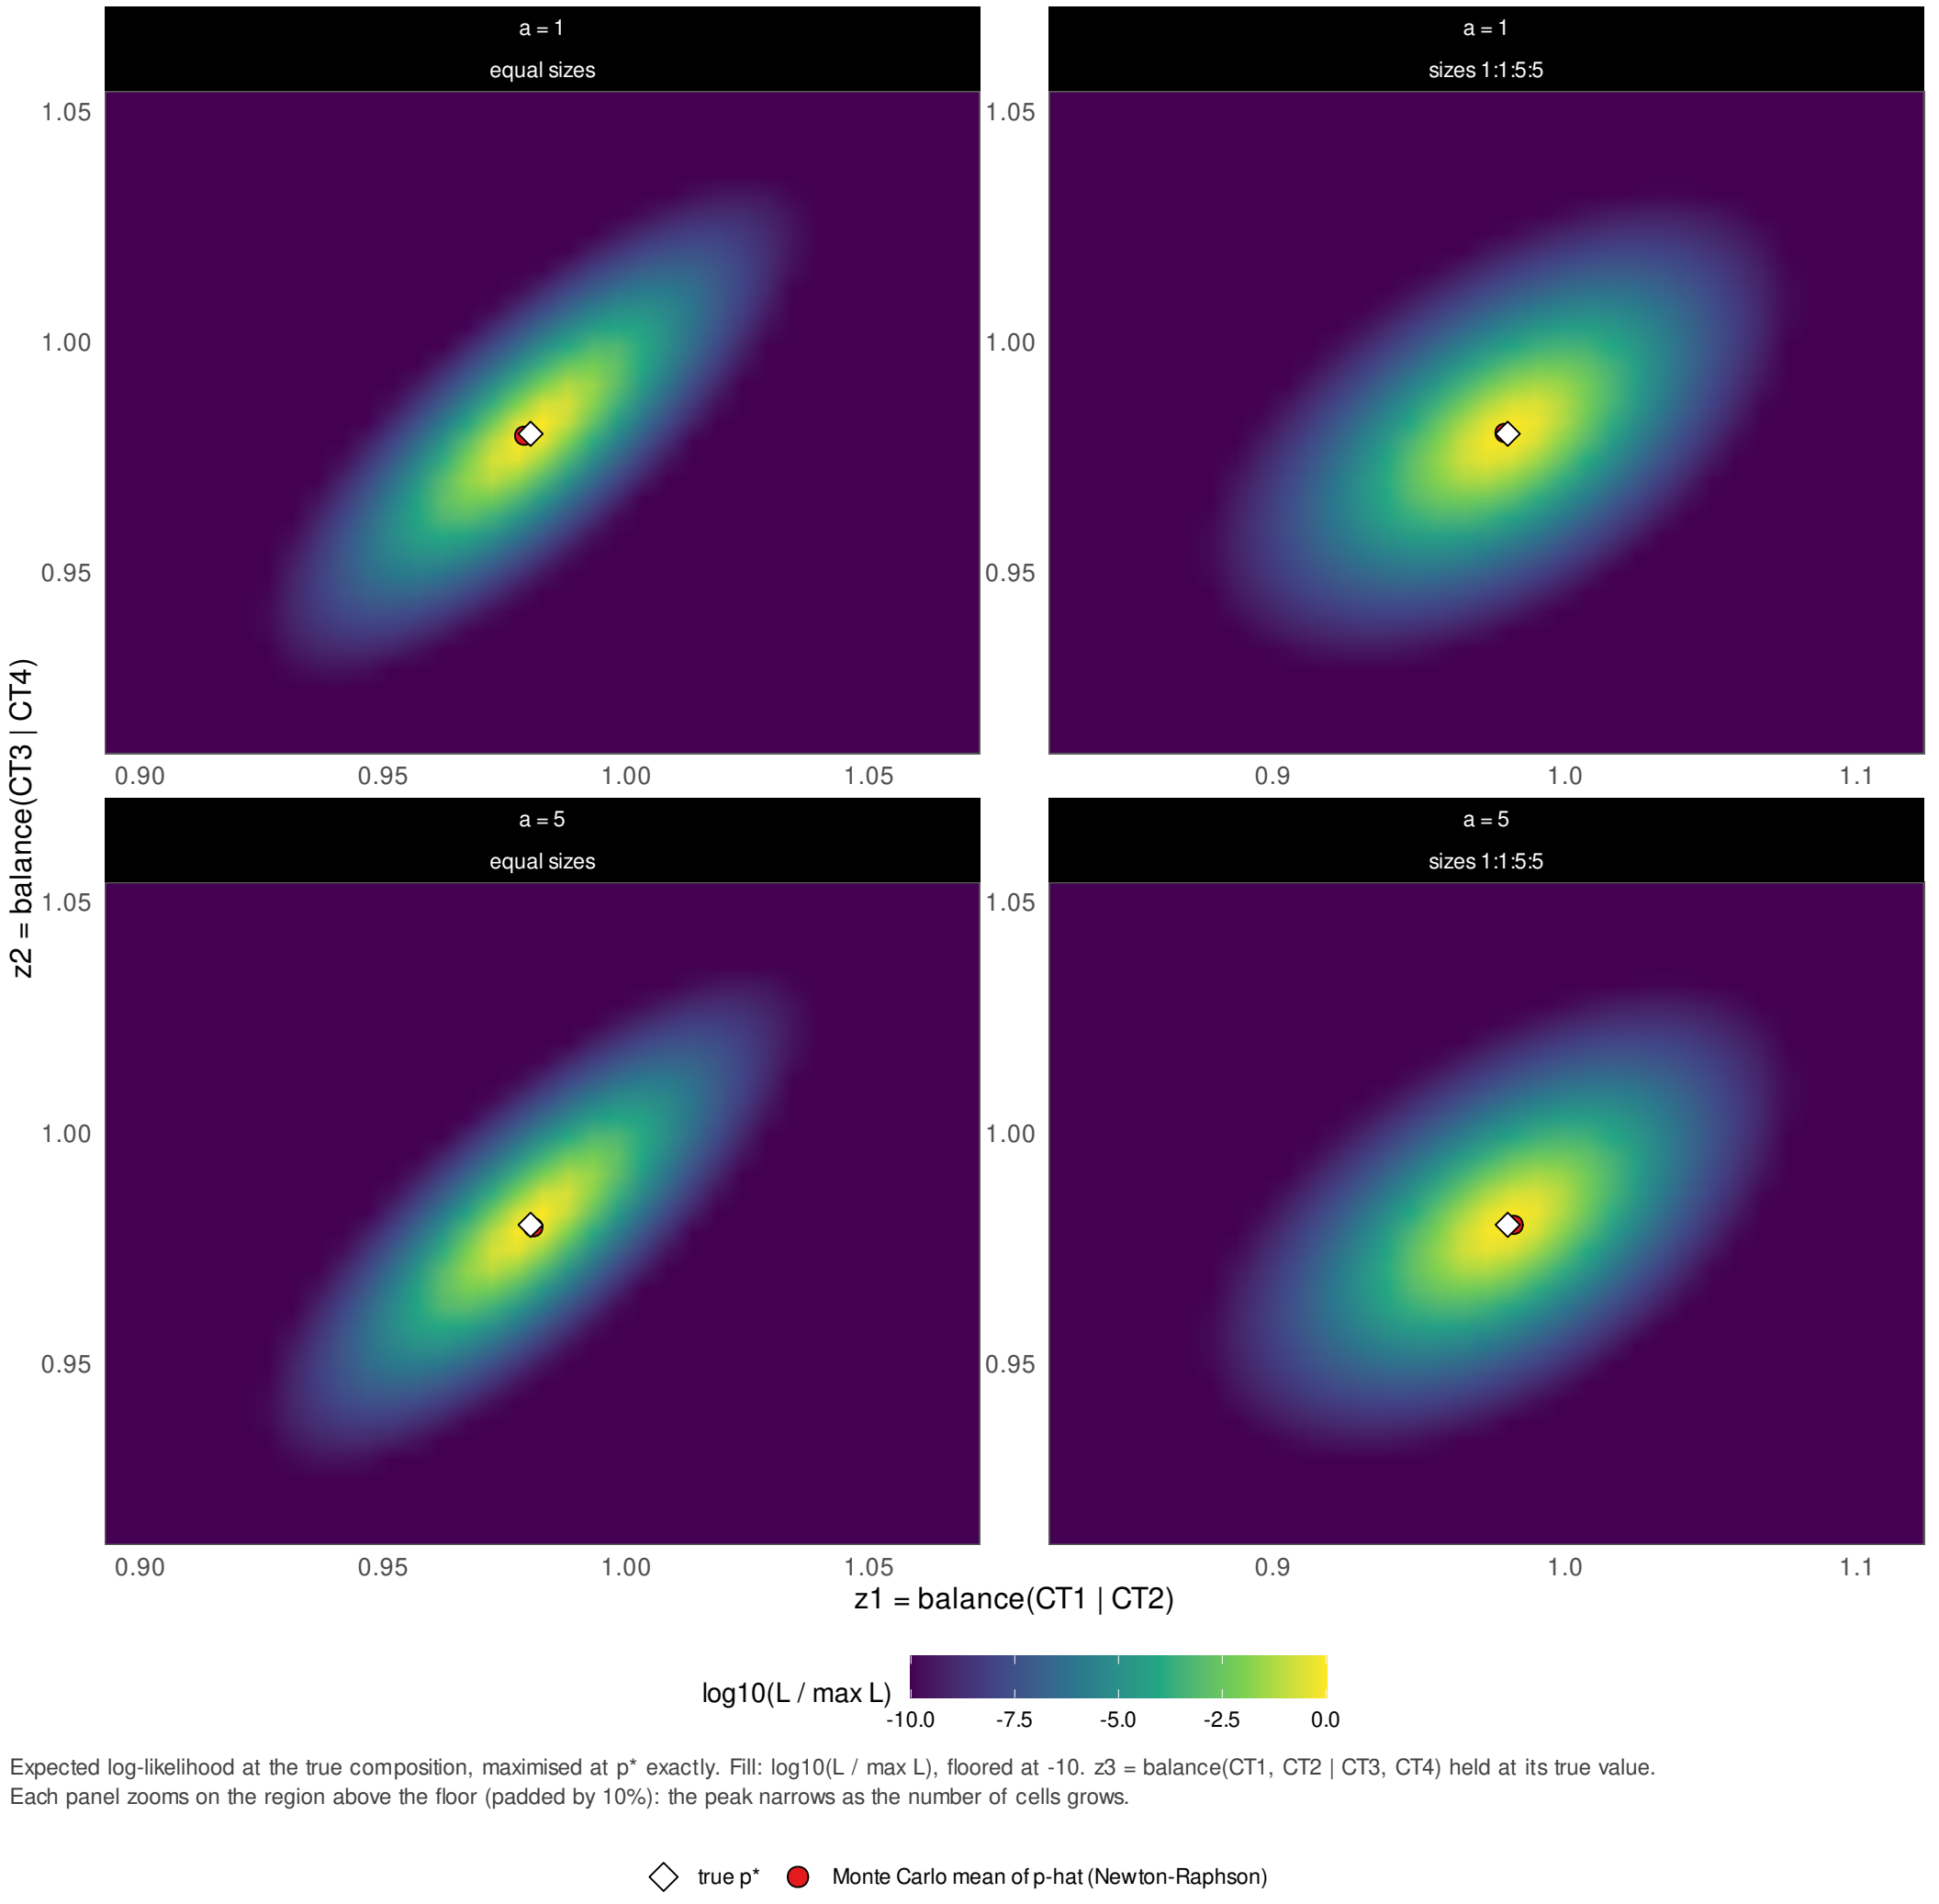


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value.
Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

G = 20 / 1e+05 cells per bulk / unbalanced / high sibling overlap

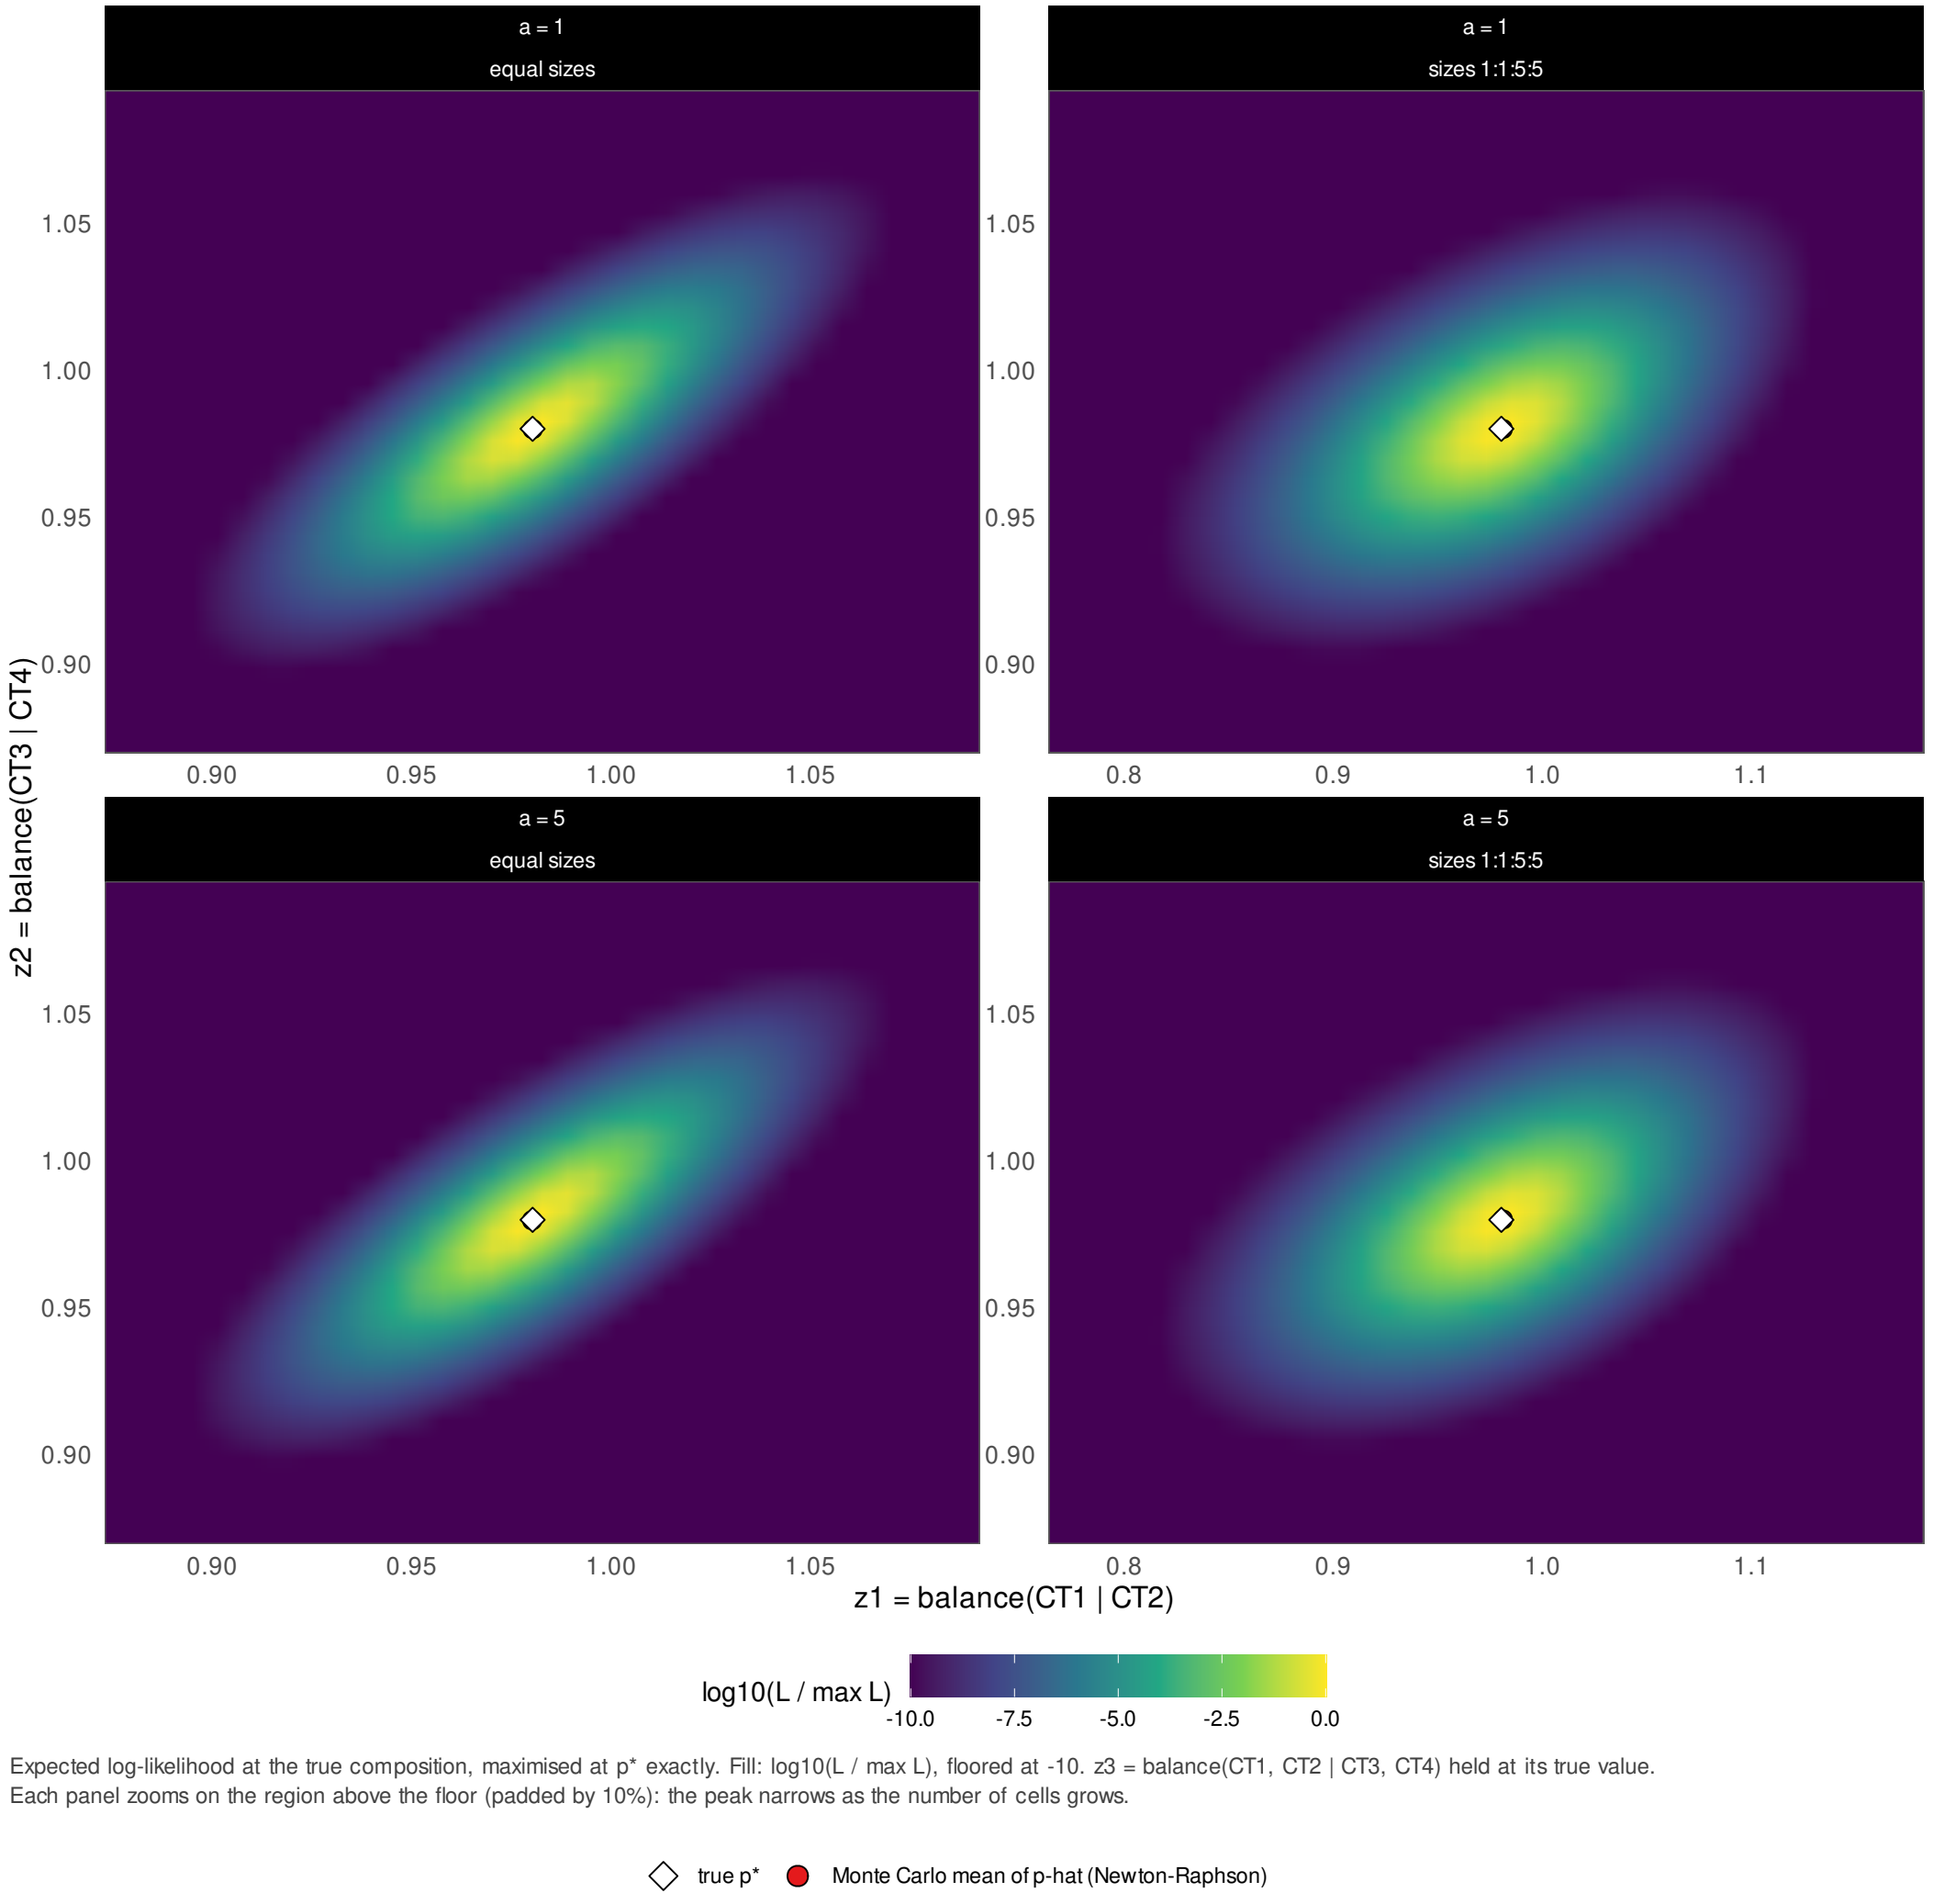


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value. Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

G = 200 / 1000 cells per bulk / balanced / low sibling overlap

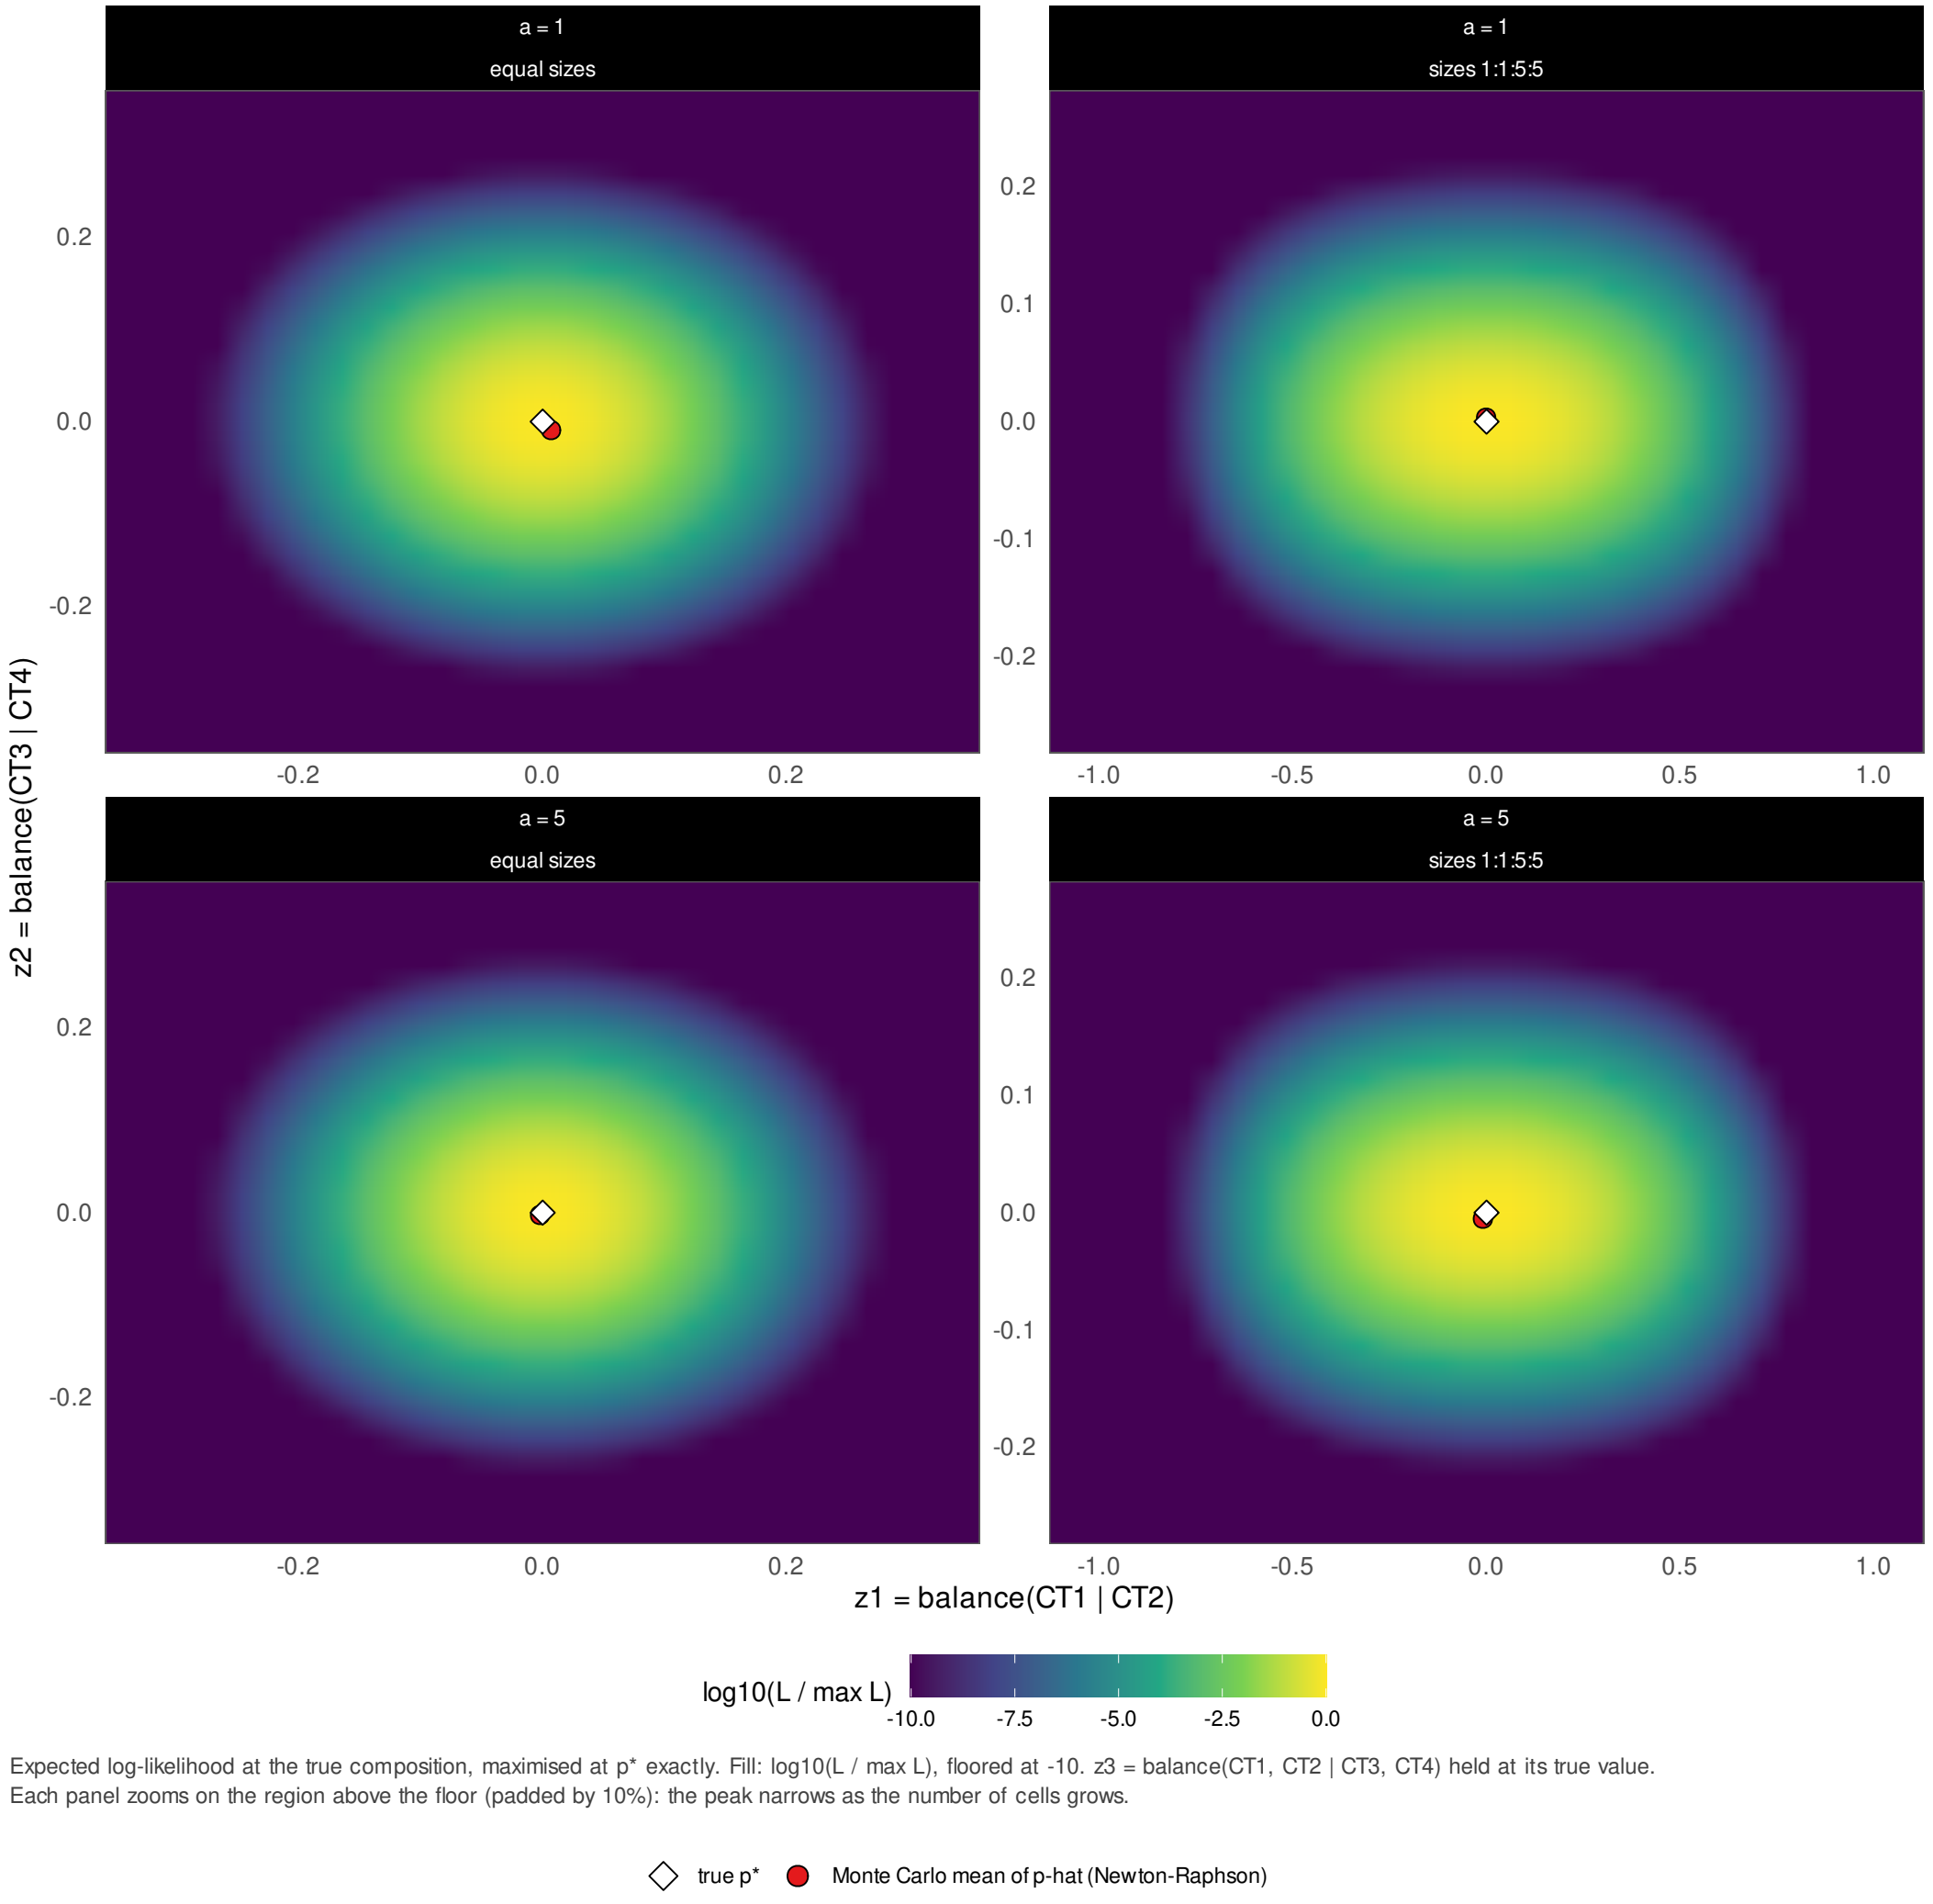


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value. Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

G = 200 / 1000 cells per bulk / balanced / high sibling overlap

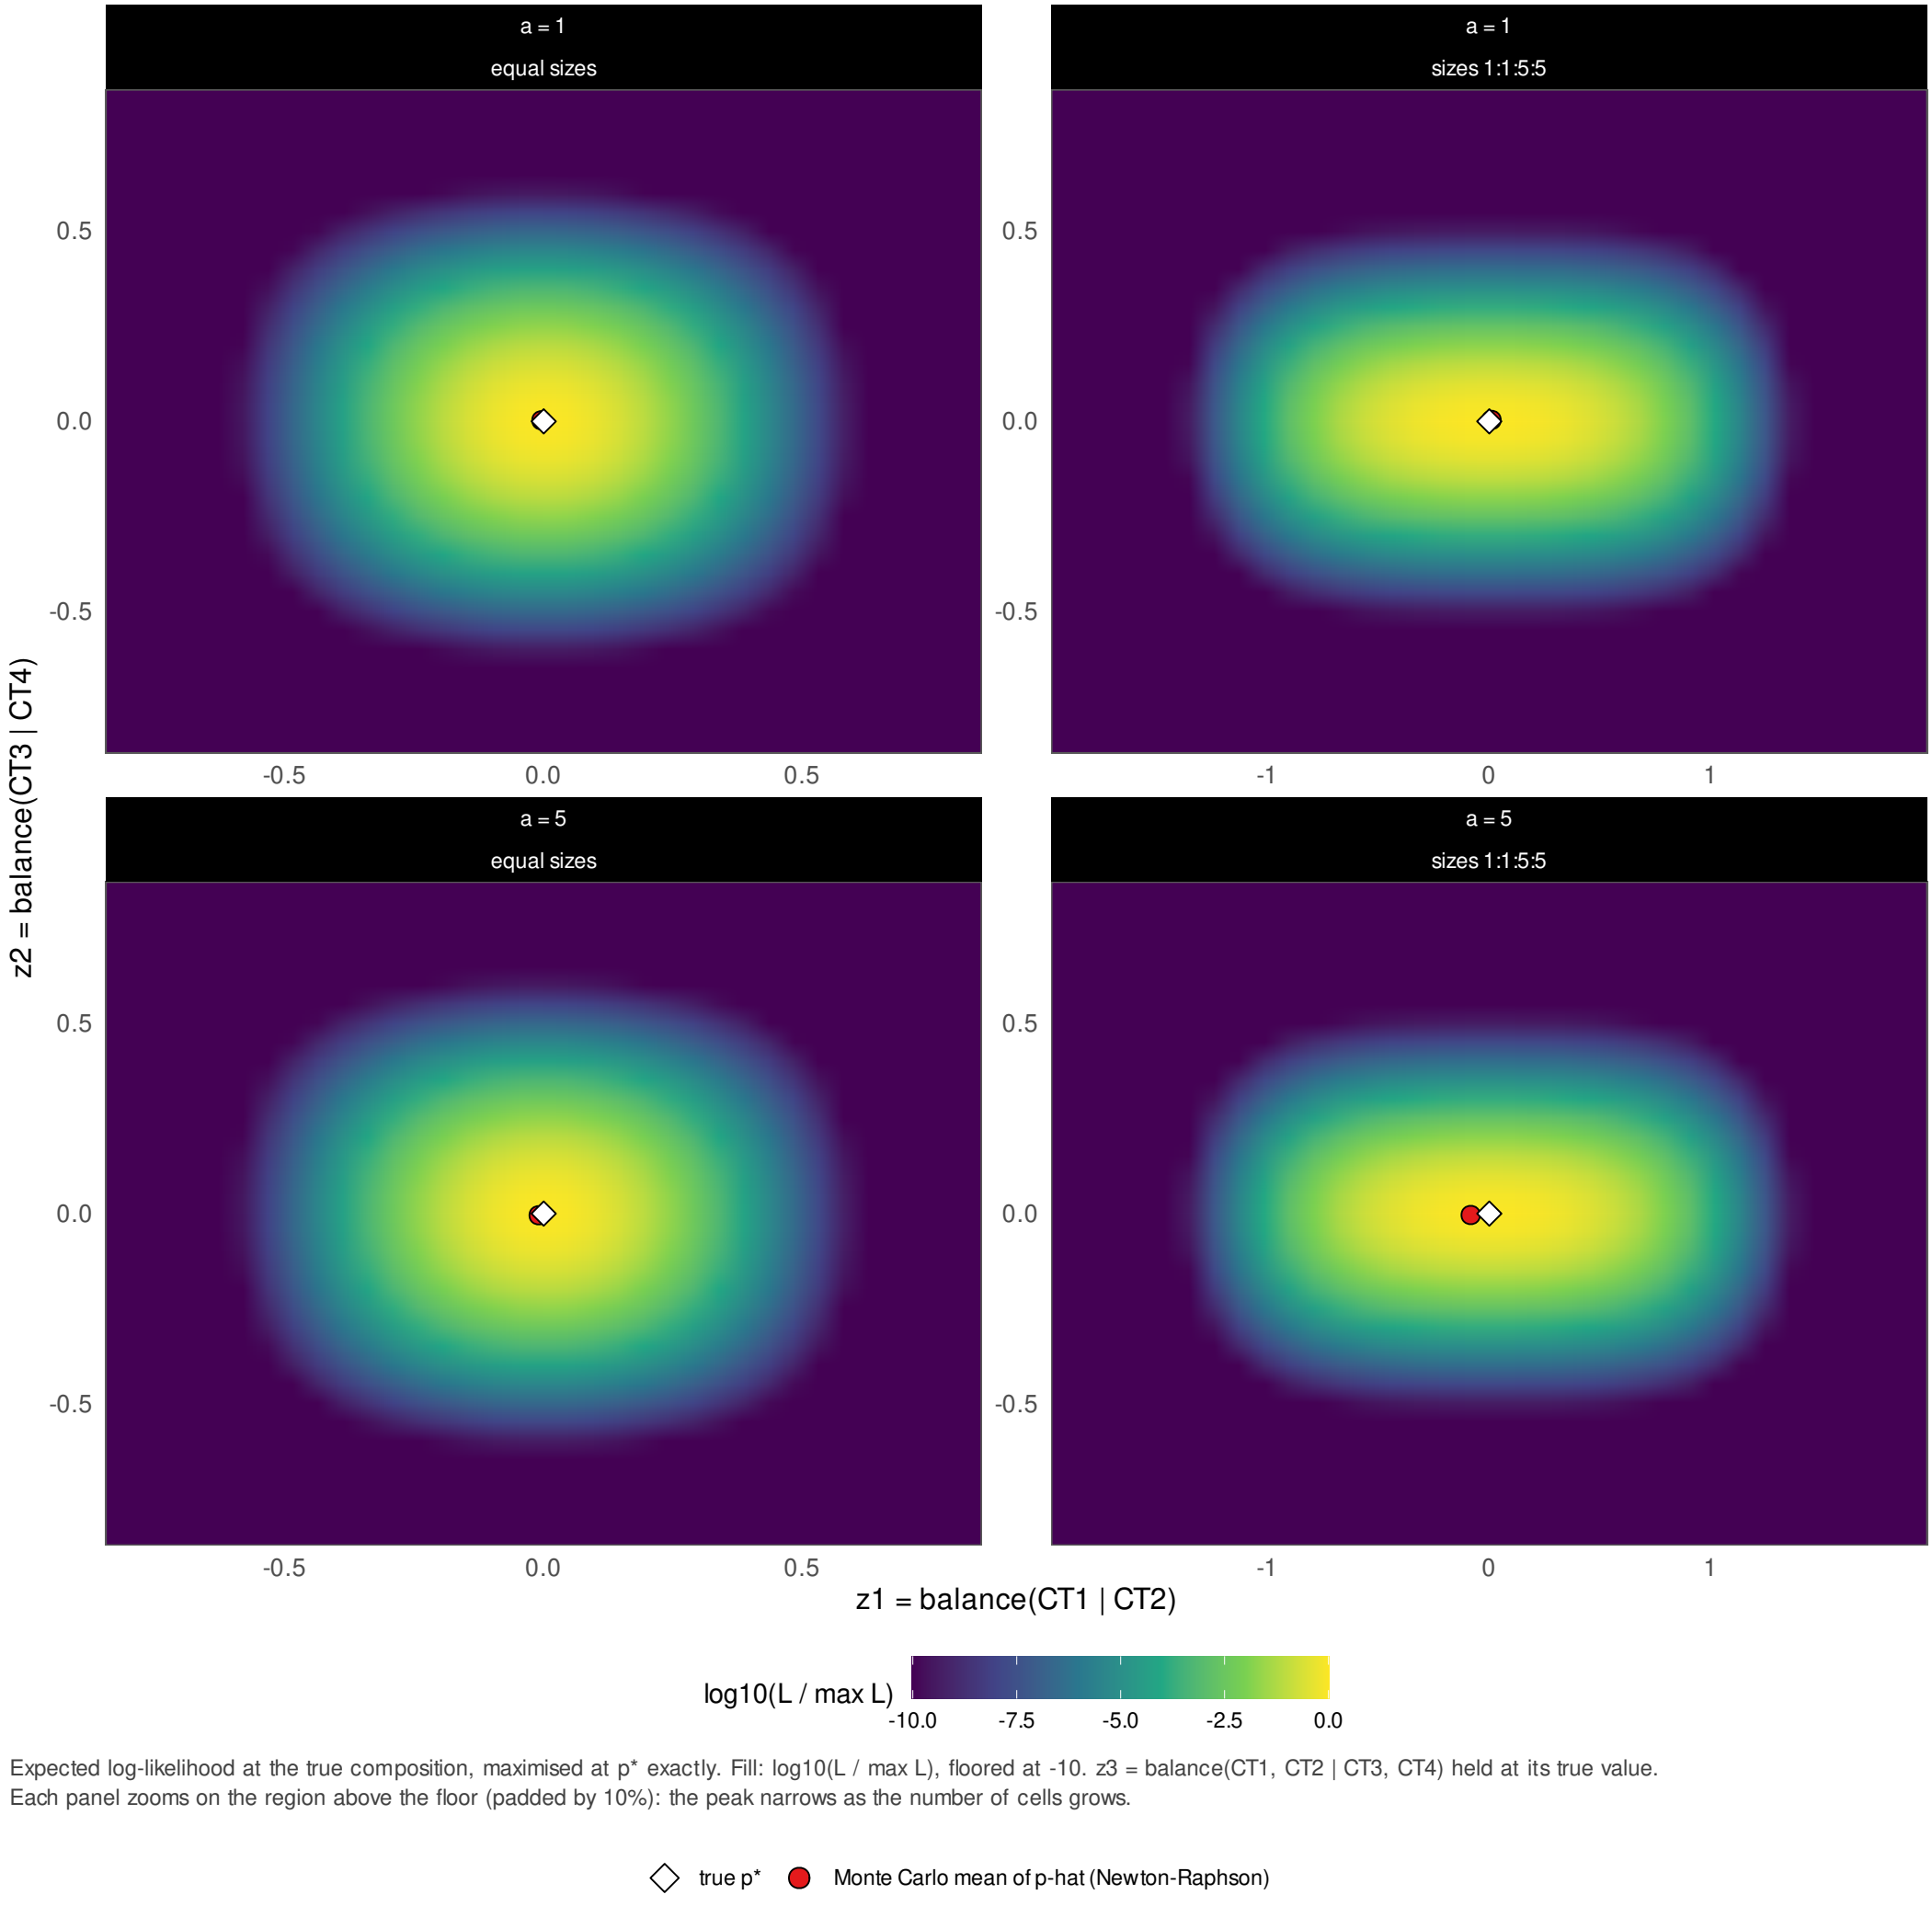


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value. Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

G = 200 / 1000 cells per bulk / unbalanced / low sibling overlap

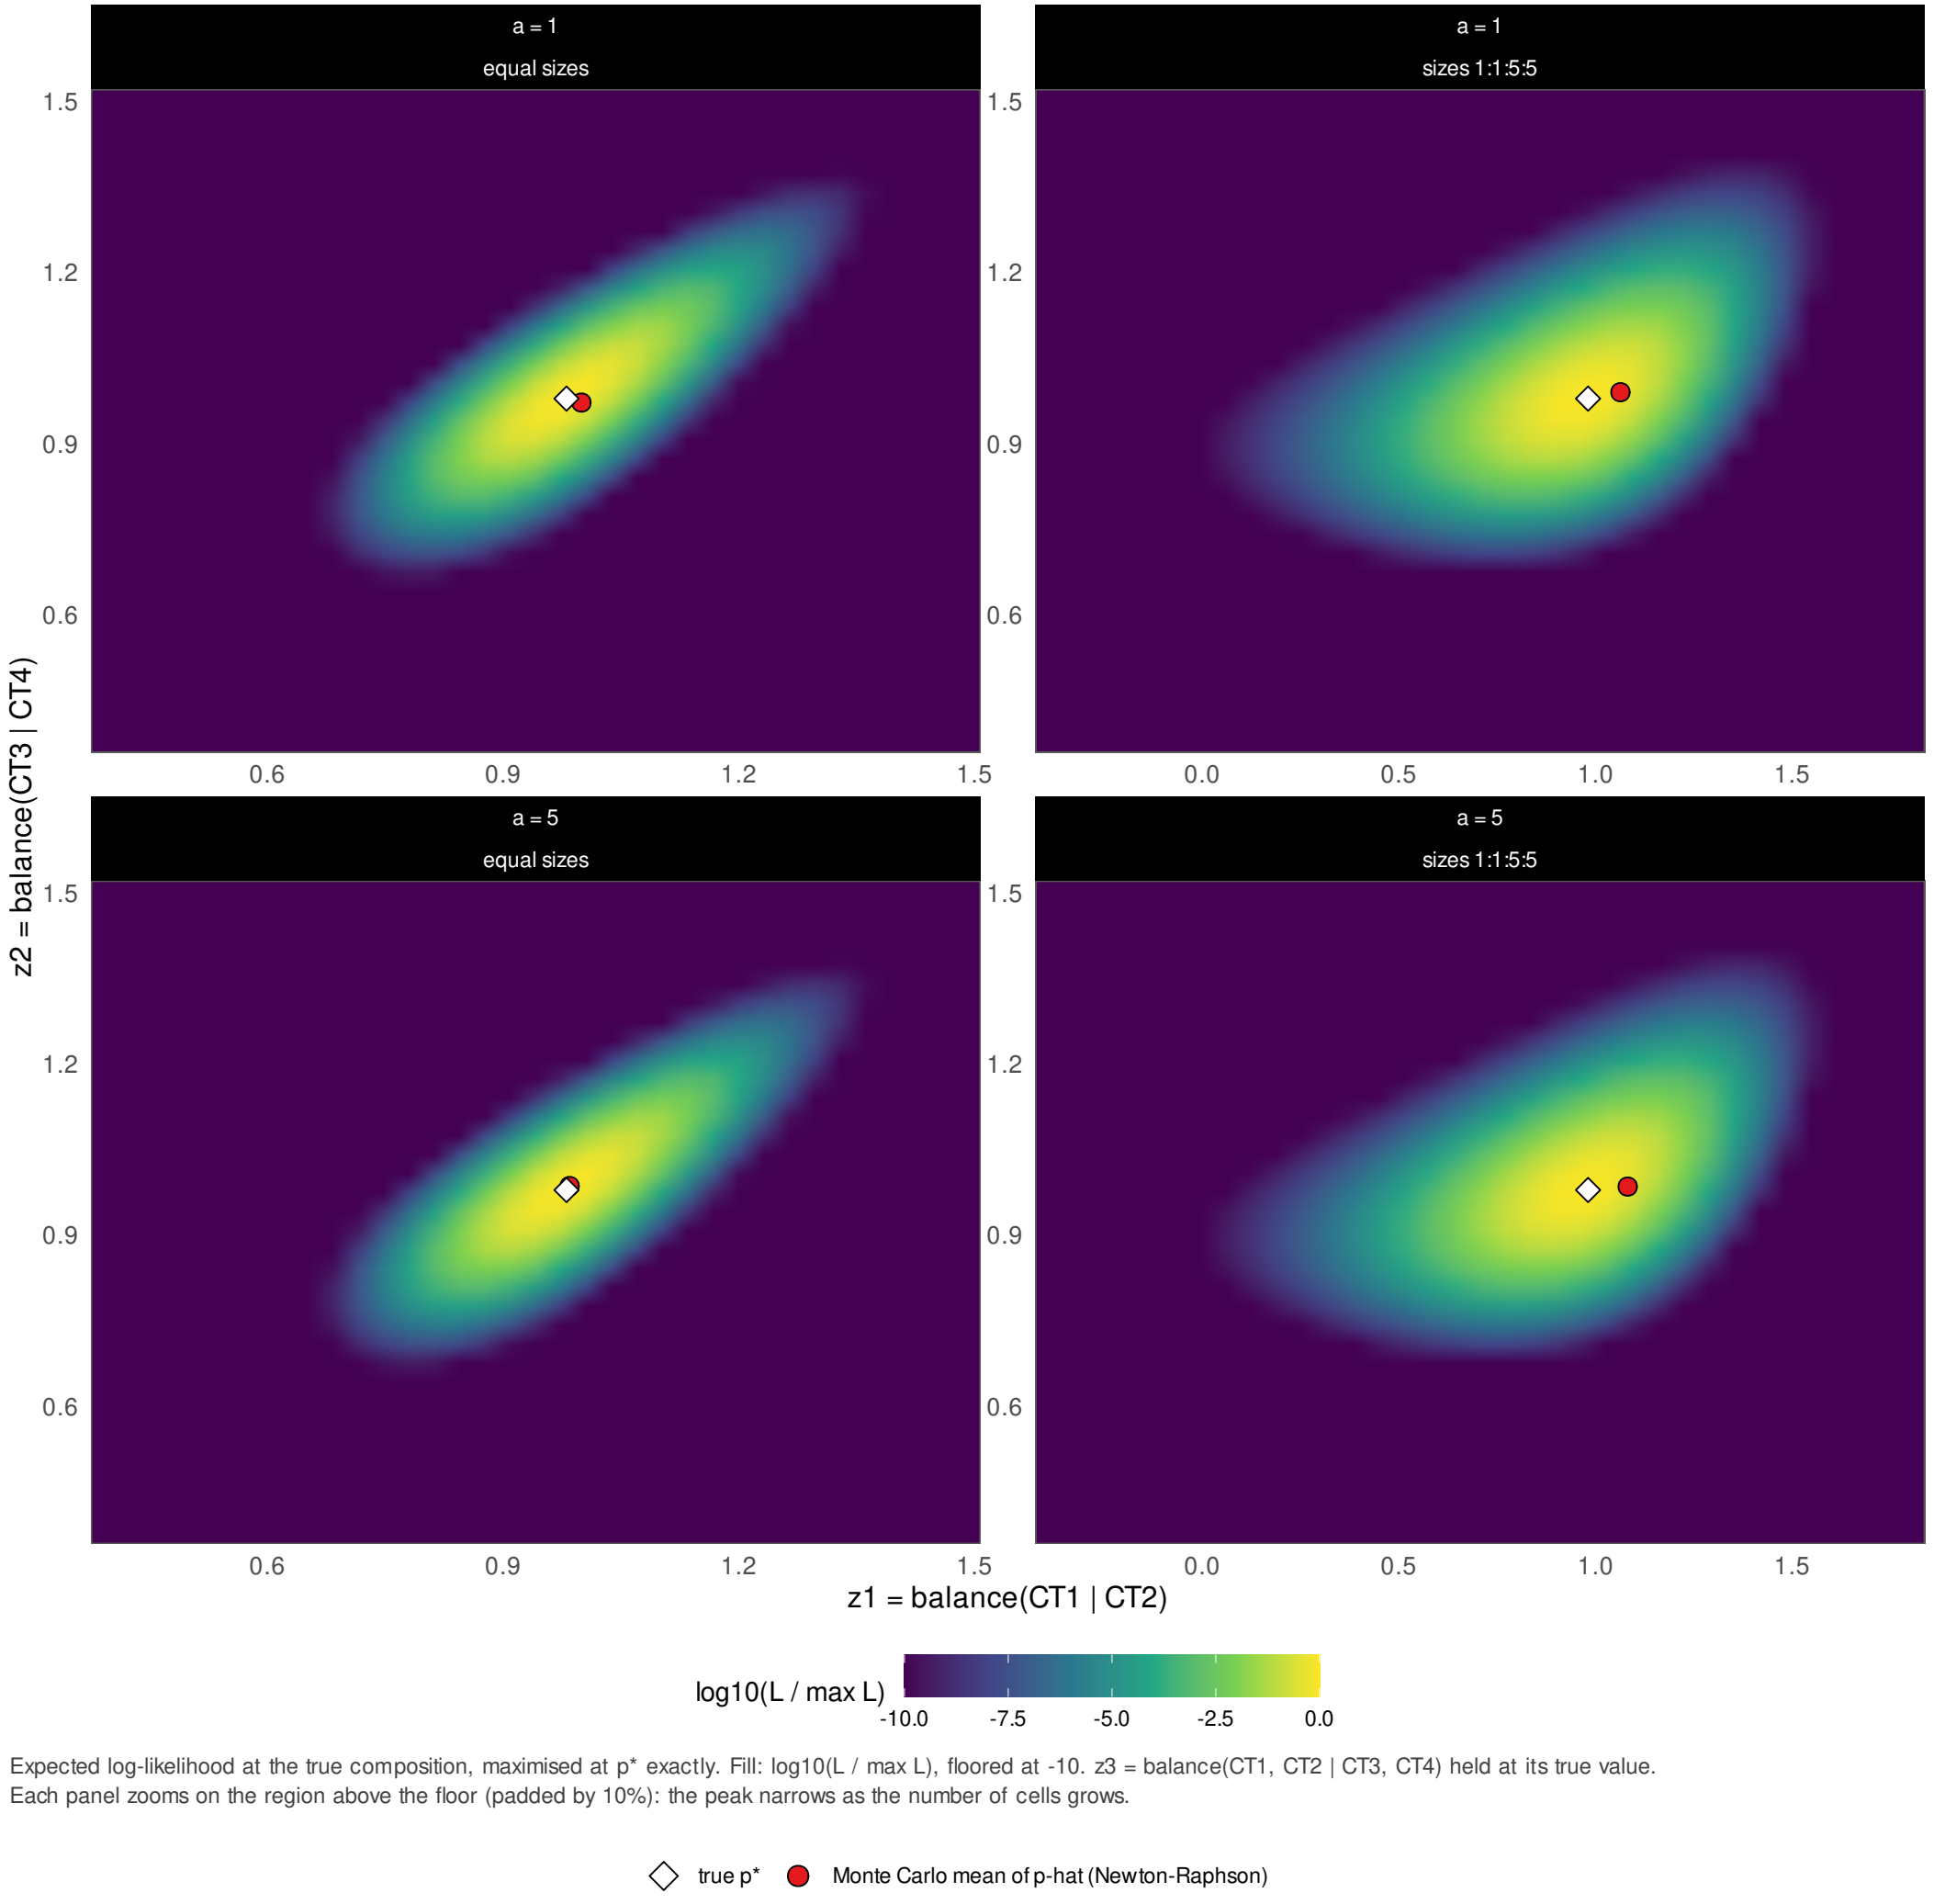


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value. Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood


G = 200 / 1000 cells per bulk / unbalanced / high sibling overlap

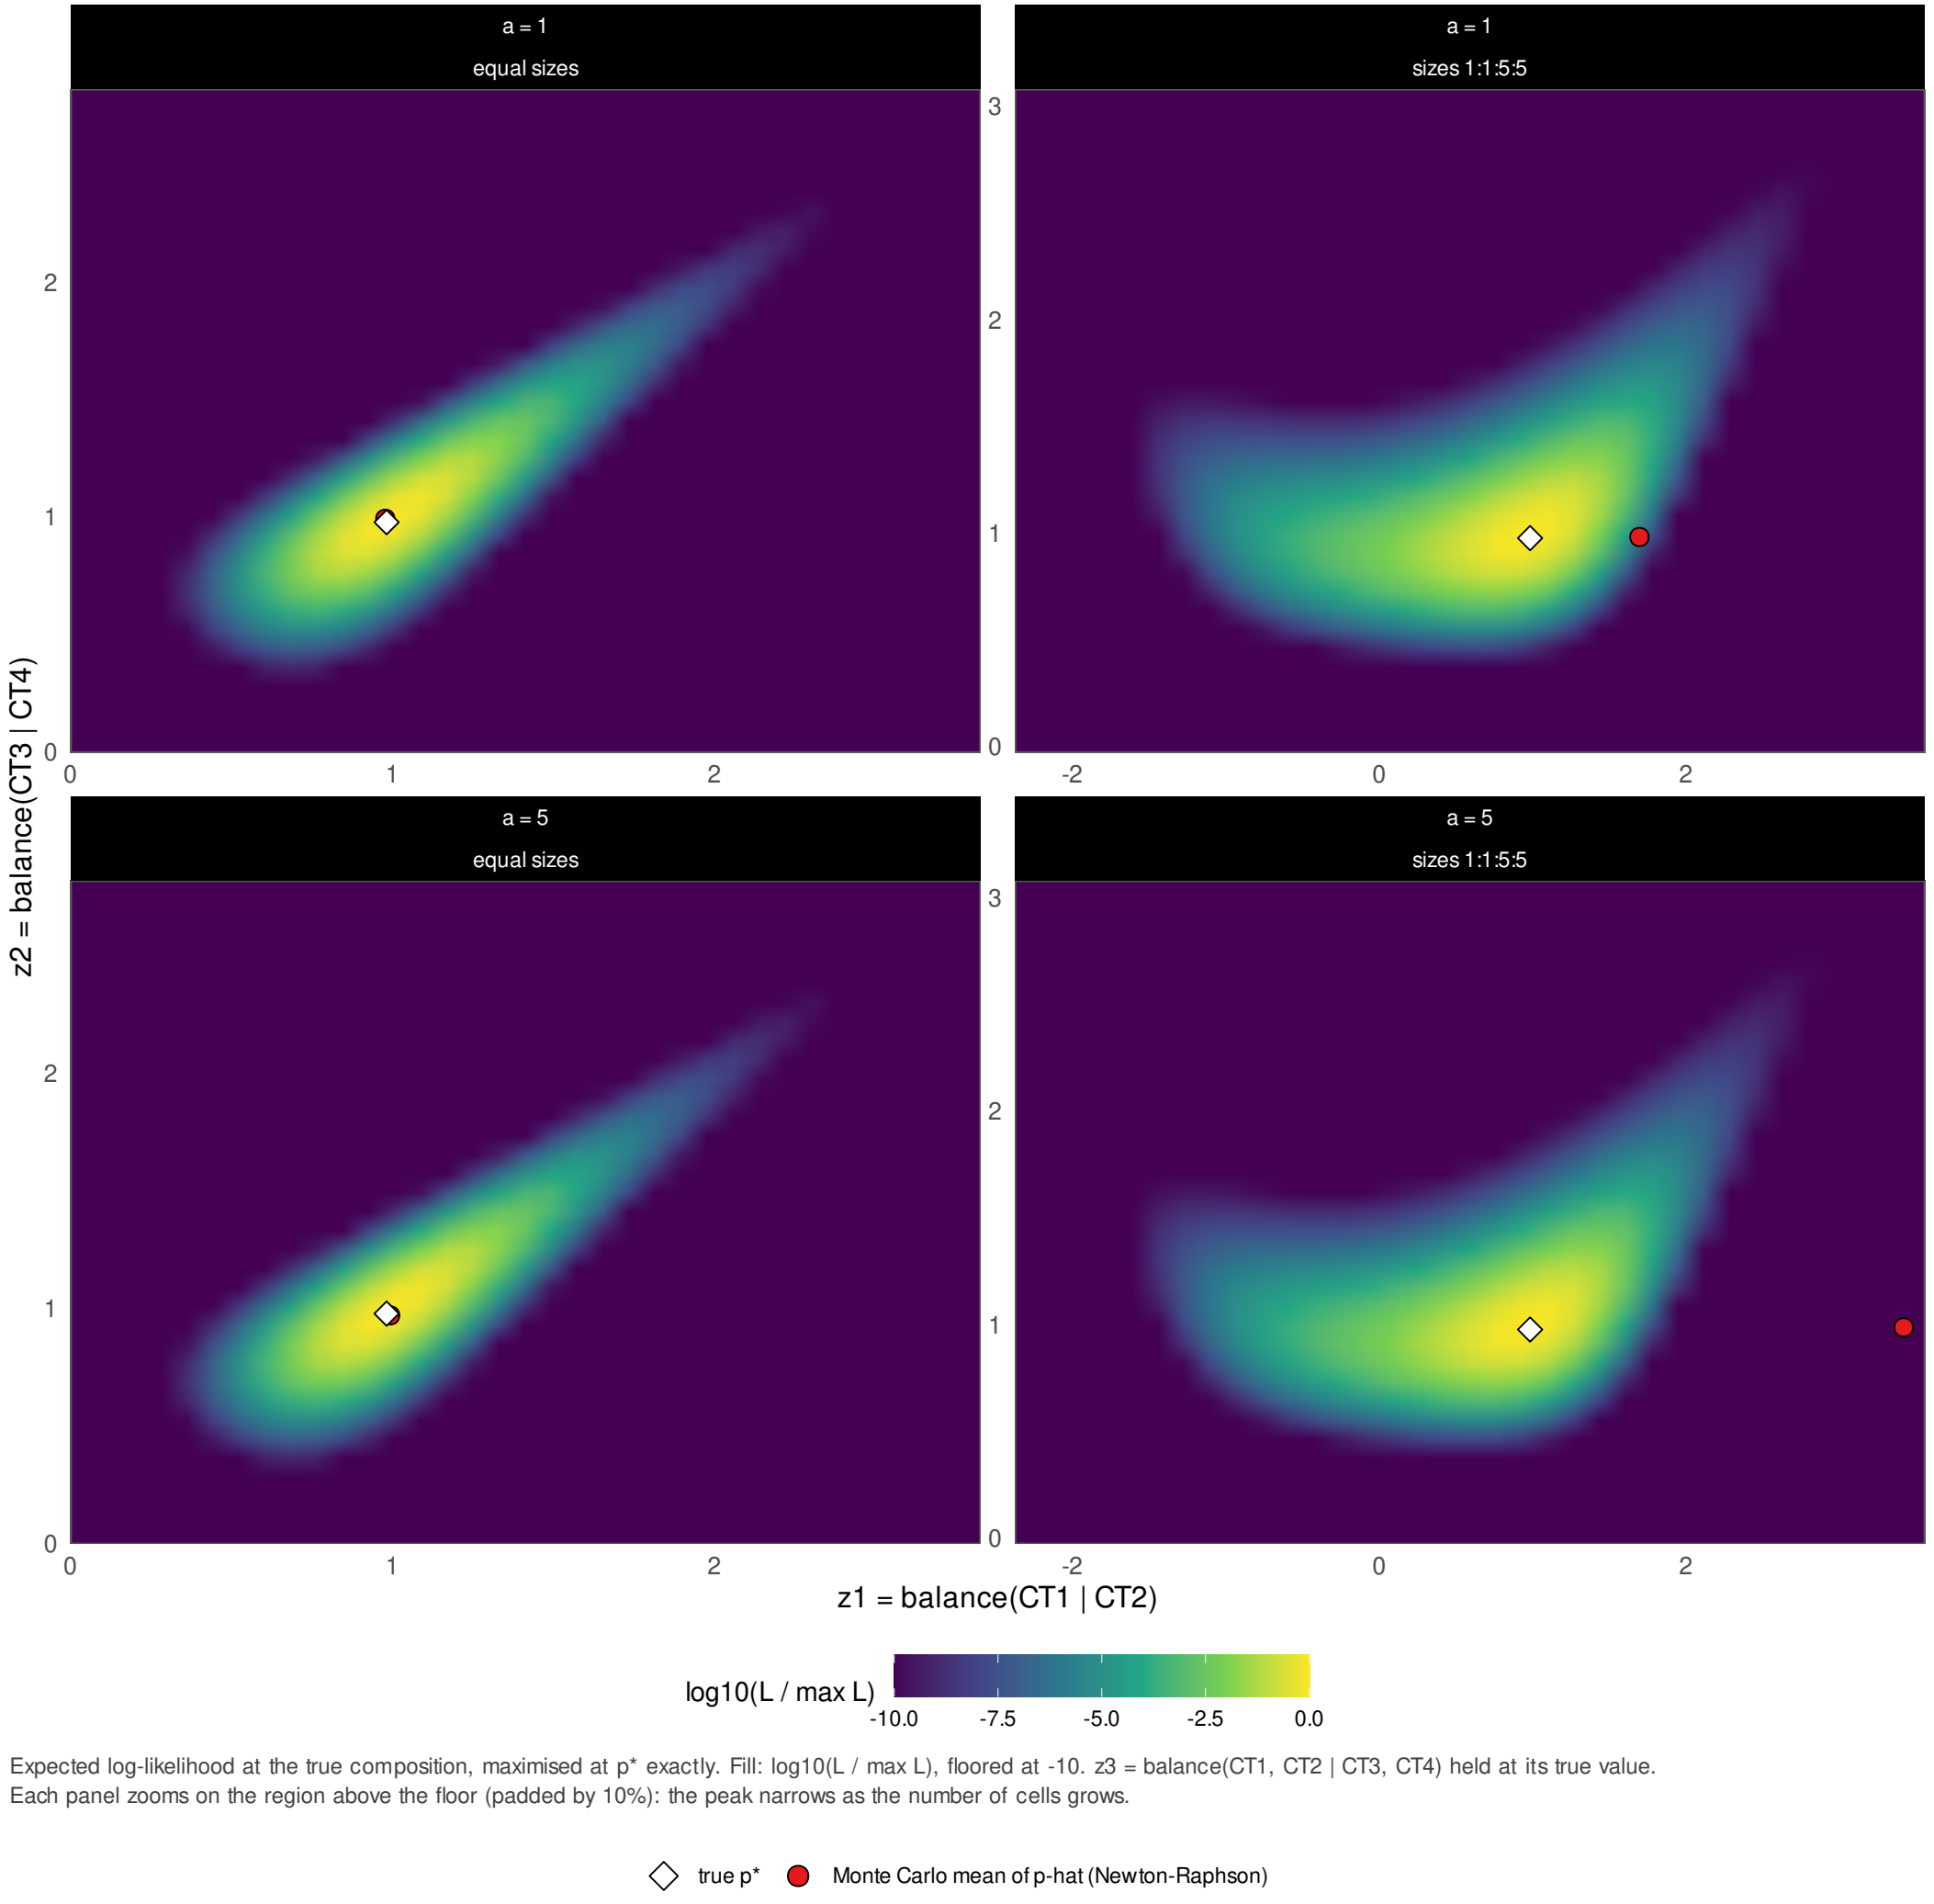

Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value. Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

Expected log-likelihood

G = 200 / 1e+05 cells per bulk / balanced / low sibling overlap

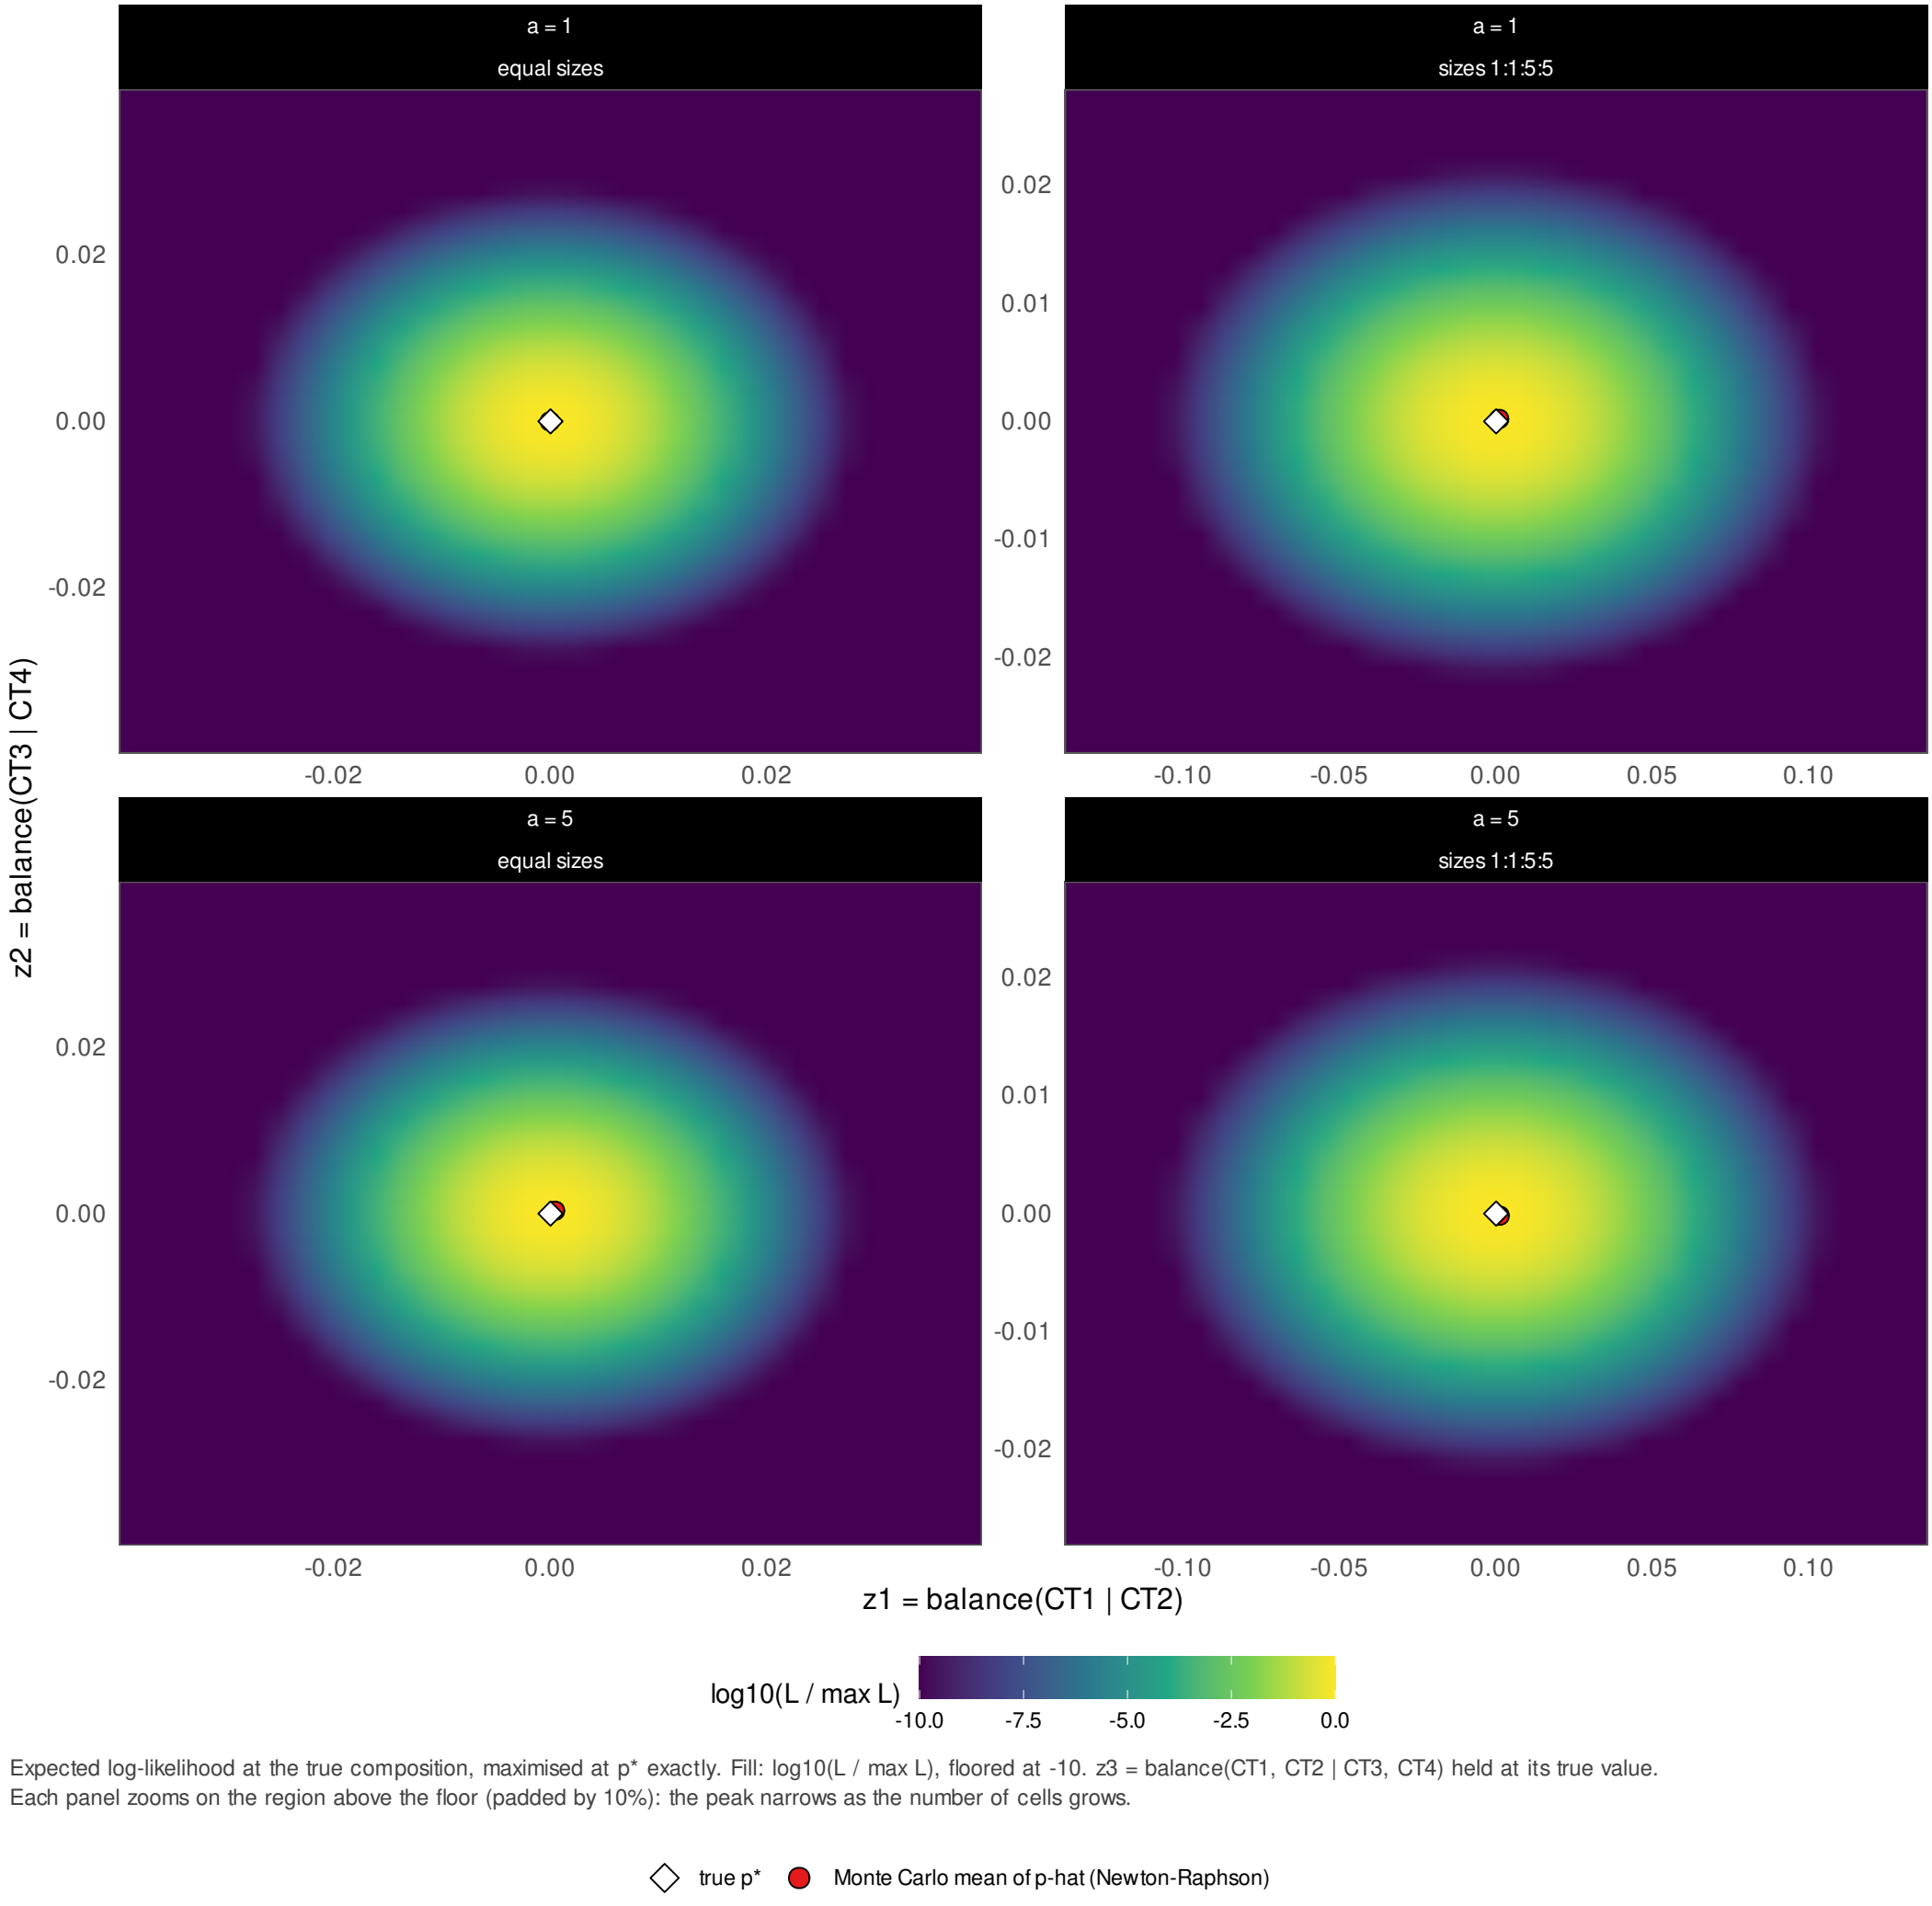


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value. Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

G = 200 / 1e+05 cells per bulk / balanced / high sibling overlap

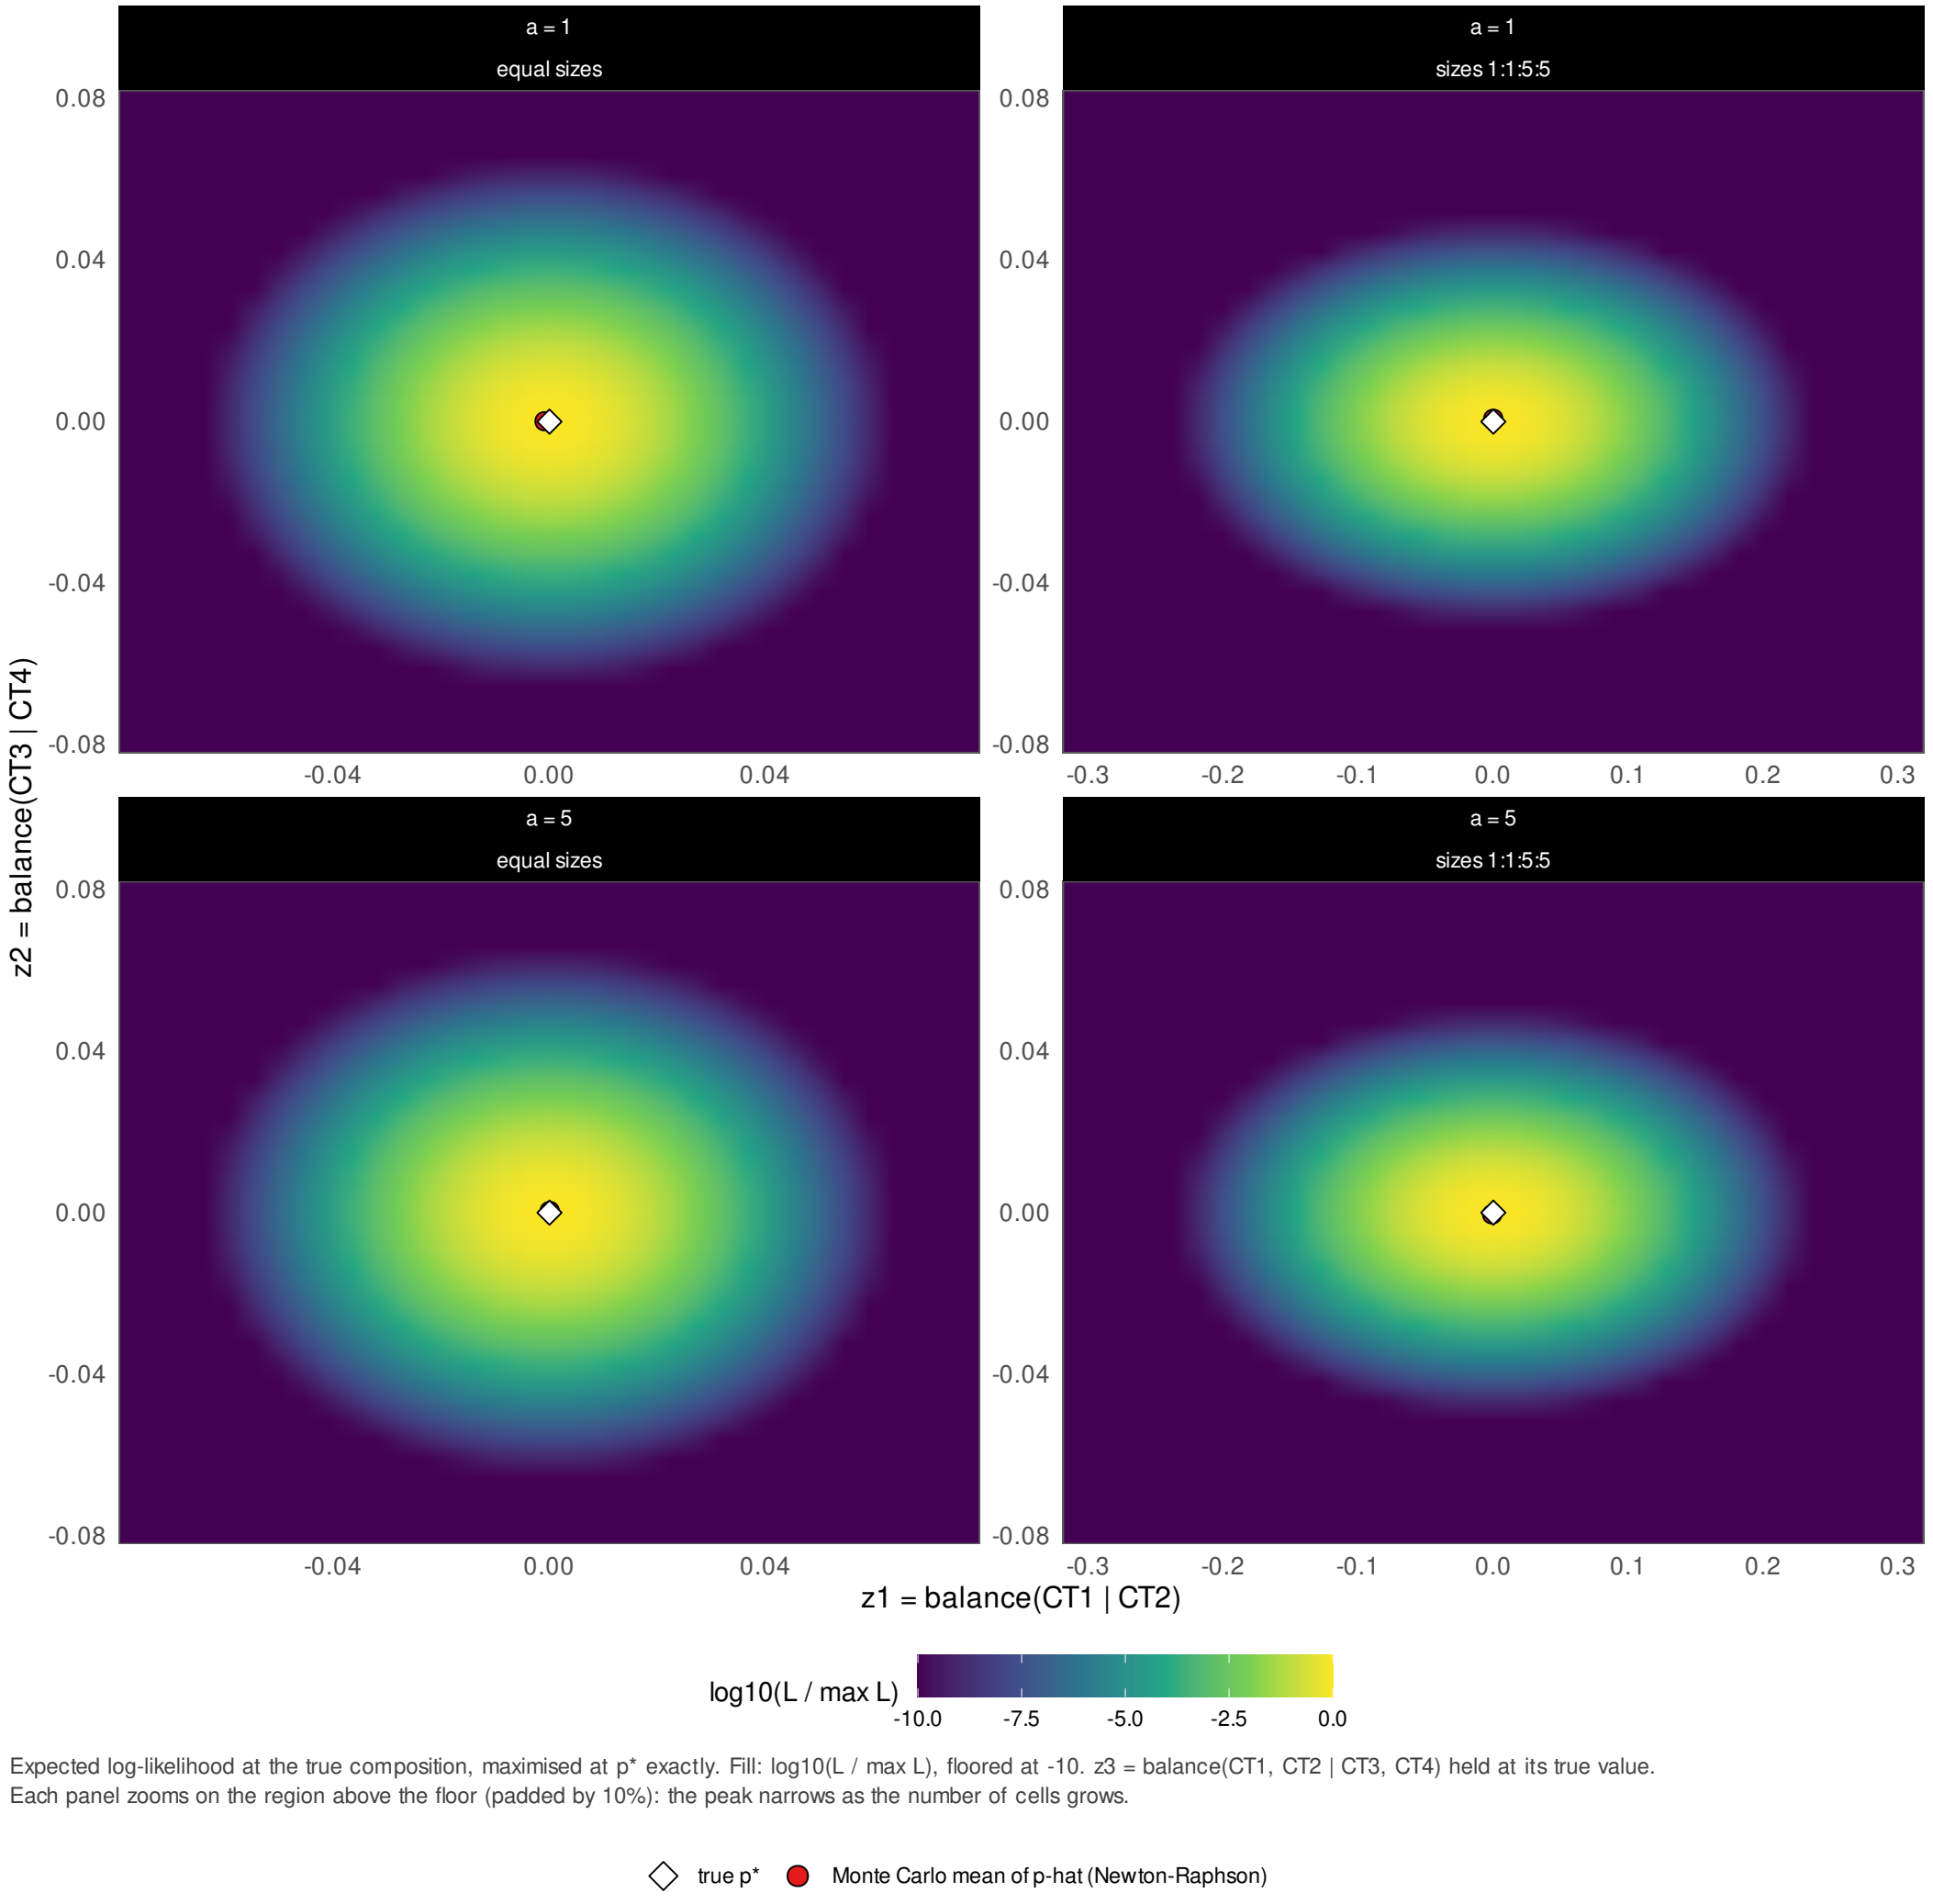


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value.
Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

G = 200 / 1e+05 cells per bulk / unbalanced / low sibling overlap

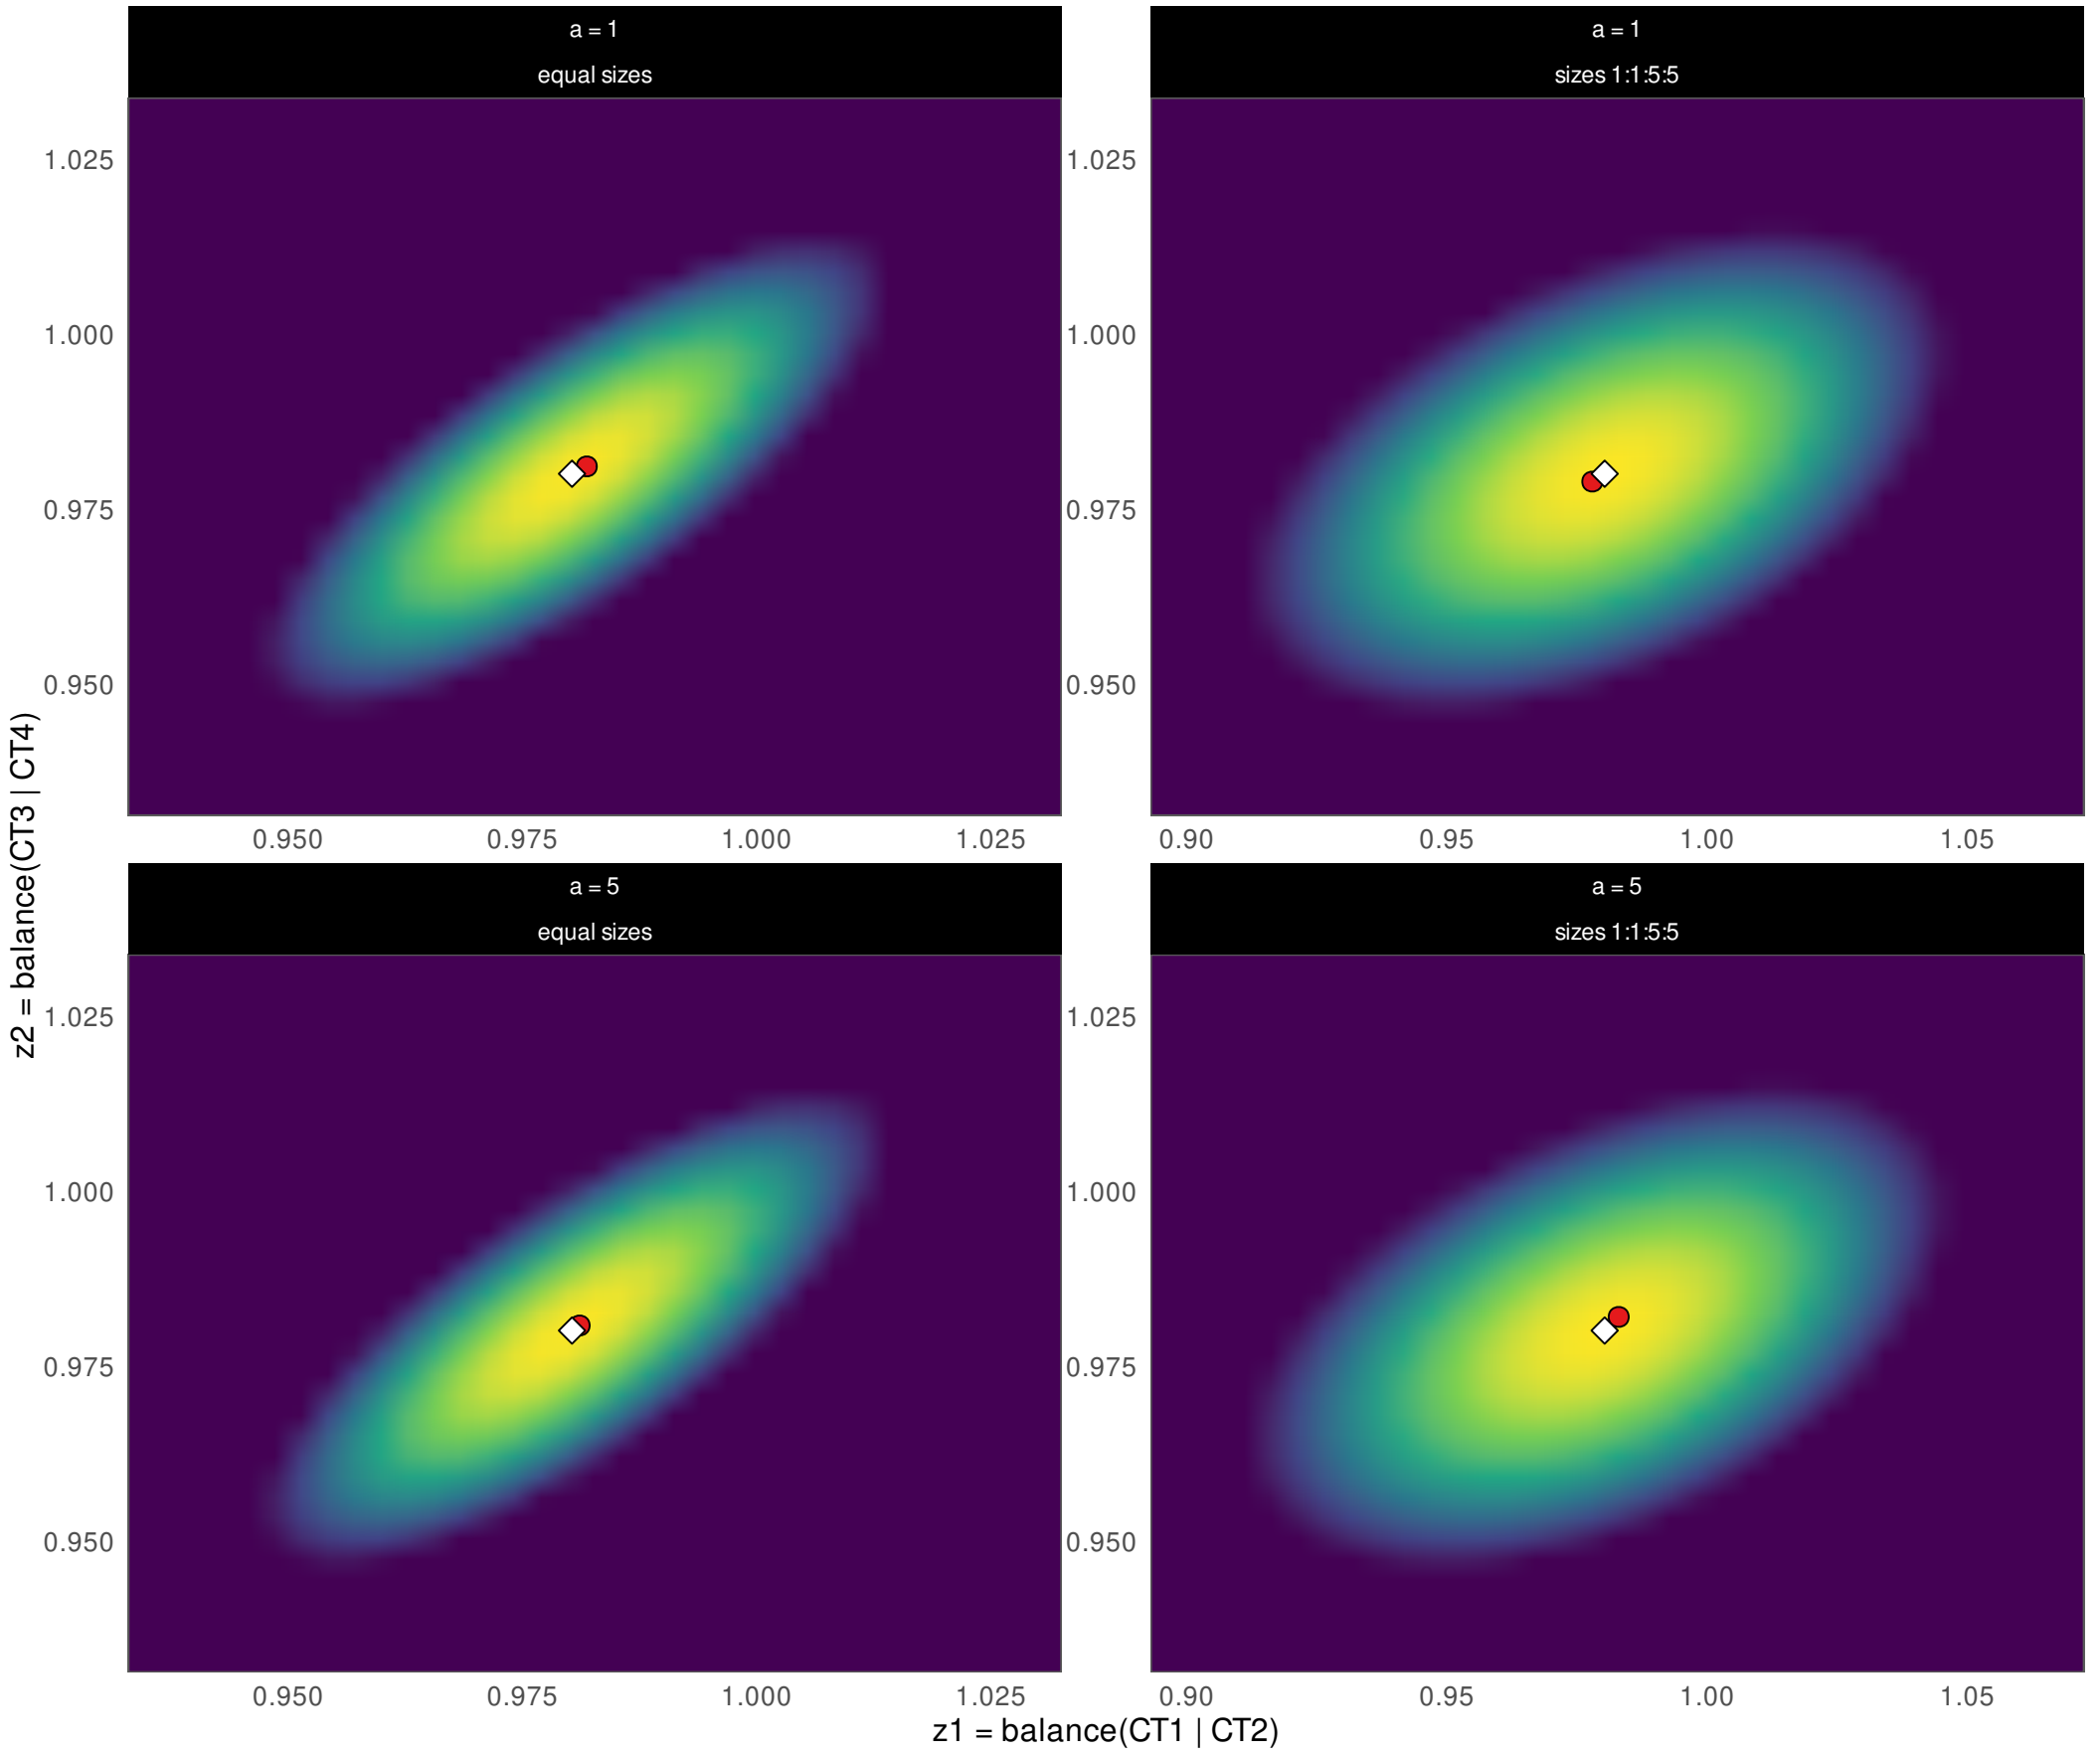


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value. Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

G = 200 / 1e+05 cells per bulk / unbalanced / high sibling overlap

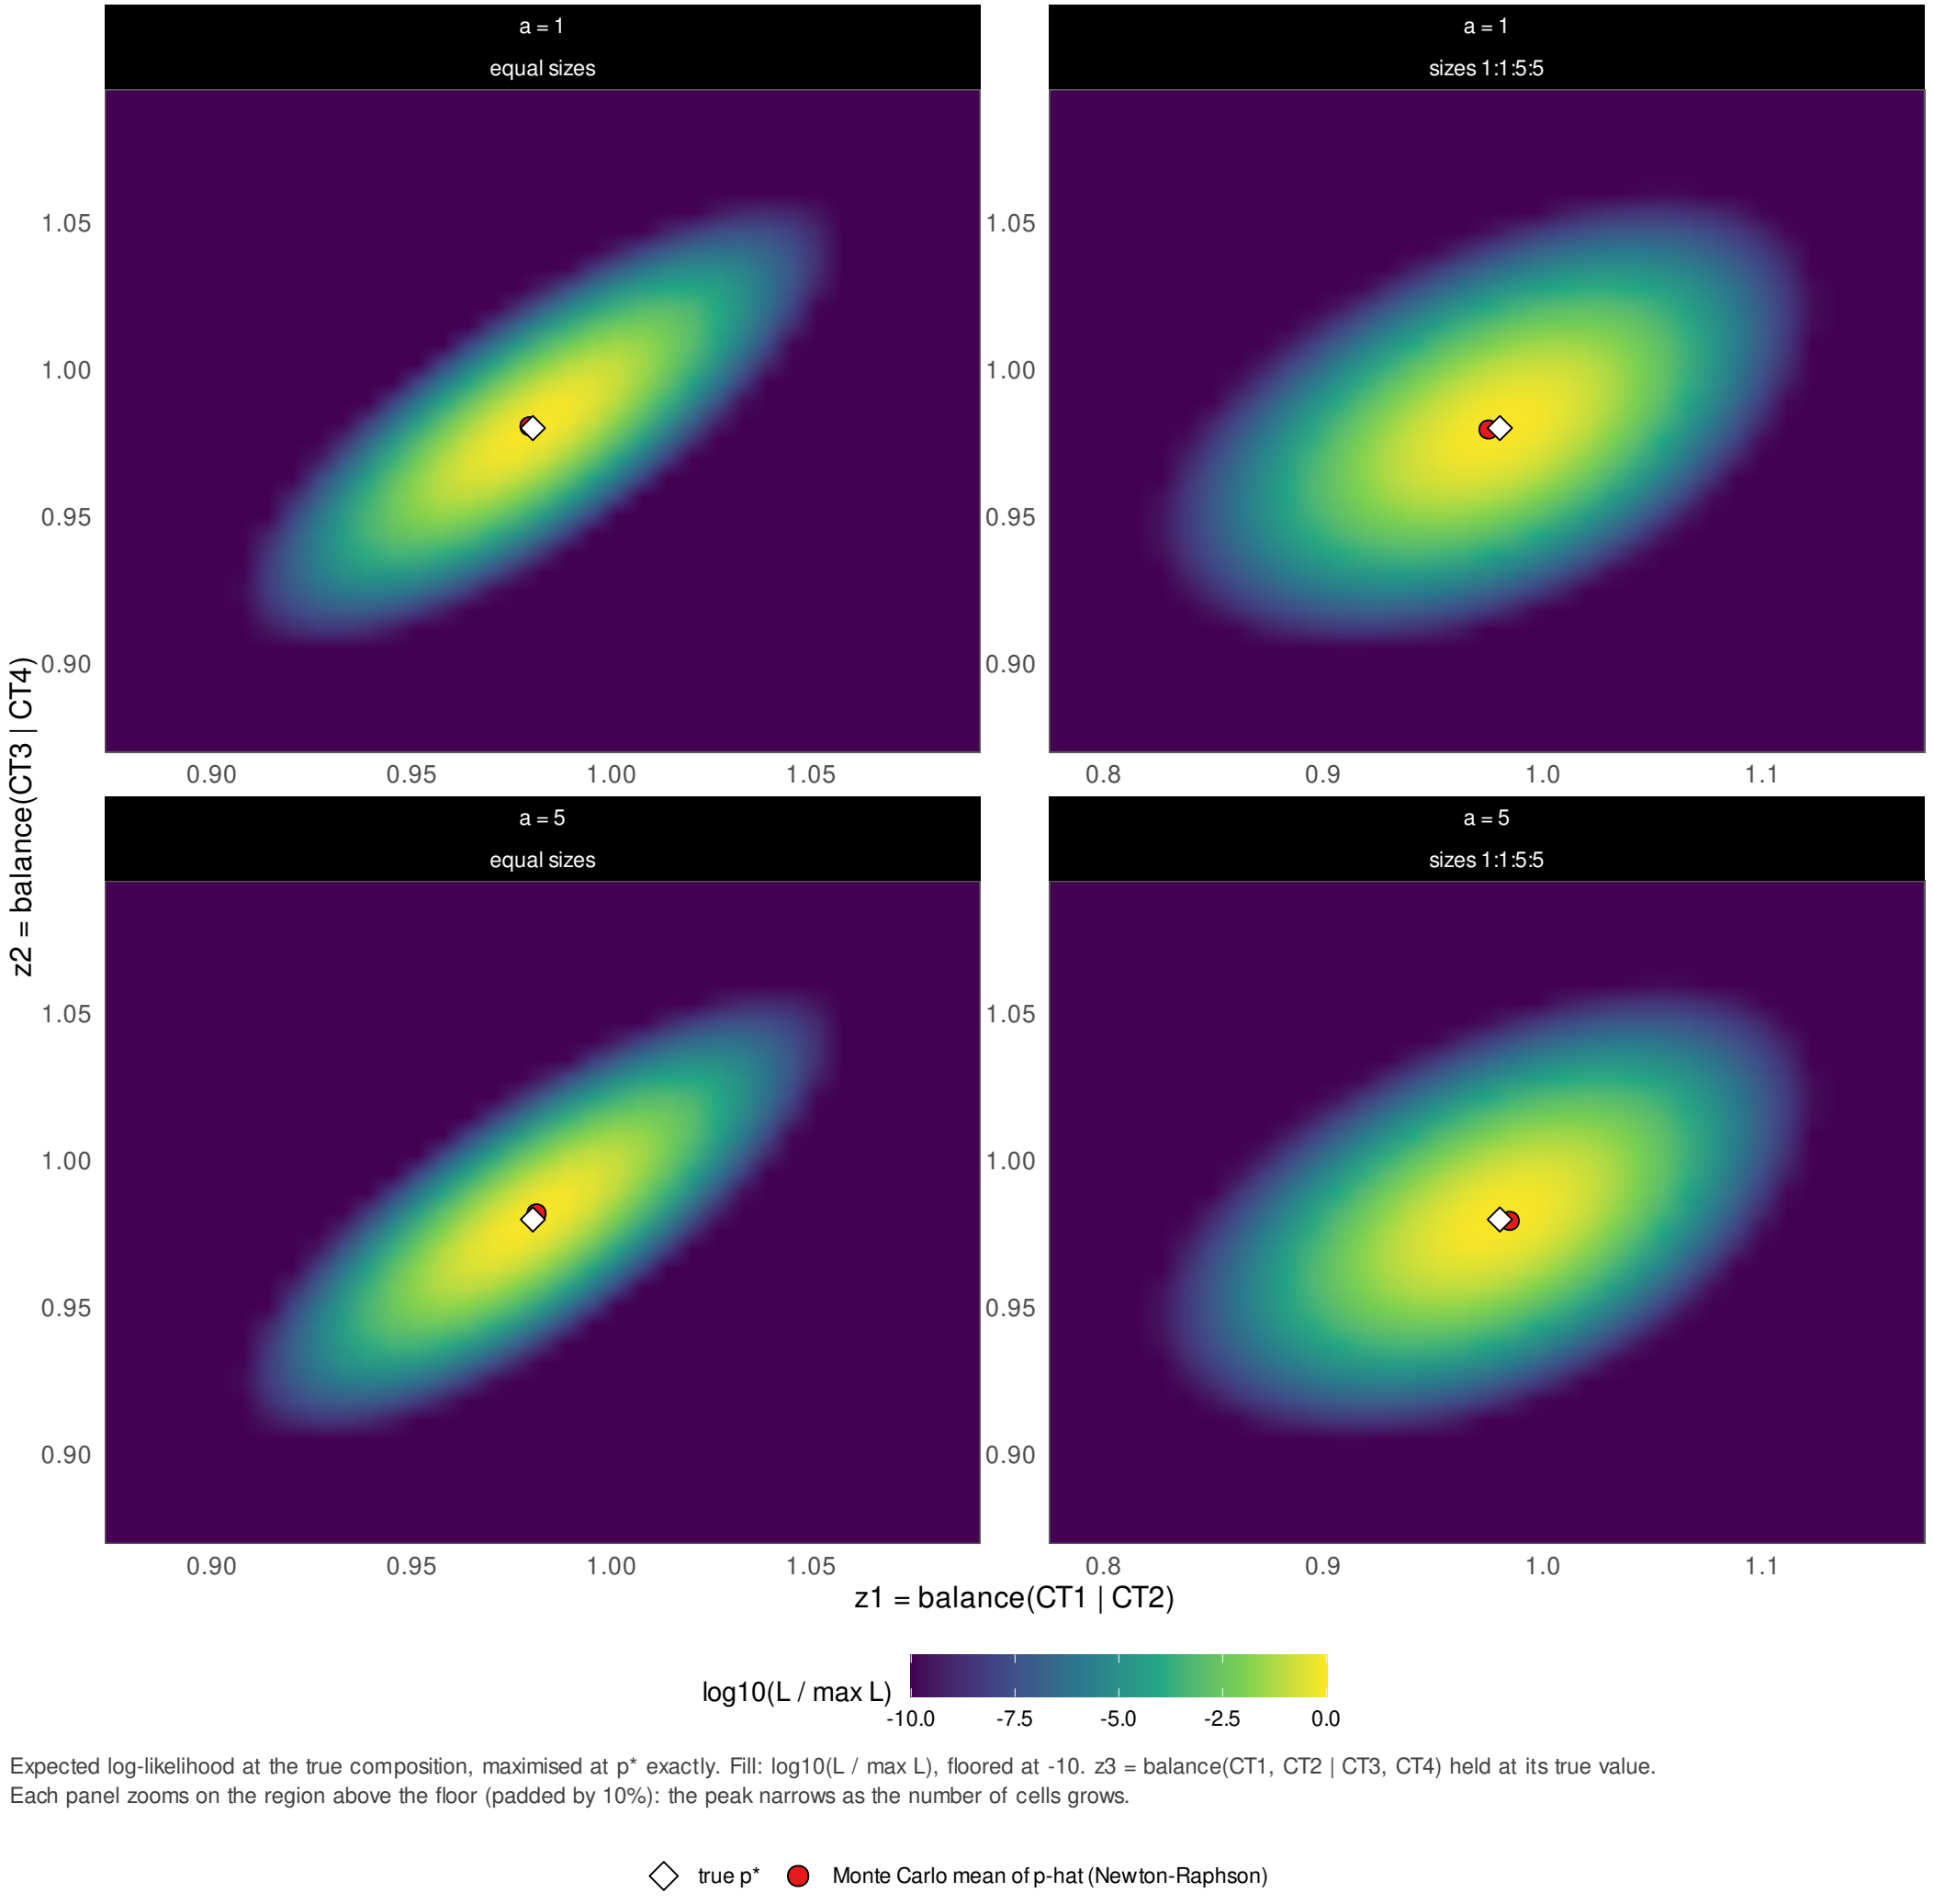

Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10. z3 = balance(CT1, CT2 | CT3, CT4) held at its true value. Each panel zooms on the region above the floor (padded by 10%): the peak narrows as the number of cells grows.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)