
Wald approximation: whitened ILR estimates against N(0, 1)

G = 20 / 1000 cells per bulk / balanced / low sibling overlap

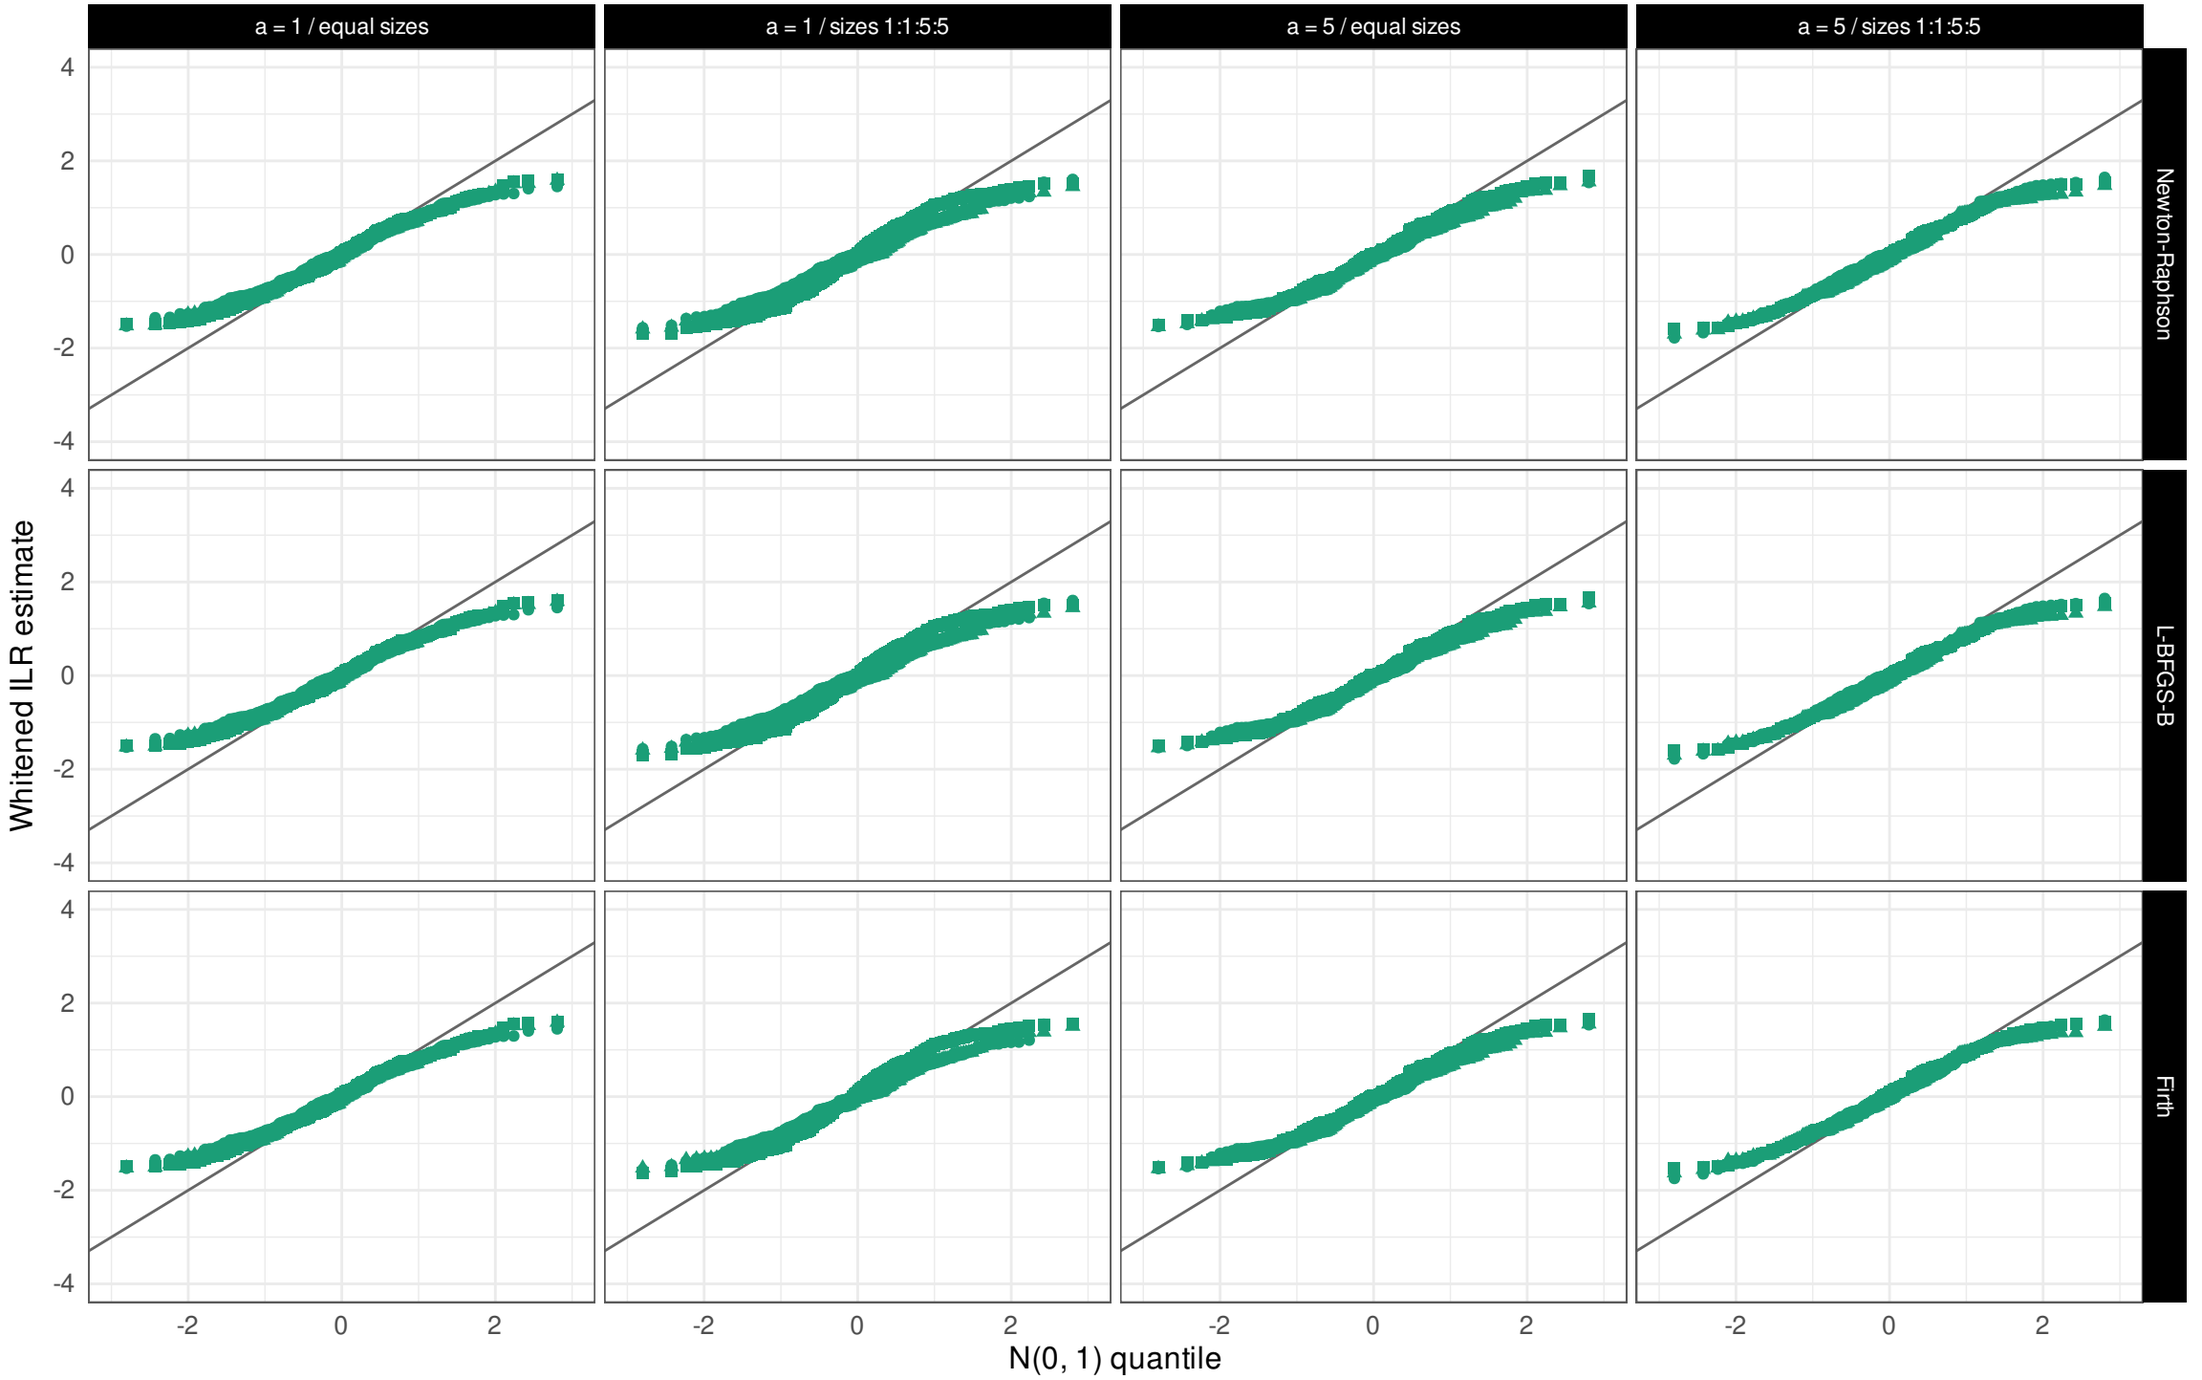


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 20 / 1000 cells per bulk / balanced / high sibling overlap

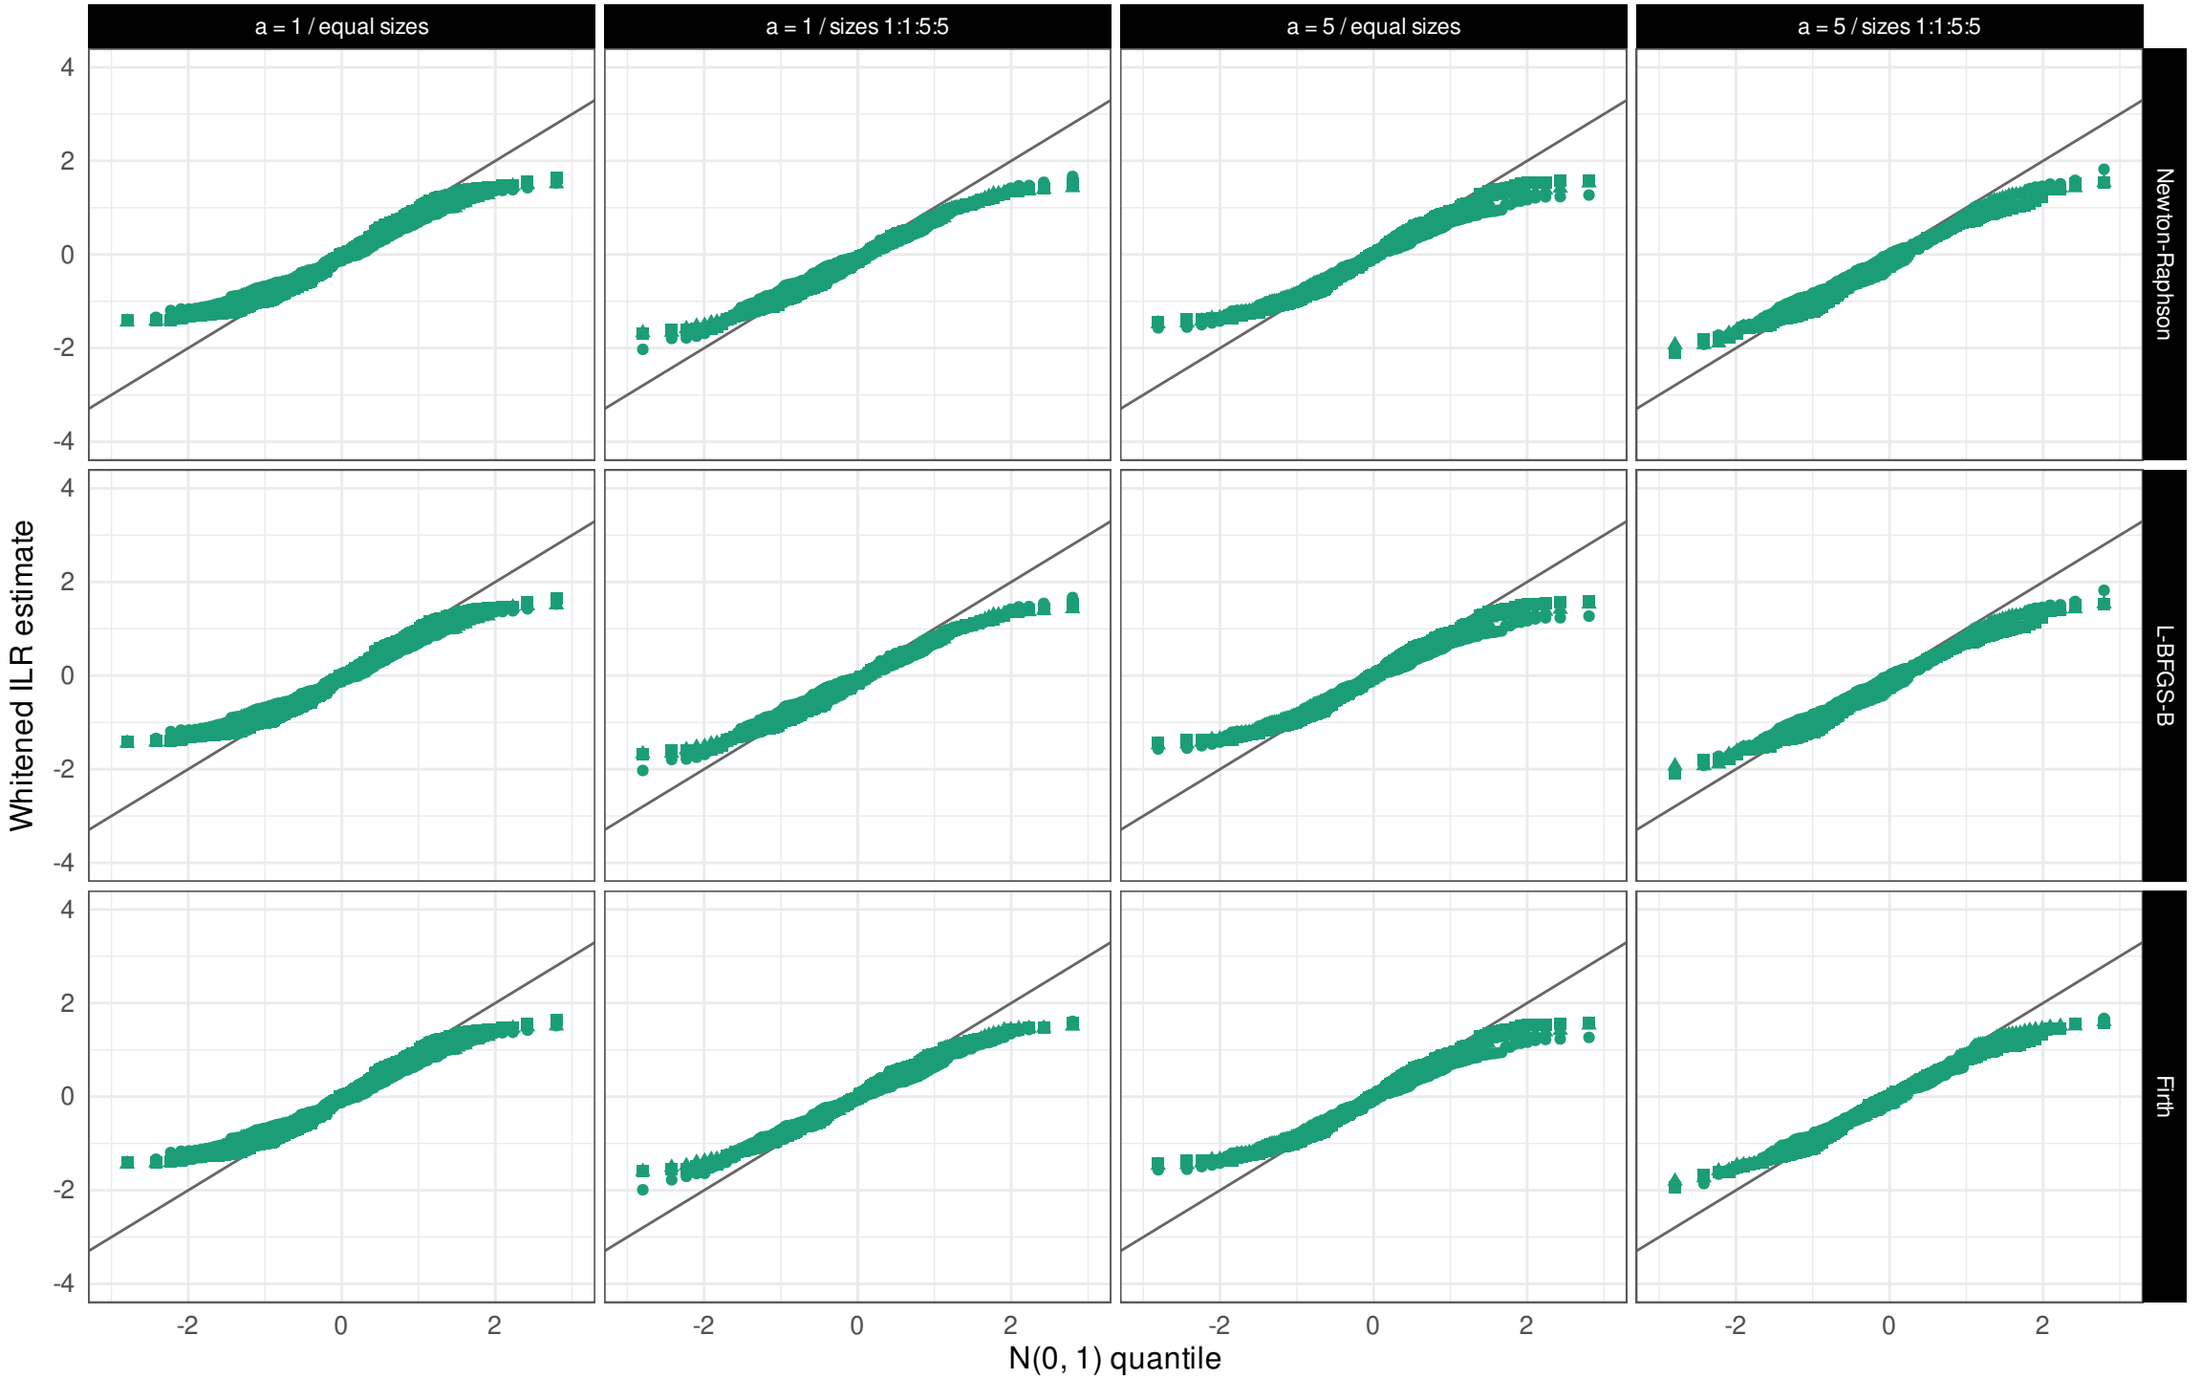


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum ● Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 20 / 1000 cells per bulk / unbalanced / low sibling overlap

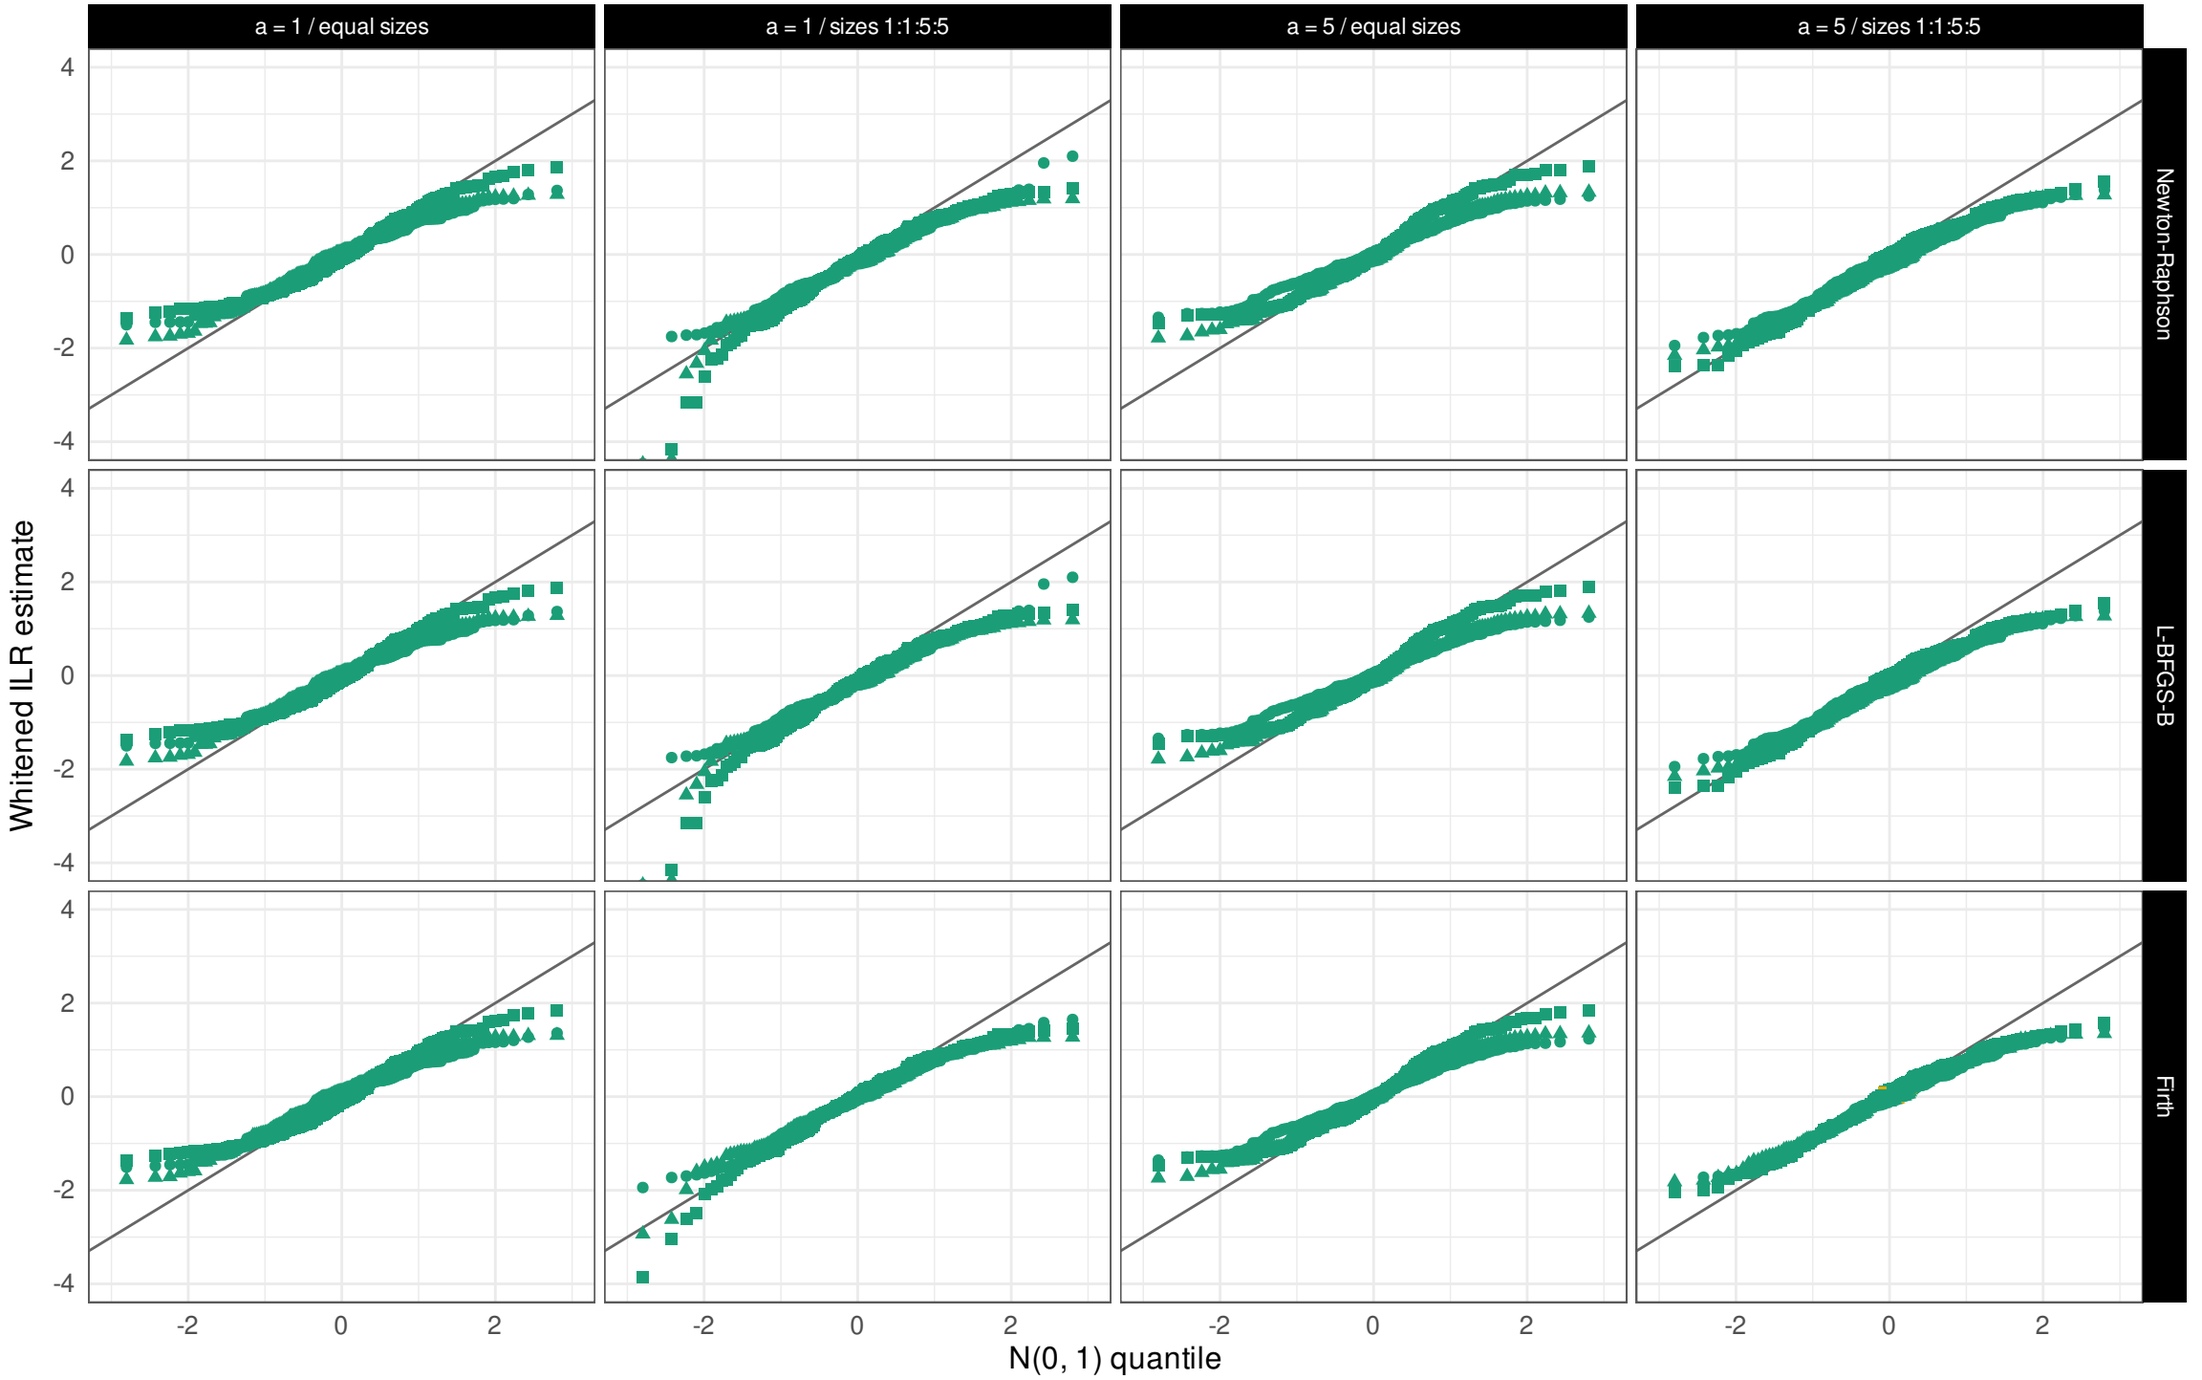


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum ● Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 20 / 1000 cells per bulk / unbalanced / high sibling overlap

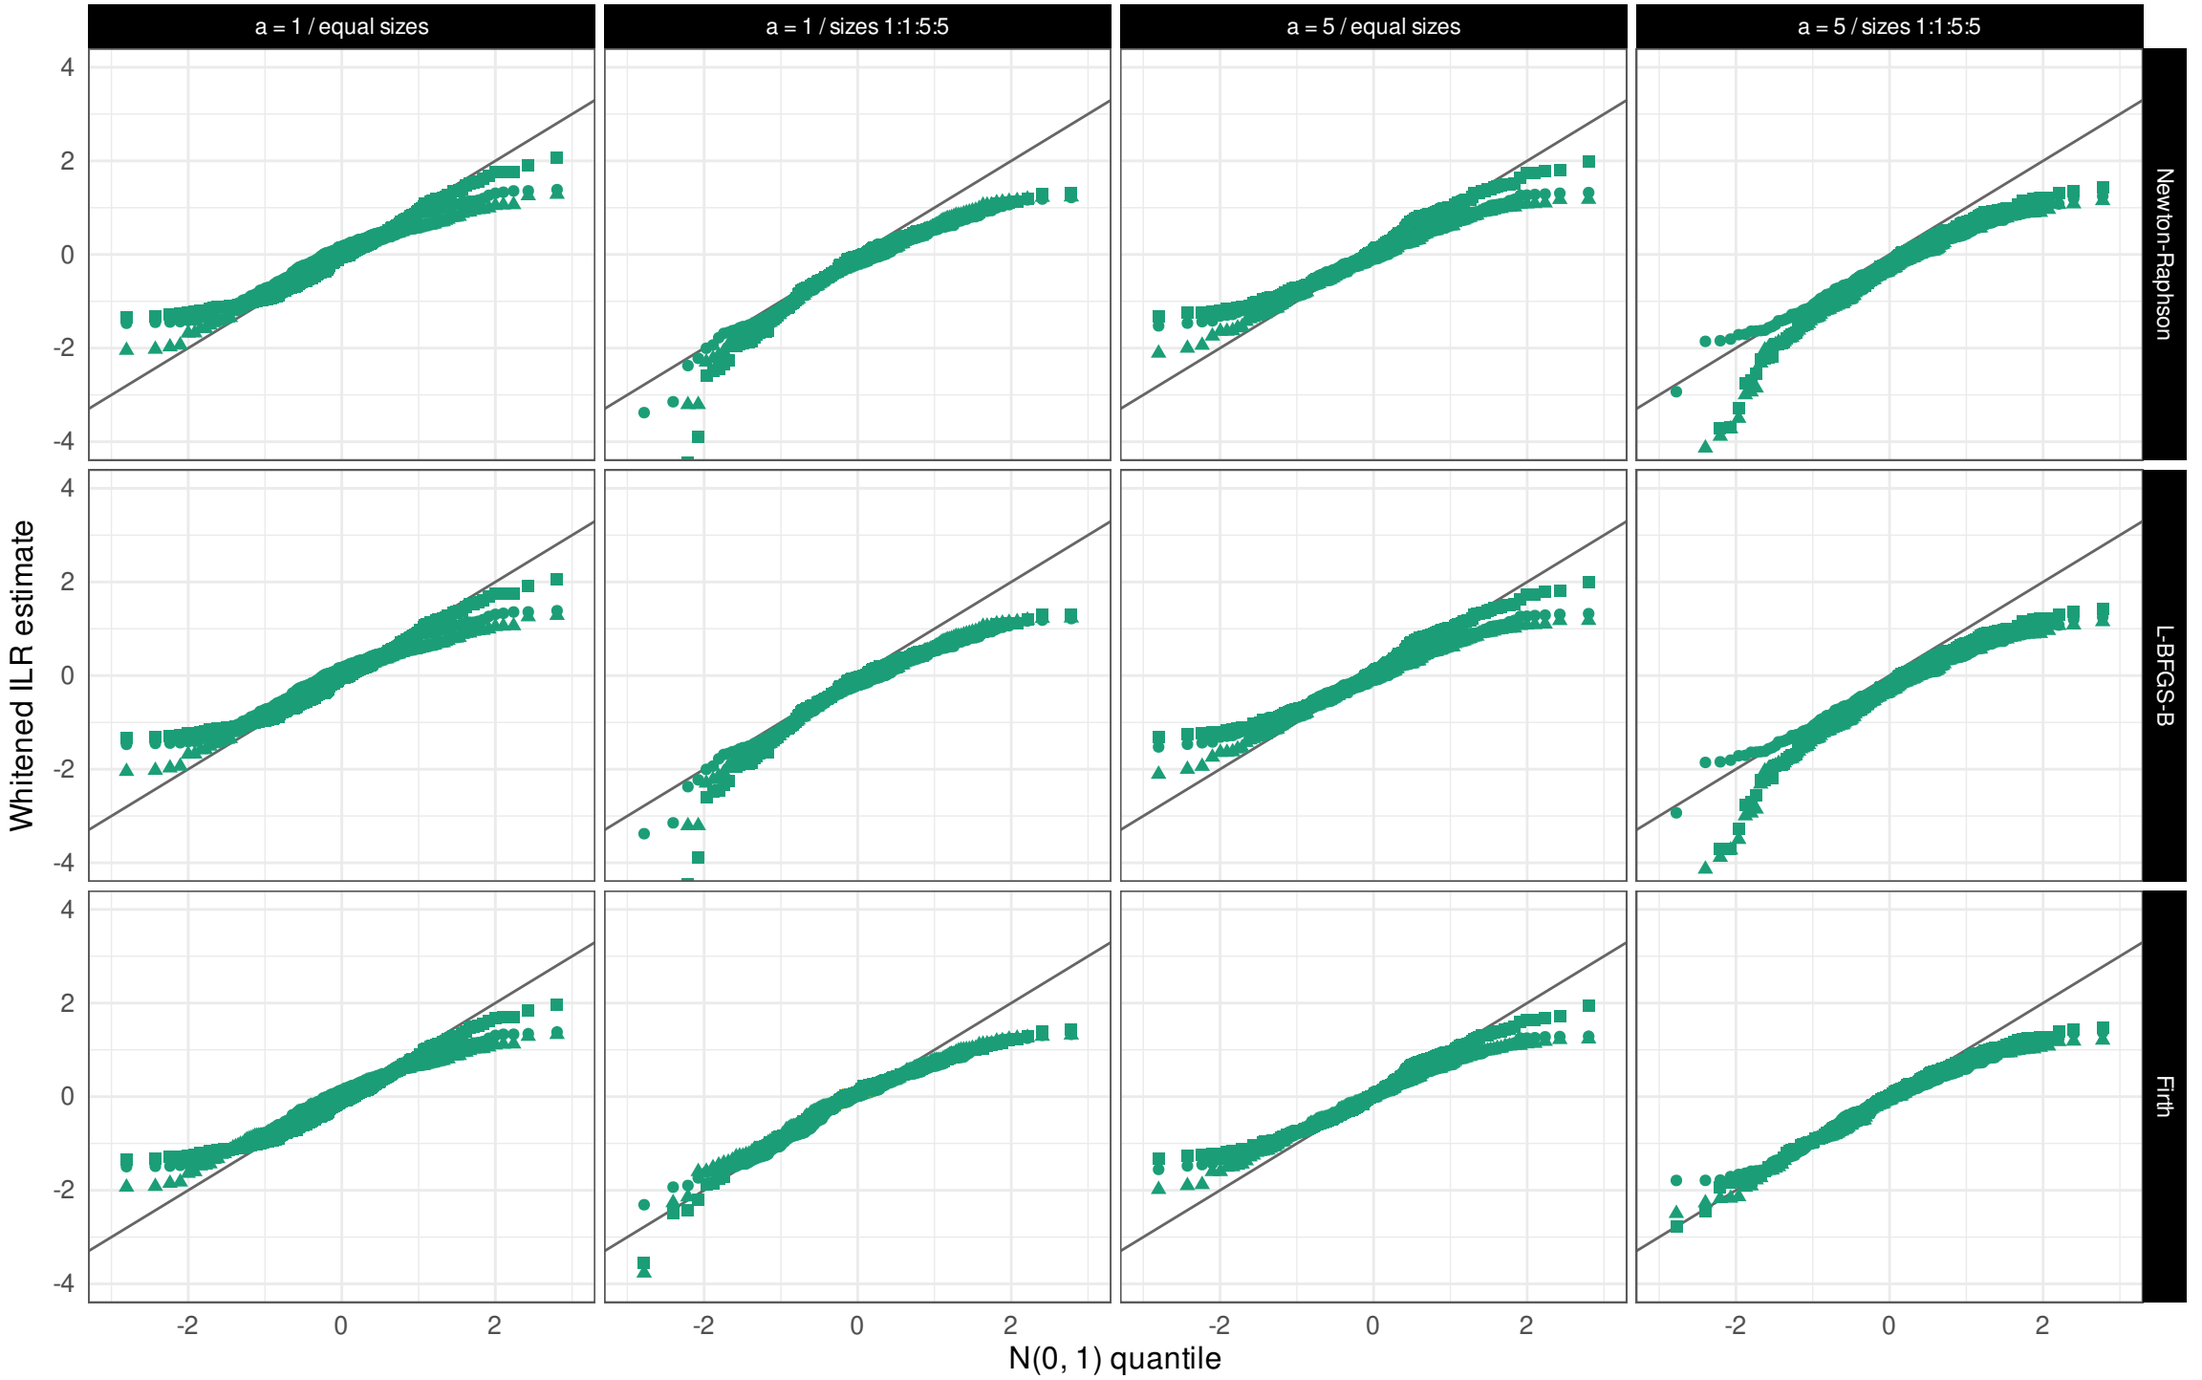


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum ● Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 20 / 1e+05 cells per bulk / balanced / low sibling overlap

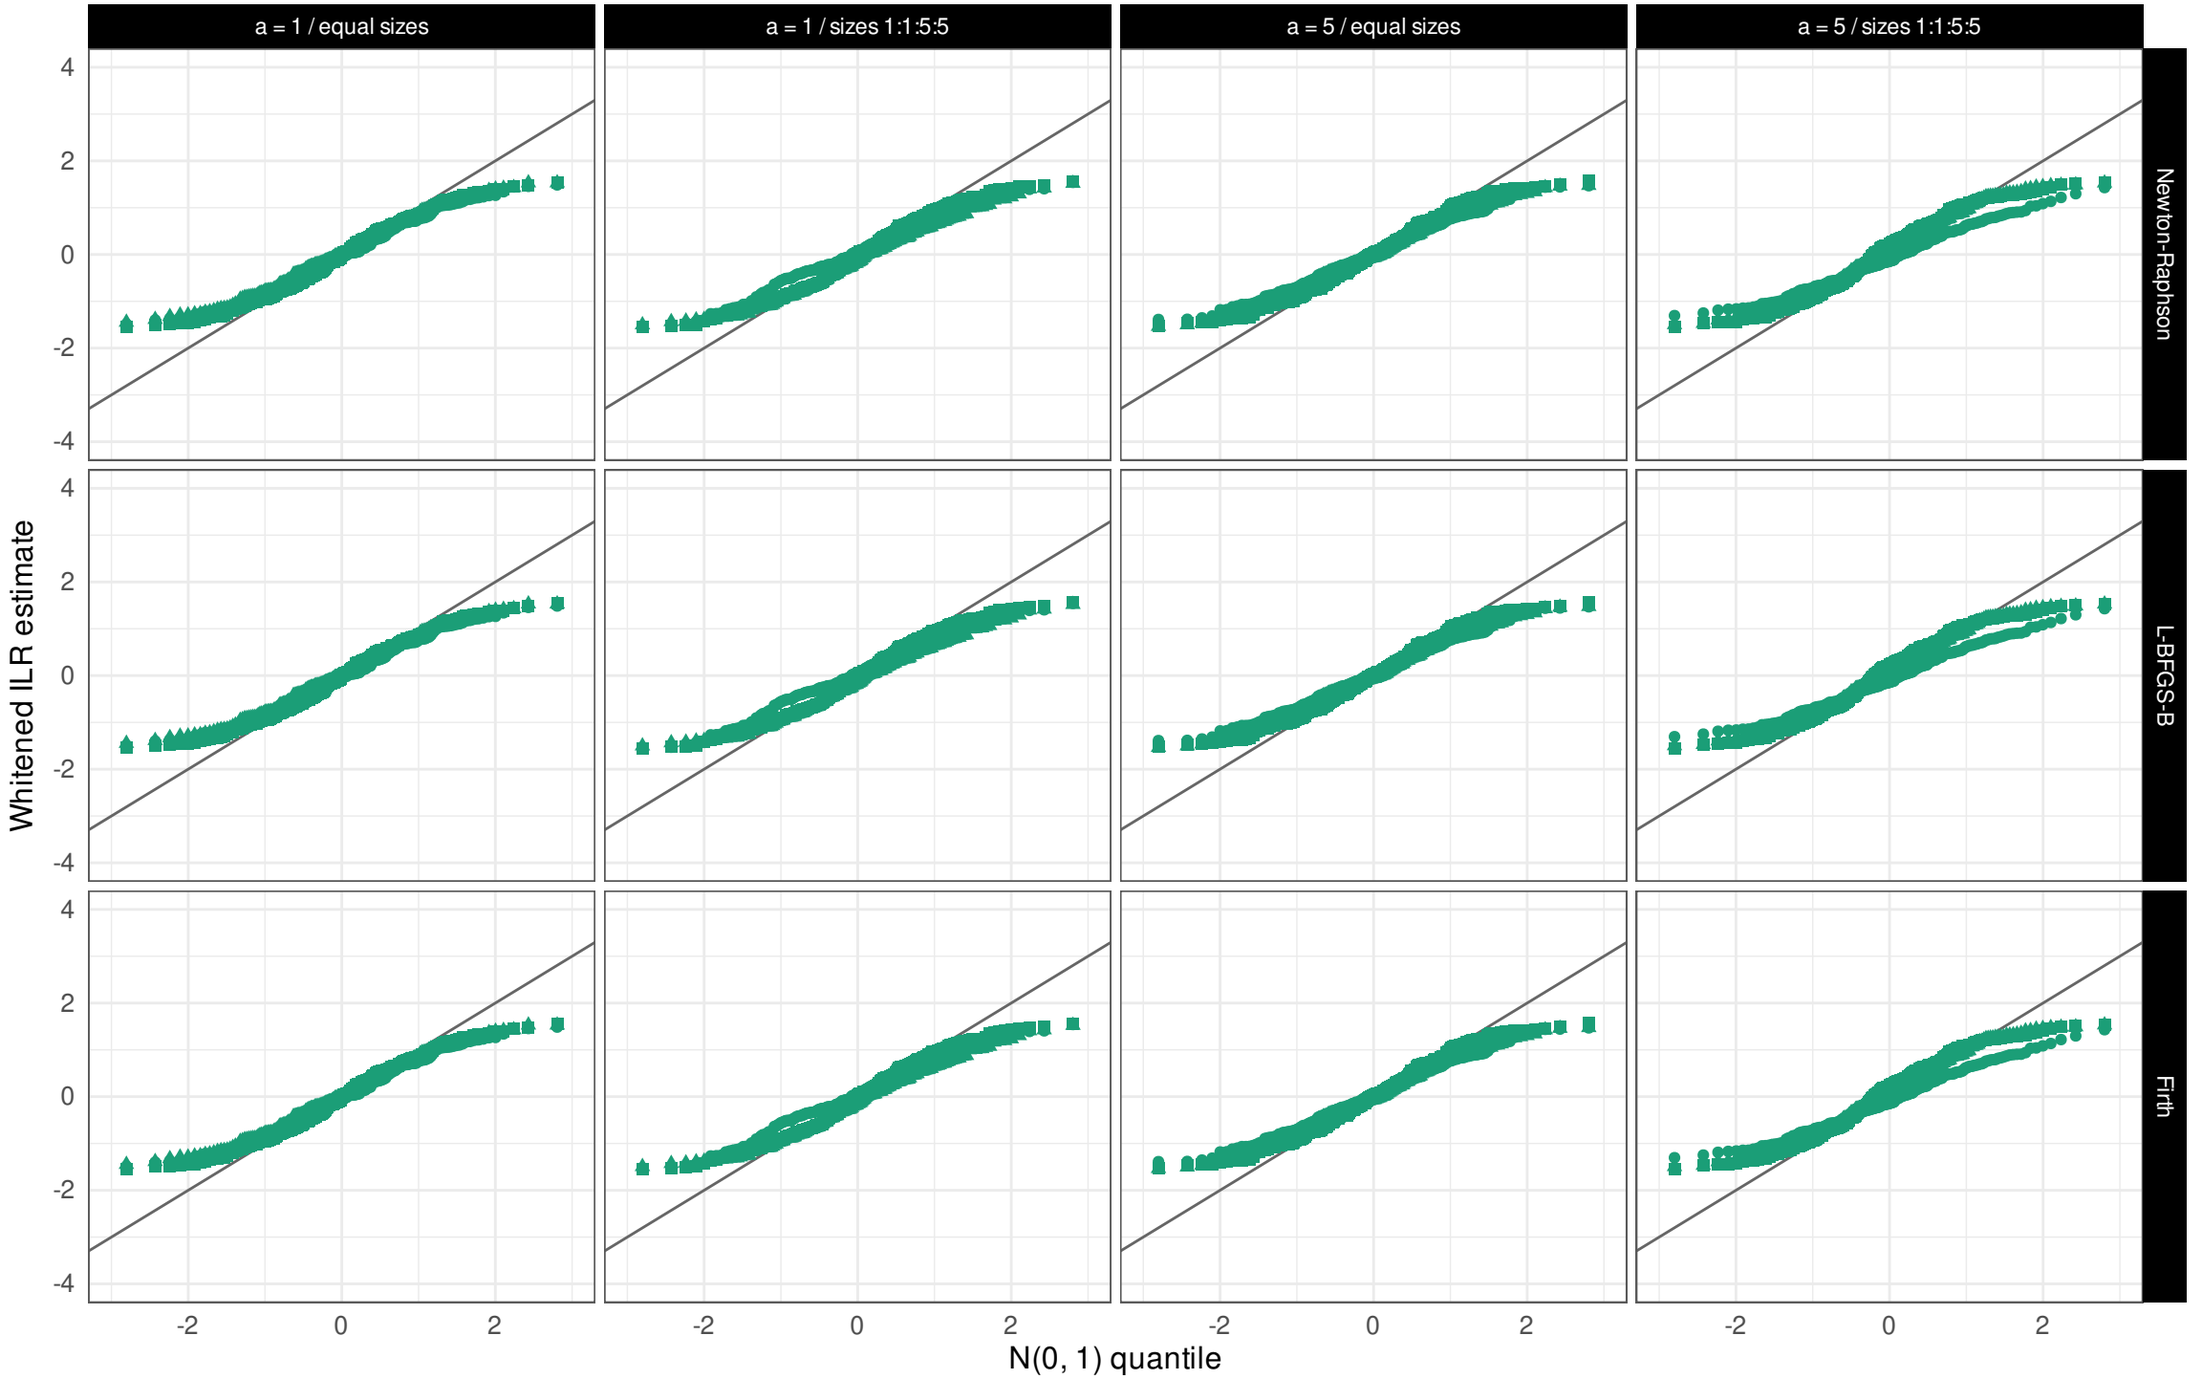


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 20 / 1e+05 cells per bulk / balanced / high sibling overlap

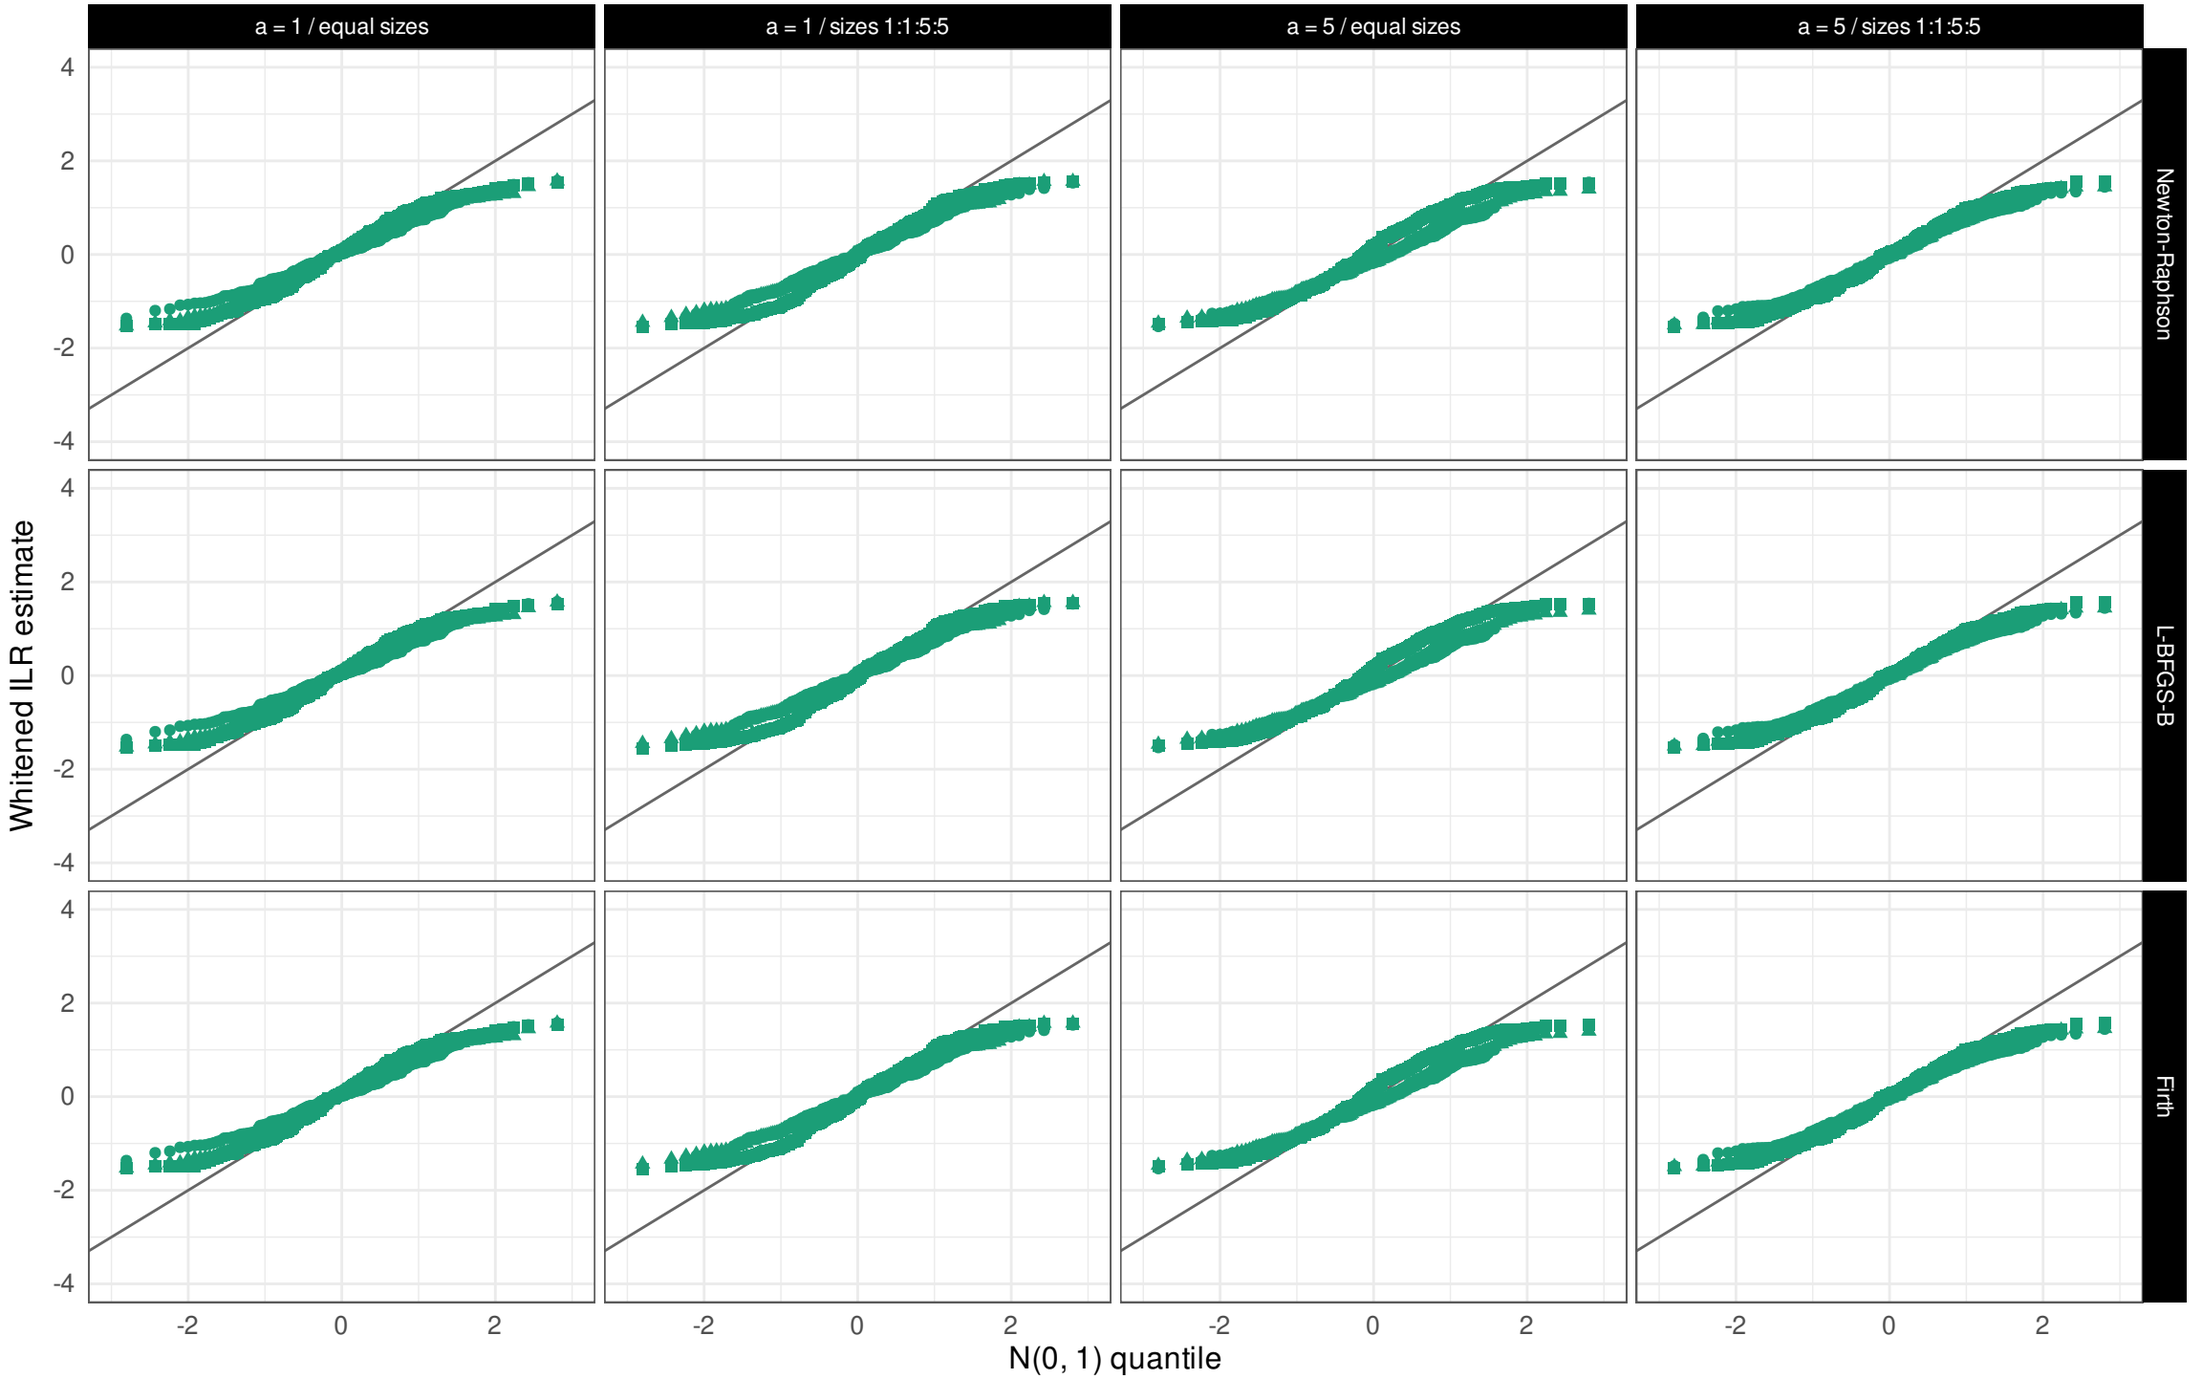


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 20 / 1e+05 cells per bulk / unbalanced / low sibling overlap

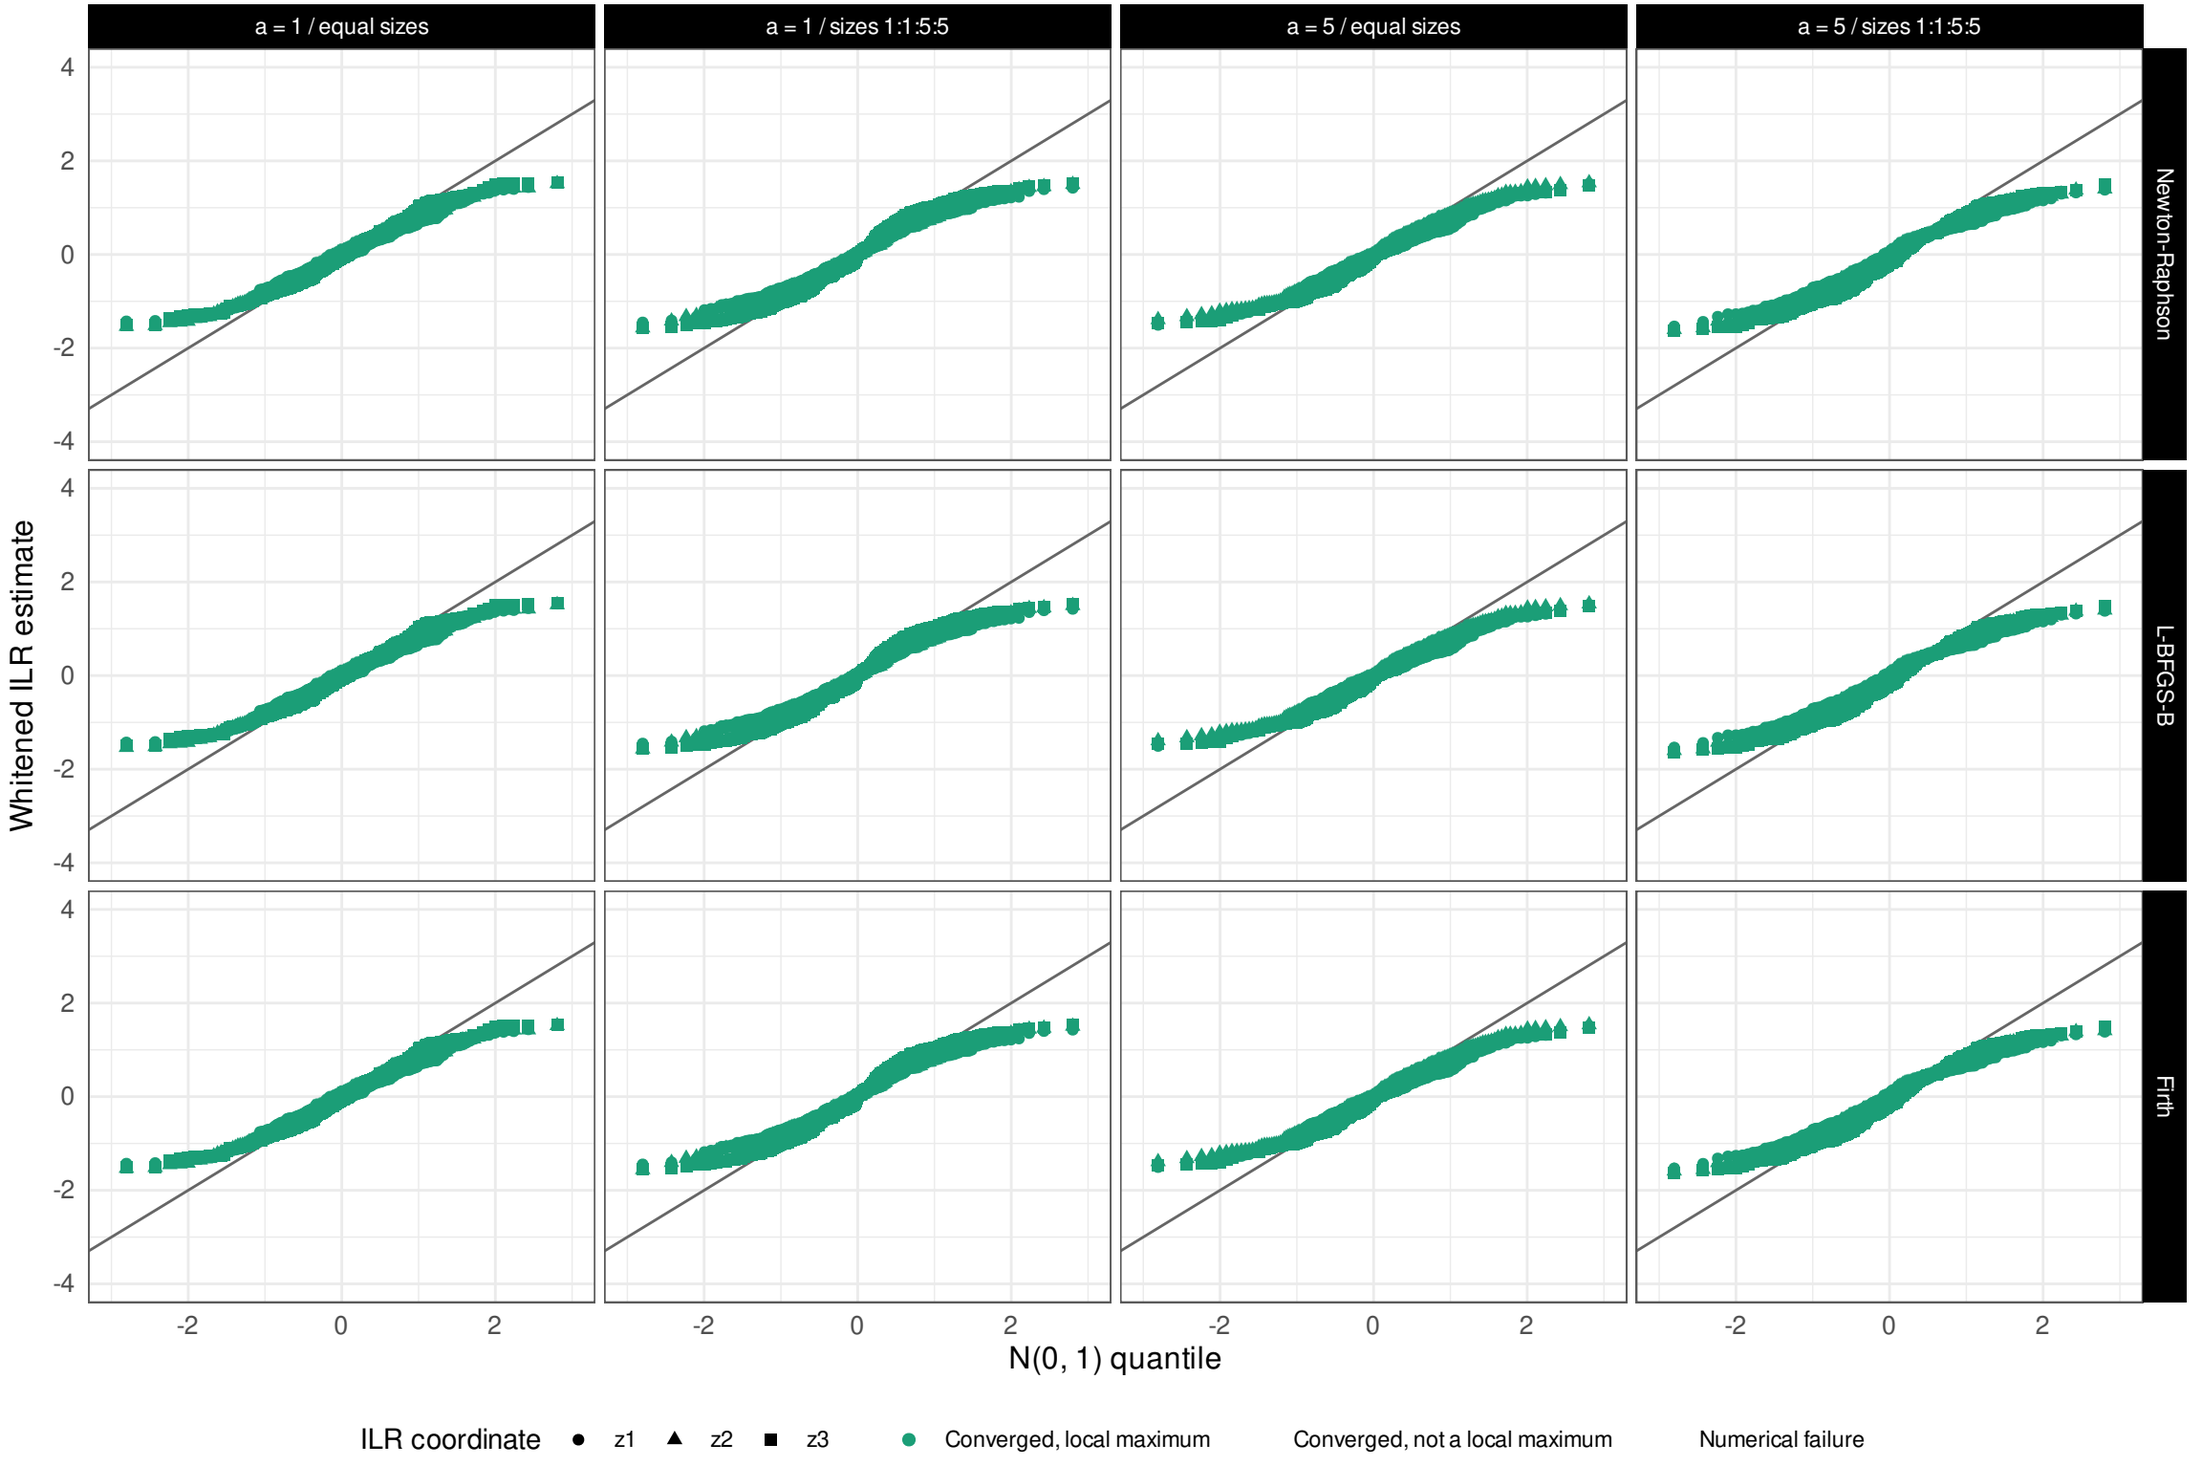


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 20 / 1e+05 cells per bulk / unbalanced / high sibling overlap

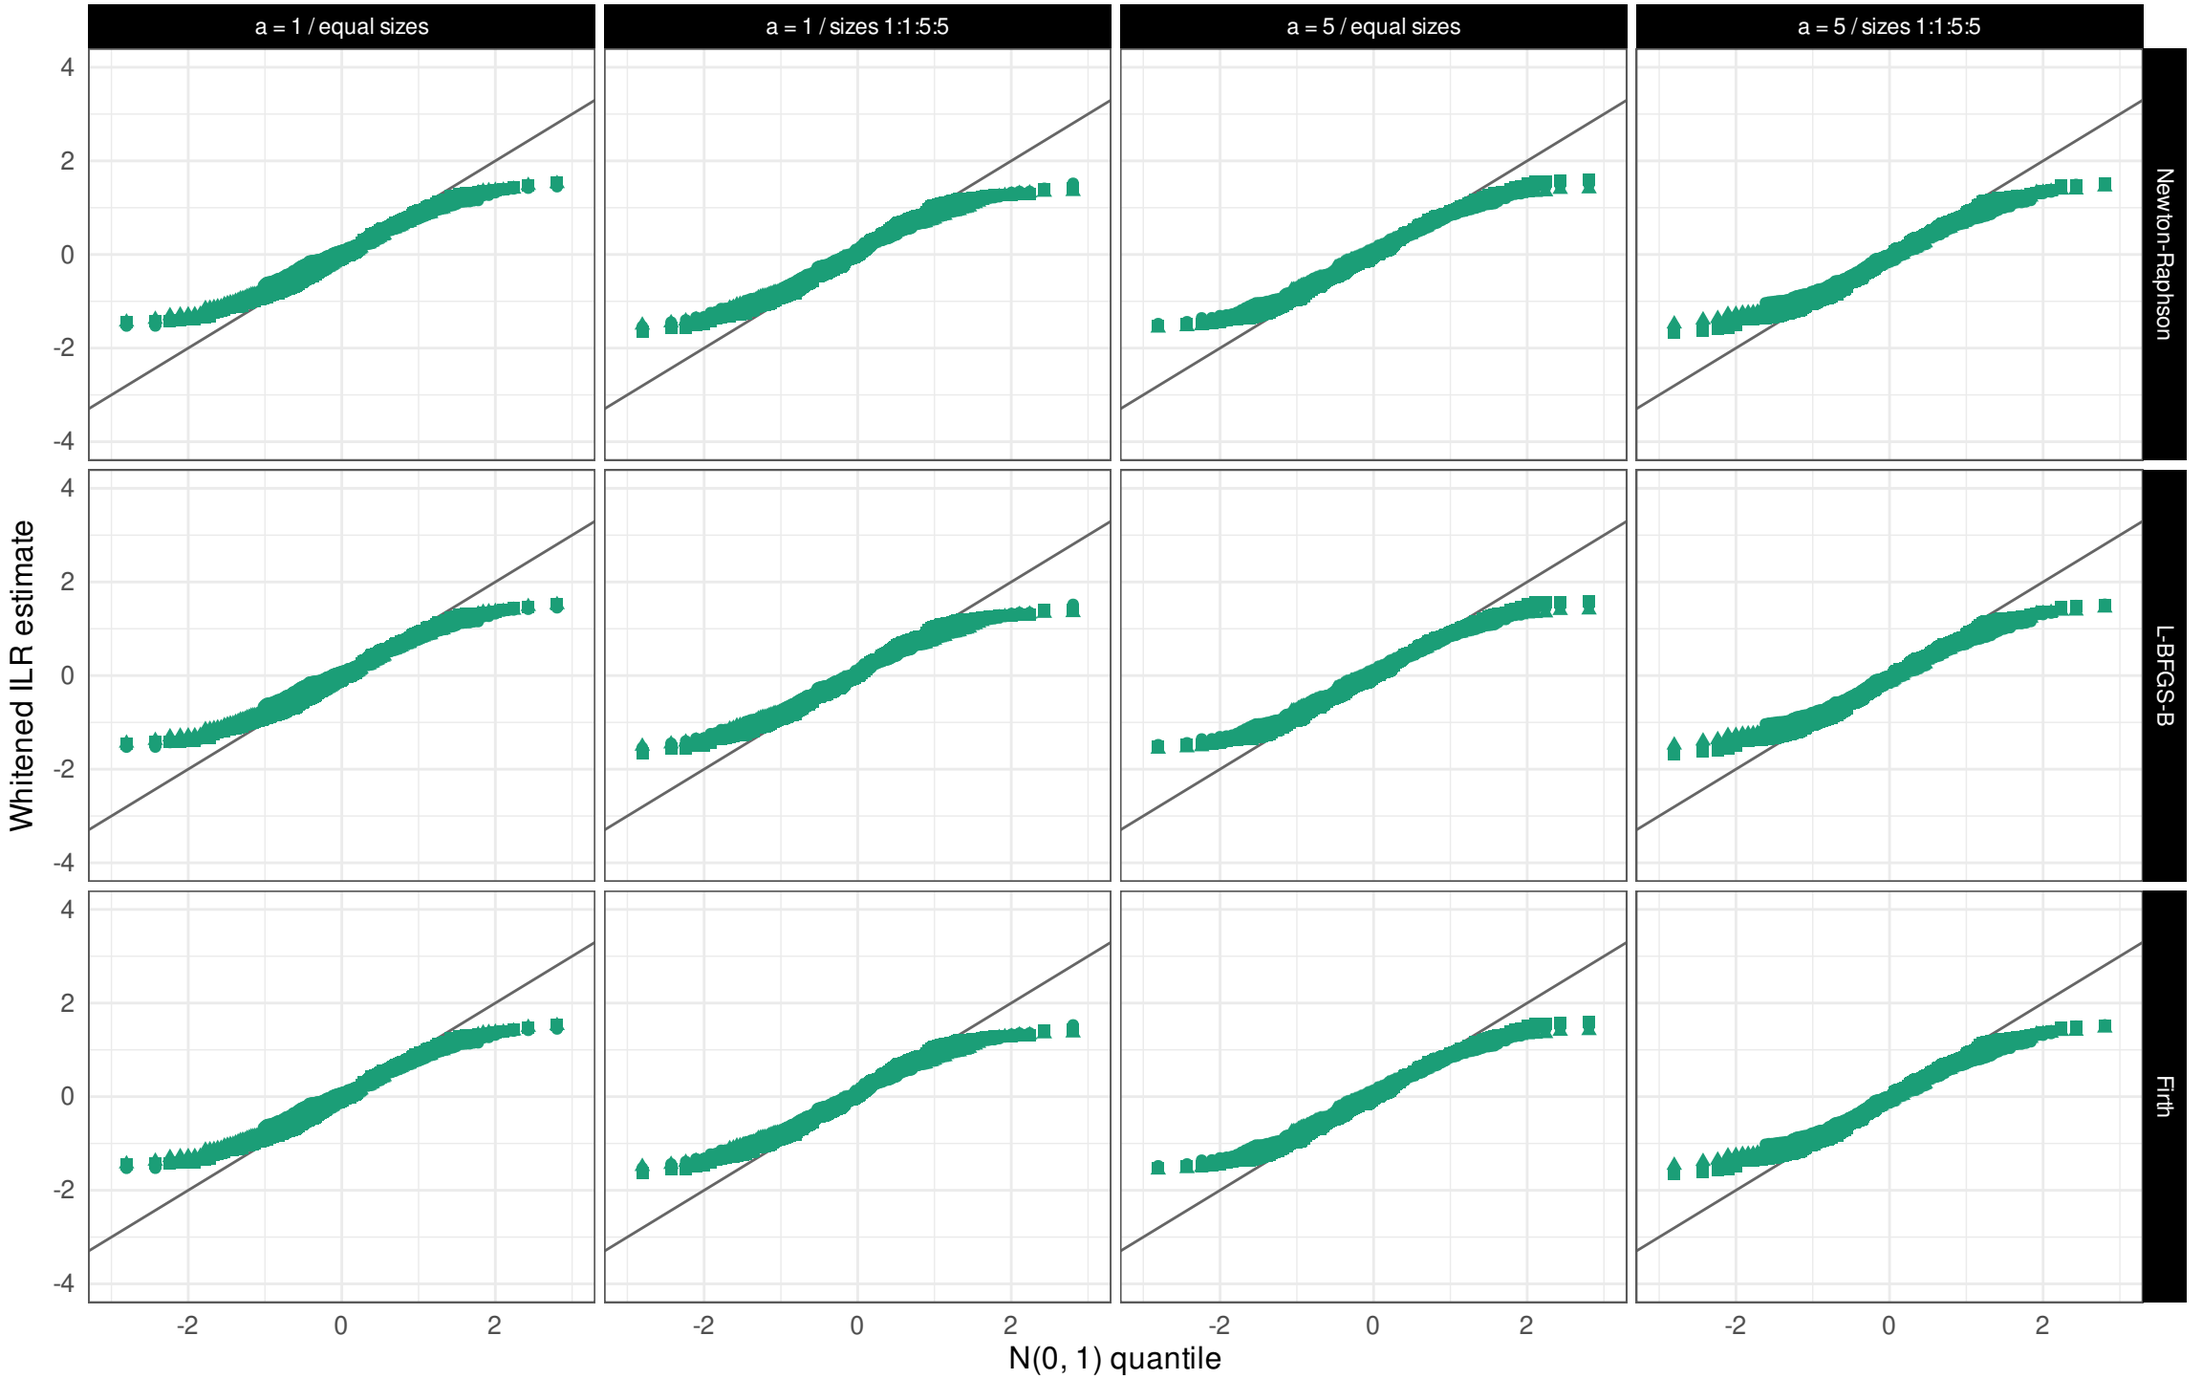


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 200 / 1000 cells per bulk / balanced / low sibling overlap

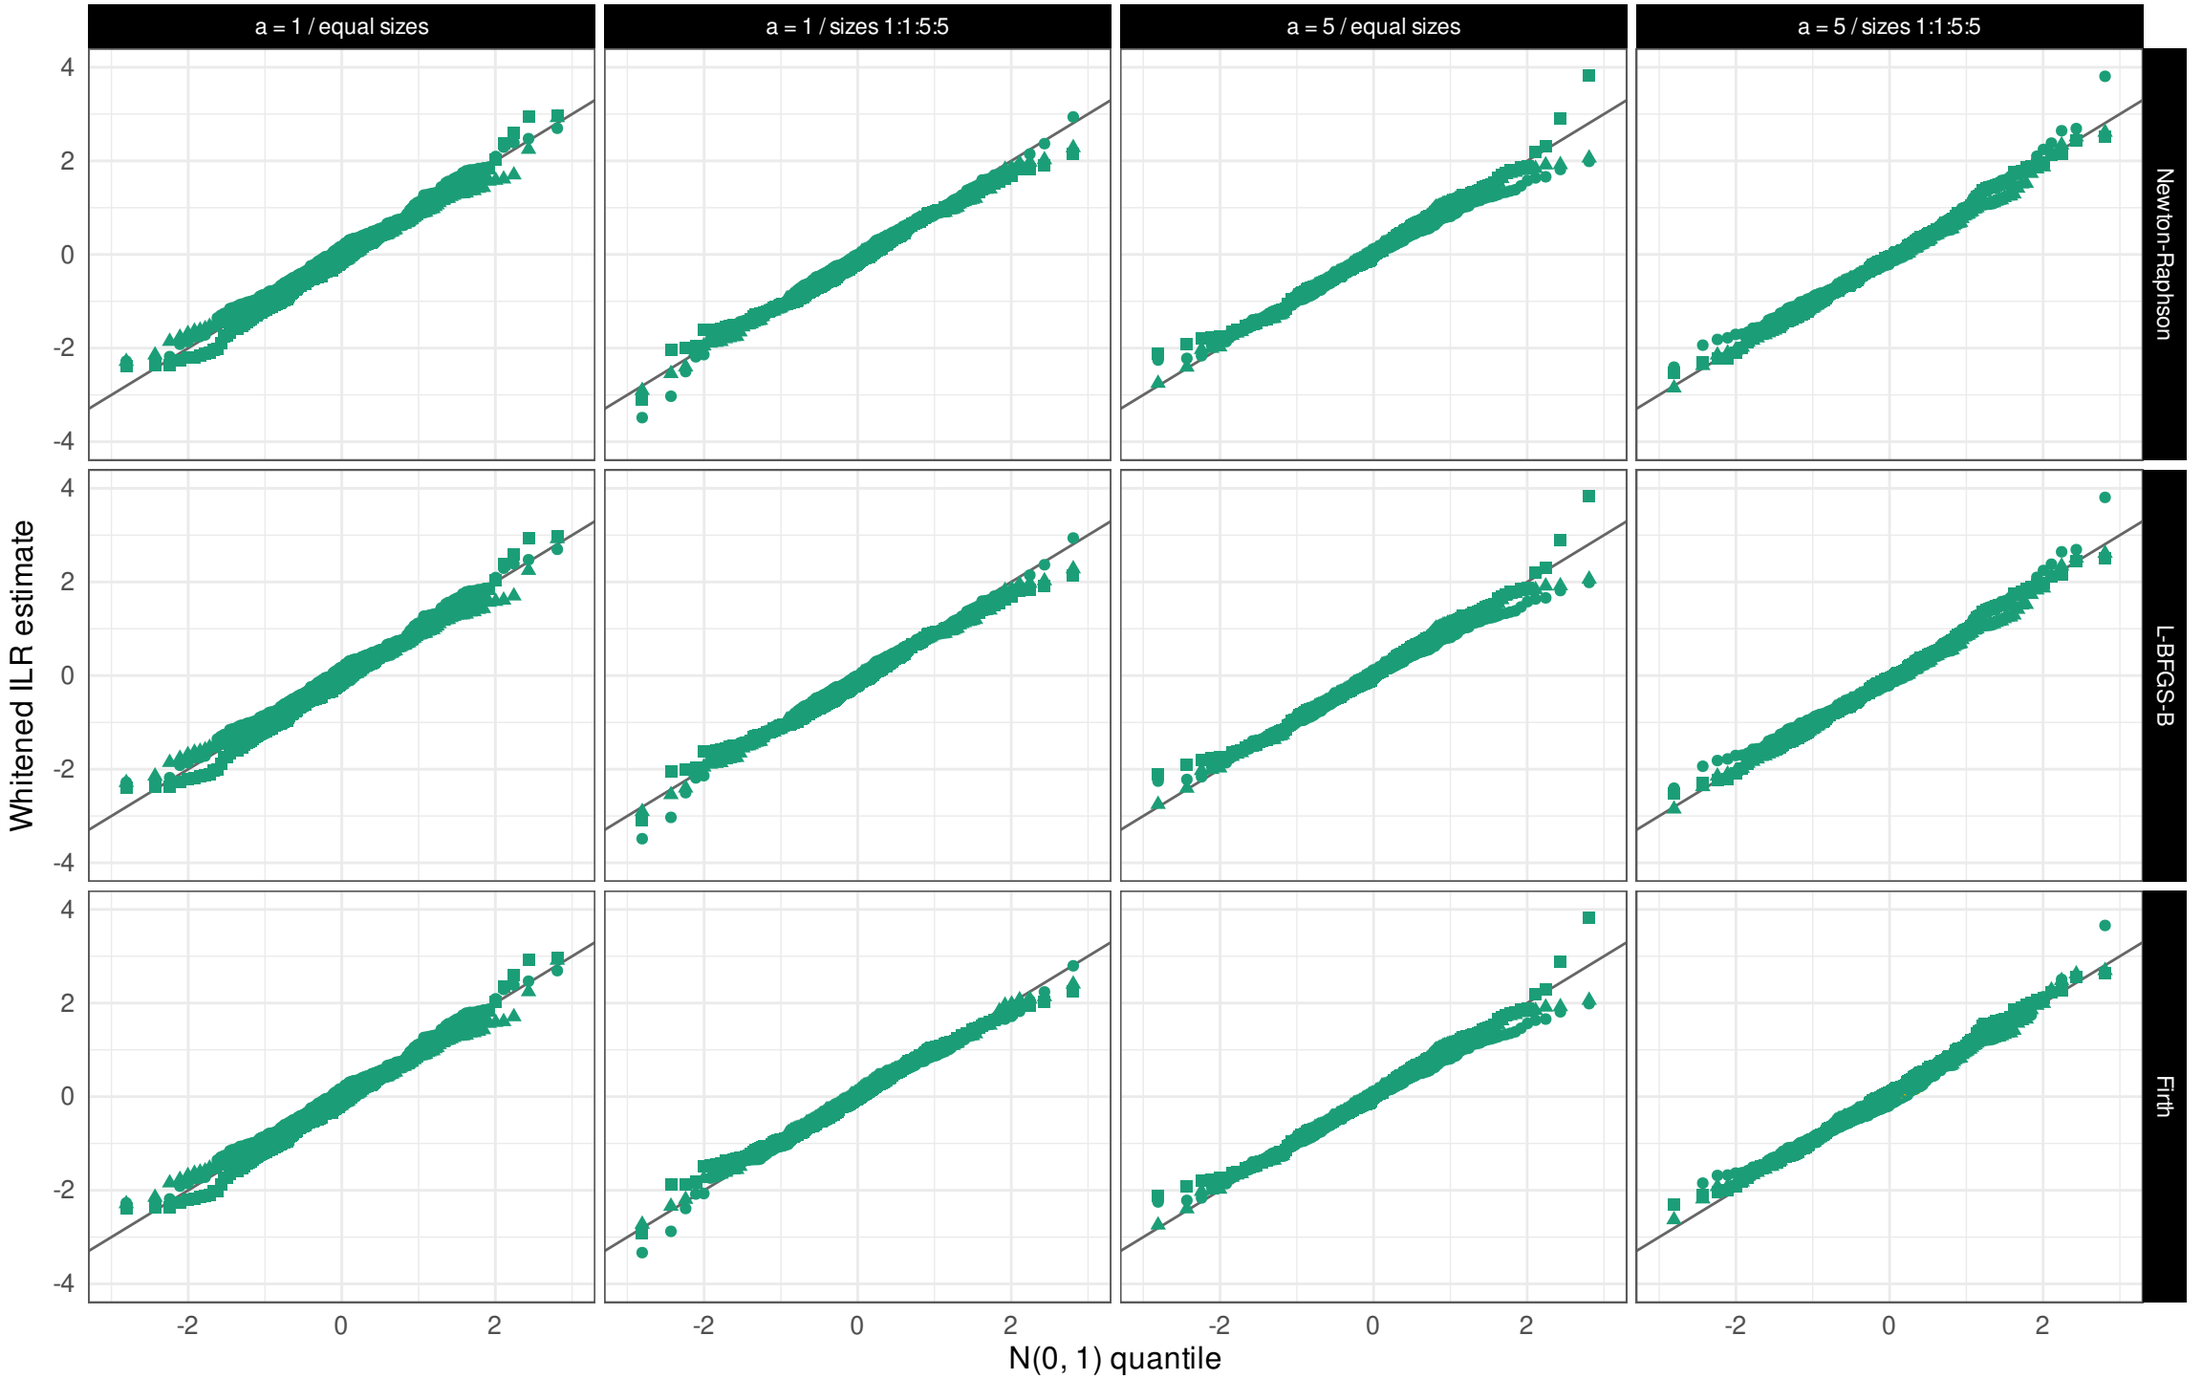


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum ● Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 200 / 1000 cells per bulk / balanced / high sibling overlap

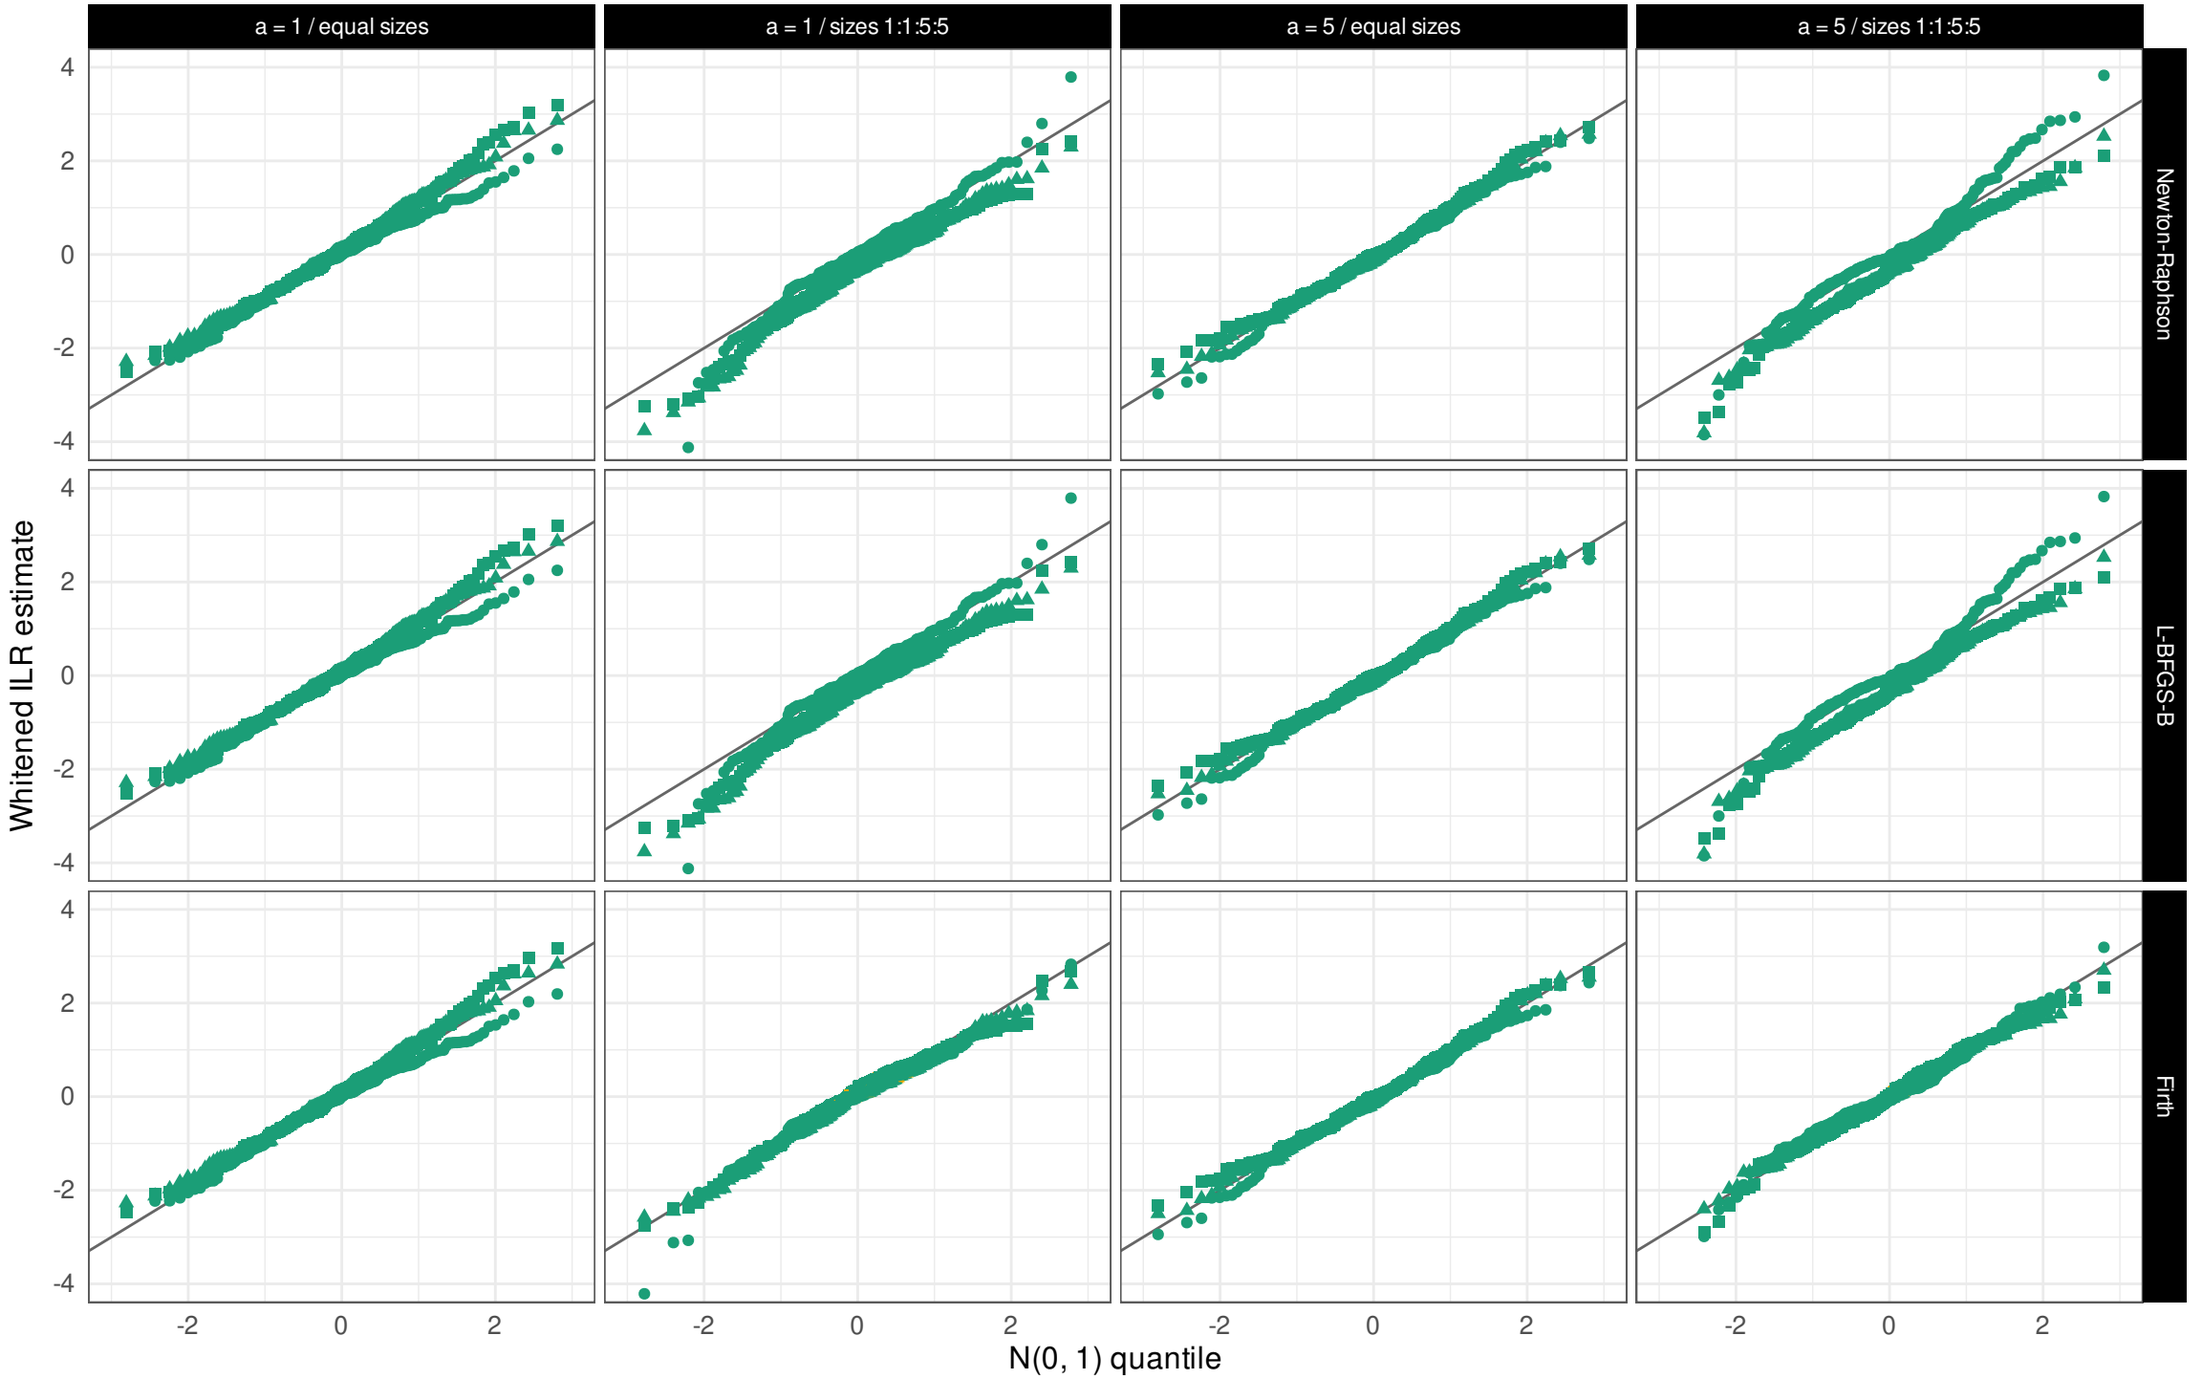


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum ● Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 200 / 1000 cells per bulk / unbalanced / low sibling overlap

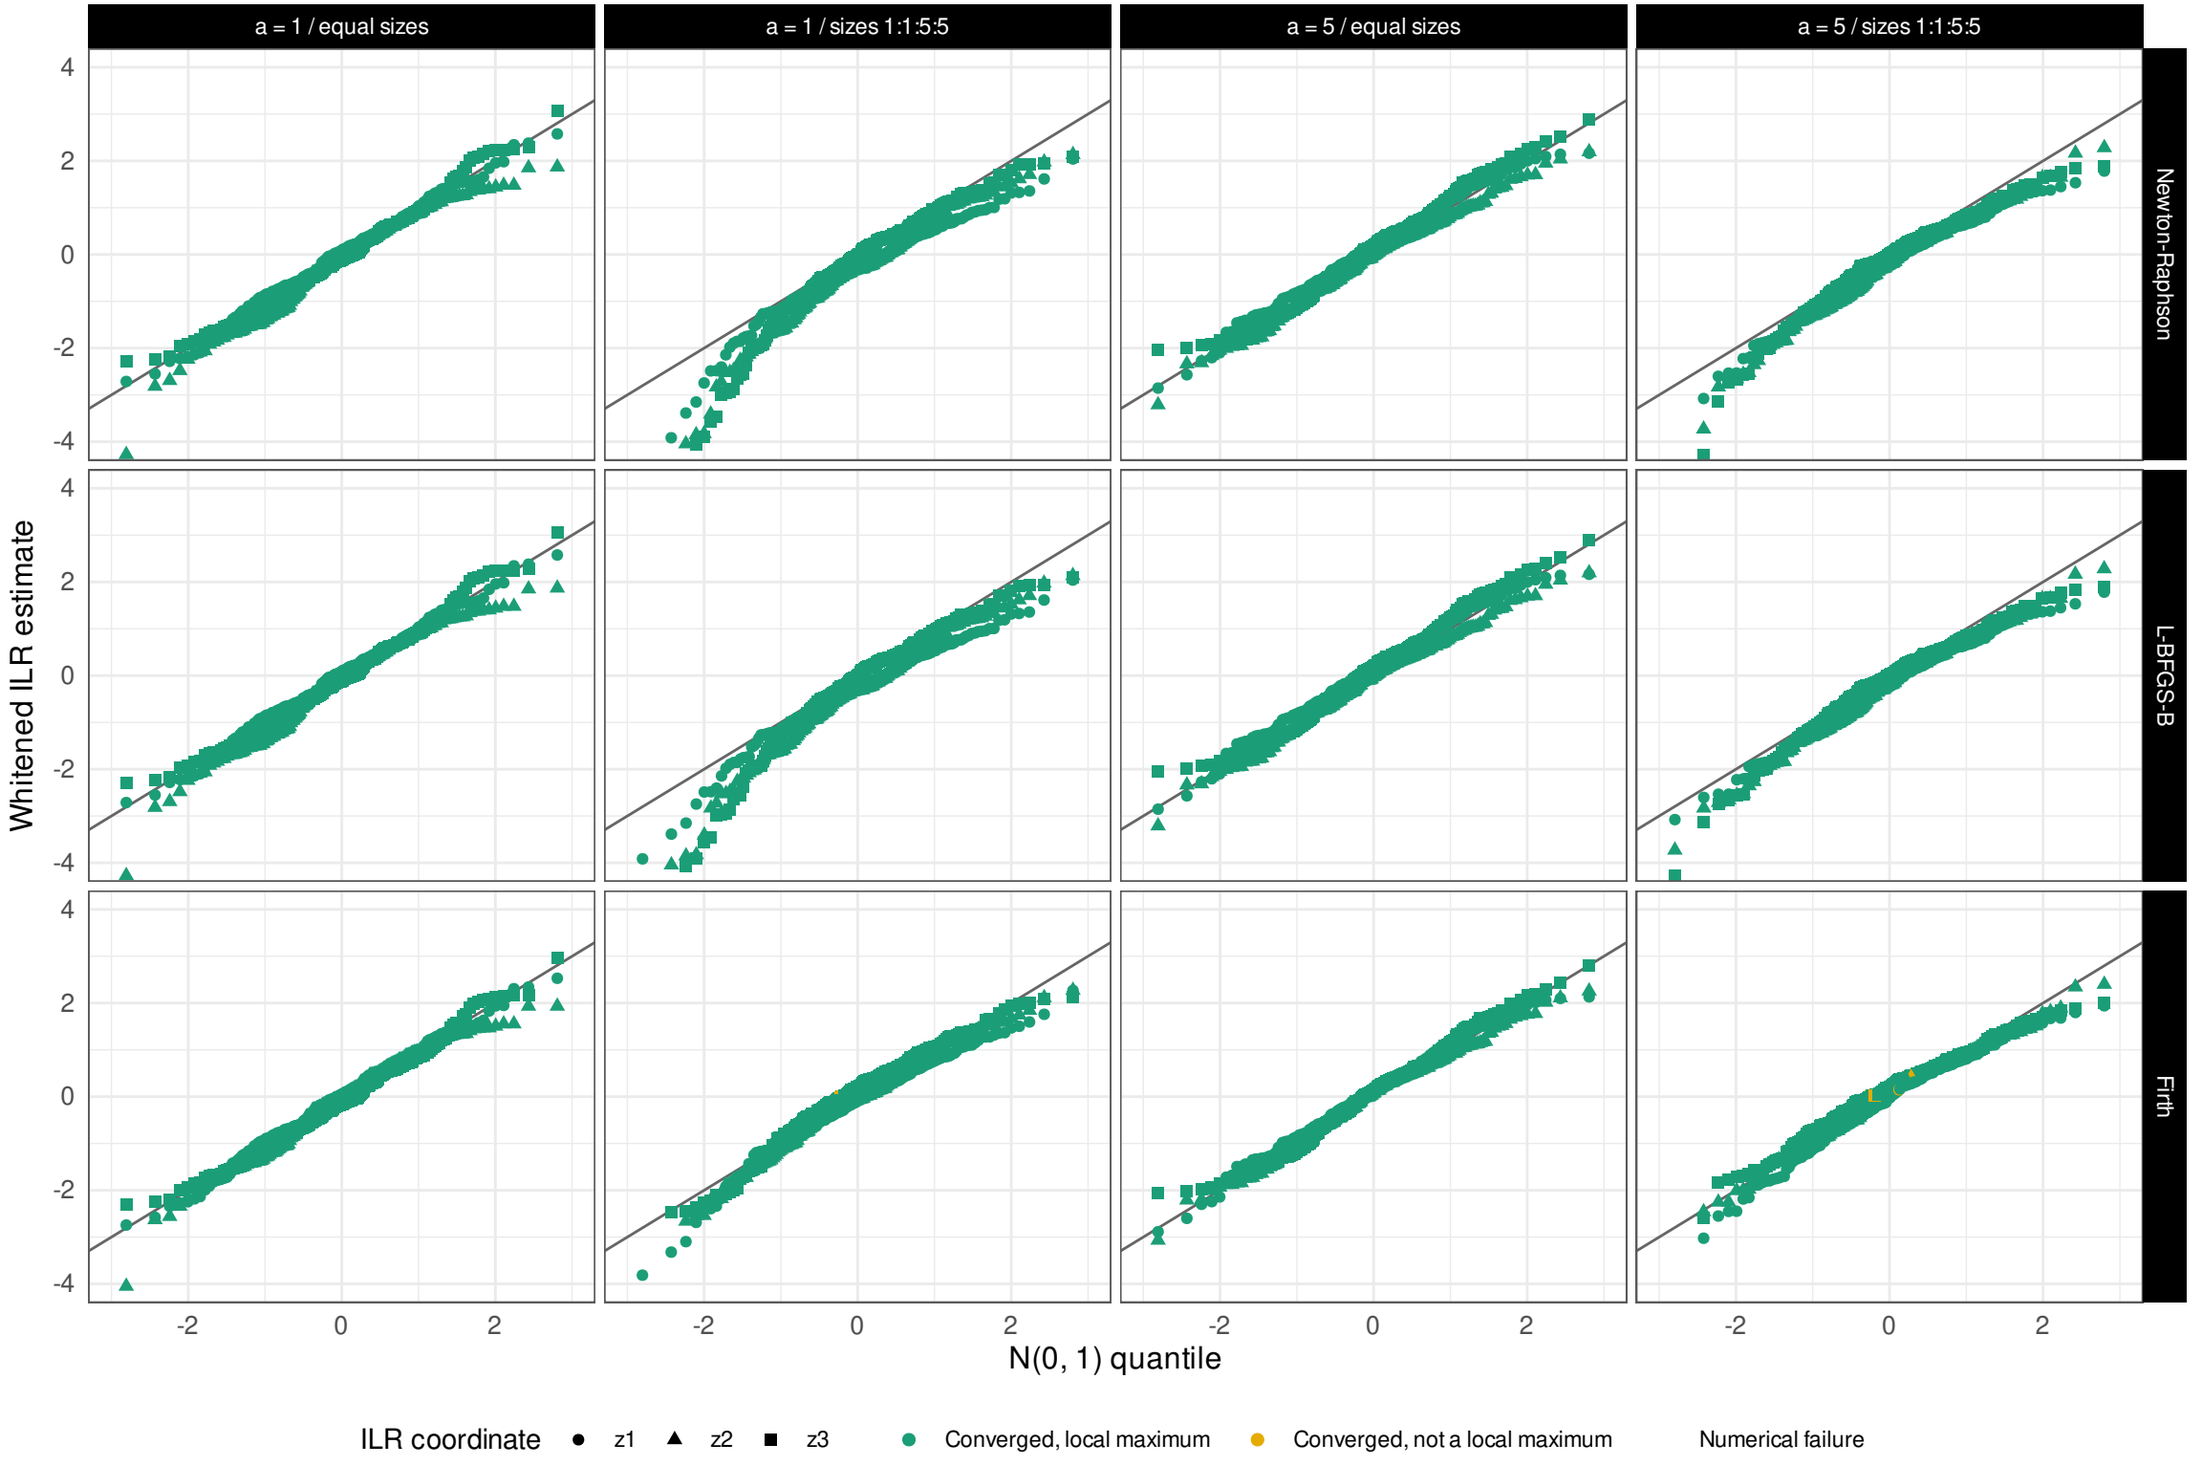


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum ● Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 200 / 1000 cells per bulk / unbalanced / high sibling overlap

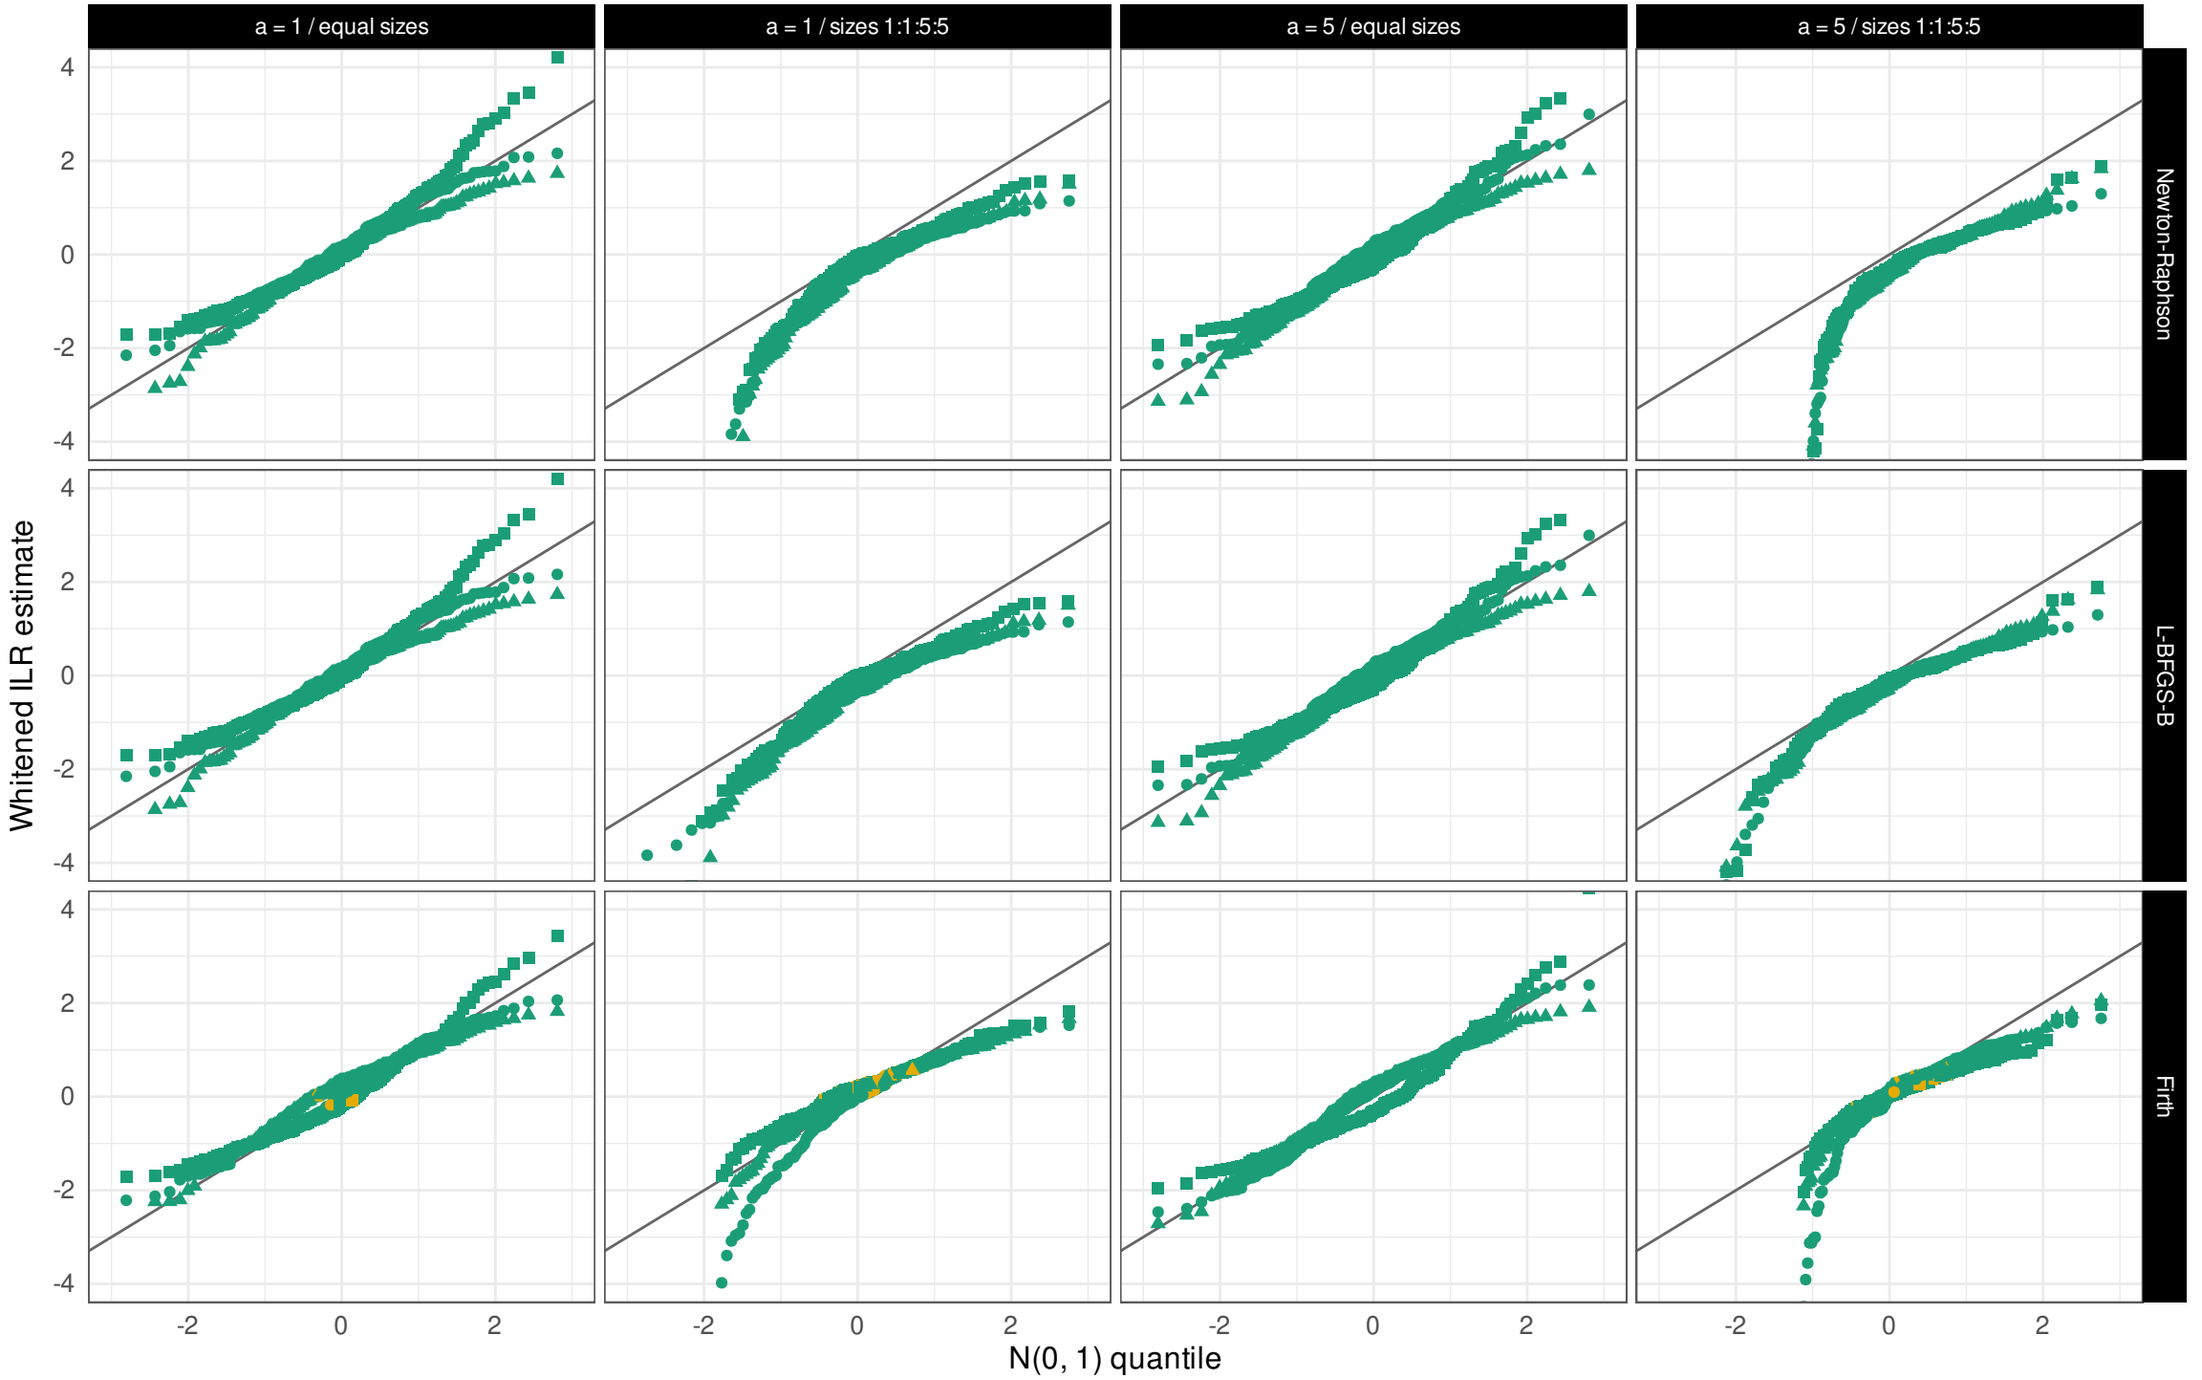


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum ● Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 200 / 1e+05 cells per bulk / balanced / low sibling overlap

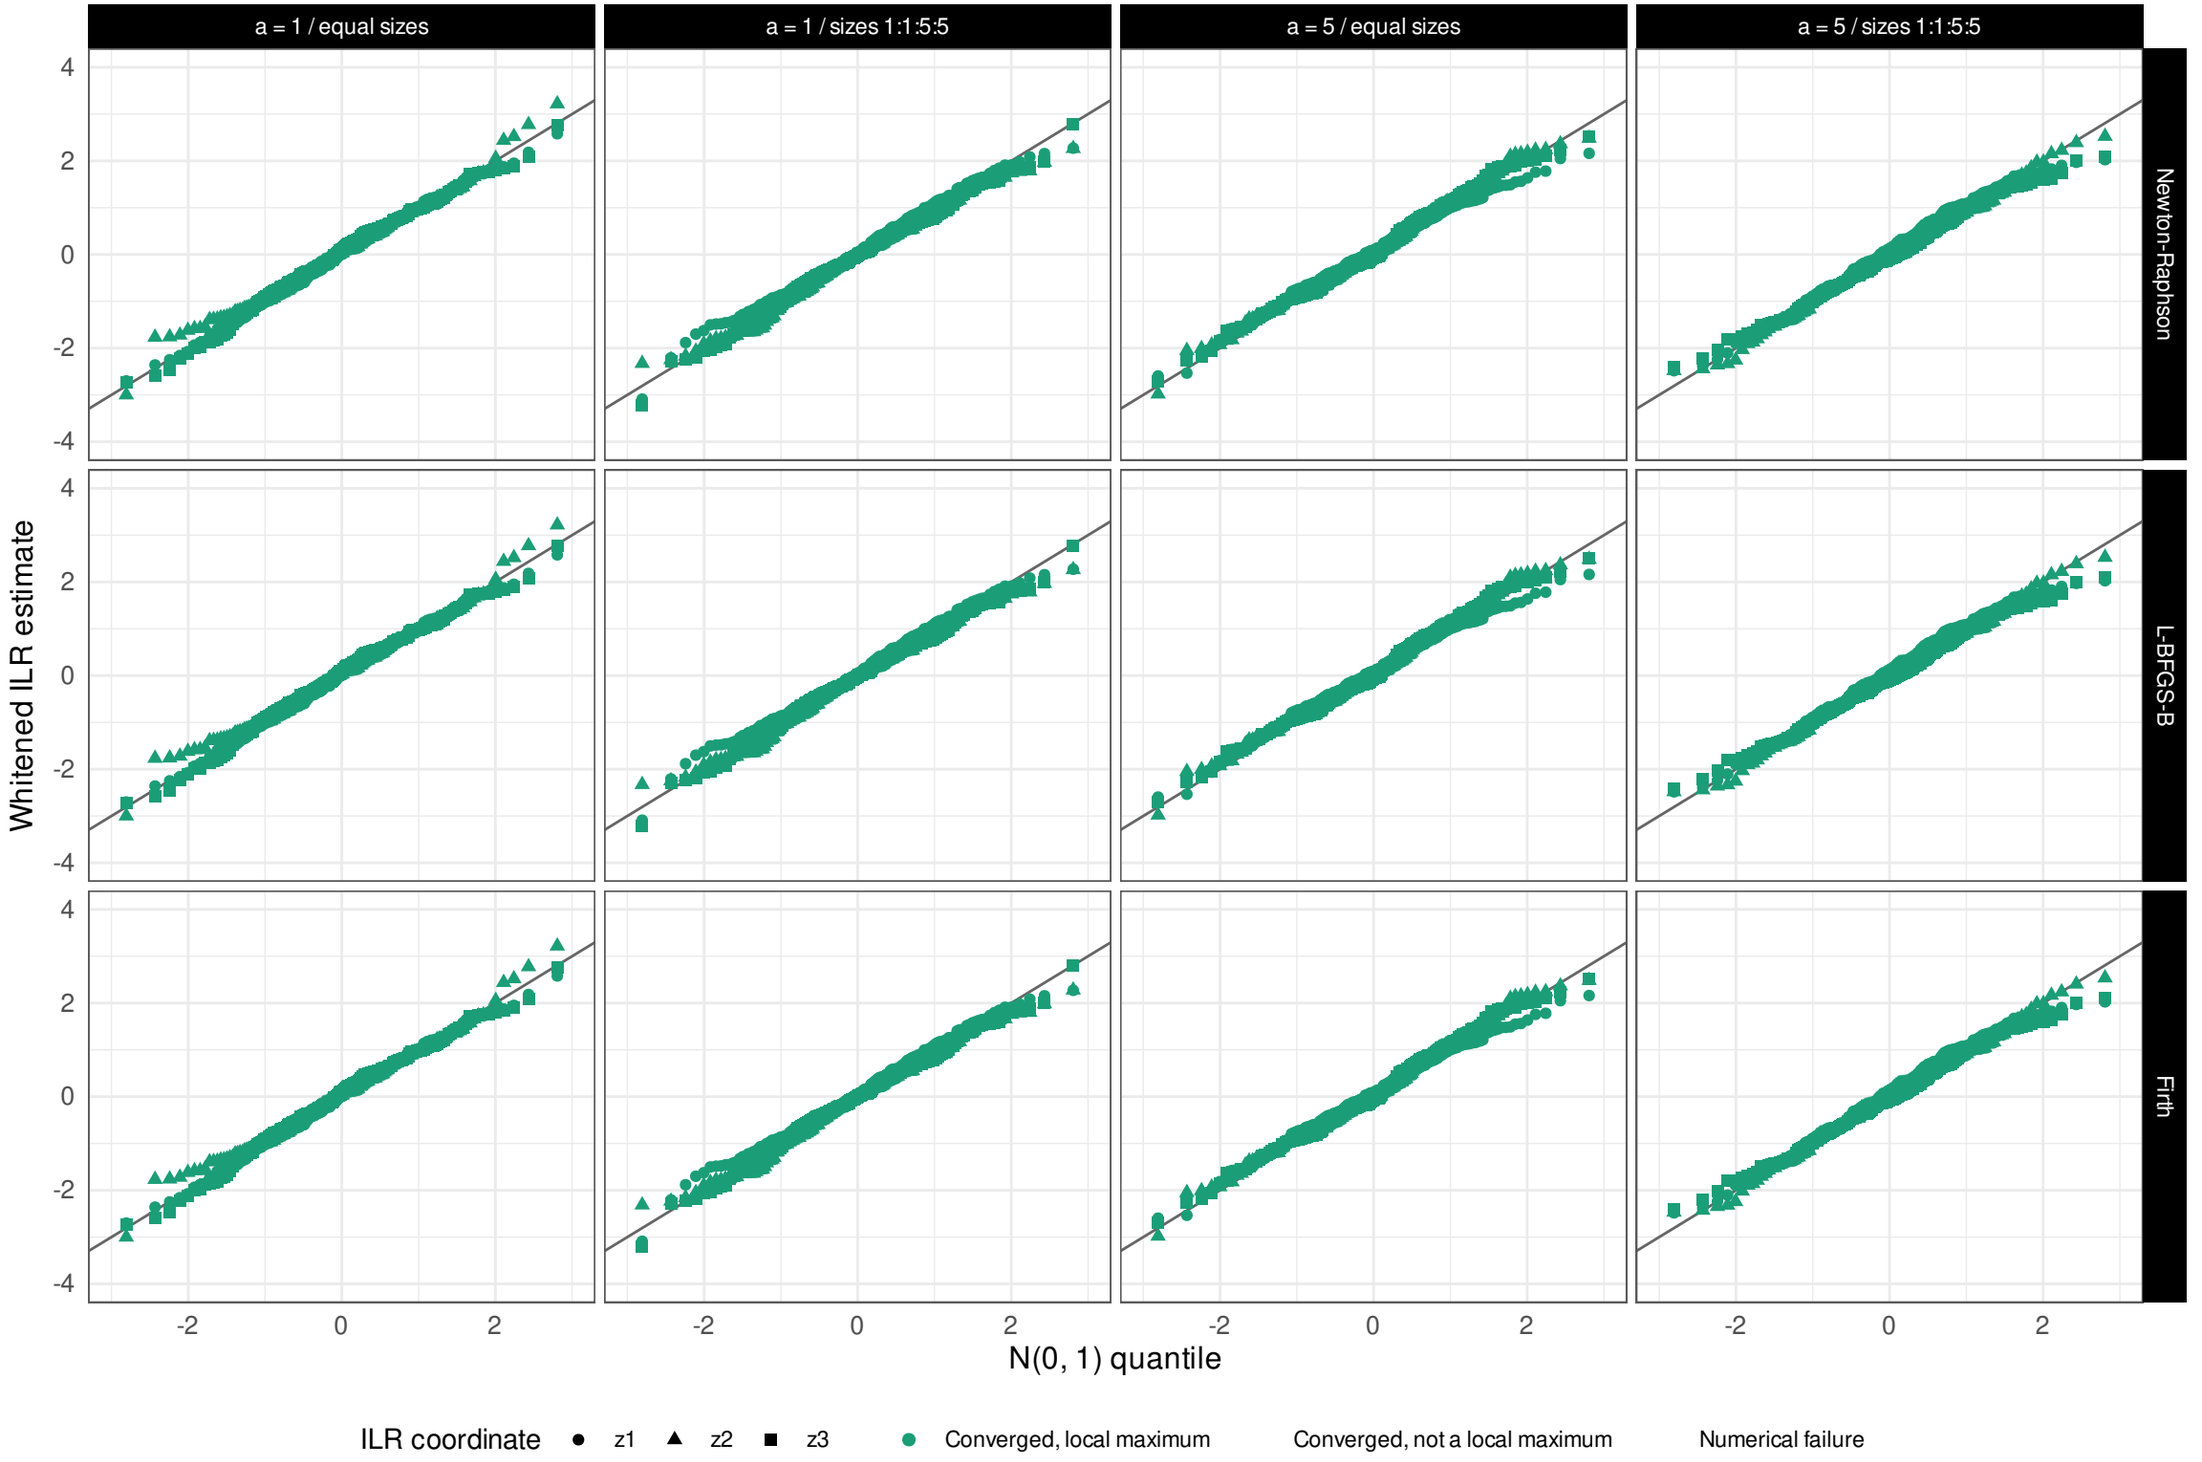


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 200 / 1e+05 cells per bulk / balanced / high sibling overlap

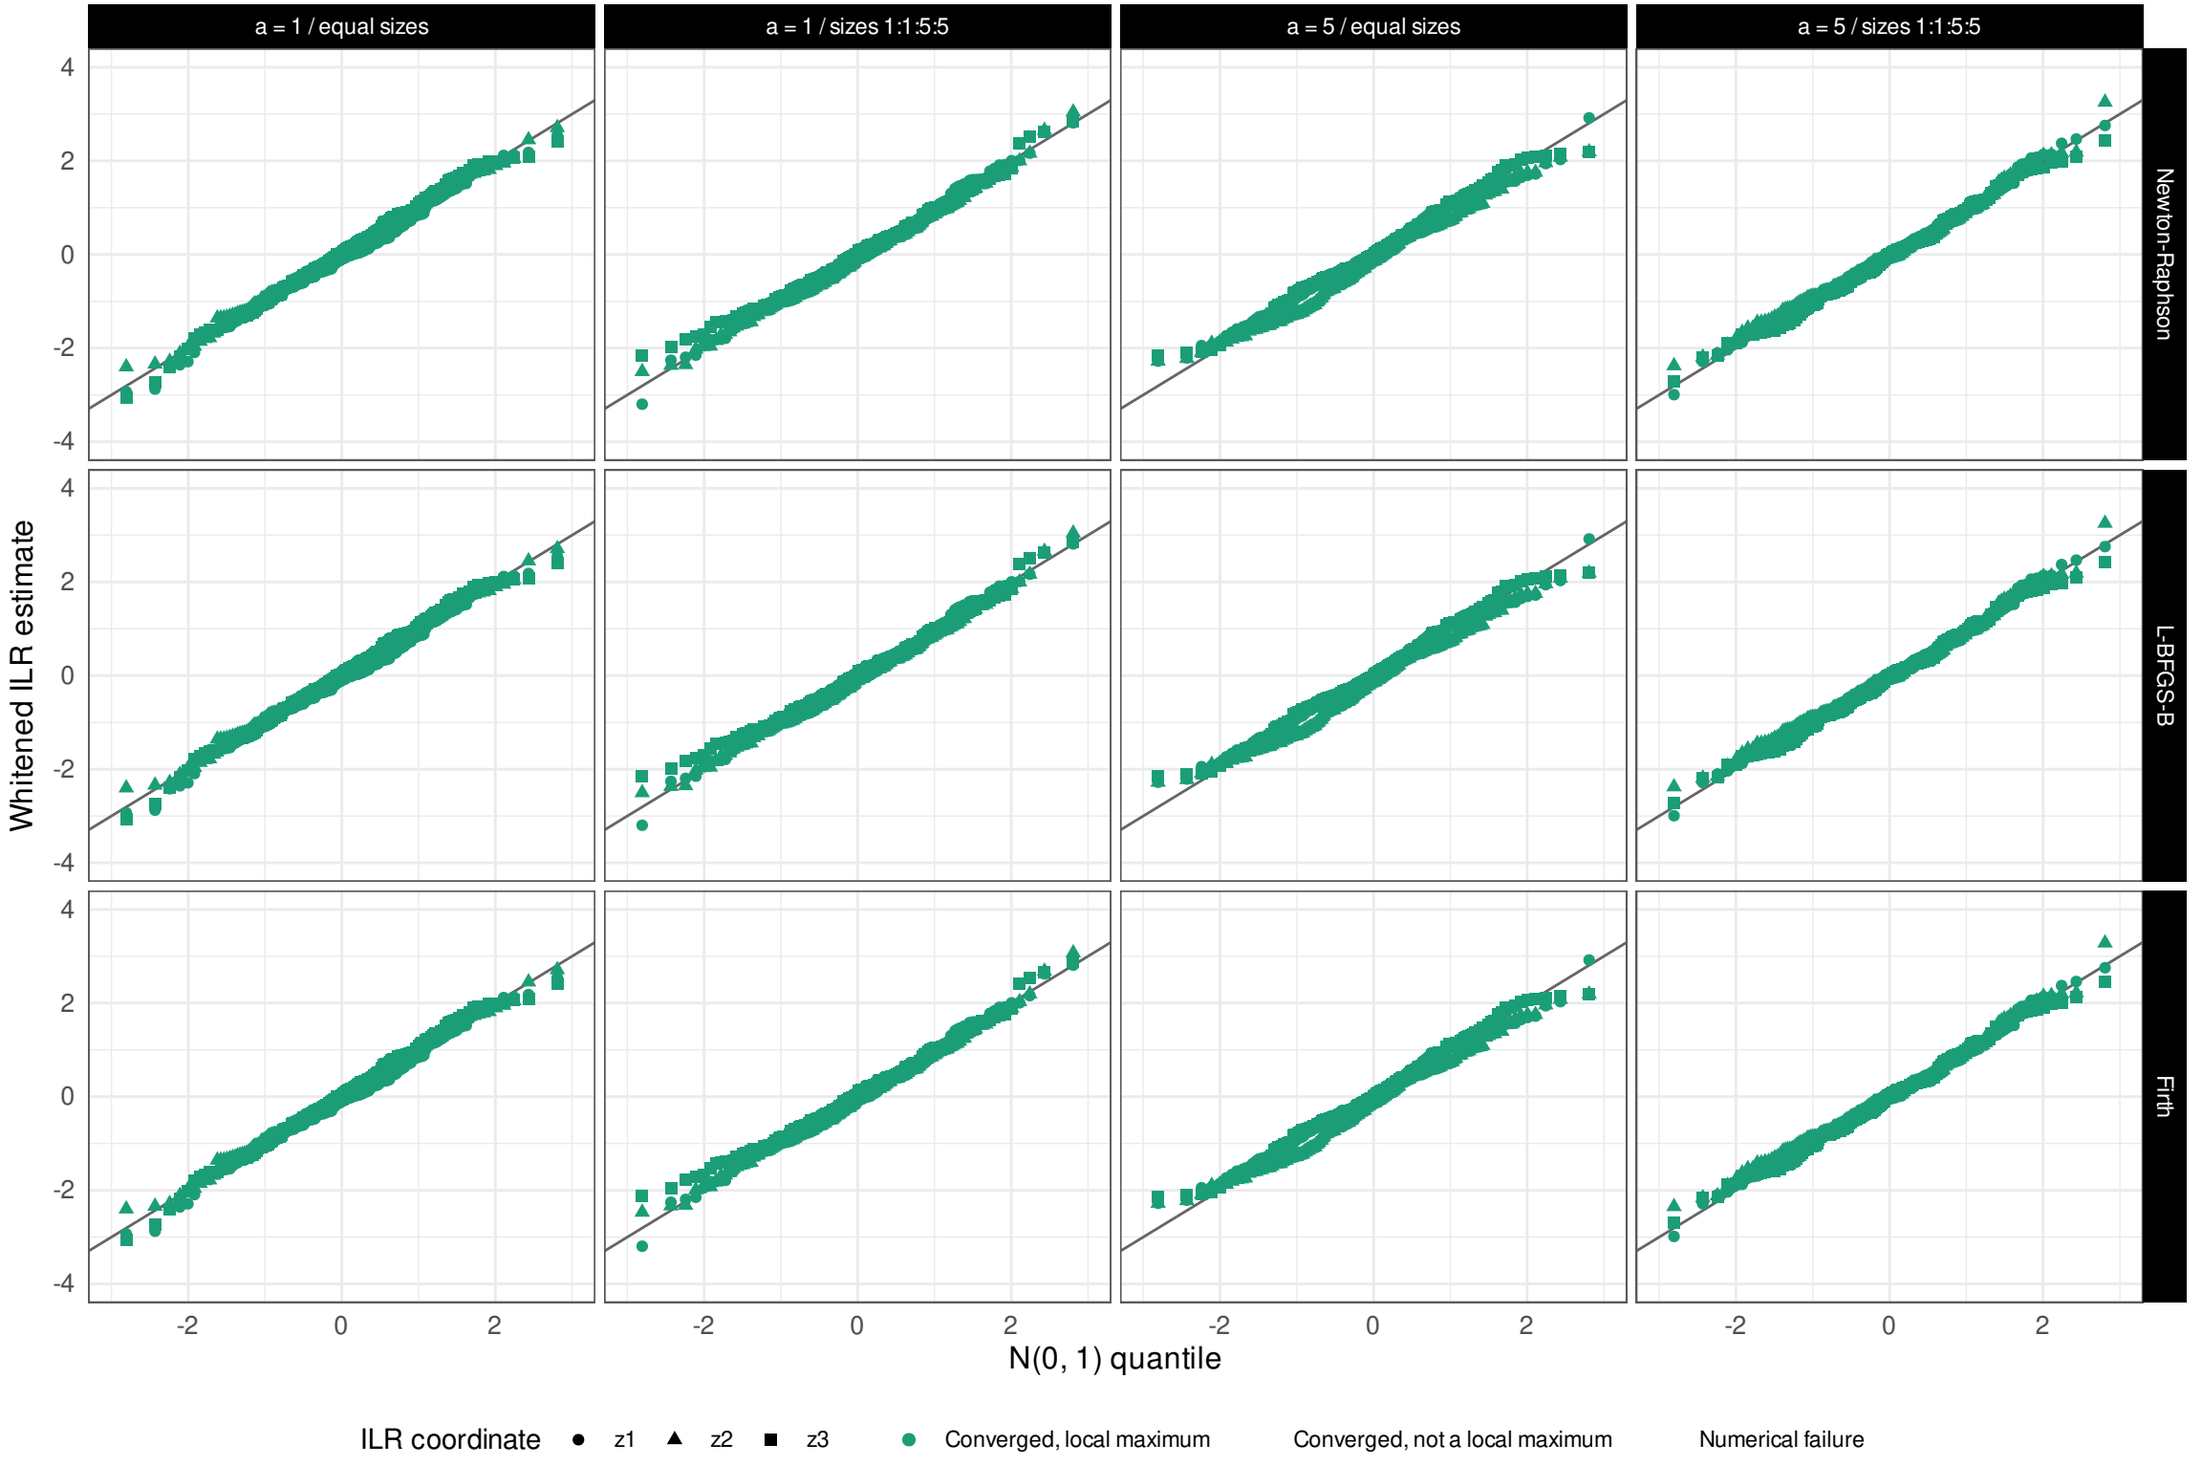


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 200 / 1e+05 cells per bulk / unbalanced / low sibling overlap

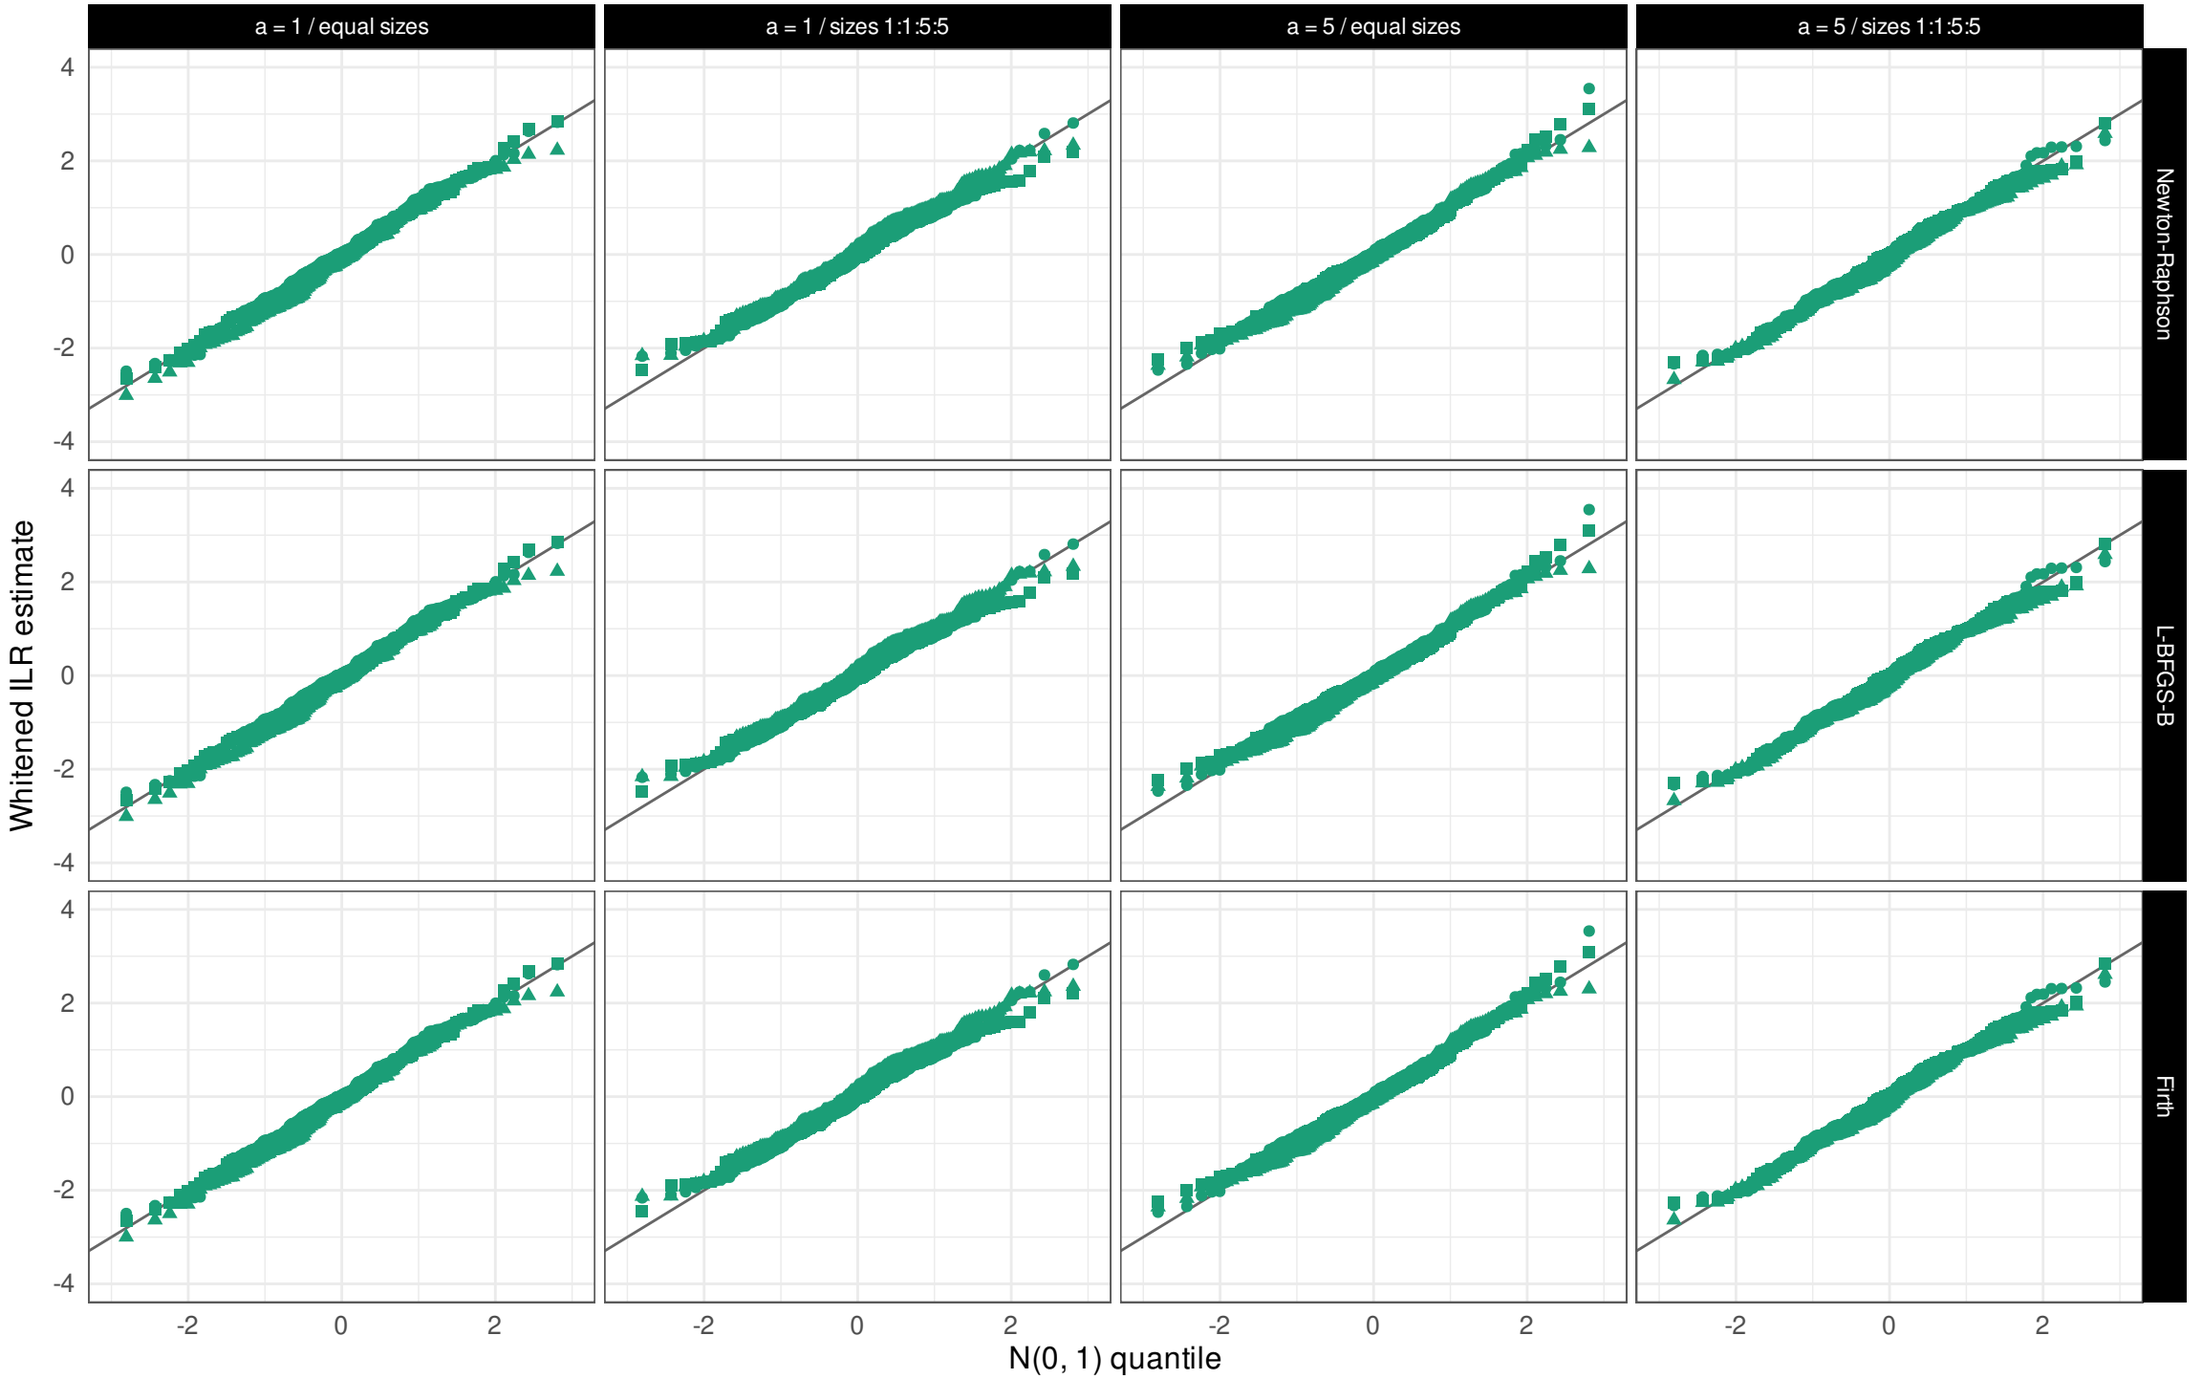


ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.

Wald approximation: whitened ILR estimates against N(0, 1)

G = 200 / 1e+05 cells per bulk / unbalanced / high sibling overlap

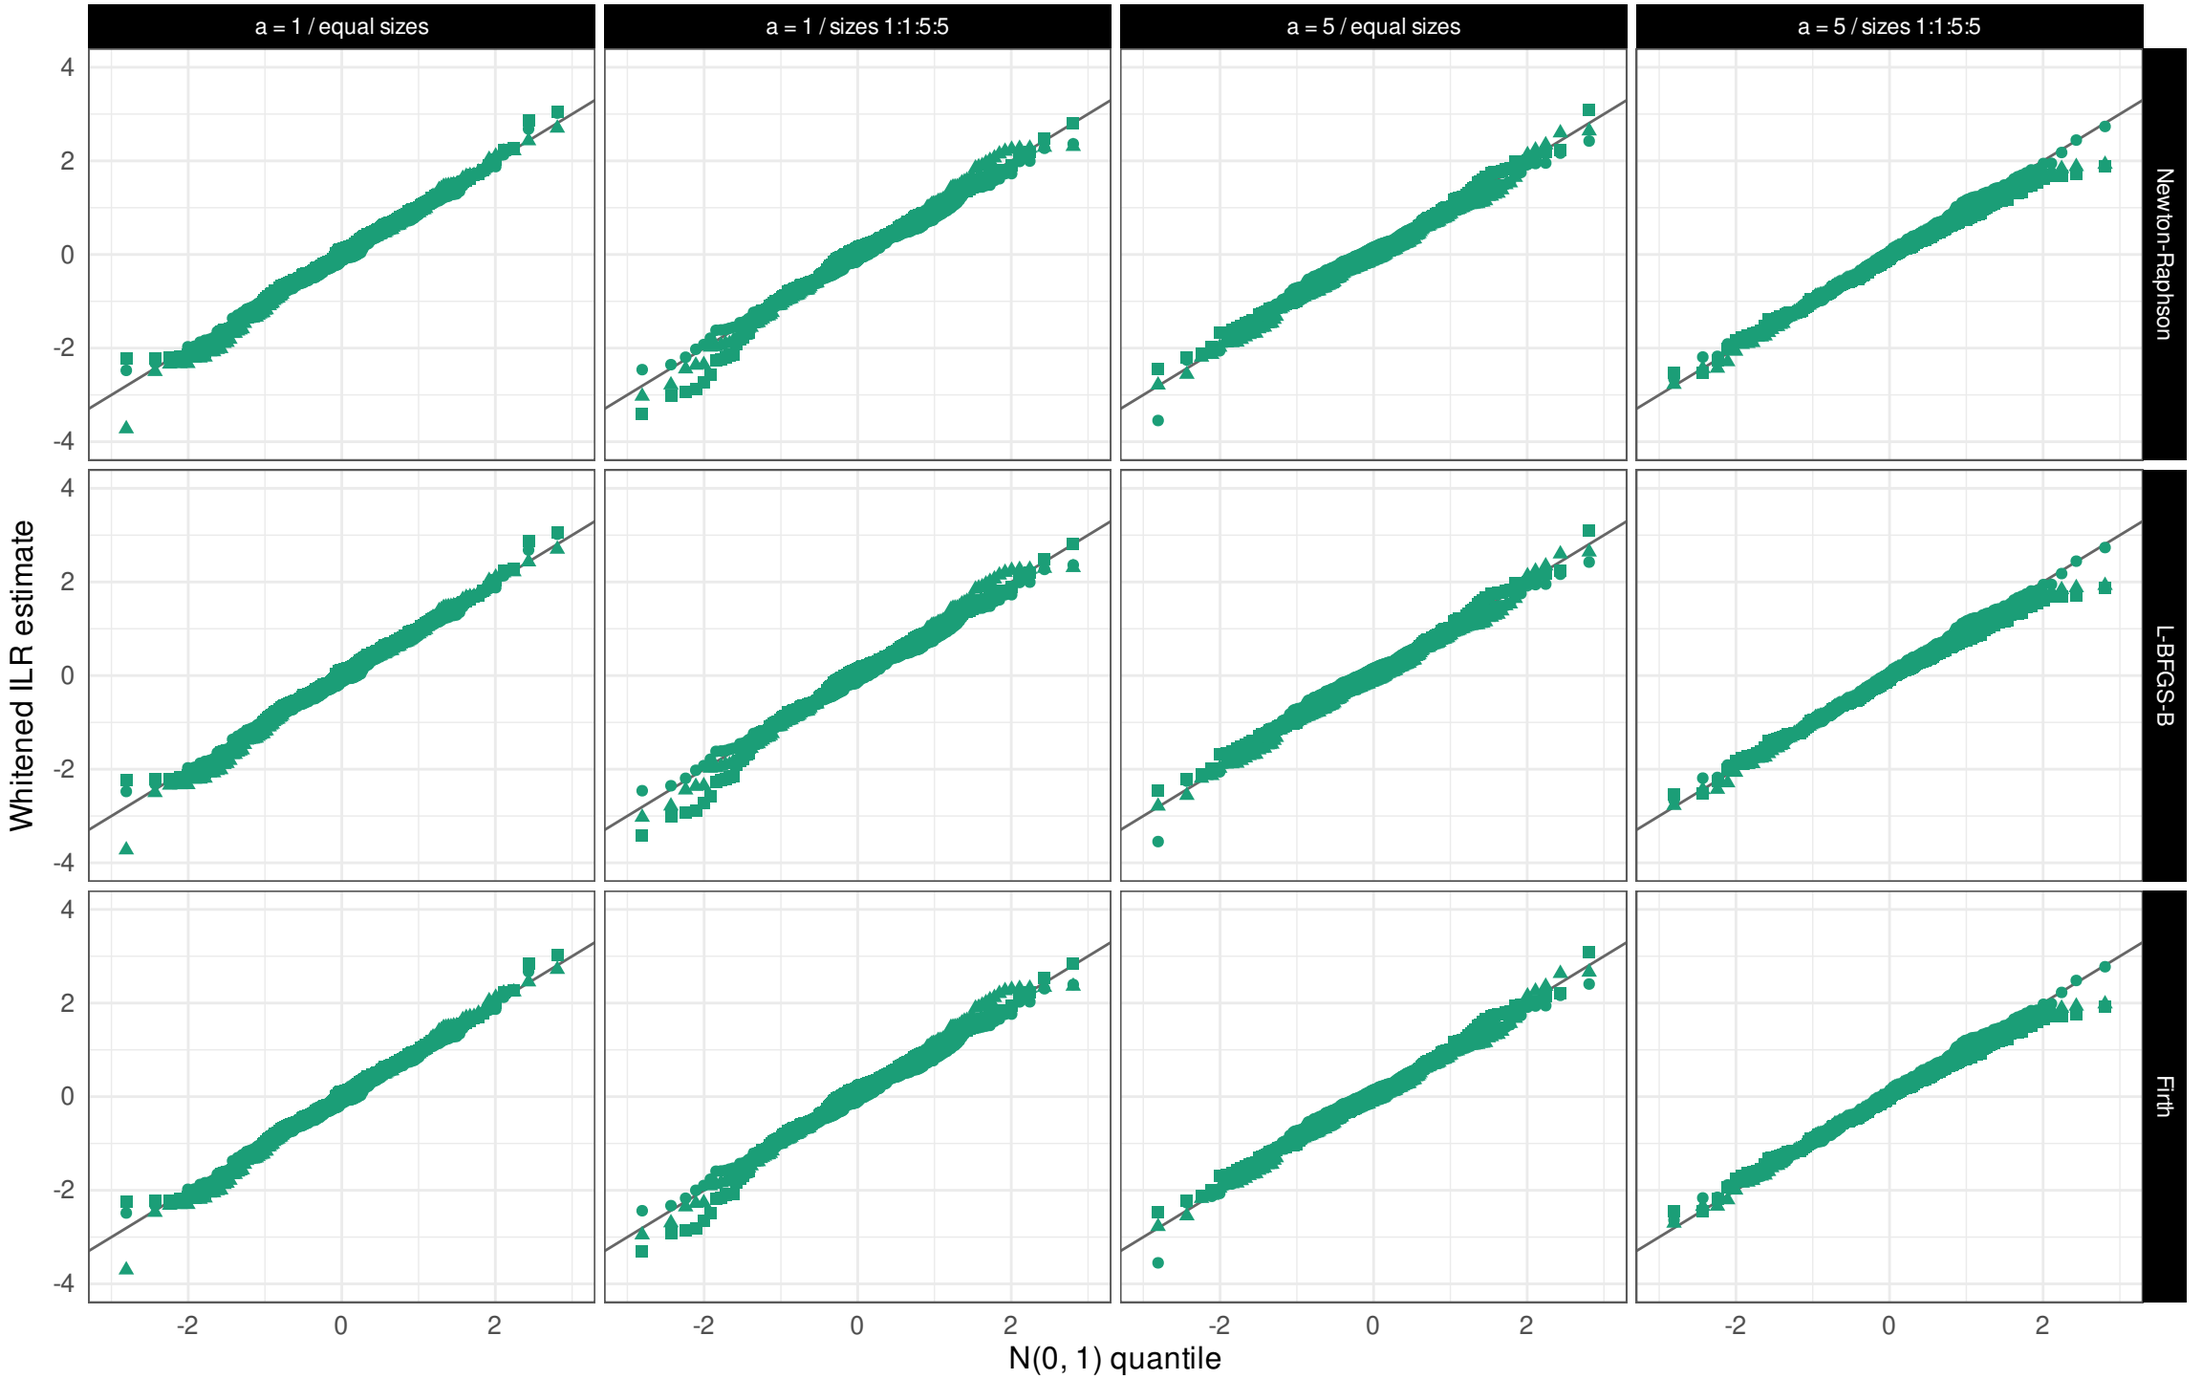

ILR coordinate ● z1 ▲ z2 ■ z3 ● Converged, local maximum Converged, not a local maximum Numerical failure

I_z(p*)^(1/2) (z-hat - z*), information at the true composition; estimates on a face have no ILR coordinates and are not shown.
Assesses the Wald approximation only; profile and bootstrap intervals do not rely on it.