
Expected log-likelihood

balanced / low overlap

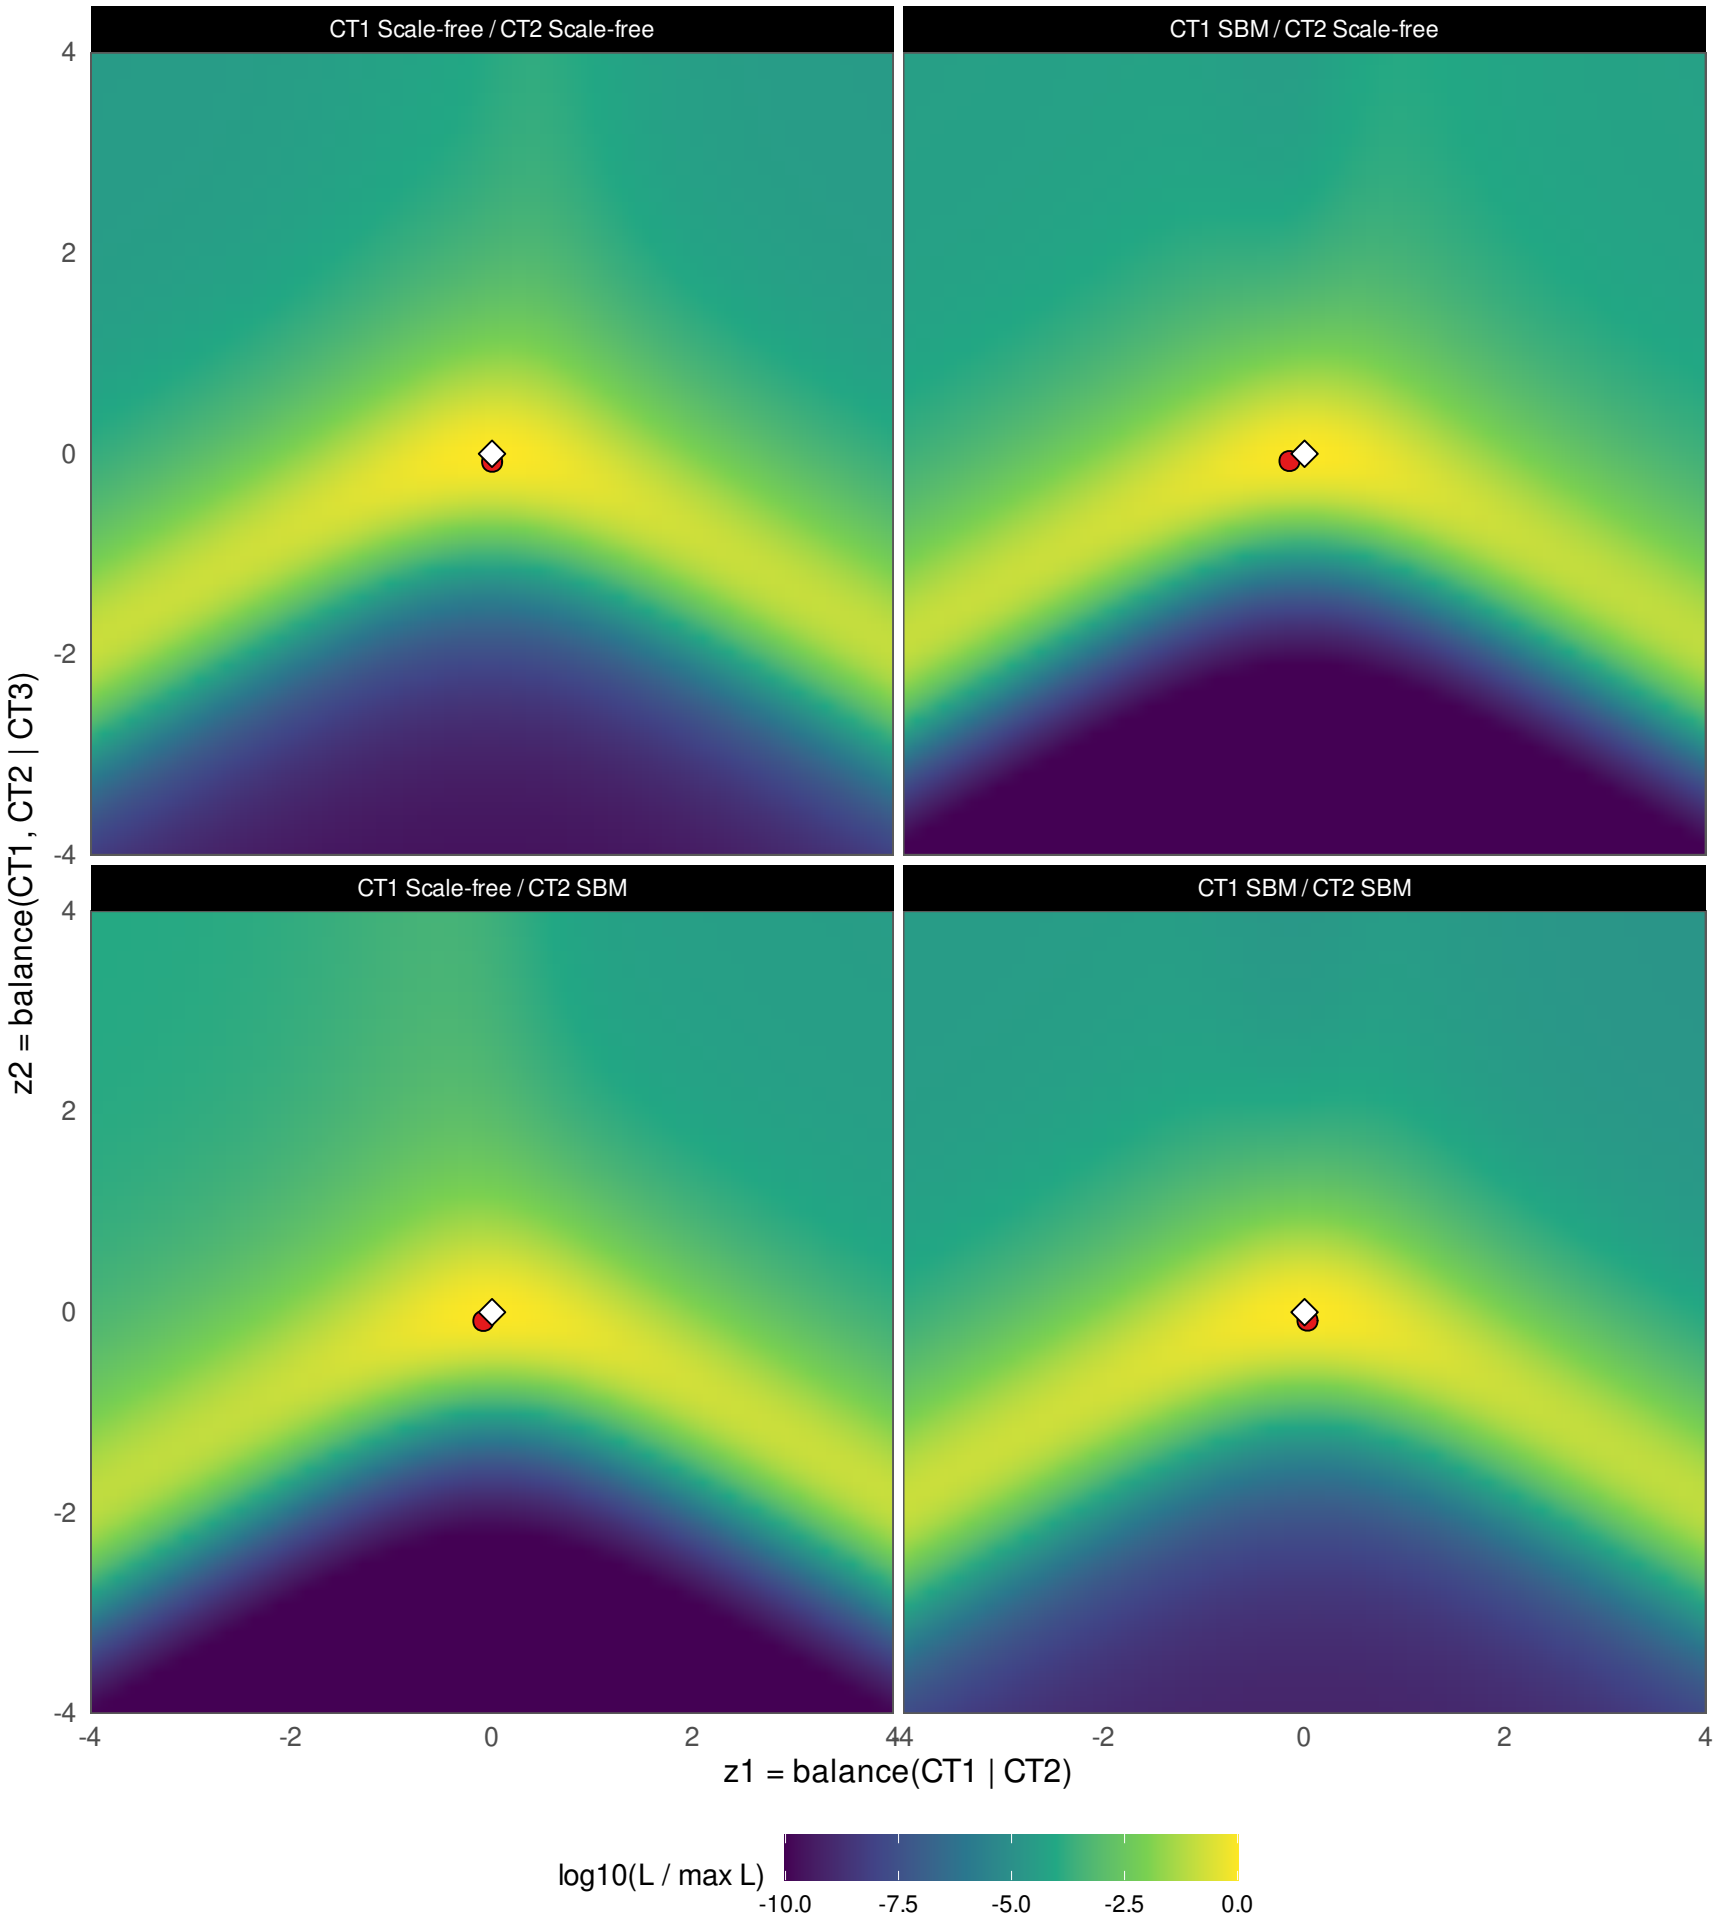


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood


balanced / moderate overlap

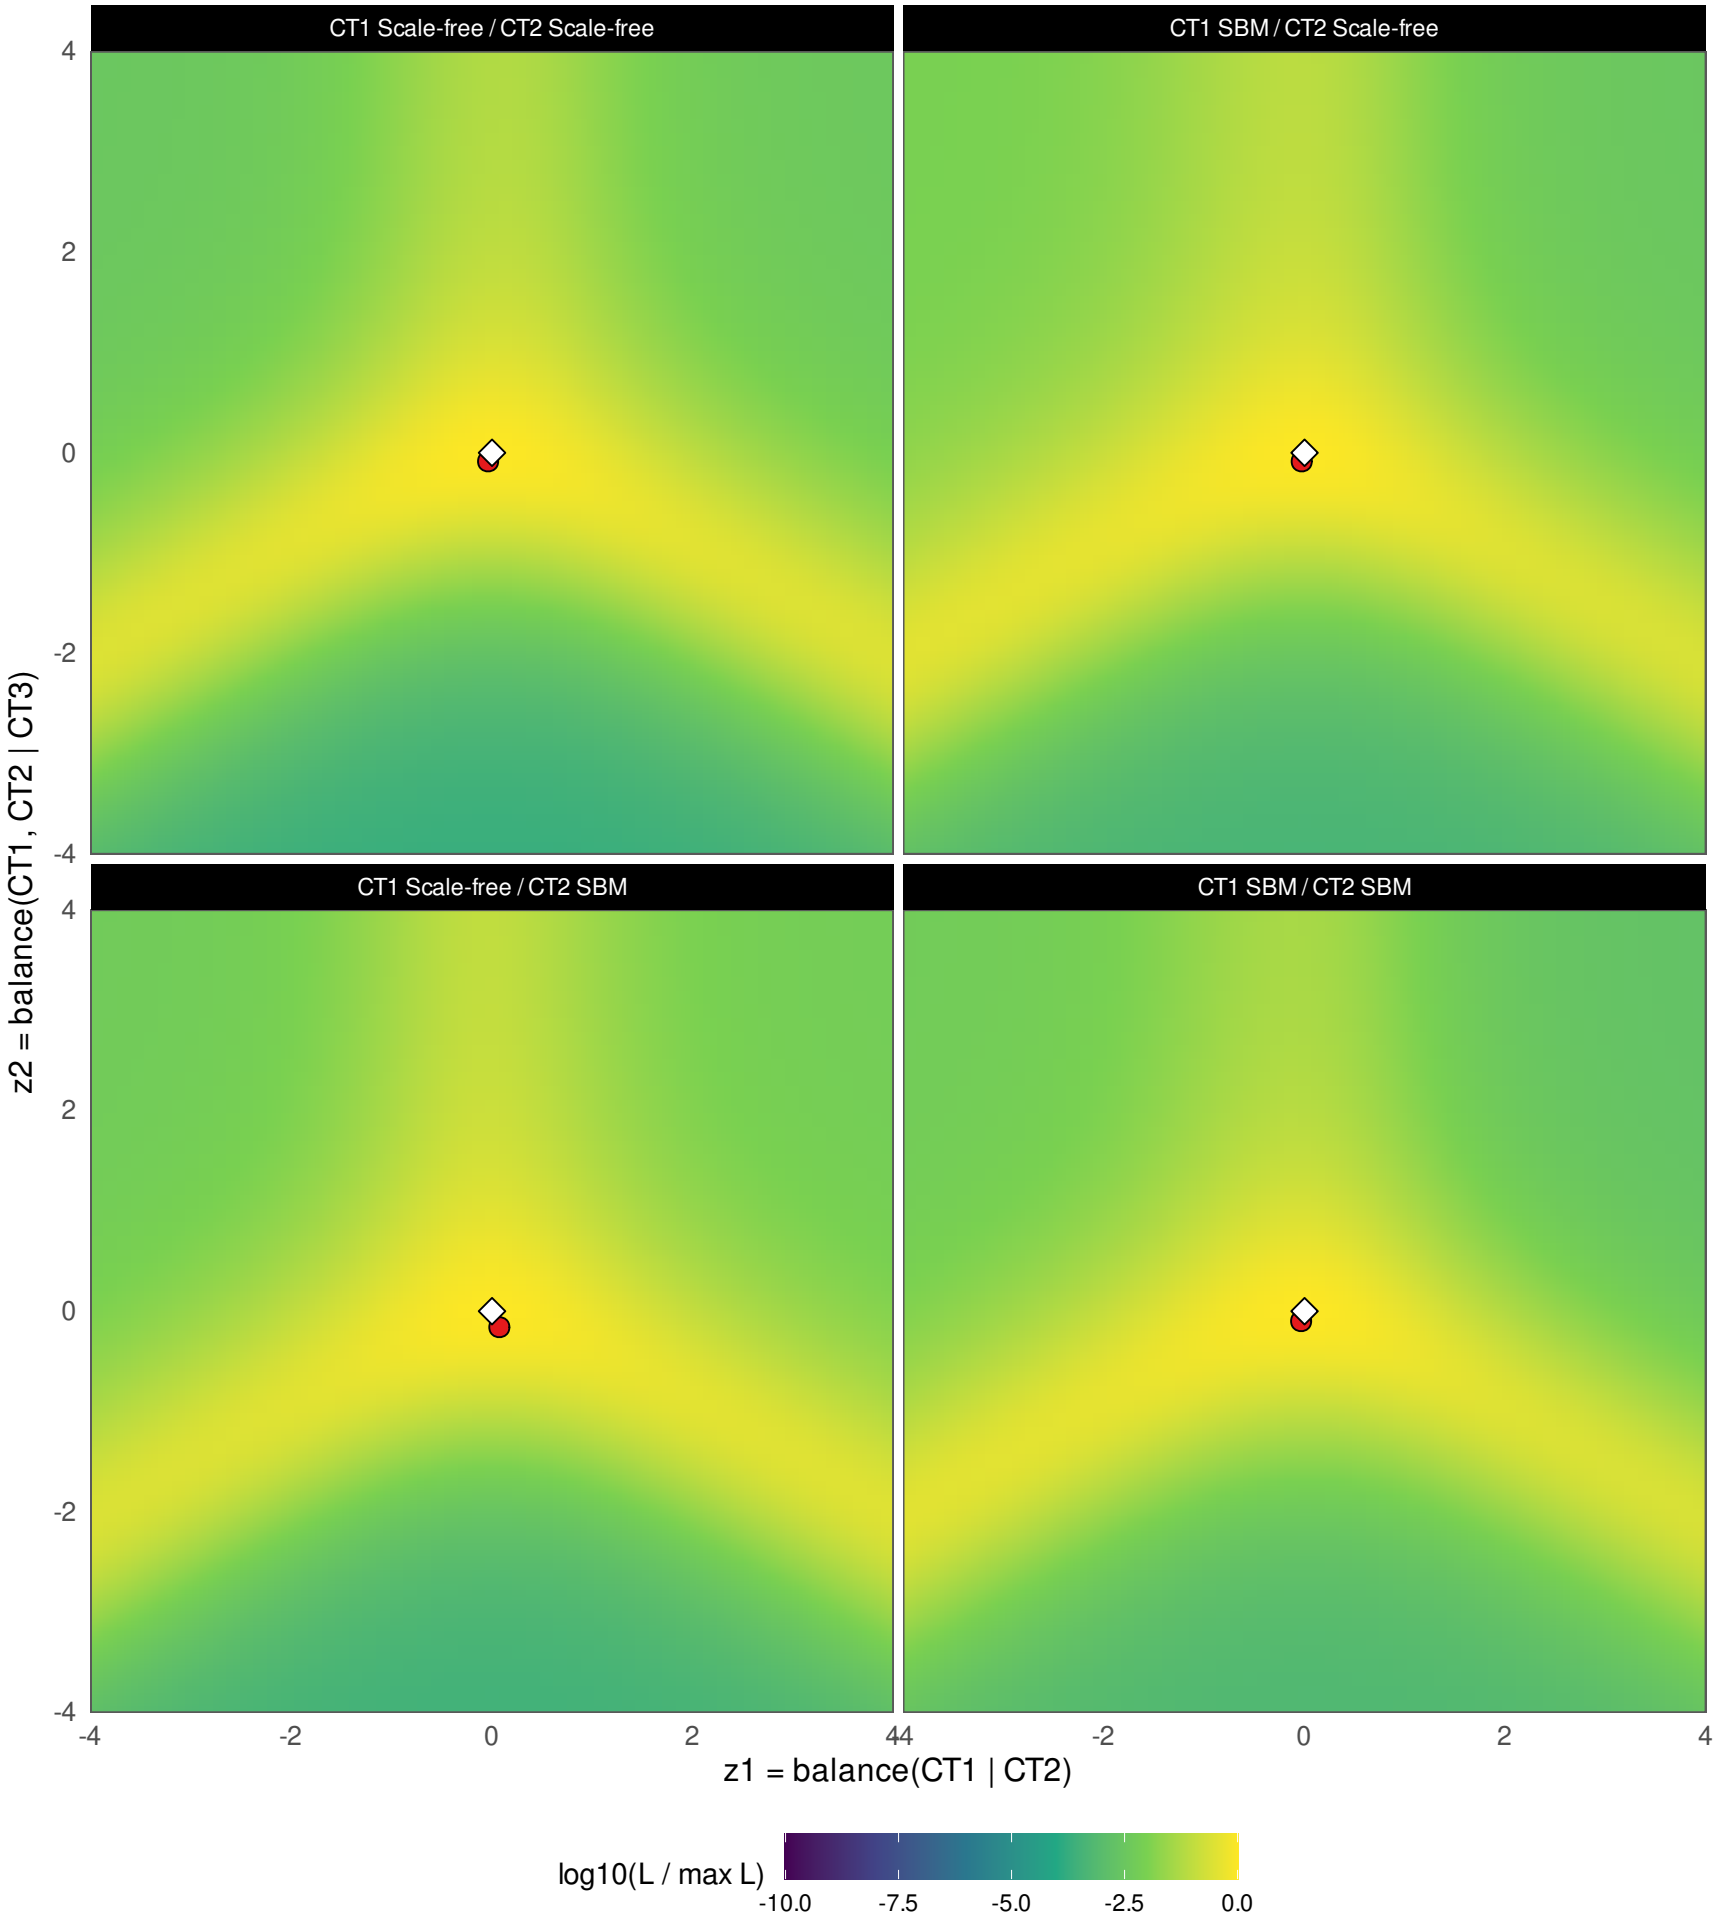

Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10.

Expected log-likelihood

balanced / high overlap

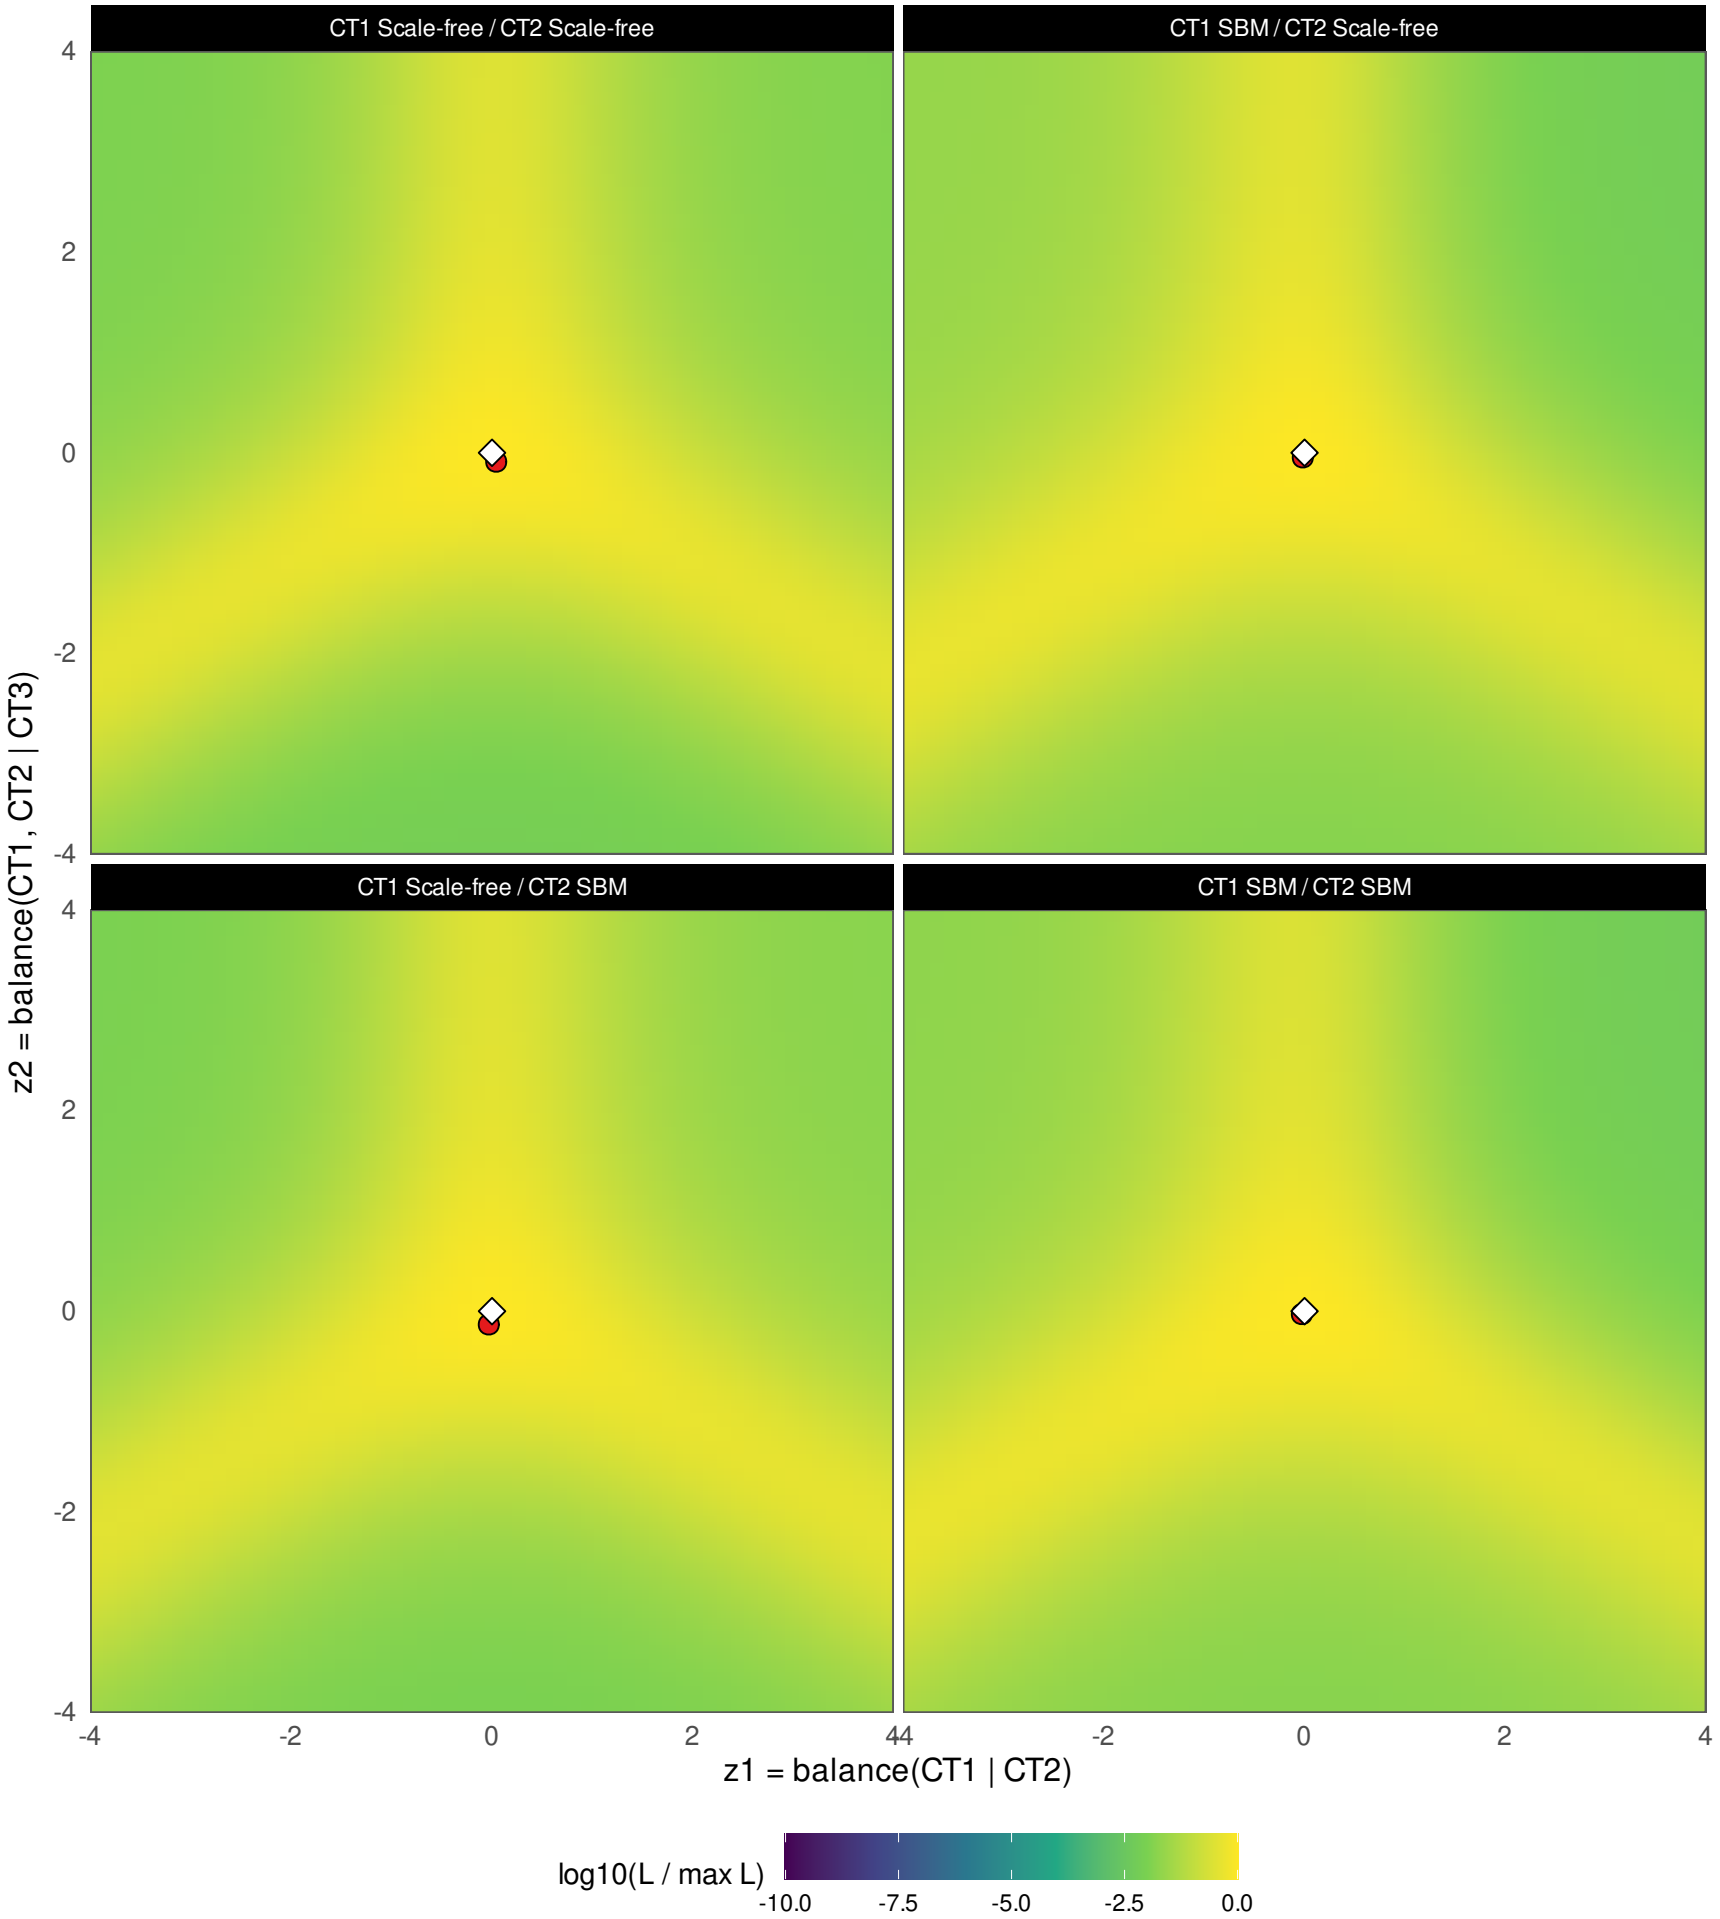


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

moderately unbalanced / low overlap

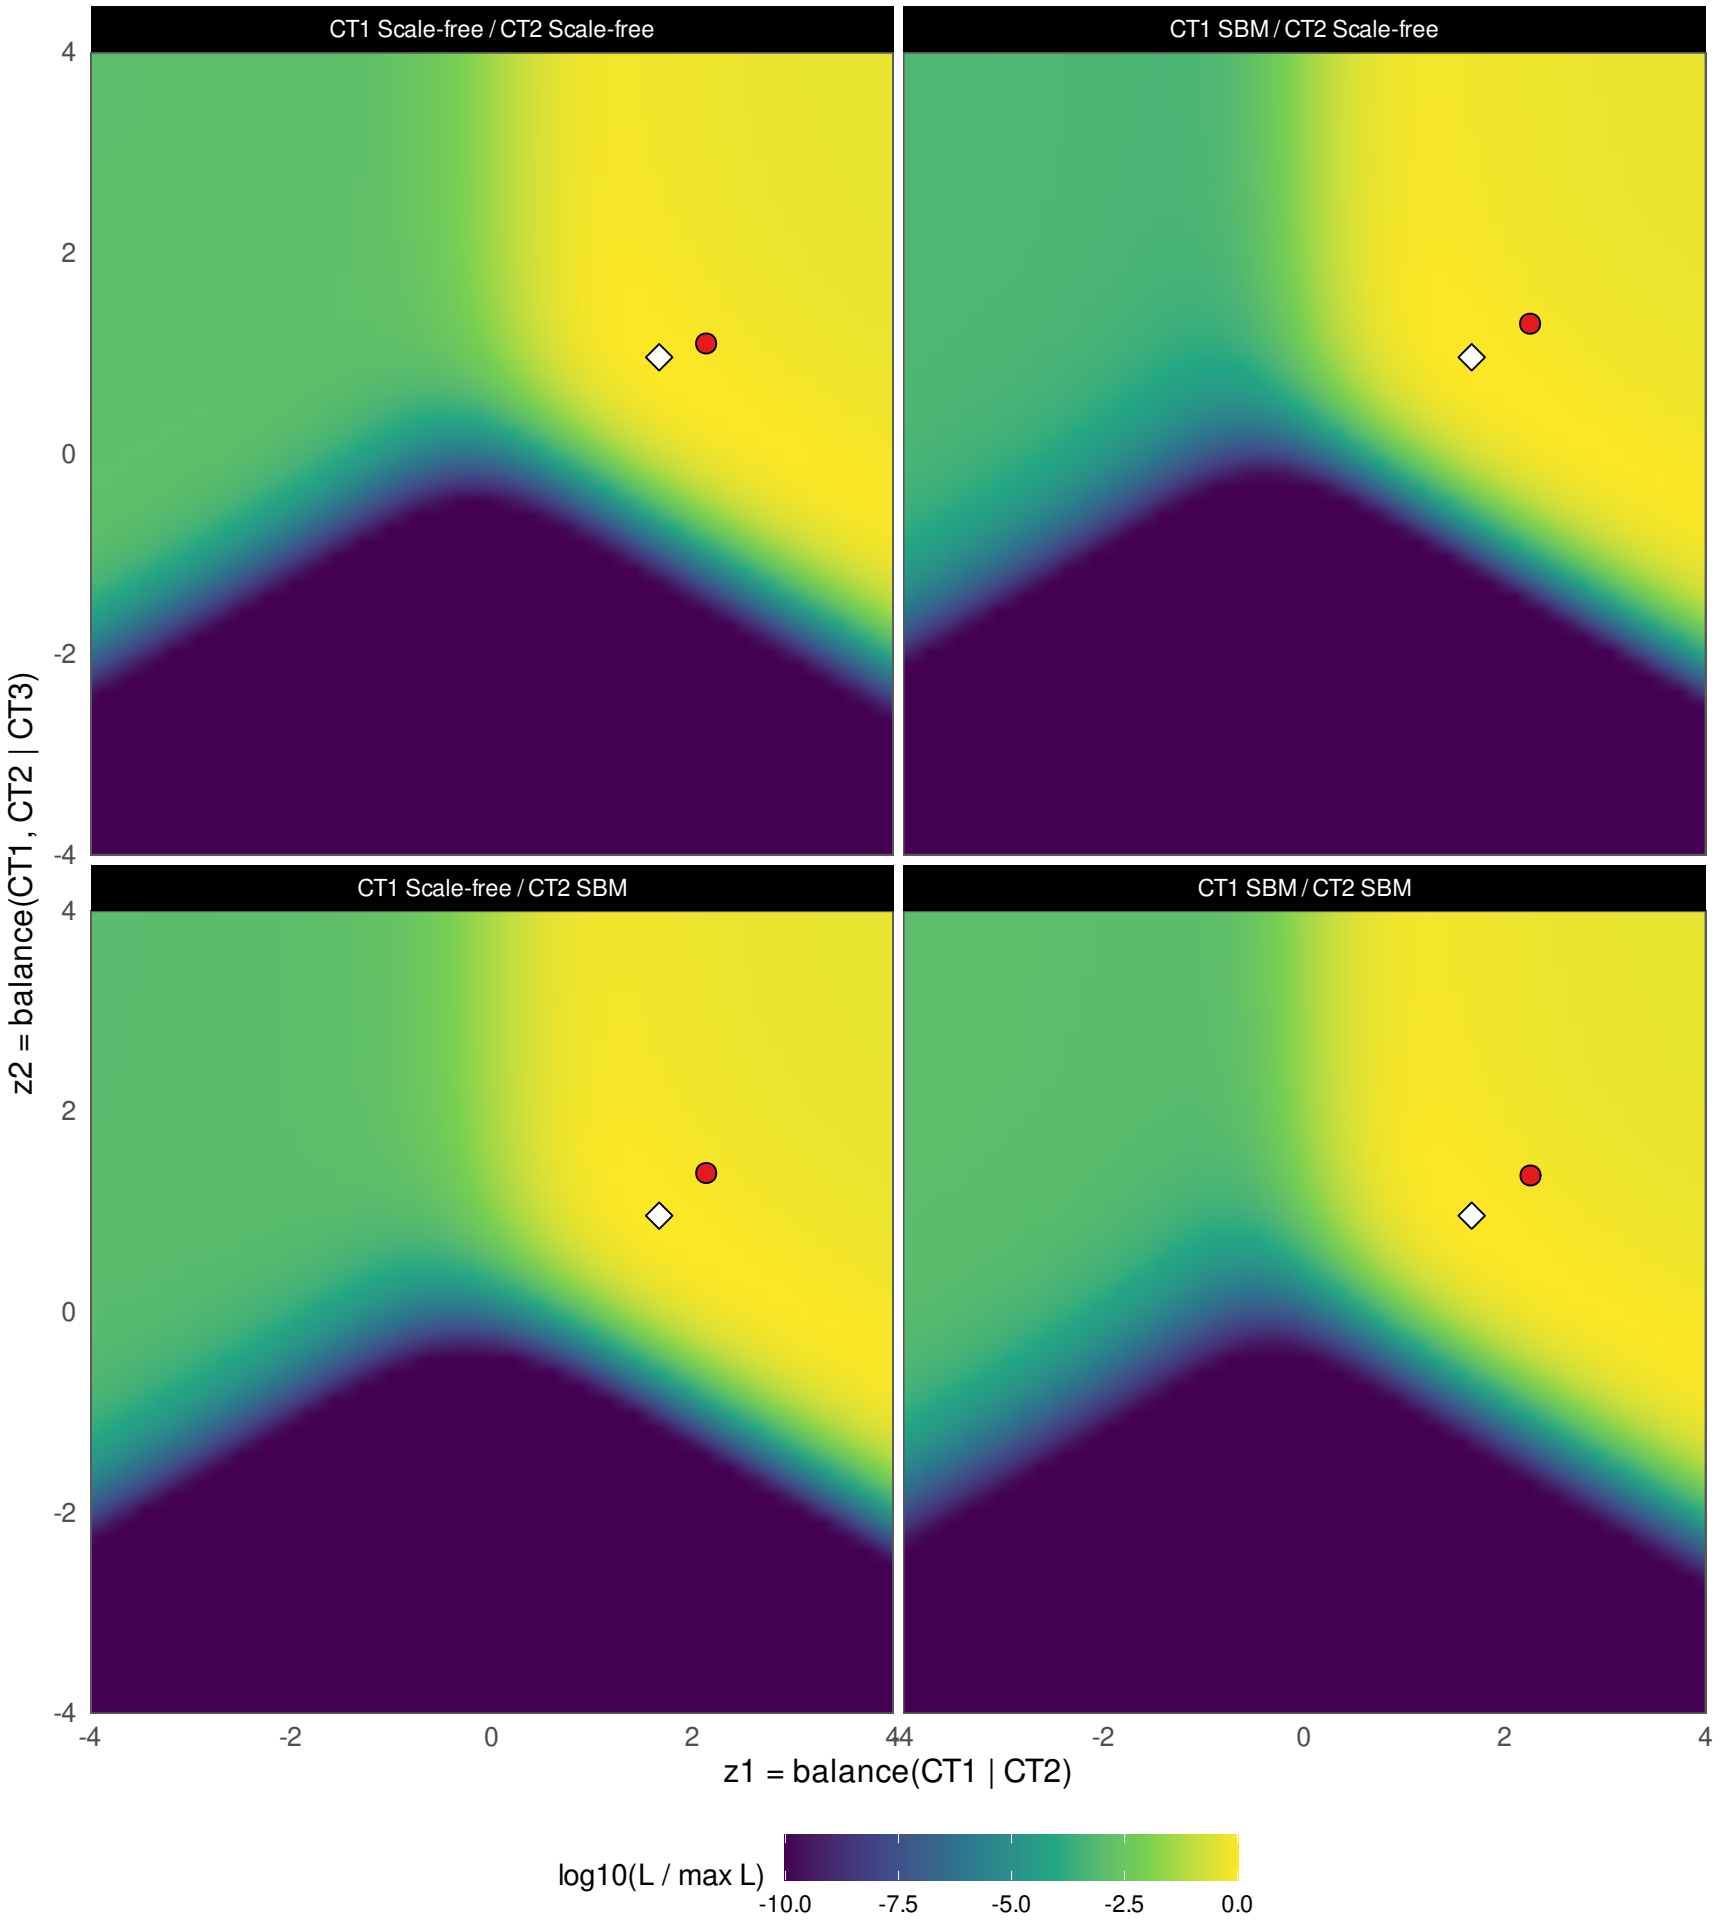


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

moderately unbalanced / moderate overlap

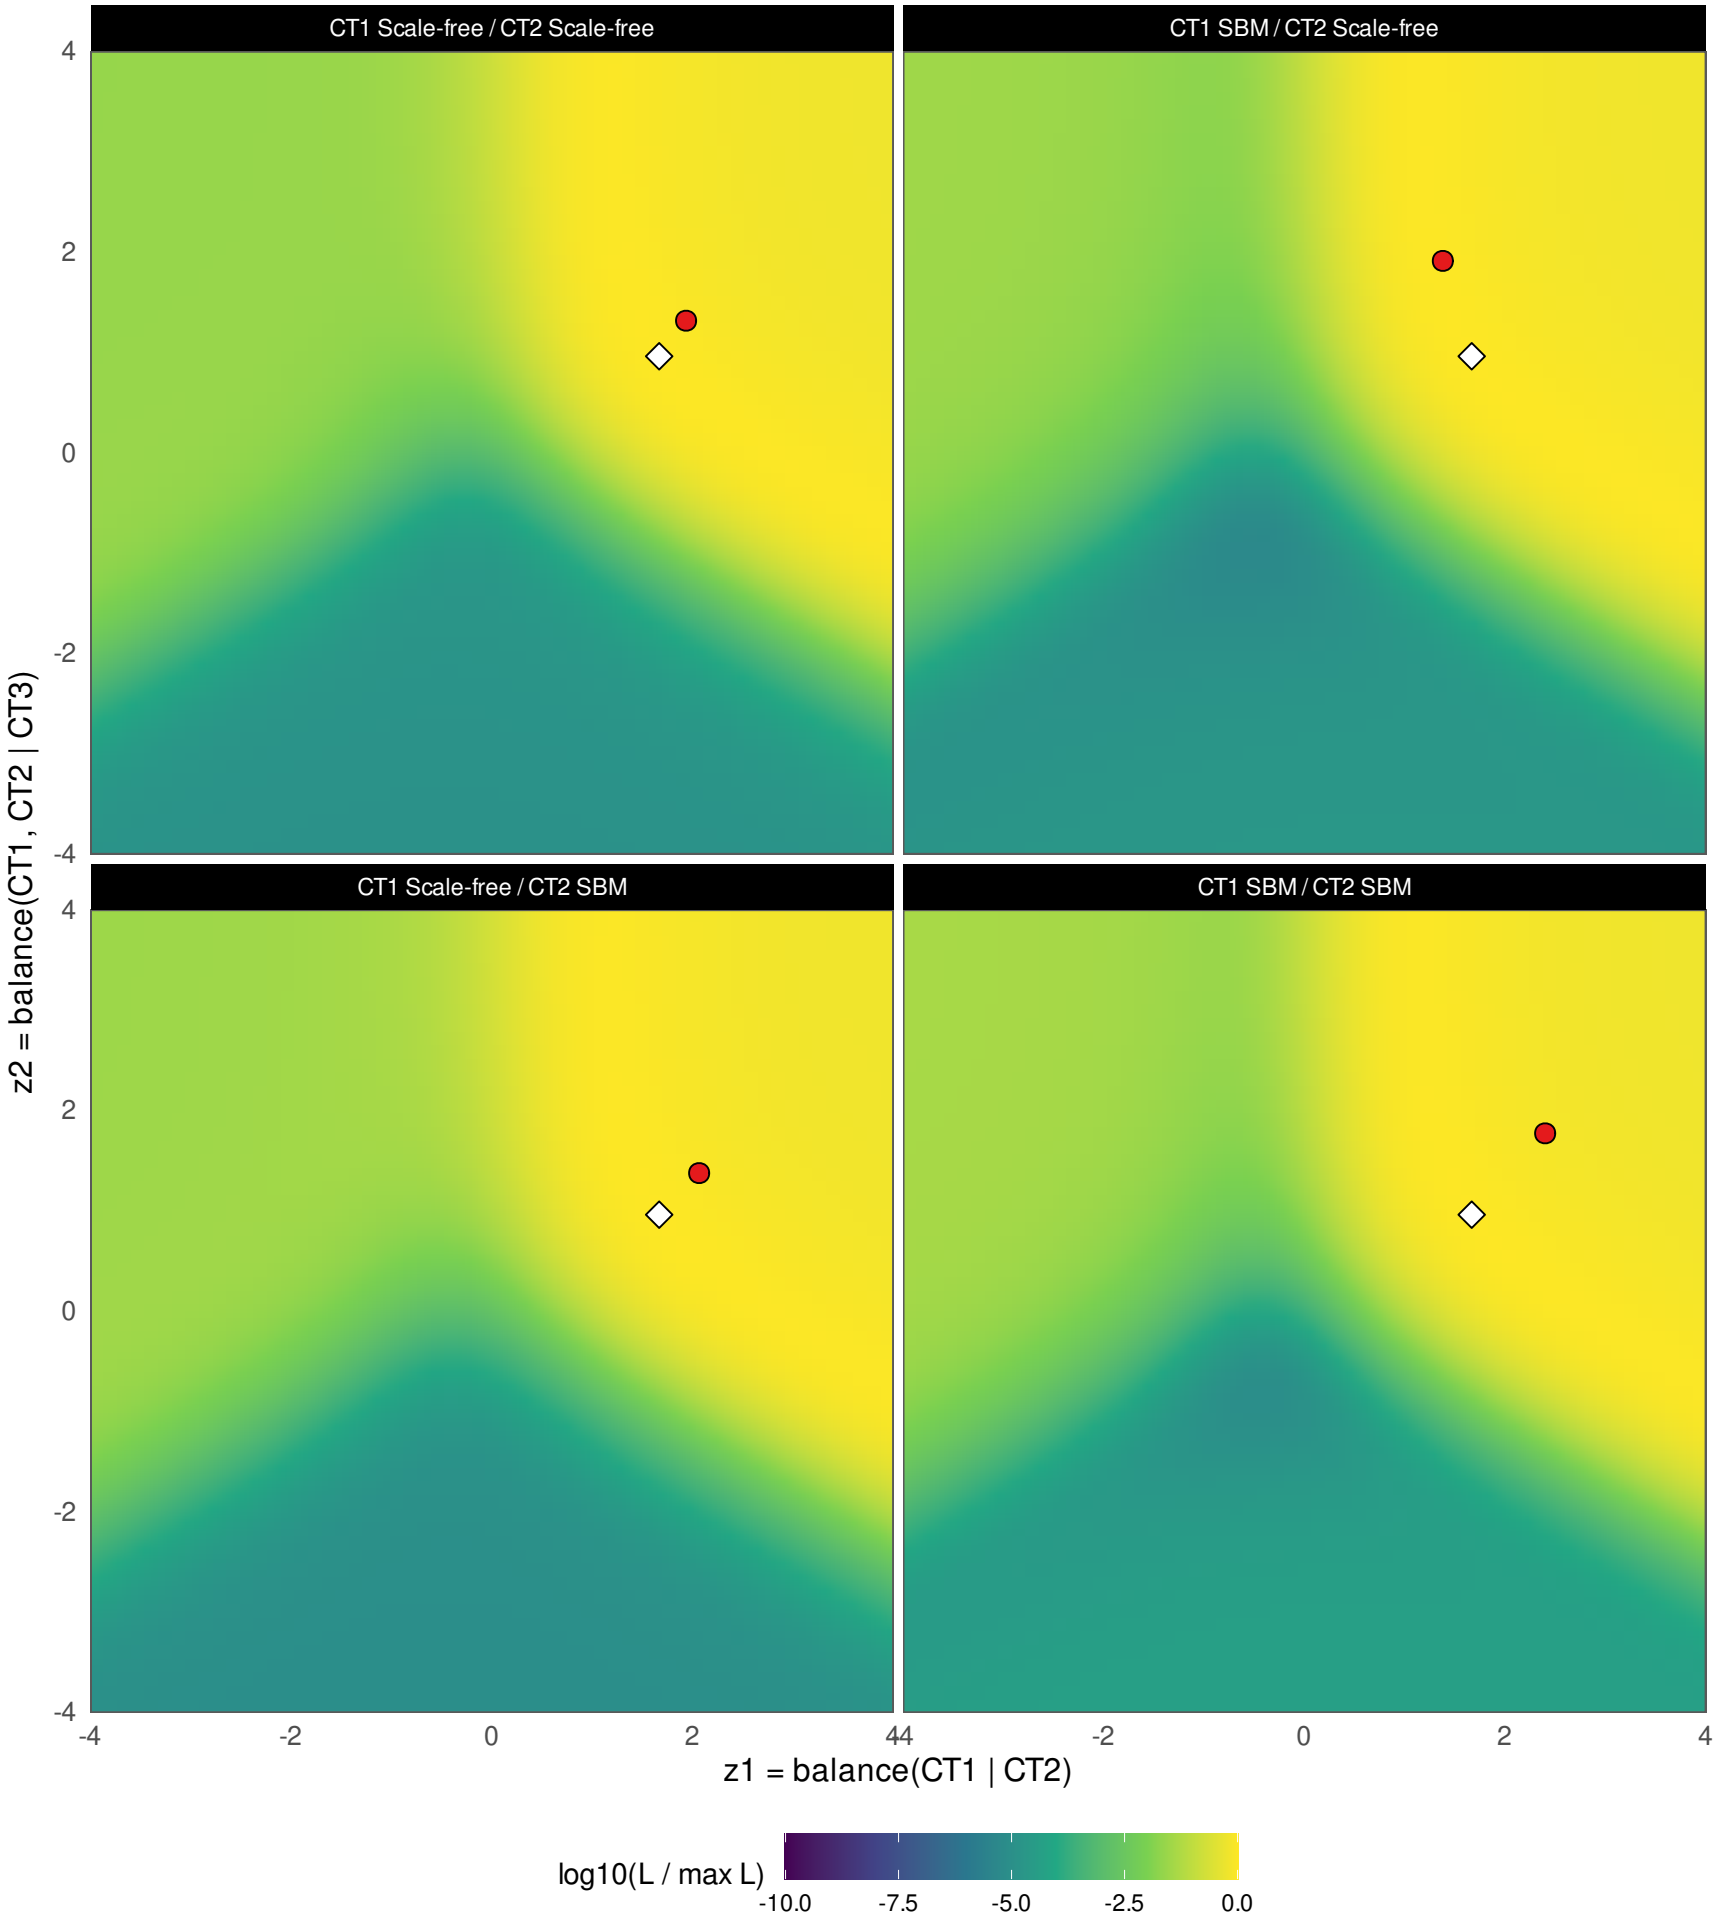


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

moderately unbalanced / high overlap

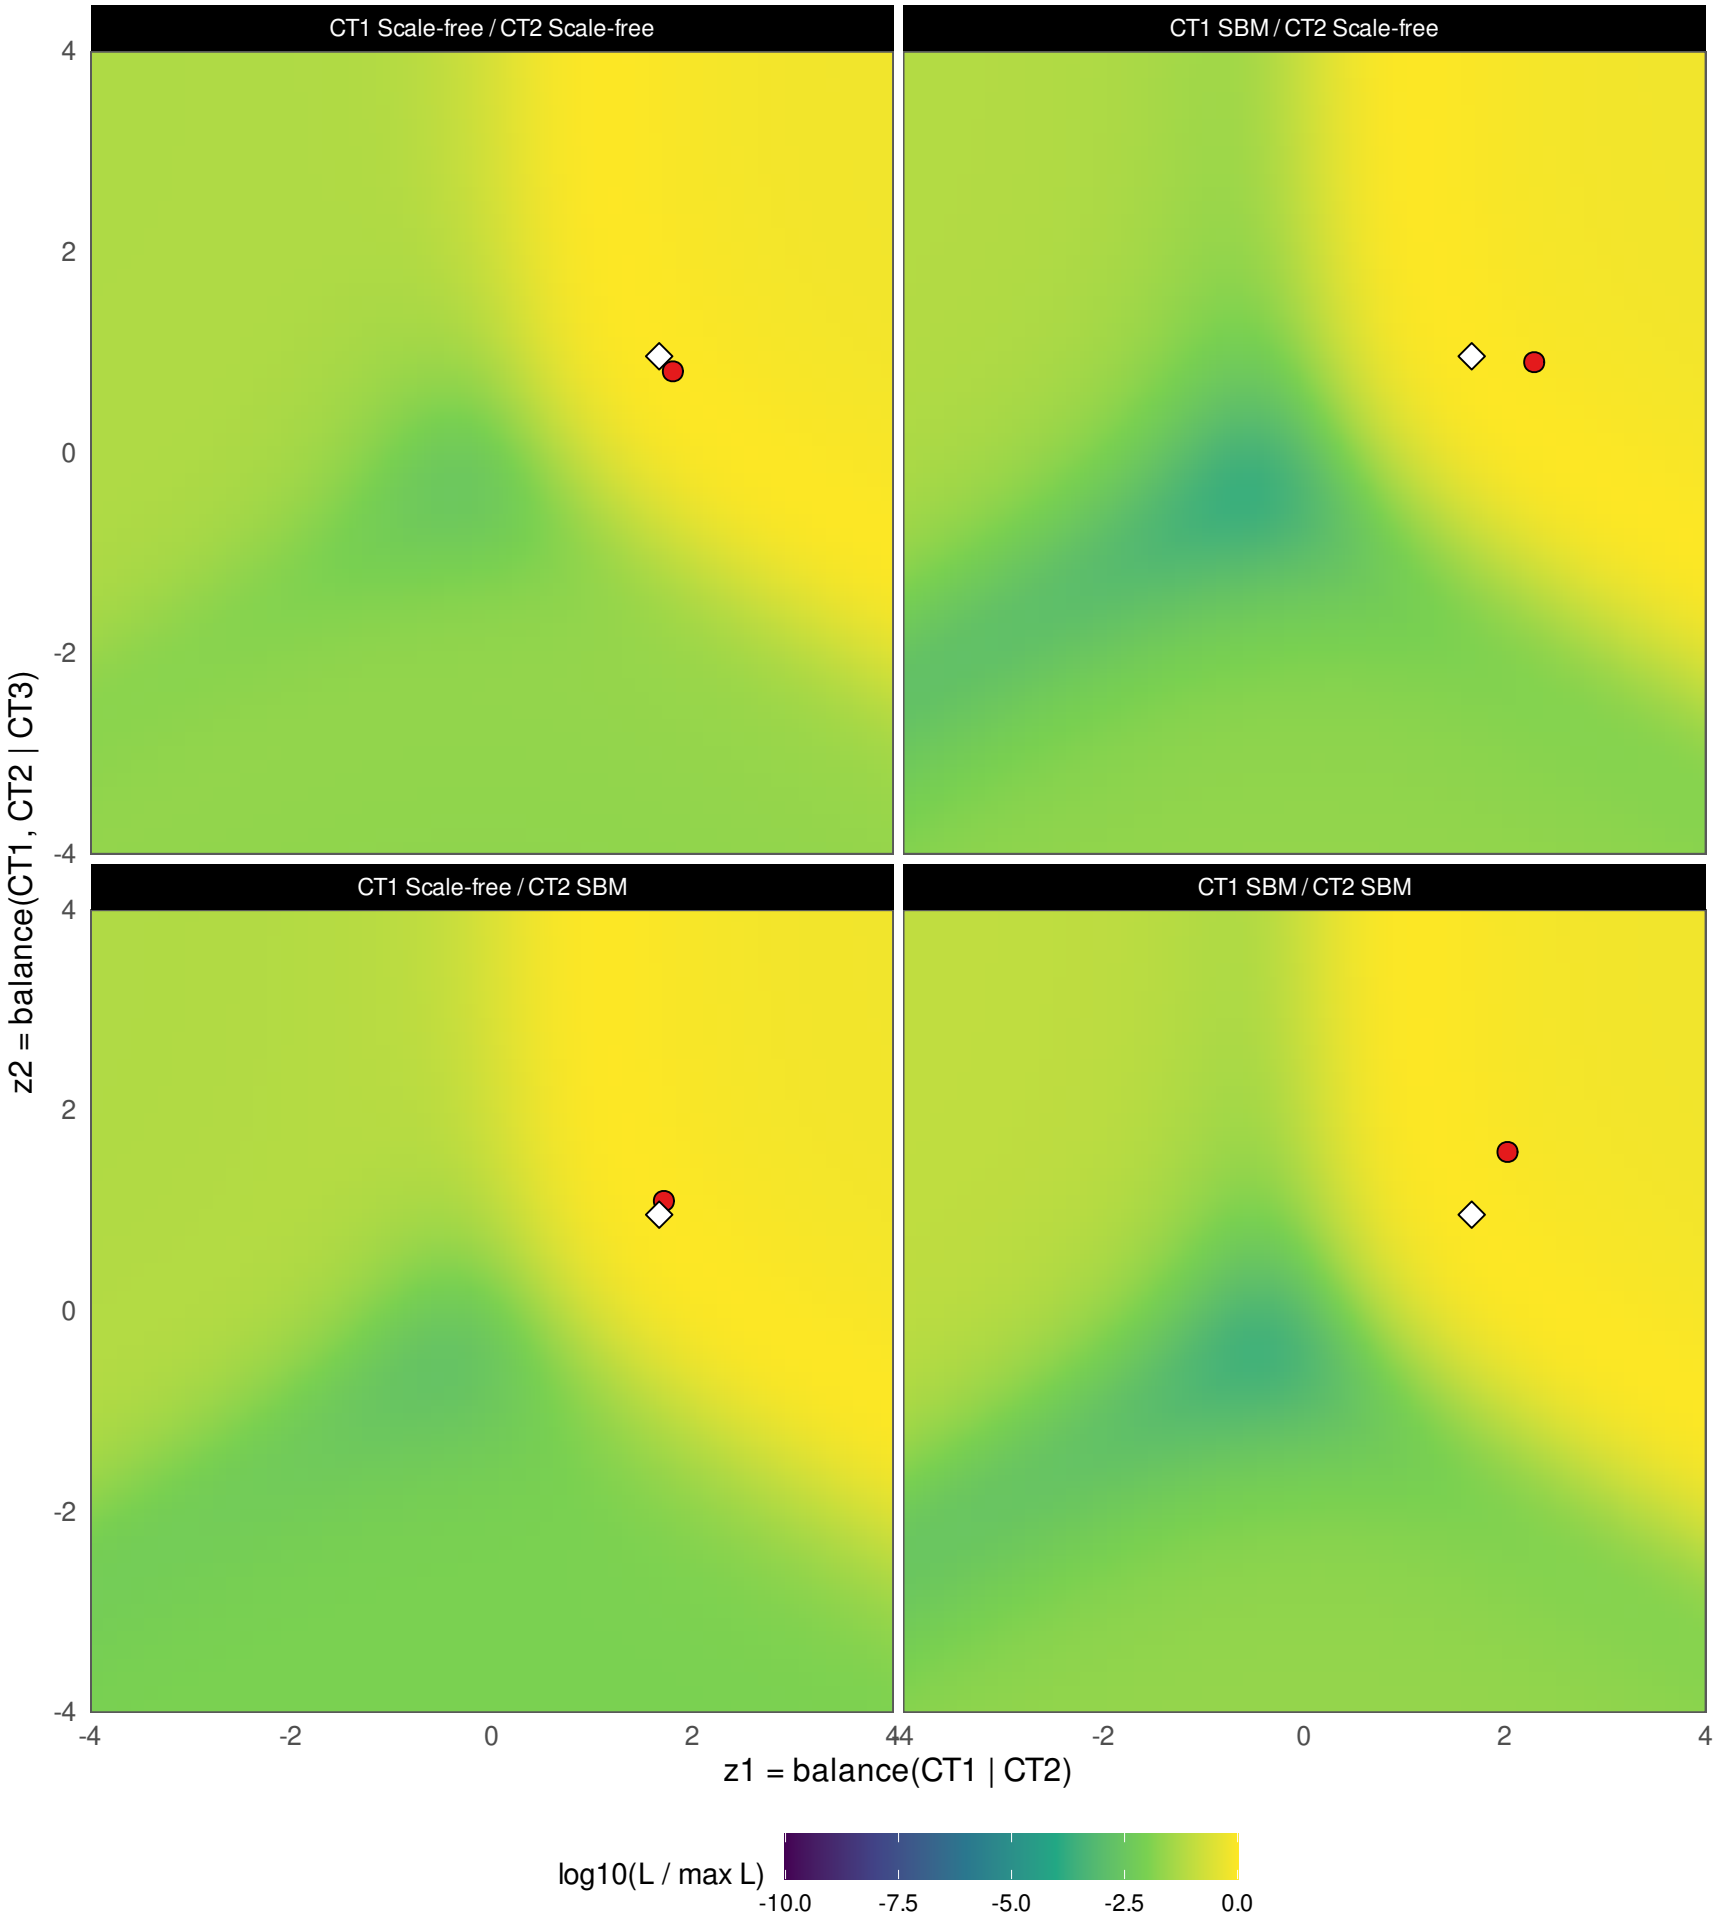


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

highly unbalanced / low overlap

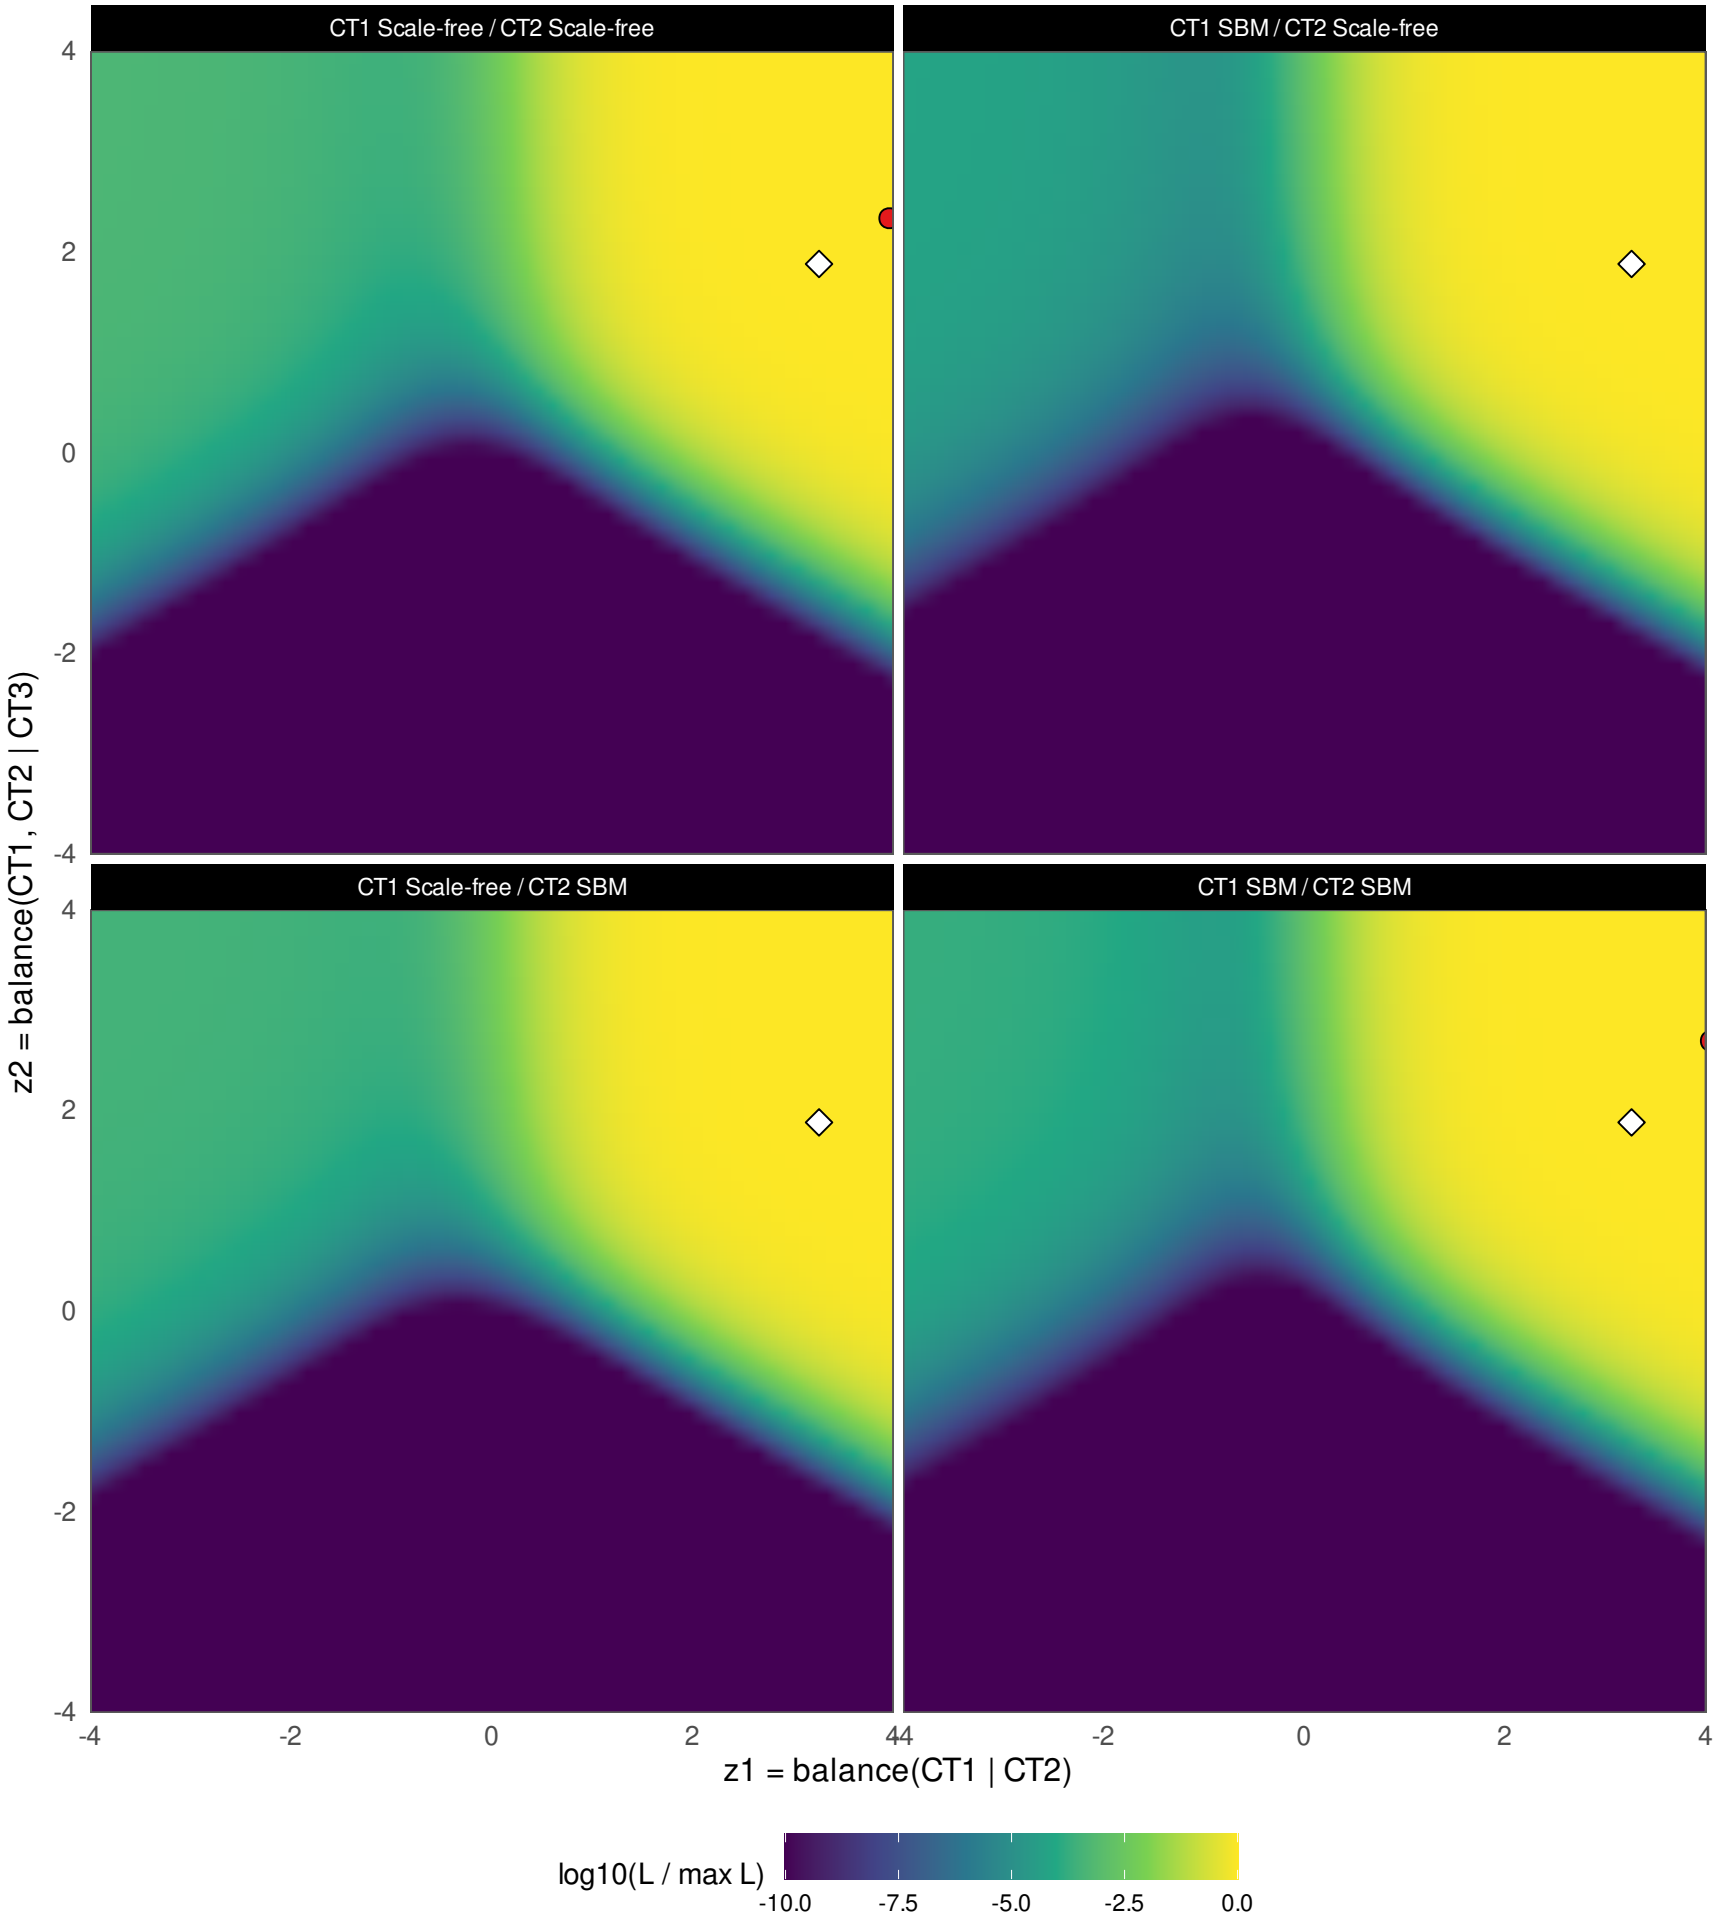


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

highly unbalanced / moderate overlap

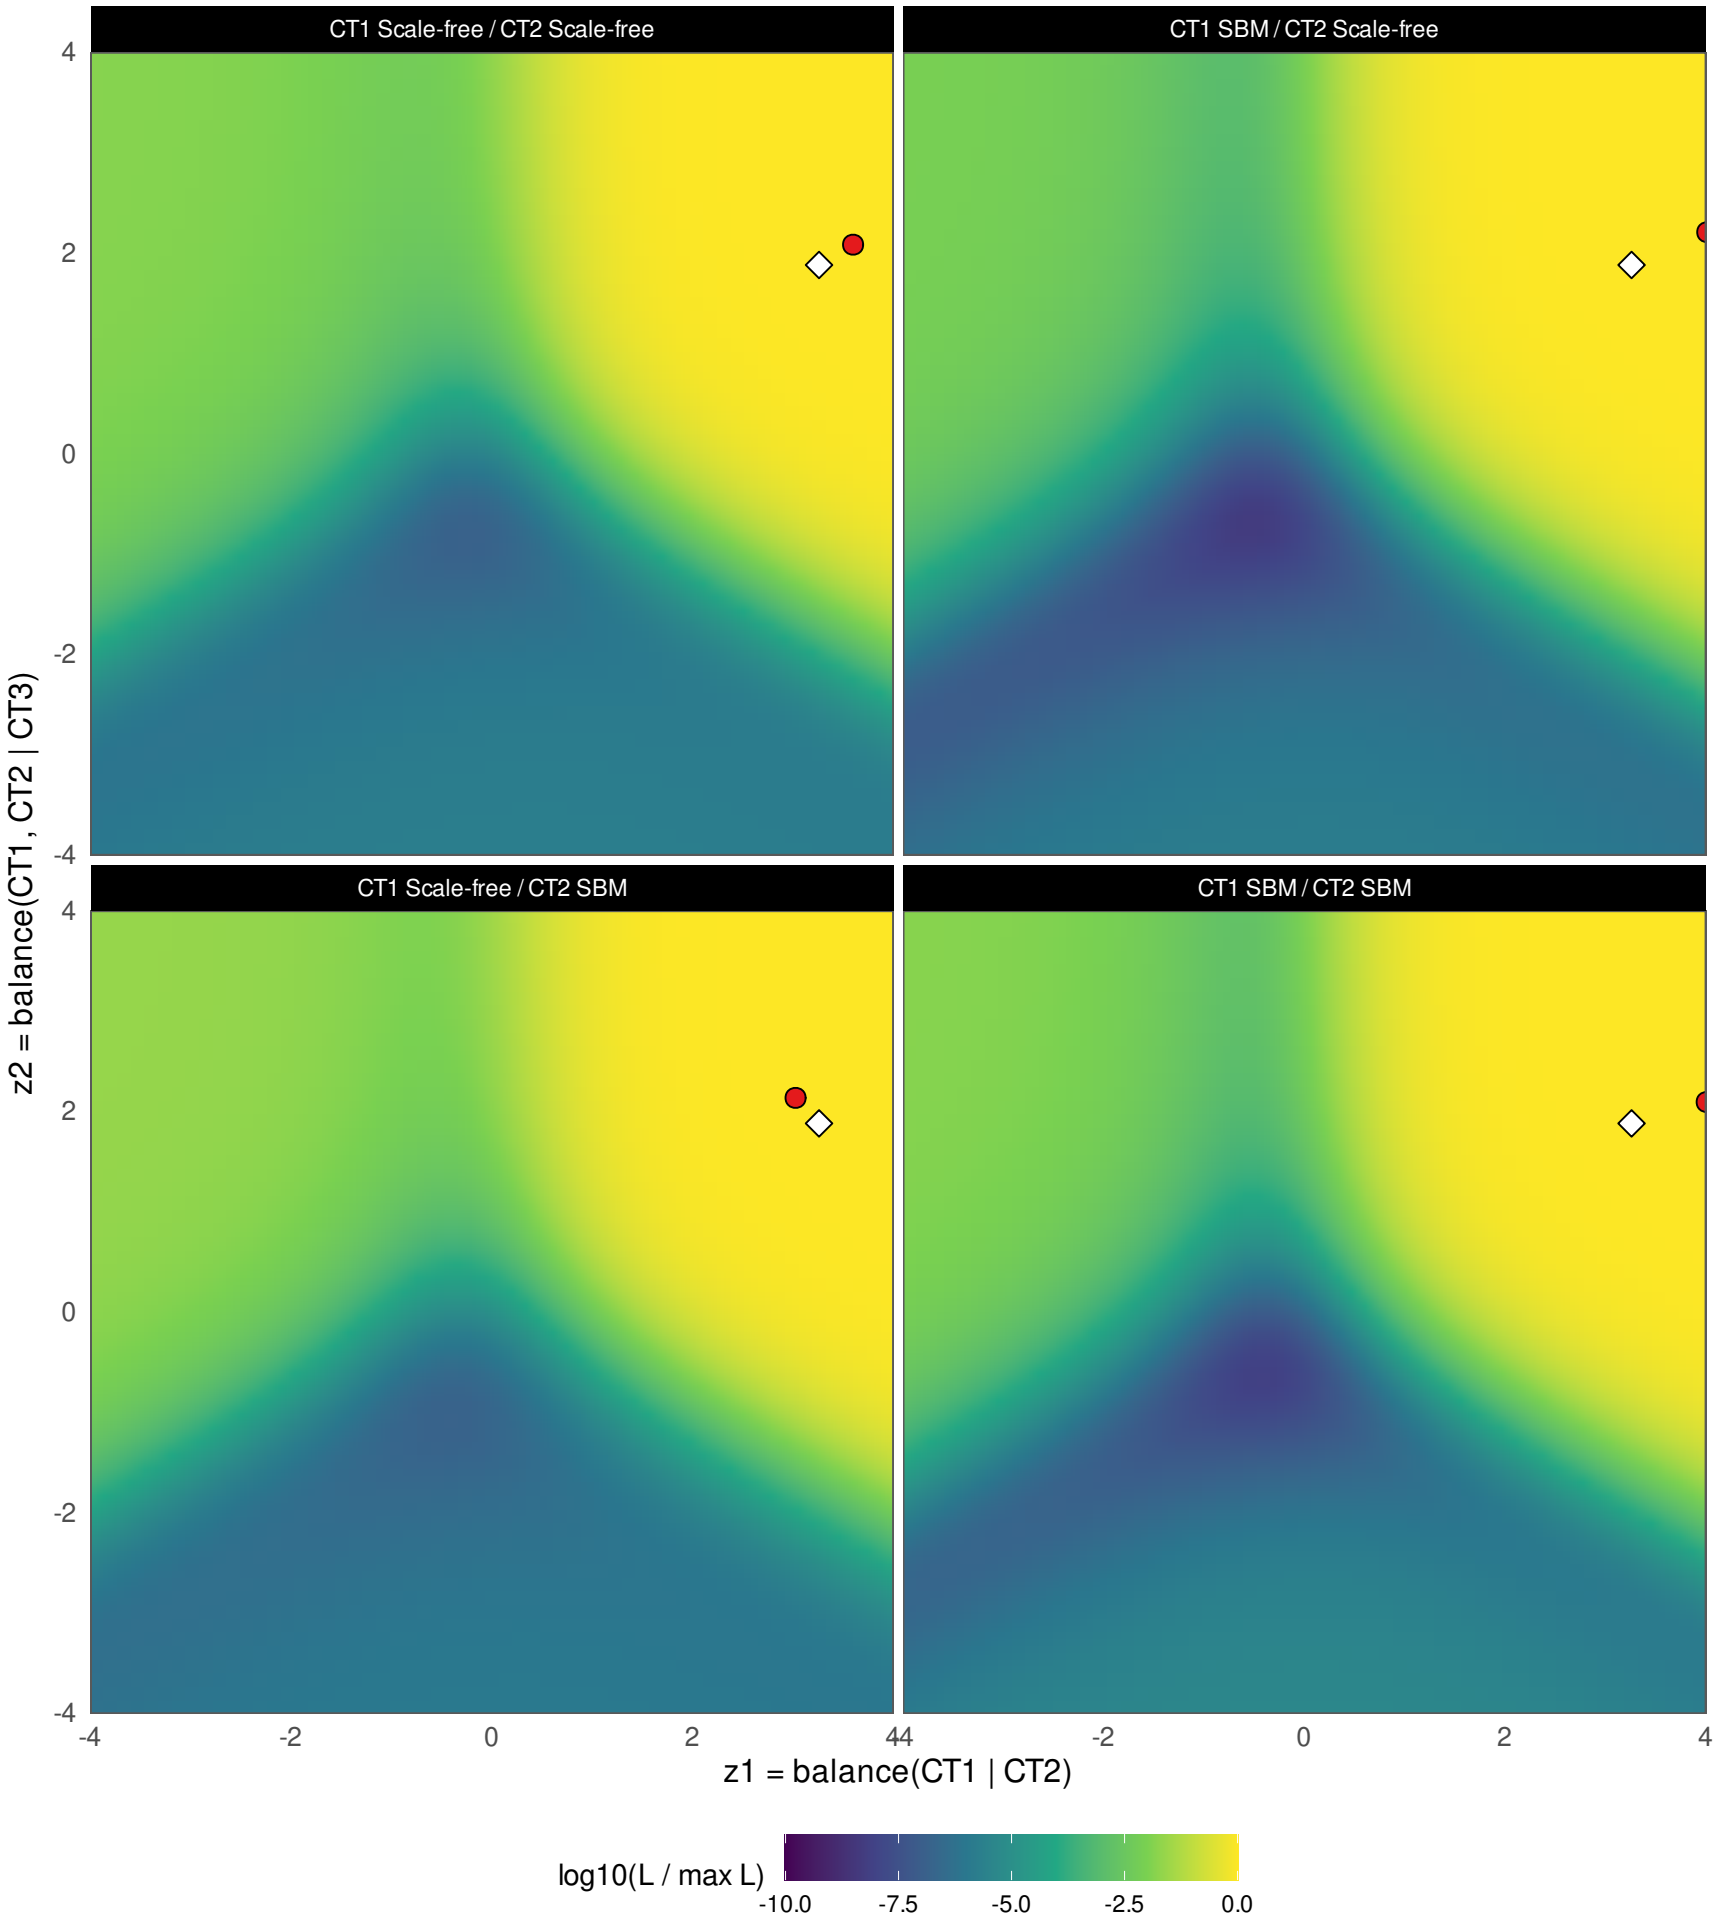


Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)

Expected log-likelihood

highly unbalanced / high overlap

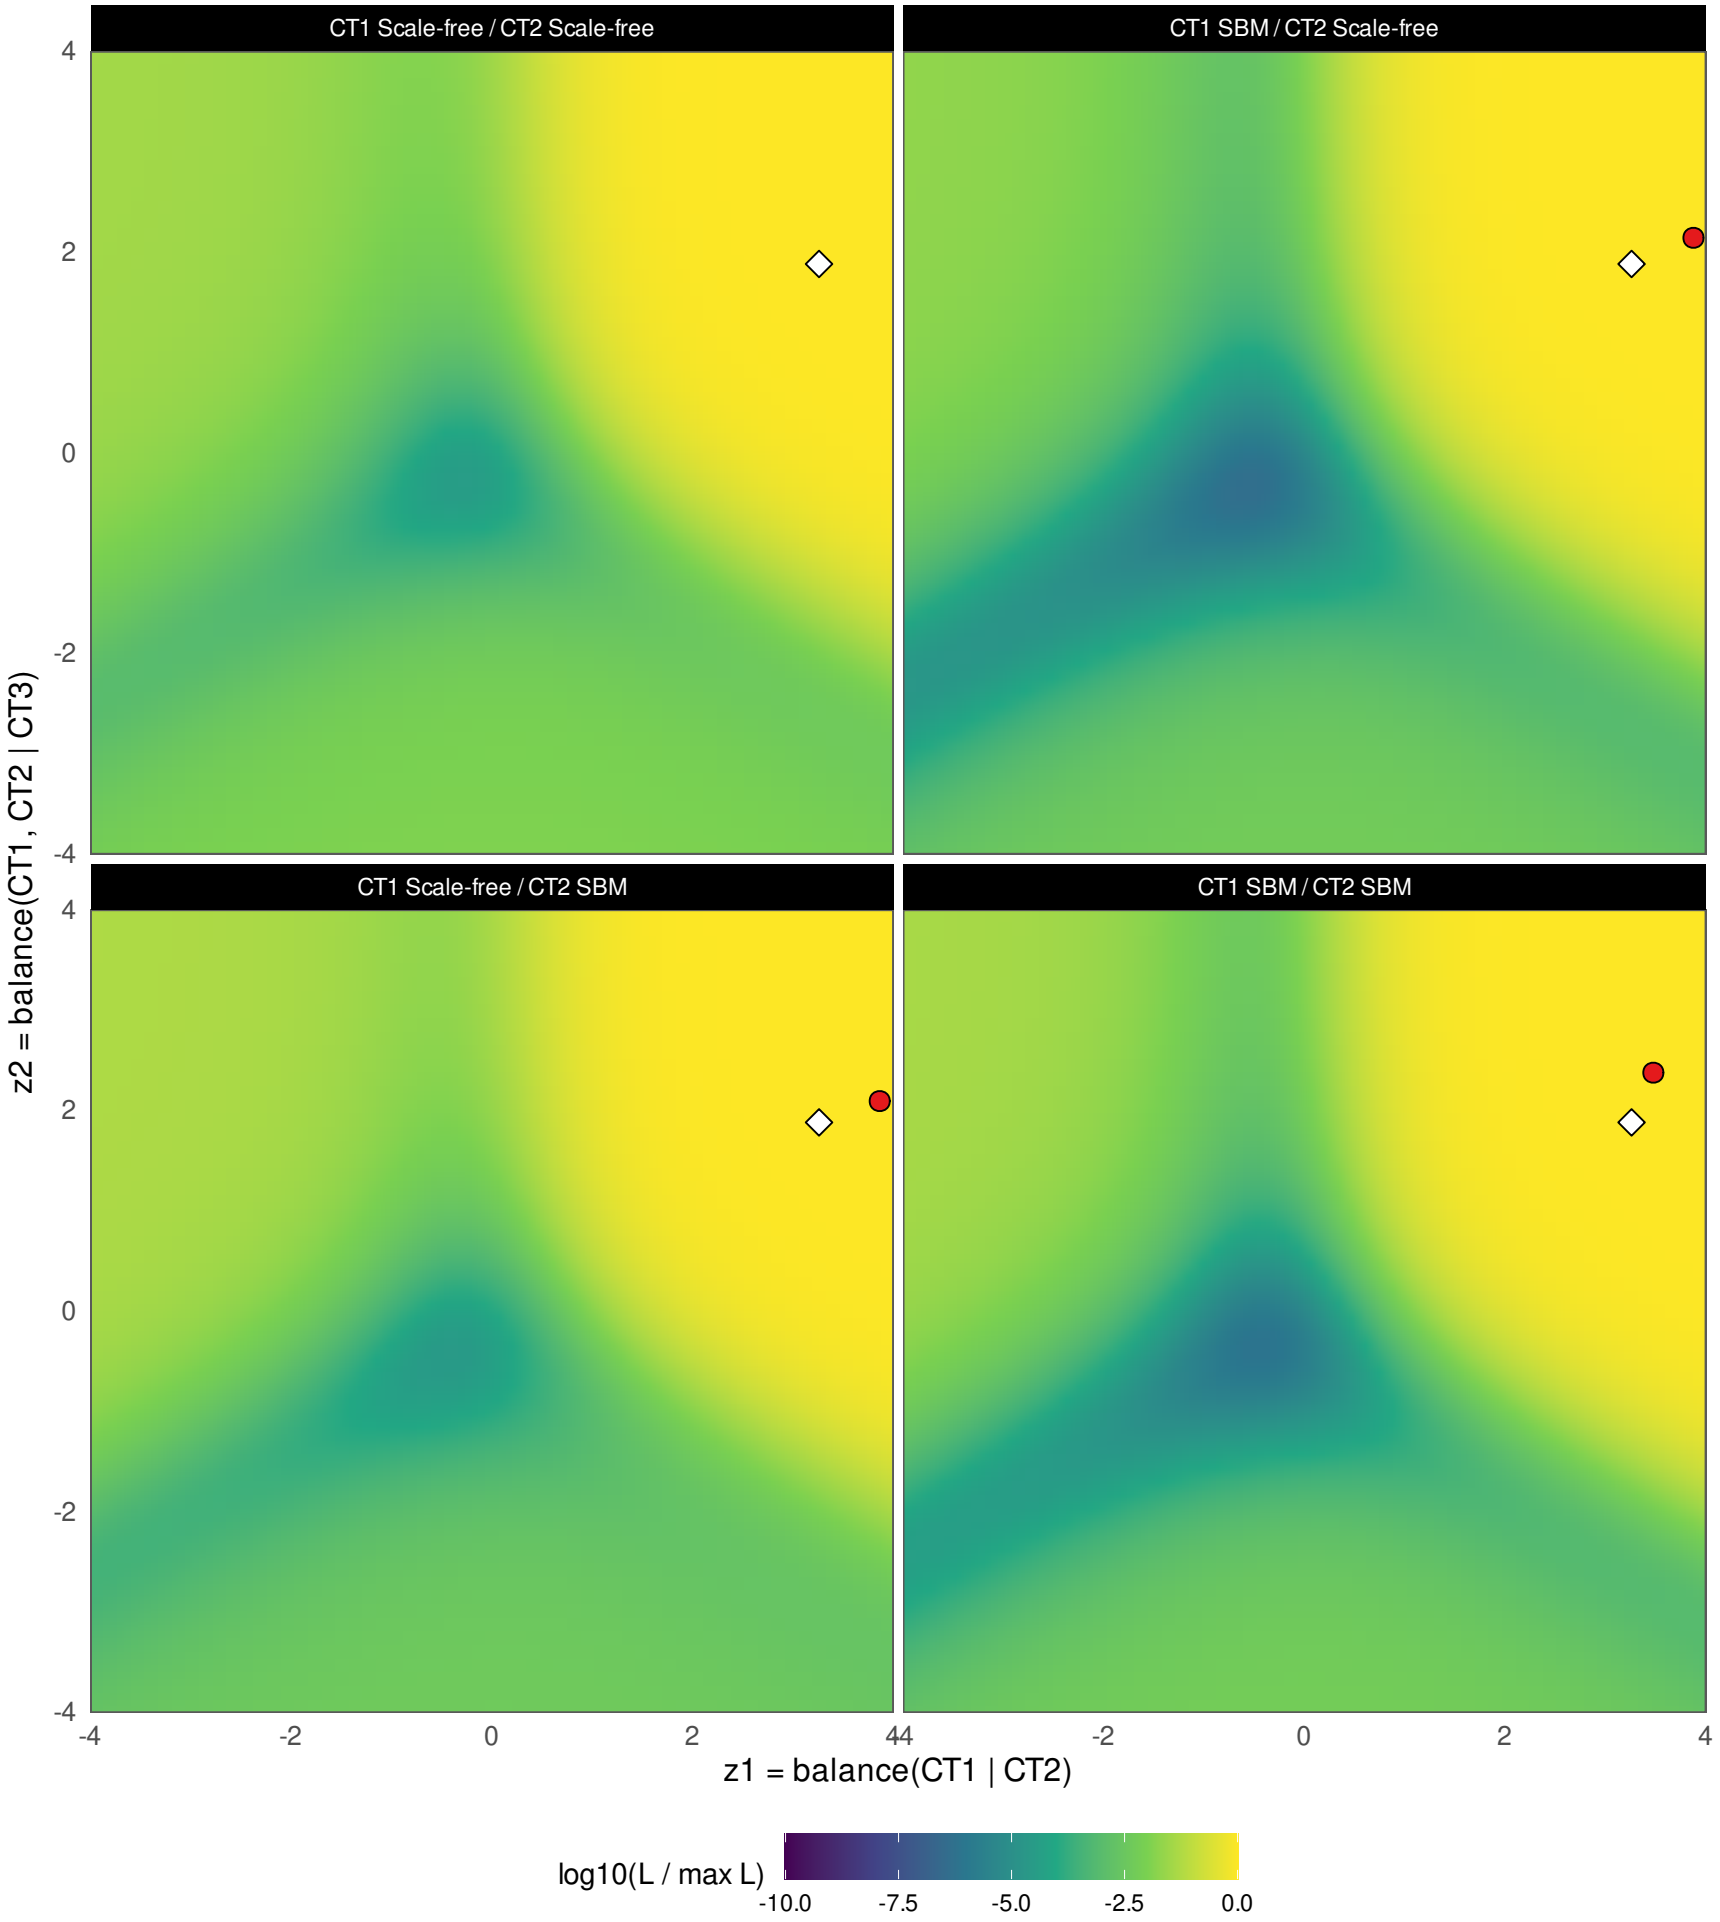

Expected log-likelihood at the true composition, maximised at p* exactly. Fill: log10(L / max L), floored at -10.

◇ true p* ● Monte Carlo mean of p-hat (Newton-Raphson)